

Perceptron Train Classic 2 Alpha

SyLab

氏名：小林智輝

1 Perceptron Train Classic 2 Alpha

Watch a perceptron learn in real time using the classic update

rule: only misclassified points trigger updates, with no weight decay.

In this variant you must find 5 successful learning rates (each reaching 100% accuracy) before the flag is revealed.

The dataset is still linearly separable,

but it is less toy-like and the separation is less obvious.

Dial in a rate, trigger a run, and the interface animates each step.

Perceptron Train Classic 2 Alpha

Tune the learning rate of a single-layer perceptron using the classic update rule. Each run performs a limited number of updates, and only misclassified points change the model. Find 5 successful learning rates to reveal the flag.

Learning rate


3

3.00

Run training

Training stops after 16 updates and evaluates all data points.

Step 16/16 · sample 4
w1=10.00, w2=14.00, b=-3.00

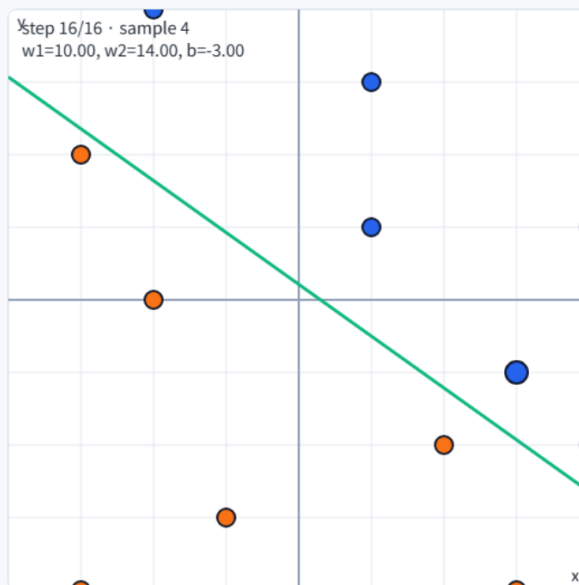

Status

Perfect! You found 5 successful learning rates. Flag unlocked.

```
academy(perceptron_classic_2_alpha_5rates_11934bdb)
```

Final accuracy: 100.0% ·
Successful learning rates:
5/5

Training log

Step	Sample	Prediction	Error	w ₁	w ₂	b	Accuracy
1	(-2, 4) → 1	0	1	-5.00	11.00	3.00	58.3%
2	(1, 1) → 1	1	0	-5.00	11.00	3.00	58.3%
3	(-2, 0) → 0	1	-1	1.00	11.00	0.00	75.0%
4	(3, -1) → 1	0	1	10.00	8.00	3.00	83.3%
5	(-3, -4) → 0	0	0	10.00	8.00	3.00	83.3%

1 img