Modem Host (Modem_Host) - flow chart

OpenMT - Rick KD0OSS

Owns the modem's serial port and serves every protocol host on TCP port 18000 + modem number - 1. One Modem Host runs for each modem (1 to 10).

main() - start-up, then the serial loop



Modem -> protocol hosts (received air traffic)

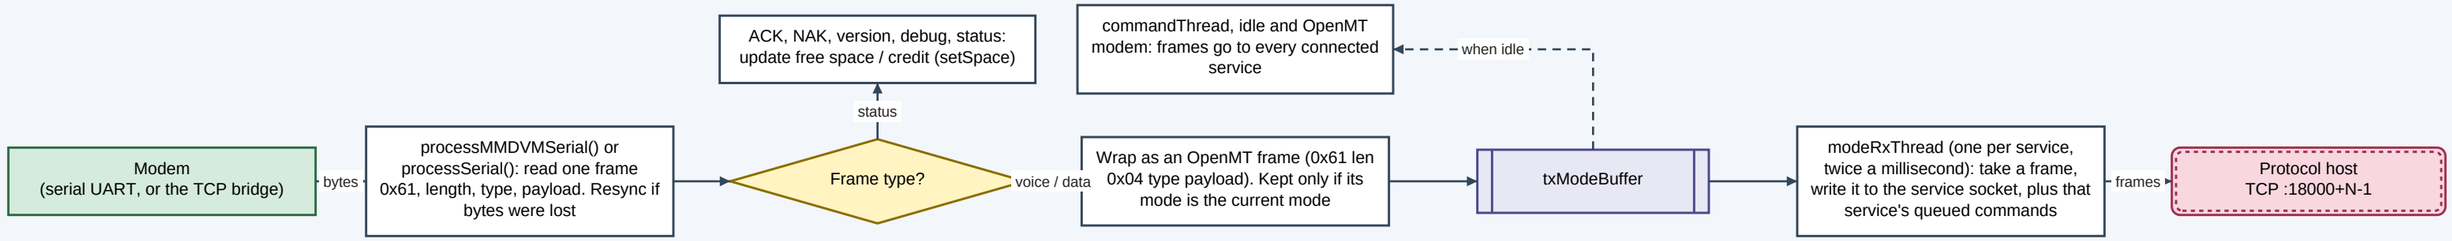

Protocol hosts -> modem (transmit)

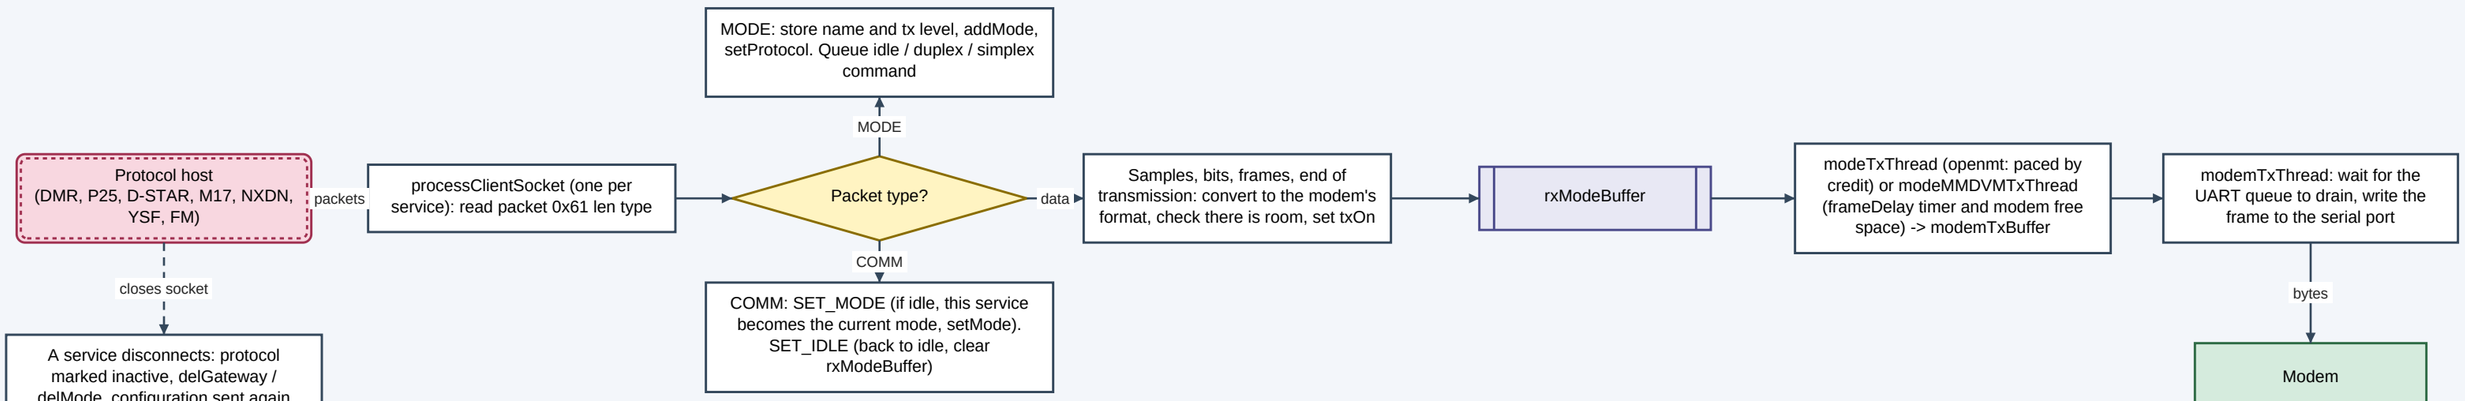

Background threads and the database

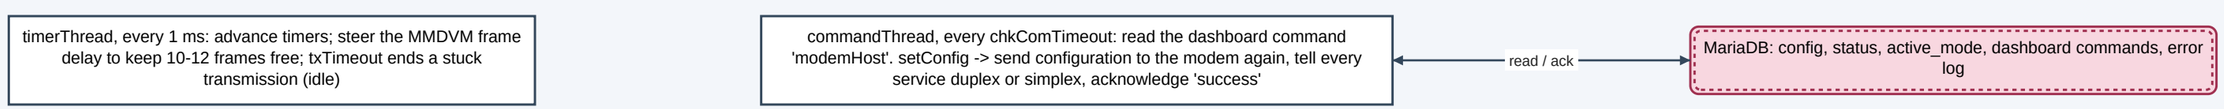

Key

Only one protocol owns the modem at a time (the current mode); a service takes it with COMM SET_MODE when idle and gives it back with SET_IDLE. All errors go to the error log table with reportError().