


26. String Methods, StringBuilder vs StringBuffer

▼ What are some method that the String class offers?

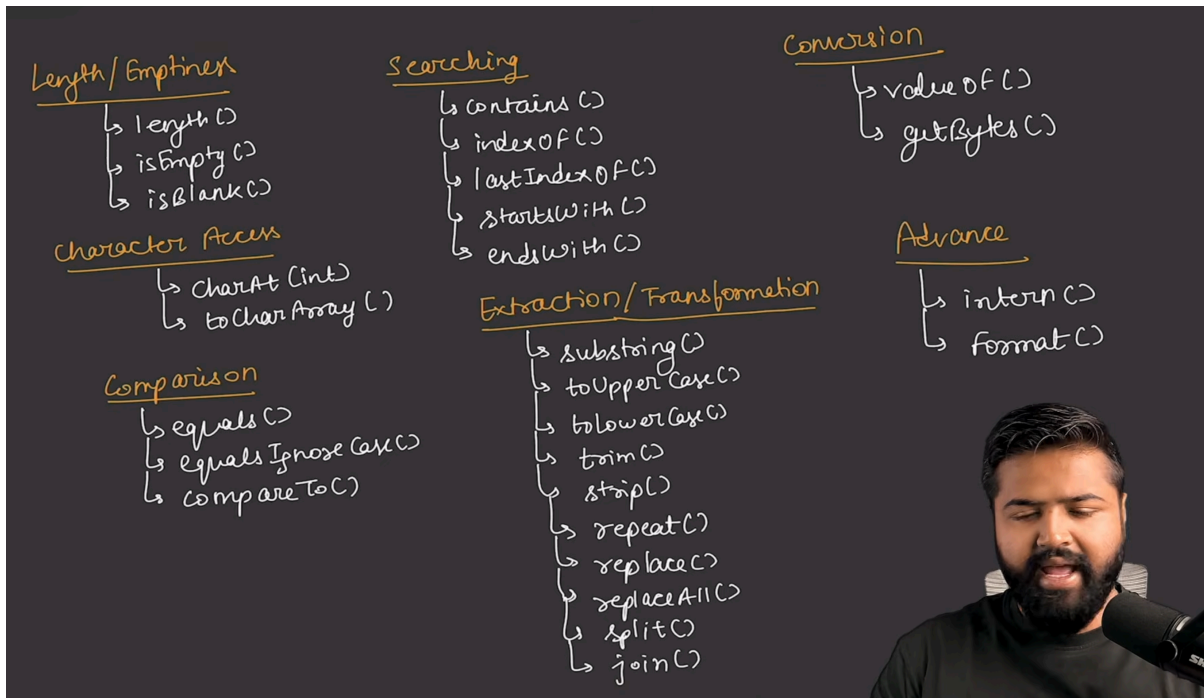

▼ isEmpty() vs isBlank() ?

`isEmpty()` is the **stricter** check. It only returns `true` when the length is 0 i.e. for `""`

→ If the String is `"\n"`, `"\t\n"`, it will return `false`

`isBlank()` checks if the String is empty or only contains **whitespace** characters like `" "`, `"\n"`, `"\t\n"` for which it will return `true`

▼ How many ways are there to initialise a String in Java?

→ Using string literal `""`

→ Using overloaded constructors for char array `new String(char[], int offset, int count)`

→ Using overloaded constructors for byte array `new String(char[], int offset, int count)`

▼ What is the `StringBuilder` class?

→ It is the mutable version of the `String` class


→ It too uses a byte array to store values, with default capacity as 16, which expands to twice it's size as soon as the slots get filled.

→ We can also initiliaze with a pre-defined size `StringBuilder sb = new StringBuilder(50);` overriding the 16 default size

▼ How is `StringBuffer` different from `StringBuilder`?

It is just the **thread safe** version of `StringBuffer` class

▼ What are some methods that the StringBuilder class offers?

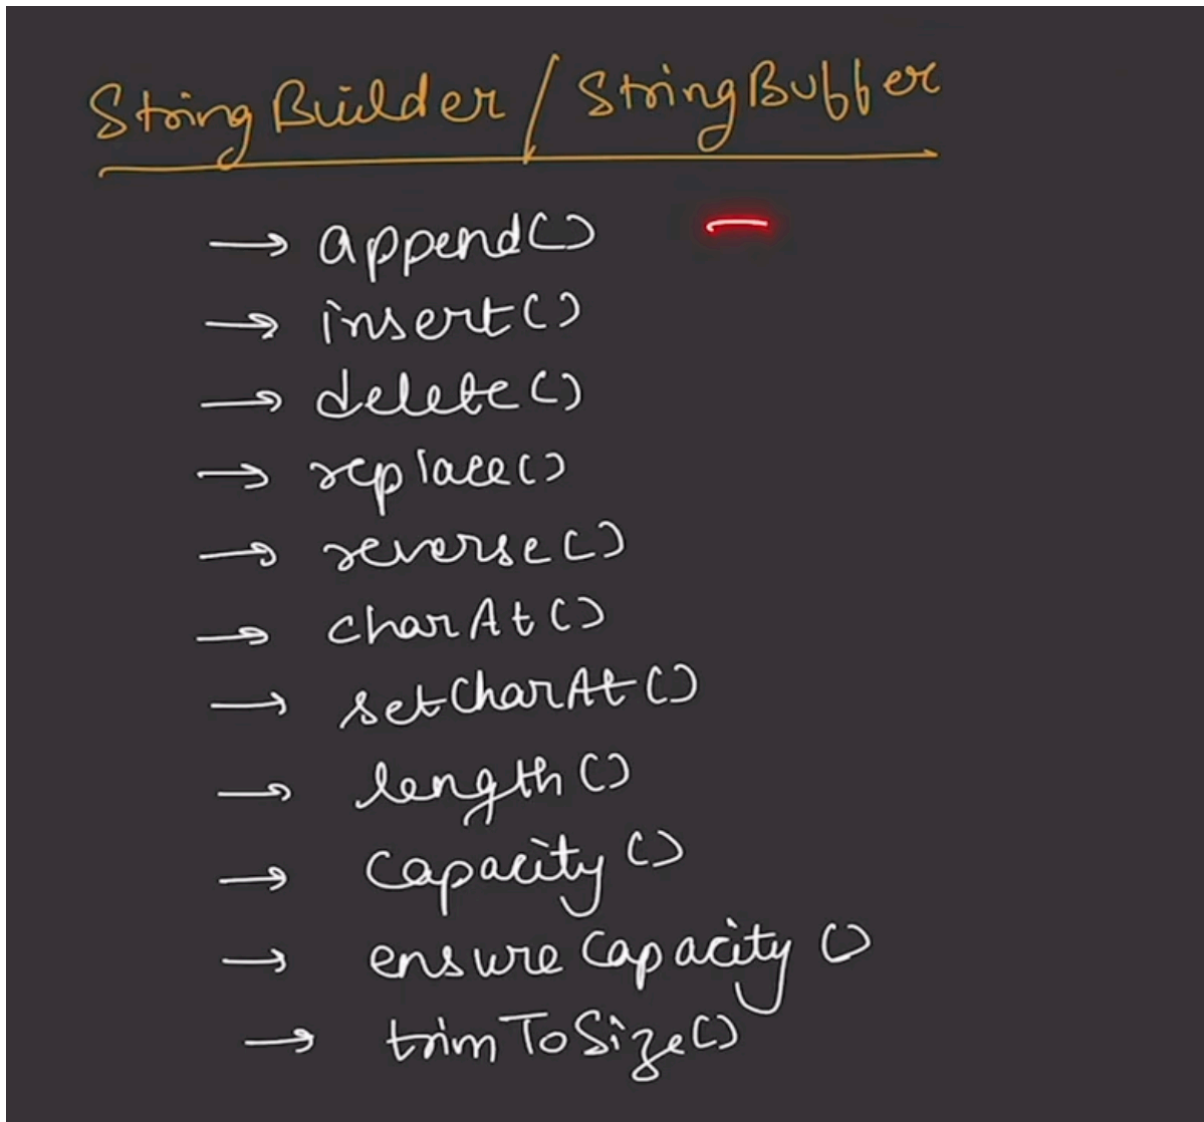

▼ Does `StringBuilder` override the `equals()` method like `String` does?

No, `sb.equals()` will invoke the `Object` class's `equal` method and even if the value of two `StringBuilder` strings is equal, the result would be `false` as internally they would be pointing to different objects