
nums = [0, 1, 2, 2, 3, 0, 4, 2] , val = 2

↳ 3 elements equal ⇒ window size = 3


Two pointer approach (swap elements to shift elements equal to val towards the end)

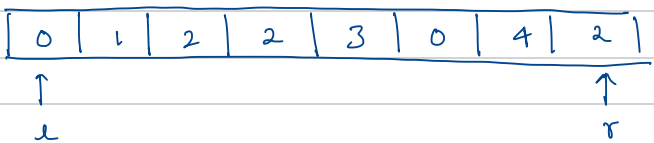


→ move 'r' only when it's position is correctly filled with element = val


→ keep moving 'l' until element = val is found, then make the swap

DRY RUN

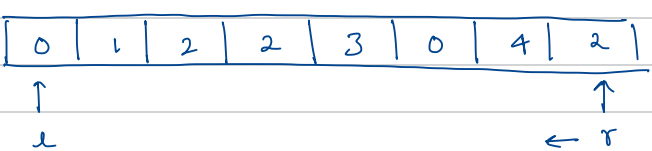① 



'r' has the spot pre-occupied with correct element

⇒ Move 'r'

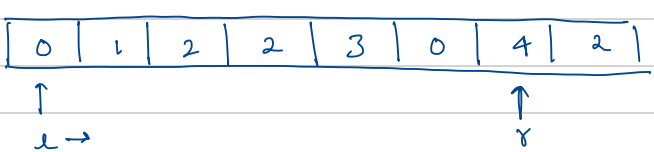
② 

Keep on moving 'l' until we find element = val

(3)

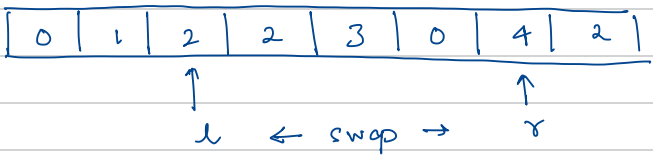



→ Element found, perform swap

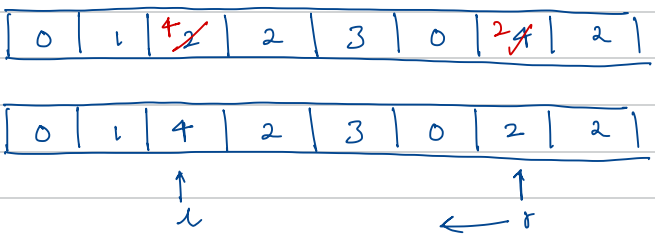



→ now move 'r'


(4)

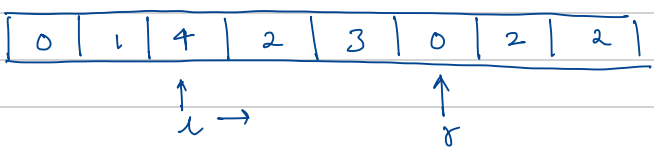


→ move 'l' until we find element = val

(5)

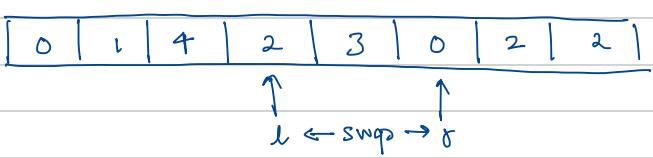

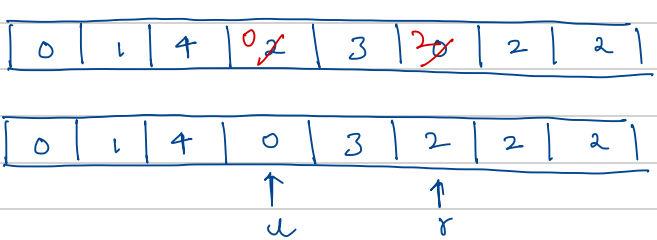
⇒ Intended array formed