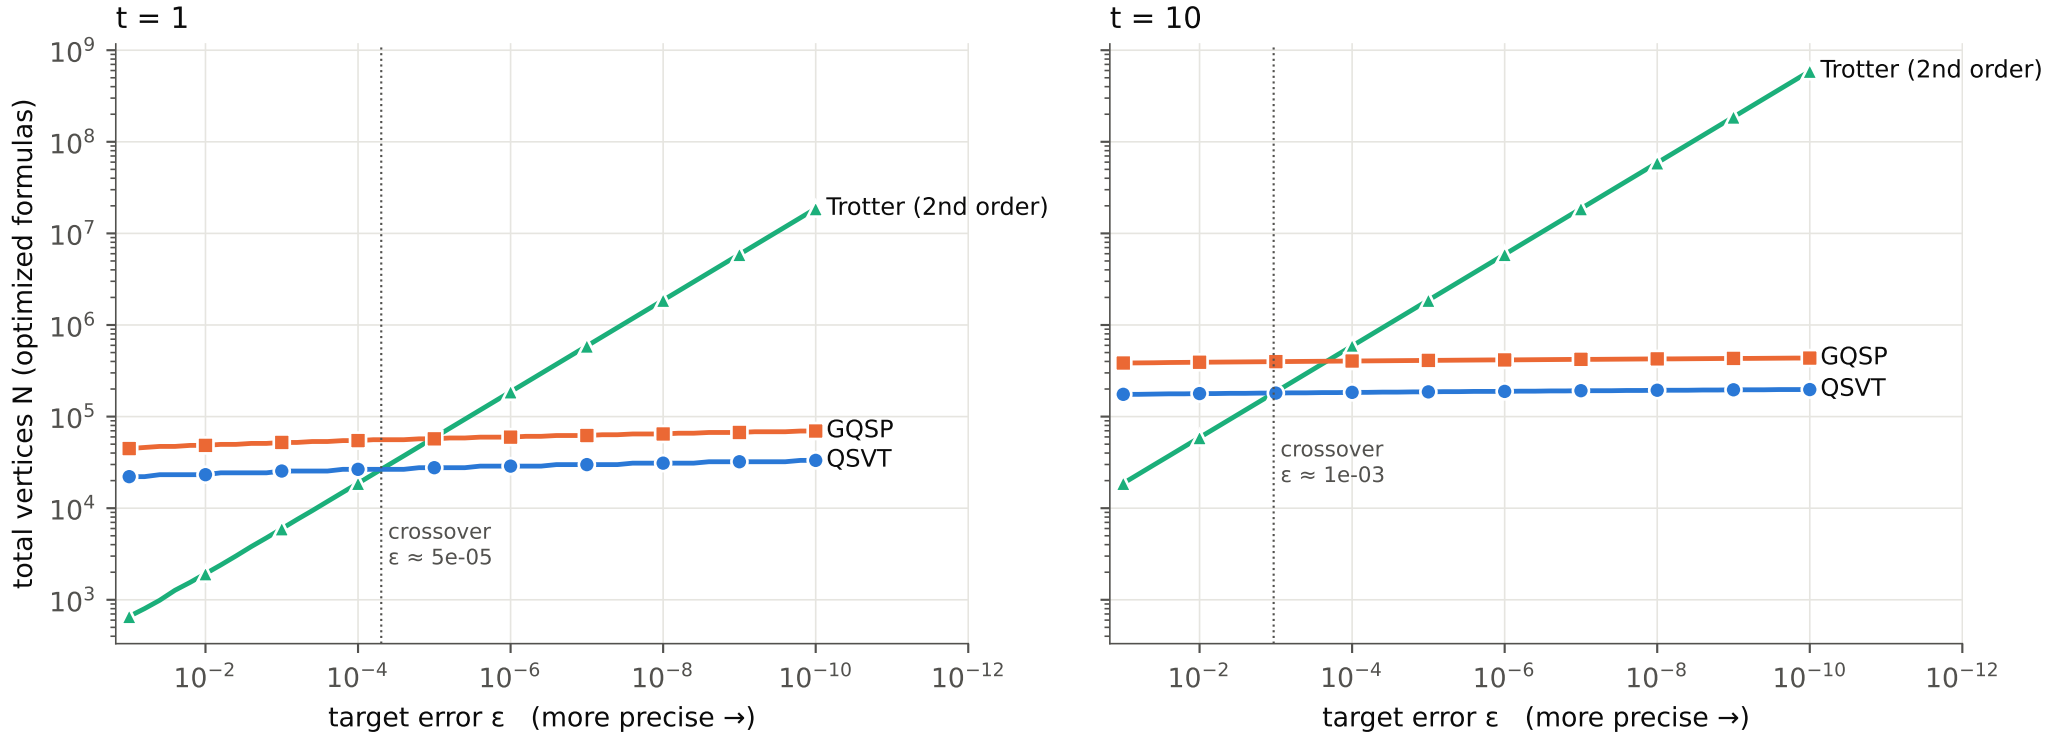
Layer C — cost to reach the same accuracy (n = 16, α = 29.5; Trotter steps from the norm bound)
t = 1
t = 10
total vertices N (optimized formulas)
target error ε (more precise →)
Trotter (2nd order)
GQSP
QSVT
crossover
ε ≈ 5e-05
crossover
ε ≈ 1e-03