

Class 14: RNA-Seq analysis mini-project

Keilyn Duarte (PID A16881868)

Table of contents

Background	1
Data Import	2
Inspect and Tidy data	2
Setup for DESeq	3
Run DESeq	4
Volcano Plot of results	5
Gene annotation	6
Pathway analysis	8
Gene ontology analysis	11

Background

The data for for hands-on session comes from GEO entry: GSE37704, which is associated with the following publication:

Trapnell C, Hendrickson DG, Sauvageau M, Goff L et al. “Differential analysis of gene regulation at transcript resolution with RNA-seq”. Nat Biotechnol 2013 Jan;31(1):46-53. PMID: 23222703

The authors report on differential analysis of lung fibroblasts in response to loss of the developmental transcription factor HOXA1. Their results and others indicate that HOXA1 is required for lung fibroblast and HeLa cell cycle progression. In particular their analysis show that “loss of HOXA1 results in significant expression level changes in thousands of individual transcripts, along with isoform switching events in key regulators of the cell cycle”. For our session we have used their Sailfish gene-level estimated counts and hence are restricted to protein-coding genes only.

Data Import

```
counts <- read.csv("GSE37704_featurecounts.csv", row.names=1)
colData <- read.csv("GSE37704_metadata.csv")
```

Inspect and Tidy data

Do the counts columns match the colData rows?

```
head(counts)
```

	length	SRR493366	SRR493367	SRR493368	SRR493369	SRR493370
ENSG00000186092	918	0	0	0	0	0
ENSG00000279928	718	0	0	0	0	0
ENSG00000279457	1982	23	28	29	29	28
ENSG00000278566	939	0	0	0	0	0
ENSG00000273547	939	0	0	0	0	0
ENSG00000187634	3214	124	123	205	207	212
	SRR493371					
ENSG00000186092	0					
ENSG00000279928	0					
ENSG00000279457	46					
ENSG00000278566	0					
ENSG00000273547	0					
ENSG00000187634	258					

```
head(colData)
```

	id	condition
1	SRR493366	control_sirna
2	SRR493367	control_sirna
3	SRR493368	control_sirna
4	SRR493369	hoxa1_kd
5	SRR493370	hoxa1_kd
6	SRR493371	hoxa1_kd

The counts data set's columns doesn't exactly match the rows of the colData dataset, we need to remove the length column to fix that.

The fix here seems to be removing the first column from counts

Q. Complete the code below to remove the troublesome first column from countData

```
# Note we need to remove the odd first $length col
countData <- counts[,-1]
head(countData)
```

	SRR493366	SRR493367	SRR493368	SRR493369	SRR493370	SRR493371
ENSG00000186092	0	0	0	0	0	0
ENSG00000279928	0	0	0	0	0	0
ENSG00000279457	23	28	29	29	28	46
ENSG00000278566	0	0	0	0	0	0
ENSG00000273547	0	0	0	0	0	0
ENSG00000187634	124	123	205	207	212	258

Check for matching countData and colData

```
colnames(countData) == colData$id
```

```
[1] TRUE TRUE TRUE TRUE TRUE TRUE
```

Q1. How many genes are in countData?

```
nrow(countData)
```

```
[1] 19808
```

Q2. Filter countData to exclude genes (i.e. rows) where we have 0 read count across all samples (i.e. columns). How many genes are left?

```
to.keep.inds <- rowSums(countData) > 0
```

```
new.counts <- countData[to.keep.inds, ]
```

```
nrow(new.counts)
```

```
[1] 15975
```

Setup for DESeq

```
library(DESeq2)
```

Setup input object for DESeq

```
dds <- DESeqDataSetFromMatrix(countData = new.counts,  
                              colData = colData,  
                              design = ~condition)
```

Warning in DESeqDataSet(se, design = design, ignoreRank): some variables in design formula are characters, converting to factors

Run DESeq

```
dds <- DESeq(dds)
```

estimating size factors

estimating dispersions

gene-wise dispersion estimates

mean-dispersion relationship

final dispersion estimates

fitting model and testing

```
res <- results(dds)
```

```
head(res)
```

log2 fold change (MLE): condition hoxa1 kd vs control sirna

Wald test p-value: condition hoxa1 kd vs control sirna

DataFrame with 6 rows and 6 columns

	baseMean	log2FoldChange	lfcSE	stat	pvalue
	<numeric>	<numeric>	<numeric>	<numeric>	<numeric>
ENSG00000279457	29.9136	0.1792571	0.3248216	0.551863	5.81042e-01
ENSG00000187634	183.2296	0.4264571	0.1402658	3.040350	2.36304e-03
ENSG00000188976	1651.1881	-0.6927205	0.0548465	-12.630158	1.43989e-36
ENSG00000187961	209.6379	0.7297556	0.1318599	5.534326	3.12428e-08
ENSG00000187583	47.2551	0.0405765	0.2718928	0.149237	8.81366e-01
ENSG00000187642	11.9798	0.5428105	0.5215599	1.040744	2.97994e-01
	padj				
	<numeric>				
ENSG00000279457	6.86555e-01				
ENSG00000187634	5.15718e-03				
ENSG00000188976	1.76549e-35				
ENSG00000187961	1.13413e-07				
ENSG00000187583	9.19031e-01				
ENSG00000187642	4.03379e-01				

Volcano Plot of results

```
library(ggplot2)
```


```
# Make a color vector for all genes
mycols <- rep("gray", nrow(res))

# Color red the genes with absolute fold change above 2
mycols[ abs(res$log2FoldChange) > 2 ] <- "red"

# Color blue those with adjusted p-value less than 0.01
# and absolute fold change more than 2
inds <- (abs(res$log2FoldChange < 0.01)) & (abs(res$log2FoldChange) > 2 )
mycols[ inds ] <- "blue"
```

```
ggplot(res) +
  aes(log2FoldChange, -log(padj)) +
  geom_point(alpha=0.3, col=mycols) +
  geom_vline(xintercept=c(-2,2), col="red") +
  geom_hline(yintercept=0.05, col="red")
```

Warning: Removed 1237 rows containing missing values or values outside the scale range (``geom_point()``).

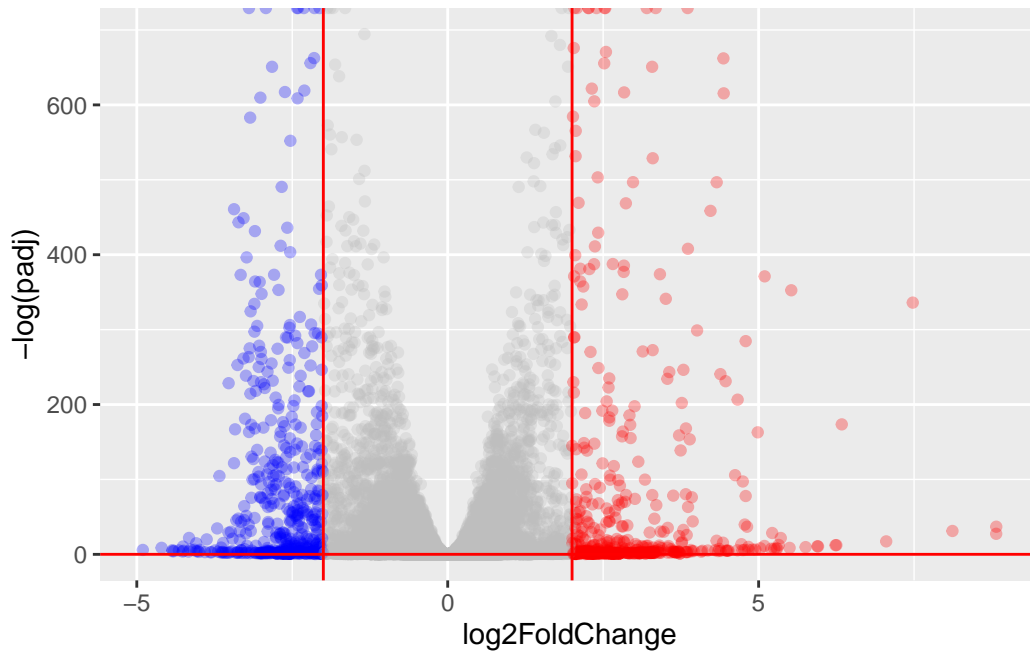

Gene annotation

Q. Use the `mapIDs()` function multiple times to add `SYMBOL`, `ENTREZID` and `GENENAME` annotation to our results by completing the code below.

```
library("AnnotationDbi")
library("org.Hs.eg.db")
```

```
columns(org.Hs.eg.db)
```

[1]	"ACCNUM"	"ALIAS"	"ENSEMBL"	"ENSEMBLPROT"	"ENSEMBLTRANS"
[6]	"ENTREZID"	"ENZYME"	"EVIDENCE"	"EVIDENCEALL"	"GENENAME"
[11]	"GENETYPE"	"GO"	"GOALL"	"IPI"	"MAP"
[16]	"OMIM"	"ONTOLOGY"	"ONTOLOGYALL"	"PATH"	"PFAM"
[21]	"PMID"	"PROSITE"	"REFSEQ"	"SYMBOL"	"UCSCKG"
[26]	"UNIPROT"				

```
res$symbol = mapIds(org.Hs.eg.db,
                    keys=row.names(res),
                    keytype="ENSEMBL",
                    column="SYMBOL",
                    multiVals="first")
```

'select()' returned 1:many mapping between keys and columns

```
res$entrez = mapIds(org.Hs.eg.db,
                    keys=row.names(res),
                    keytype="ENSEMBL",
                    column="ENTREZID",
                    multiVals="first")
```

'select()' returned 1:many mapping between keys and columns

```
res$name = mapIds(org.Hs.eg.db,
                  keys=row.names(res),
                  keytype="ENSEMBL",
                  column="GENENAME",
                  multiVals="first")
```

'select()' returned 1:many mapping between keys and columns

```
head(res, 10)
```

log2 fold change (MLE): condition hoxa1 kd vs control sirna

Wald test p-value: condition hoxa1 kd vs control sirna

DataFrame with 10 rows and 9 columns

	baseMean	log2FoldChange	lfcSE	stat	pvalue
	<numeric>	<numeric>	<numeric>	<numeric>	<numeric>
ENSG00000279457	29.913579	0.1792571	0.3248216	0.551863	5.81042e-01
ENSG00000187634	183.229650	0.4264571	0.1402658	3.040350	2.36304e-03
ENSG00000188976	1651.188076	-0.6927205	0.0548465	-12.630158	1.43989e-36
ENSG00000187961	209.637938	0.7297556	0.1318599	5.534326	3.12428e-08
ENSG00000187583	47.255123	0.0405765	0.2718928	0.149237	8.81366e-01
ENSG00000187642	11.979750	0.5428105	0.5215599	1.040744	2.97994e-01
ENSG00000188290	108.922128	2.0570638	0.1969053	10.446970	1.51282e-25
ENSG00000187608	350.716868	0.2573837	0.1027266	2.505522	1.22271e-02

ENSG00000188157	9128.439422	0.3899088	0.0467163	8.346304	7.04321e-17
ENSG00000237330	0.158192	0.7859552	4.0804729	0.192614	8.47261e-01
	padj	symbol	entrez		name
	<numeric>	<character>	<character>		<character>
ENSG00000279457	6.86555e-01	NA	NA		NA
ENSG00000187634	5.15718e-03	SAMD11	148398	sterile alpha motif ..	
ENSG00000188976	1.76549e-35	NOC2L	26155	NOC2 like nucleolar ..	
ENSG00000187961	1.13413e-07	KLHL17	339451	kelch like family me..	
ENSG00000187583	9.19031e-01	PLEKHN1	84069	pleckstrin homology ..	
ENSG00000187642	4.03379e-01	PERM1	84808	PPARGC1 and ESRR ind..	
ENSG00000188290	1.30538e-24	HES4	57801	hes family bHLH tran..	
ENSG00000187608	2.37452e-02	ISG15	9636	ISG15 ubiquitin like..	
ENSG00000188157	4.21963e-16	AGRN	375790		agrin
ENSG00000237330	NA	RNF223	401934	ring finger protein ..	

```
res = res[order(res$pvalue),]
write.csv(res, file="deseq_results.csv")
```

Pathway analysis

```
library(gage)
```

```
library(gageData)
library(pathview)
```

```
#####
Pathview is an open source software package distributed under GNU General
Public License version 3 (GPLv3). Details of GPLv3 is available at
http://www.gnu.org/licenses/gpl-3.0.html. Particullary, users are required to
formally cite the original Pathview paper (not just mention it) in publications
or products. For details, do citation("pathview") within R.
```

The pathview downloads and uses KEGG data. Non-academic uses may require a KEGG license agreement (details at <http://www.kegg.jp/kegg/legal.html>).

```
#####
```



```
data(kegg.sets.hs)
data(sigmet.idx.hs)

kegg.sets.hs = kegg.sets.hs[sigmet.idx.hs]

head(kegg.sets.hs, 3)
```

```
$`hsa00232 Caffeine metabolism`
```

```
[1] "10" "1544" "1548" "1549" "1553" "7498" "9"
```

```
$`hsa00983 Drug metabolism - other enzymes`
```

```
[1] "10" "1066" "10720" "10941" "151531" "1548" "1549" "1551"
[9] "1553" "1576" "1577" "1806" "1807" "1890" "221223" "2990"
[17] "3251" "3614" "3615" "3704" "51733" "54490" "54575" "54576"
[25] "54577" "54578" "54579" "54600" "54657" "54658" "54659" "54963"
[33] "574537" "64816" "7083" "7084" "7172" "7363" "7364" "7365"
[41] "7366" "7367" "7371" "7372" "7378" "7498" "79799" "83549"
[49] "8824" "8833" "9" "978"
```

```
$`hsa00230 Purine metabolism`
```

```
[1] "100" "10201" "10606" "10621" "10622" "10623" "107" "10714"
[9] "108" "10846" "109" "111" "11128" "11164" "112" "113"
[17] "114" "115" "122481" "122622" "124583" "132" "158" "159"
[25] "1633" "171568" "1716" "196883" "203" "204" "205" "221823"
[33] "2272" "22978" "23649" "246721" "25885" "2618" "26289" "270"
[41] "271" "27115" "272" "2766" "2977" "2982" "2983" "2984"
[49] "2986" "2987" "29922" "3000" "30833" "30834" "318" "3251"
[57] "353" "3614" "3615" "3704" "377841" "471" "4830" "4831"
[65] "4832" "4833" "4860" "4881" "4882" "4907" "50484" "50940"
[73] "51082" "51251" "51292" "5136" "5137" "5138" "5139" "5140"
[81] "5141" "5142" "5143" "5144" "5145" "5146" "5147" "5148"
[89] "5149" "5150" "5151" "5152" "5153" "5158" "5167" "5169"
[97] "51728" "5198" "5236" "5313" "5315" "53343" "54107" "5422"
[105] "5424" "5425" "5426" "5427" "5430" "5431" "5432" "5433"
[113] "5434" "5435" "5436" "5437" "5438" "5439" "5440" "5441"
[121] "5471" "548644" "55276" "5557" "5558" "55703" "55811" "55821"
[129] "5631" "5634" "56655" "56953" "56985" "57804" "58497" "6240"
[137] "6241" "64425" "646625" "654364" "661" "7498" "8382" "84172"
[145] "84265" "84284" "84618" "8622" "8654" "87178" "8833" "9060"
[153] "9061" "93034" "953" "9533" "954" "955" "956" "957"
[161] "9583" "9615"
```

```
foldchanges = res$log2FoldChange
names(foldchanges) = res$entrez
head(foldchanges)
```

```
      1266      54855      1465      51232      2034      2317
-2.422719  3.201955 -2.313738 -2.059631 -1.888019 -1.649792
```

Run pathway analysis with KEGG

```
keggres = gage(foldchanges, gsets=kegg.sets.hs)
```


Cell cycle figure

```
pathview(gene.data=foldchanges, pathway.id="hsa04110")
```

'select()' returned 1:1 mapping between keys and columns

Info: Working in directory /Users/keilynduarte/Desktop/BIMM 143/Class14

Info: Writing image file hsa04110.pathview.png

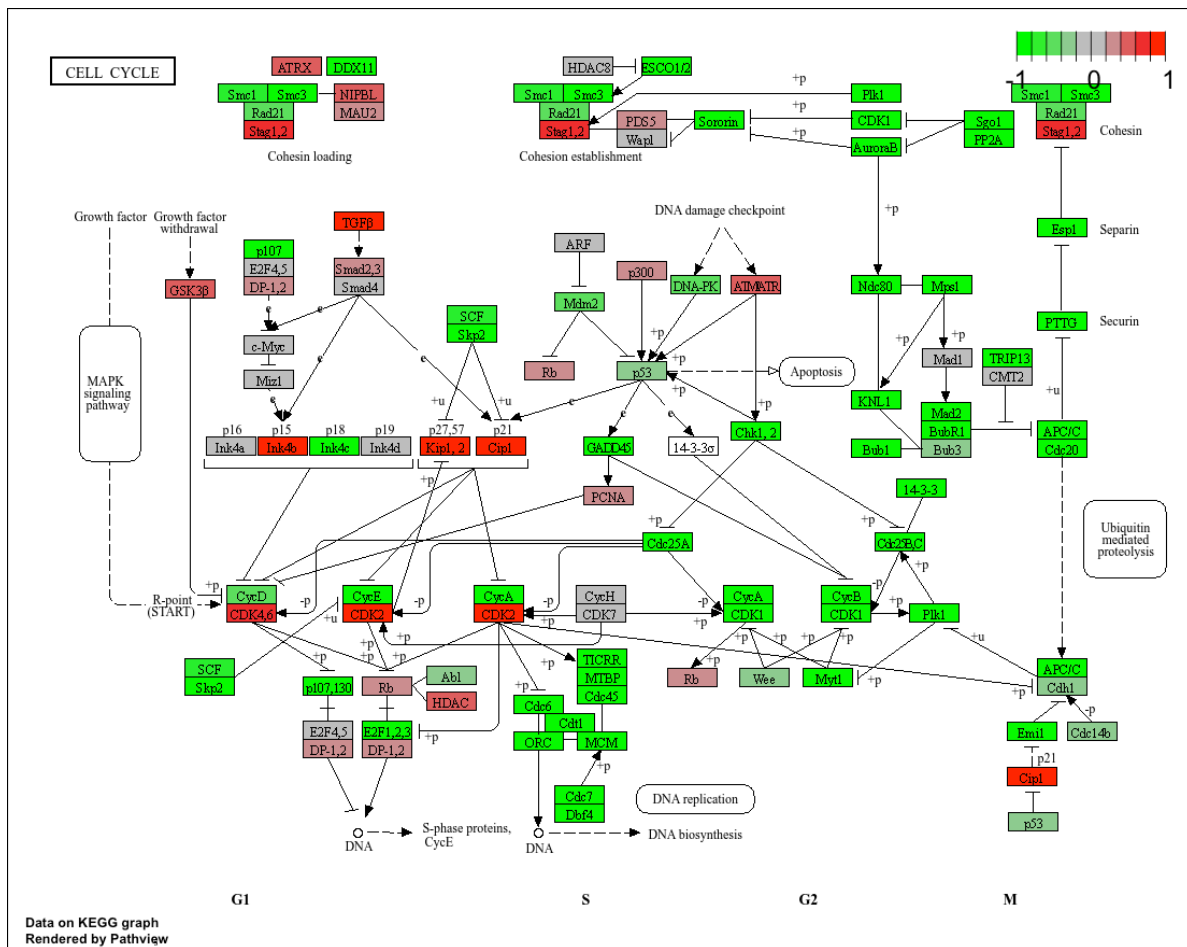

Gene ontology analysis

Run pathway analysis with GO

```
data(go.sets.hs)
```

```
gobpres = gage(foldchanges, gsets=go.sets.hs)
```

```
data(go.sets.hs)
```

```
data(go.subs.hs)
```

```
# Focus on Biological Process subset of GO
```

```
gobpsets = go.sets.hs[go.subs.hs$BP]
```

```
gobpres = gage(foldchanges, gsets=gobpsets, same.dir=TRUE)
```

```
head(gobpres$less)
```

	p.geomean	stat.mean	p.val
G0:0048285 organelle fission	1.536227e-15	-8.063910	1.536227e-15
G0:0000280 nuclear division	4.286961e-15	-7.939217	4.286961e-15
G0:0007067 mitosis	4.286961e-15	-7.939217	4.286961e-15
G0:0000087 M phase of mitotic cell cycle	1.169934e-14	-7.797496	1.169934e-14
G0:0007059 chromosome segregation	2.028624e-11	-6.878340	2.028624e-11
G0:0000236 mitotic prometaphase	1.729553e-10	-6.695966	1.729553e-10

	q.val	set.size	expl
G0:0048285 organelle fission	5.841698e-12	376	1.536227e-15
G0:0000280 nuclear division	5.841698e-12	352	4.286961e-15
G0:0007067 mitosis	5.841698e-12	352	4.286961e-15
G0:0000087 M phase of mitotic cell cycle	1.195672e-11	362	1.169934e-14
G0:0007059 chromosome segregation	1.658603e-08	142	2.028624e-11
G0:0000236 mitotic prometaphase	1.178402e-07	84	1.729553e-10