Skill-6

INPUT:

keathana@Chandu: ~/skill-6

GNU nano 8.7.1 escape_parser.c

```
void test_parser(const char *input)
{
    char output[MAX];

    process_escapes(input, output);

    printf("Input  : %s\n", input);
    printf("Output : %s\n", output);
    printf("--------------------------------\n");
}

int main(void)
{
    printf("Skill-6: Escape Sequence Parser\n");
    printf("================================\n\n");

    /* Test normal text */
    test_parser("hello world");

    /* Test escaped space */
    test_parser("hello\\ world");

    /* Test escaped special symbol */
    test_parser("hello\\&world");

    /* Test escaped pipe */
    test_parser("hello\\|world");

    /* Test escaped semicolon */
    test_parser("hello\\;world");

    /* Test escaped backslash */
    test_parser("hello\\\\world");

    /* Test complex input */
    test_parser("hello\\ world\\&test\\|data");
```

^G Help ^O Write Out ^F Where Is ^K Cut ^T Execute ^C Location M-U Undo M-A Set Mark M-] To Bracket M-B Previous

keathana@Chandu: ~/skill-6

GNU nano 8.7.1 escape_parser.c

```
#include <stdio.h>
#include <string.h>

#define MAX 200

/*
 * Process escape sequences.
 *
 * Examples:
 * hello\ world  -> hello world
 * hello\&world  -> hello&world
 * hello\\world  -> hello\world
 */

void process_escapes(const char *input, char *output)
{
    int i = 0;
    int j = 0;

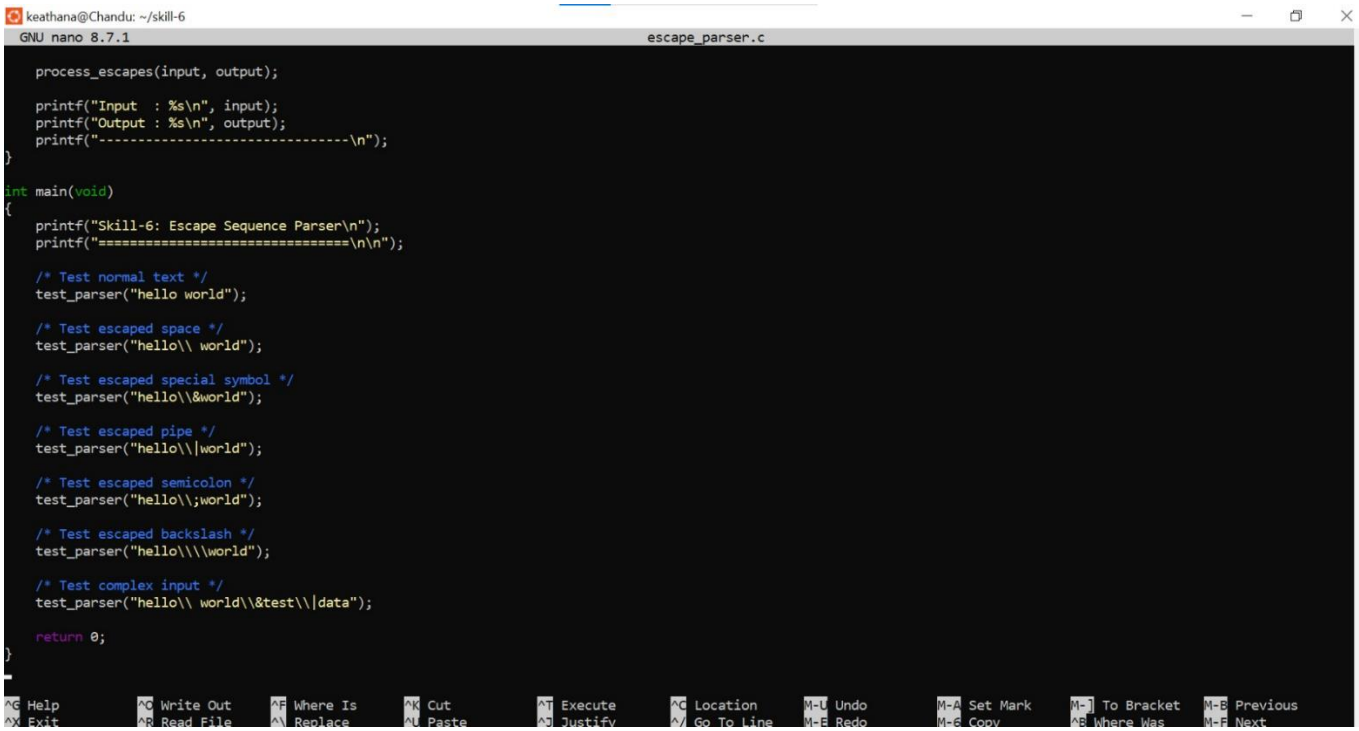
    while (input[i] != '\0') {
        if (input[i] == '\\') {
            i++;

            if (input[i] != '\0') {
                /* Copy the character after the backslash */
                output[j++] = input[i++];
            }
        } else {
            output[j++] = input[i++];
        }
    }

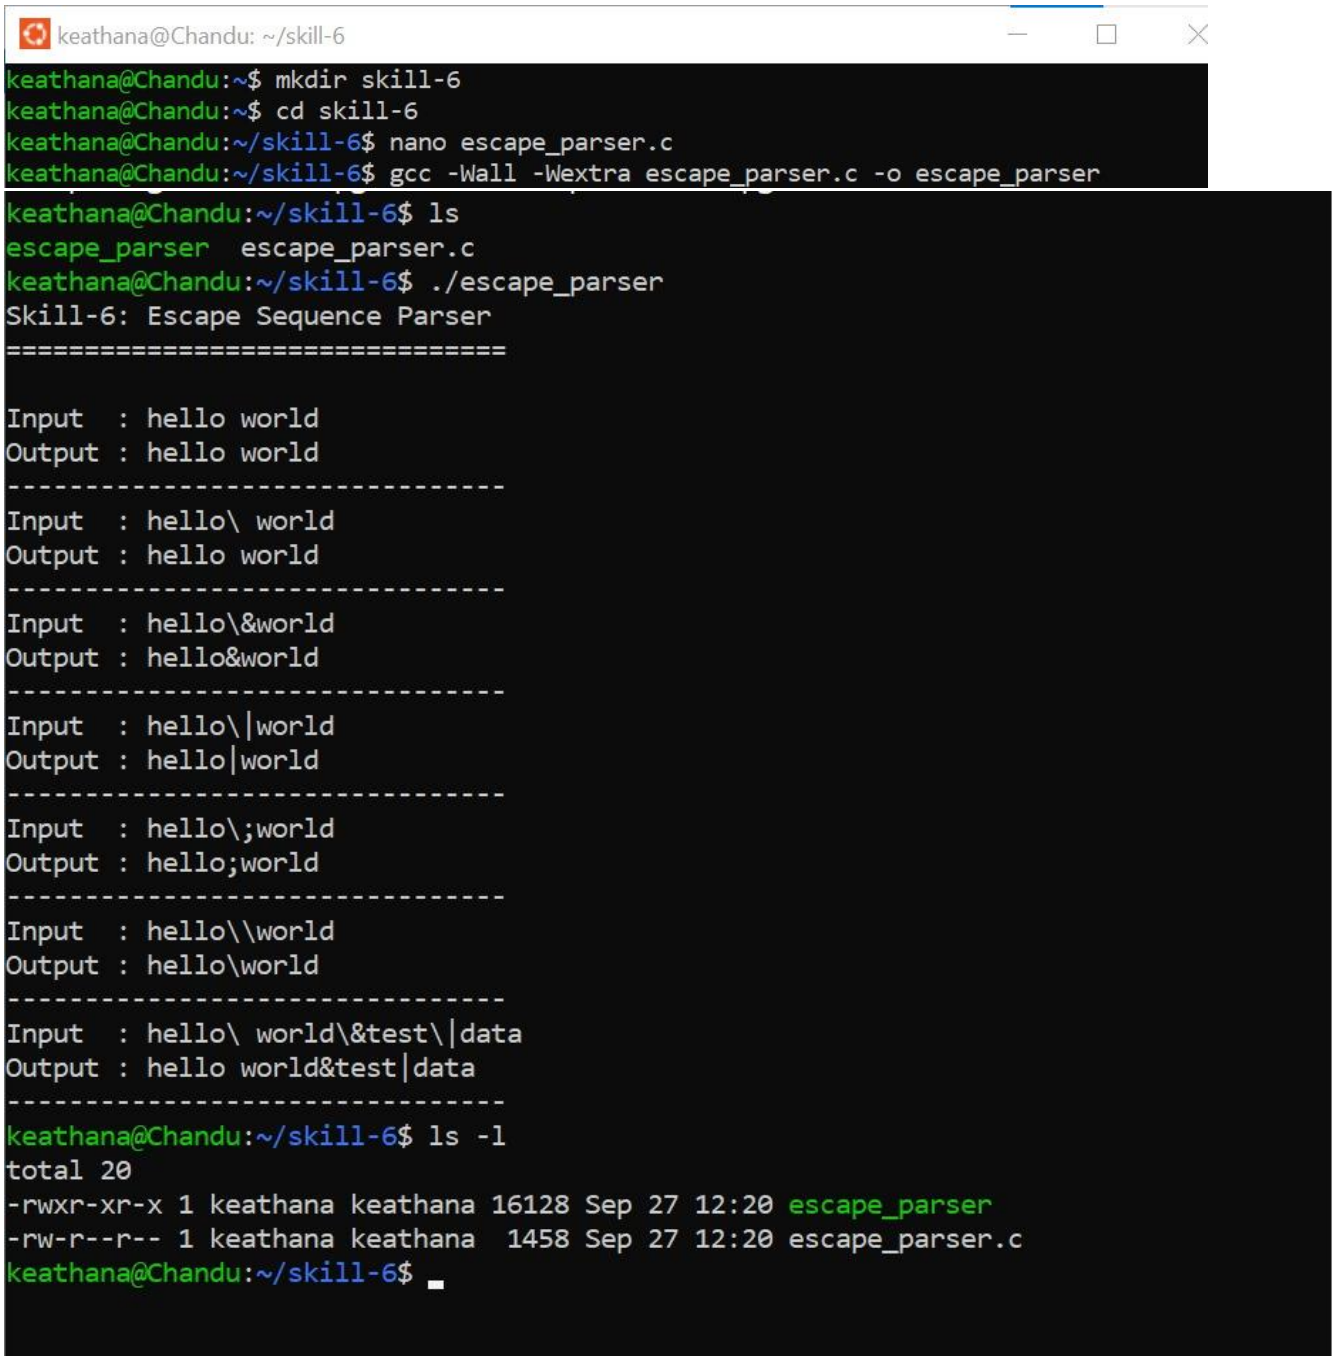
    output[j] = '\0';
}

void test_parser(const char *input)
{
```

^G Help ^O Write Out ^F Where Is ^K Cut ^T Execute ^C Location M-U Undo M-A Set Mark M-] To Bracket M-B Previous


keathana@Chandu: ~/skill-6
GNU nano 8.7.1
escape_parser.c
process_escapes(input, output);
printf("Input : %s\n", input);
printf("Output : %s\n", output);
printf("--------------------------------\n");
}
int main(void)
{
printf("Skill-6: Escape Sequence Parser\n");
printf("==============================\n\n");
/* Test normal text */
test_parser("hello world");
/* Test escaped space */
test_parser("hello\\ world");
/* Test escaped special symbol */
test_parser("hello\\&world");
/* Test escaped pipe */
test_parser("hello\\|world");
/* Test escaped semicolon */
test_parser("hello\\;world");
/* Test escaped backslash */
test_parser("hello\\\\world");
/* Test complex input */
test_parser("hello\\ world\\&test\\|data");
return 0;
}
^G Help ^O Write Out ^F Where Is ^K Cut ^T Execute ^C Location M-U Undo M-A Set Mark M-] To Bracket M-B Previous
^X Exit ^R Read File ^\ Replace ^U Paste ^J Justify ^/ Go To Line M-E Redo M-6 Copy ^B Where Was M-F Next

OUTPUT:


keathana@Chandu: ~/skill-6
keathana@Chandu:~$ mkdir skill-6
keathana@Chandu:~$ cd skill-6
keathana@Chandu:~/skill-6$ nano escape_parser.c
keathana@Chandu:~/skill-6$ gcc -Wall -Wextra escape_parser.c -o escape_parser
keathana@Chandu:~/skill-6$ ls
escape_parser escape_parser.c
keathana@Chandu:~/skill-6$ ./escape_parser
Skill-6: Escape Sequence Parser
==========
Input : hello world
Output : hello world
Input : hello\ world
Output : hello world
Input : hello\&world
Output : hello&world
Input : hello\|world
Output : hello|world
Input : hello\;world
Output : hello;world
Input : hello\\world
Output : hello\world
Input : hello\ world\&test\|data
Output : hello world&test|data
keathana@Chandu:~/skill-6$ ls -l
total 20
-rwxr-xr-x 1 keathana keathana 16128 Sep 27 12:20 escape_parser
-rw-r--r-- 1 keathana keathana 1458 Sep 27 12:20 escape_parser.c
keathana@Chandu:~/skill-6$