

Swonflake + data factory

STEP 1:

CREATE STORAGE ACCOUNT

DATA LAKE STORAGE ACCOUNT(ENABLE HEIRACHICY)

CREATE A CONTAINER(RETAIL-DATA)

CREATE DIRECTORIES IN IT(RAW,PROCESSES,ERROR)

PLACE A FILE ORDERS.CSV IN RAW/SALES/ORDERS.CSV

Home > keerthidatalakehexa

keerthidatalakehexa | Storage browser

Storage account

Search

Tags

Diagnose and solve problems

Access Control (IAM)

Data migration

Events

Storage browser

Partner solutions

Resource visualizer

Data storage

Security + networking

Data management

Settings

keerthidatalakehexa

Favorites

Recently viewed

Blob containers

\$logs

retail-data

View all

Classic file shares

Queues

Tables

+ Add Directory

Upload

Refresh

Delete

...

Blob containers > retail-data

Authentication method: Access key (Switch to Microsoft Entra user account)

Search blobs by prefix (c...)

Only show active objects

Showing all 3 items

	Name	Last modified	Access tier
☐	error	5/22/2026, 10:27:41 AM	
☐	processed	5/22/2026, 10:26:54 AM	
☐	raw	5/22/2026, 10:26:07 AM	

Home > keerthidatalakehexa

keerthidatalakehexa | Storage browser

Storage account

Search

Tags

Diagnose and solve problems

Access Control (IAM)

Data migration

Events

Storage browser

Partner solutions

Resource visualizer

Data storage

Security + networking

Data management

Settings

keerthidatalakehexa

Favorites

Recently viewed

Blob containers

\$logs

retail-data

View all

Classic file shares

Queues

Tables

+ Add Directory

Upload

Refresh

Delete

...

Blob containers > retail-data > raw > sales

Authentication method: Access key (Switch to Microsoft Entra user account)

Search blobs by prefix (c...)

Only show active objects

Showing all 1 items

	Name	Last modified	Access tier
☐	[.]		
☐	orders (1).csv	5/22/2026, 10:26:34 AM	Hot (Inferred)

STEP 2:

CREATE DATABRICKS

WORKSPACE – NOTEBOOK

COMPUTE


|

CREATE CLUSTER

ADVANCED – AUTO – STANDARD – UNITY CATALOG

- ISOLATED – NORMAL ONE

SELECT SPARK IN ADVANCED

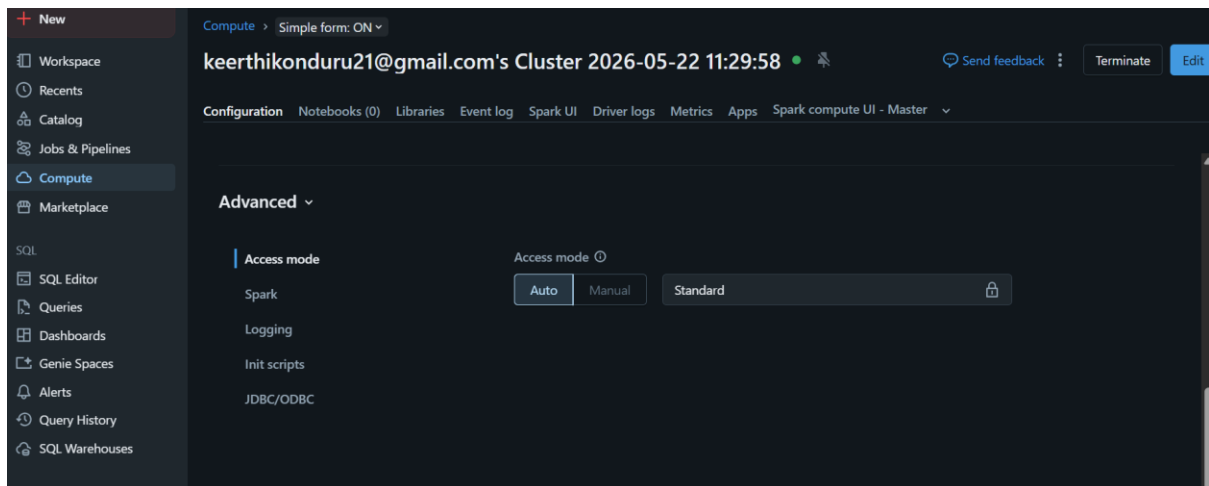


**fs.azure.account.auth.type.<STORAGE ACCOUNT
NAME>.dfs.core.windows.net SAS**


**fs.azure.sas.token.provider.type.<STORAGE ACCOUNT
NAME>.dfs.core.windows.net**

org.apache.hadoop.fs.azurebfs.sas.FixedSASTokenProvider

**fs.azure.sas.fixed.token.keerthidatalakehexa.dfs.core.windows.net
<SAS TOKEN>**

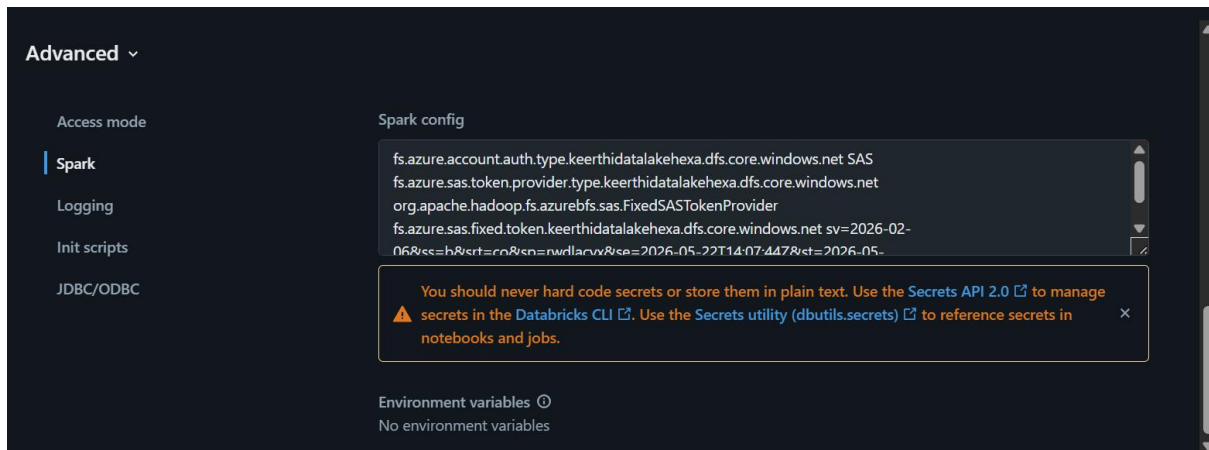

HOW TO GET SAS(SHARED ACCESS SIGNATURE) TOKEN?

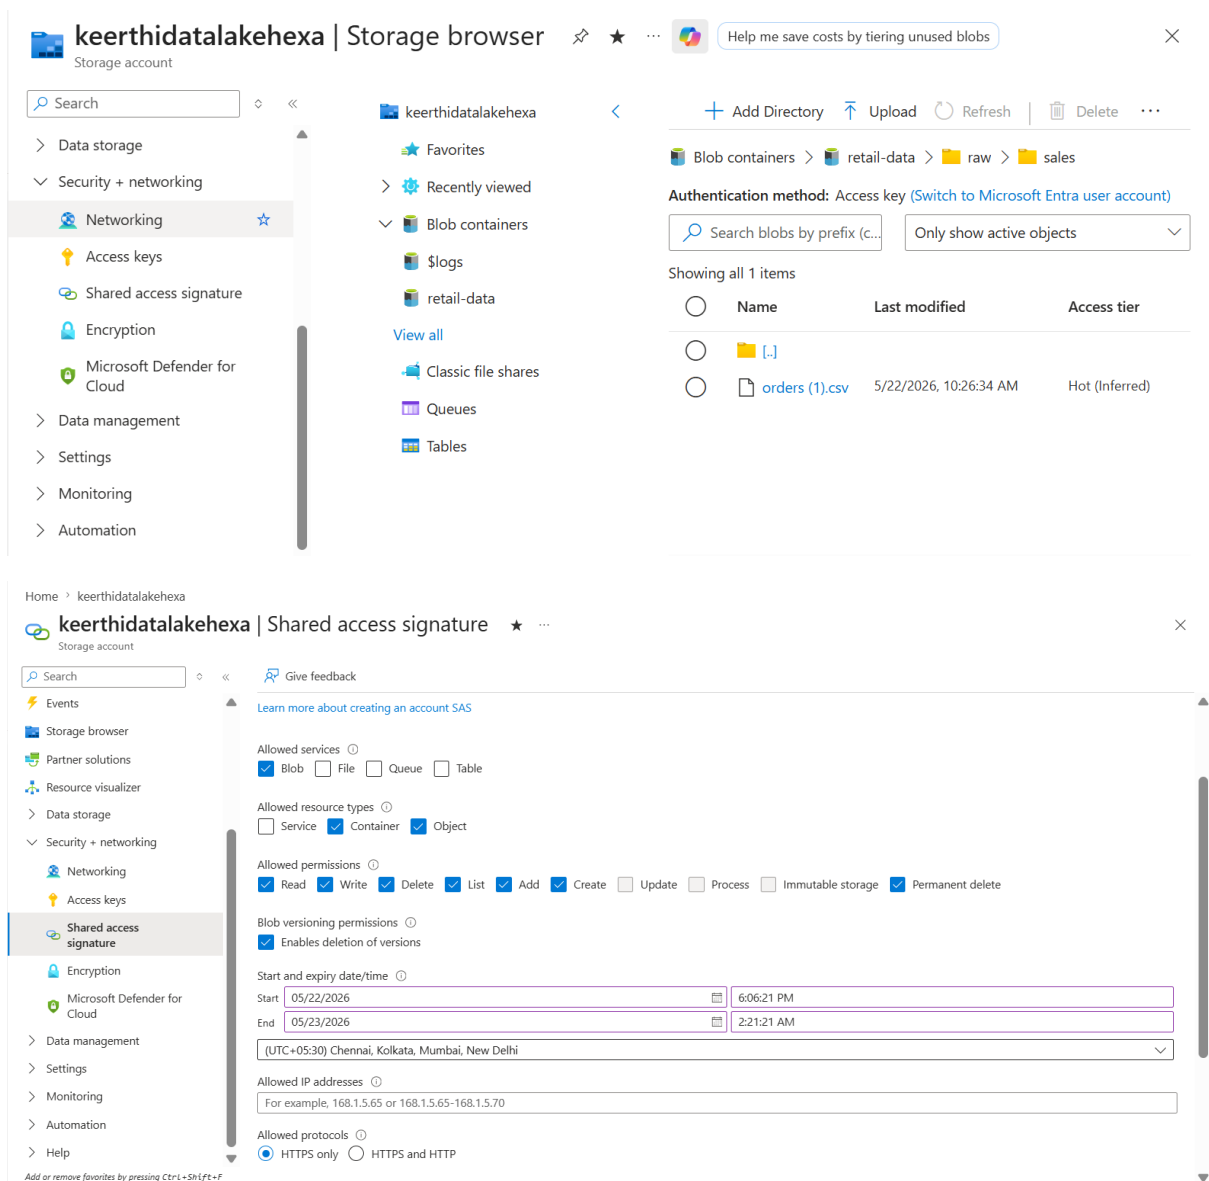

CLICK GENERATE SAS AND URL YOU CAN SEE THE SAS TOKEN

WHY TO DO THIS – WHY TO USE IT IN SPARK CONFIG WHILE CREATING THE COMPUTE?

NORMALLY WE CONNECT DATA LAKE TO DATABRICKS THROUGH MOUNT BUT WITH THIS SPARK CONFIG MAKES THE PROCESS EASY NO USE OF MOUNTING , DIRECT CONNECT WITH DATA LAKE.

STEP 3:

PERFORM FILE LEVEL CLEANING IN THE DATA BRICKS

SAVE THE CLEANED CSV FILES TO THE PROCESSED/SALES WHICH IS IN DATA LAKE

STEP 4:

IN SNOWFLAKE

CREATE WAREHOUSE

CREATE DATABASE

SCHEMAS 2 – ONE FOR RAW DATA

- ONE TO STORE FINAL OUTPUT

CREATE A RAW TABLE

CREATE A FINAL TABLE

CREATE A STAGE

URL =

'azure://<STORAGEACCOUNTNAME>.blob.core.windows.net/retail-data/processed/sales/'

CREDENTIALS = (AZURE_SAS_TOKEN = "")

CREATE A SAS TOKEN

FILE_FORMAT = CSV_FILE_FORMAT;

STEP 5:

COPY INTO RAW_TABLE FROM

STAGE.

STEP 6:

CREATE PROCEDURE

PERFORM TRANSFORMATIONS


SAVE IT AS FINAL_TABLE

CALL PROCEDURENAME();

STEP 7:

CREATE DATA FACTORY

CREATE THREE LINKED SERVICES

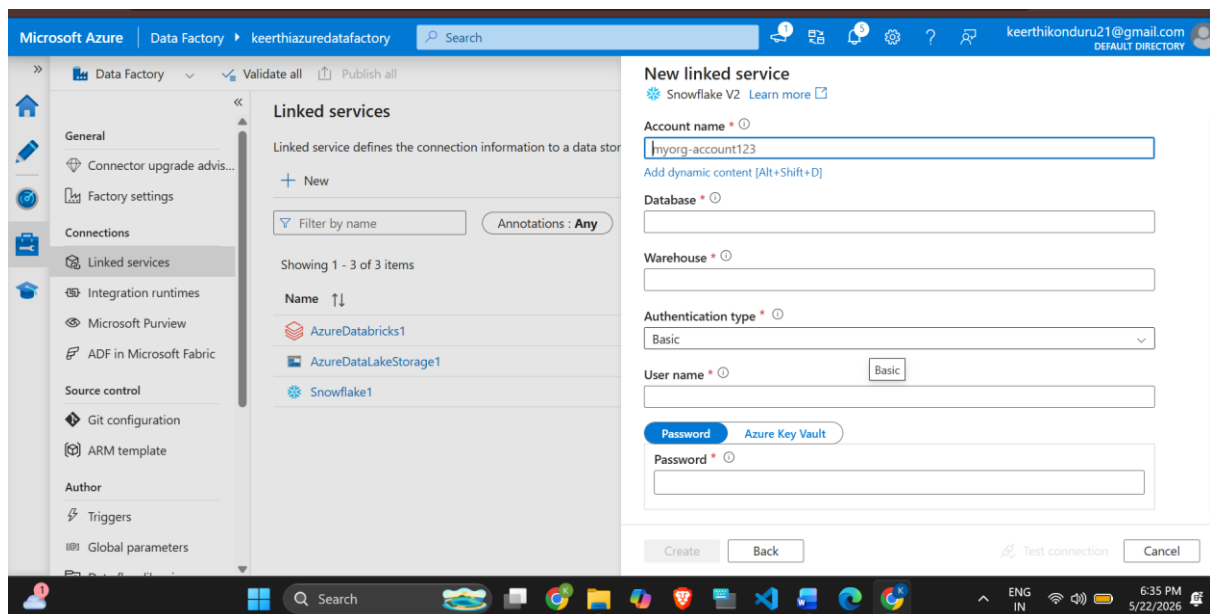


1.AZURE DATA LAKE

2.AZURE DATABRICKS(WE CAN FIND IT IN COMPUTE)

3.SNOWFLAKE

ACCOUNT NAME

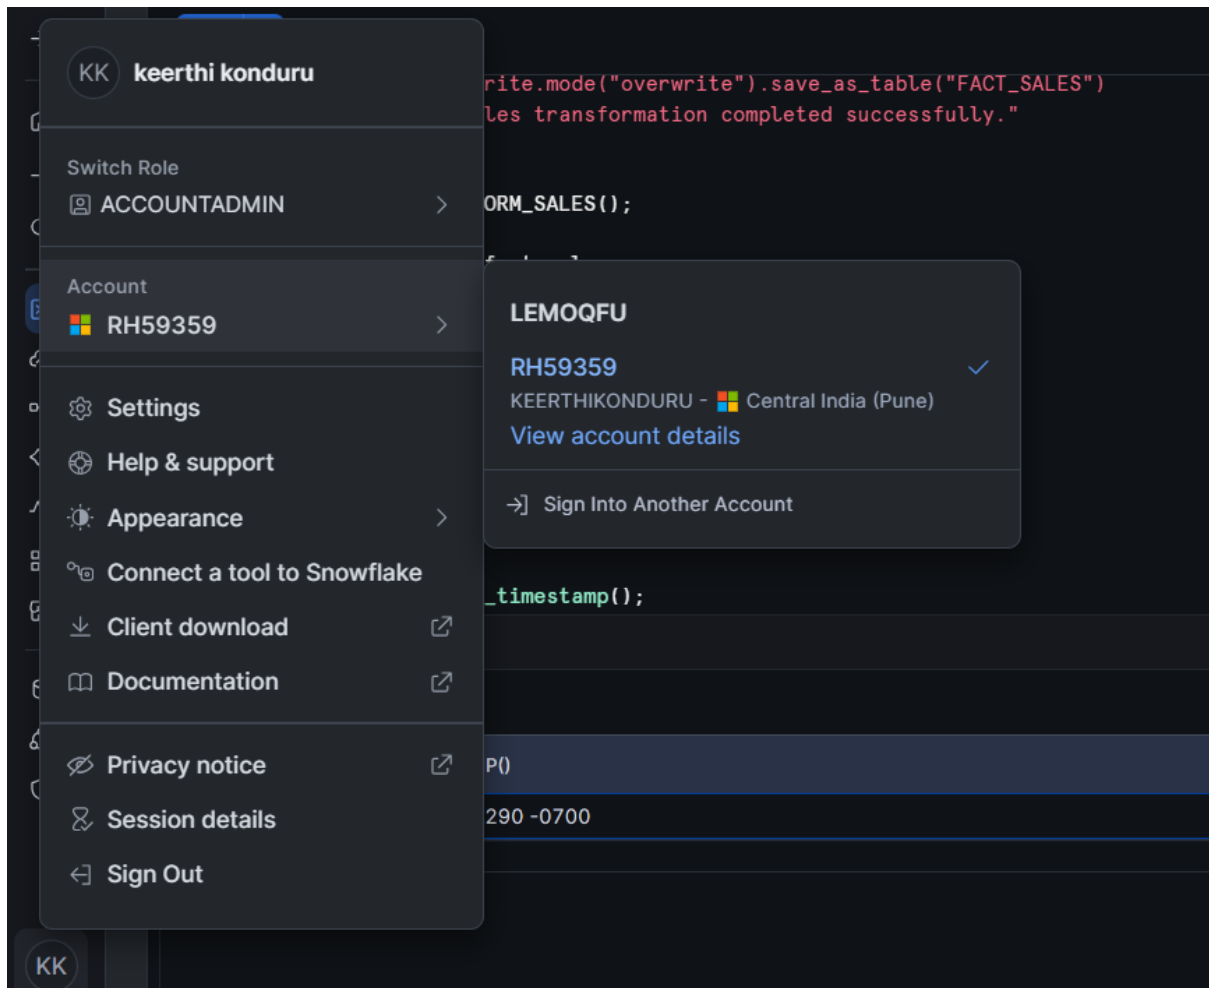

Account Details		
Account Config File Connectors/Drivers SQL Commands		
NAME	VALUE	
Account identifier ⓘ	LEMOQFU-RH59359	
Data sharing account identifier ⓘ	LEMOQFU.RH59359	
Organization name	LEMOQFU	
Account name	RH59359	
Account/Server URL	LEMOQFU-RH59359.snowflakecomputing.com	
Login name ⓘ	KEERTHIKONDURU	
Role	ACCOUNTADMIN	
Account locator	QR89921	
Cloud platform	AZURE	
Edition	Standard	
Learn more		Close

ACCOUNT NAME = ACCOUNT IDENTIFIER

DATABASE NAME = EX: REATAIL_DB

WAREHOUSE NAME = EX:REATAIL_LOAD_WH

USERNAME = KEERTHIKONDURU

PASSWORD = SET DURING THE SET UP OF SNOWFLAKE

ROLE = ACCOUNTADMIN

NO NEED OF HOST

CREATE

LINKED SERVICE CREATED FOR SNOWFLAKE

STEP 8:

SETTING PIPELINE

STEP A:



CHECK WHETHER THERE IS A FILE IN RAW/SALES OR NOT

PIPELINE-NEW PIPELINE


IN ACTIVITIES

MANAGE

DRAW AND DROP GET METADATA

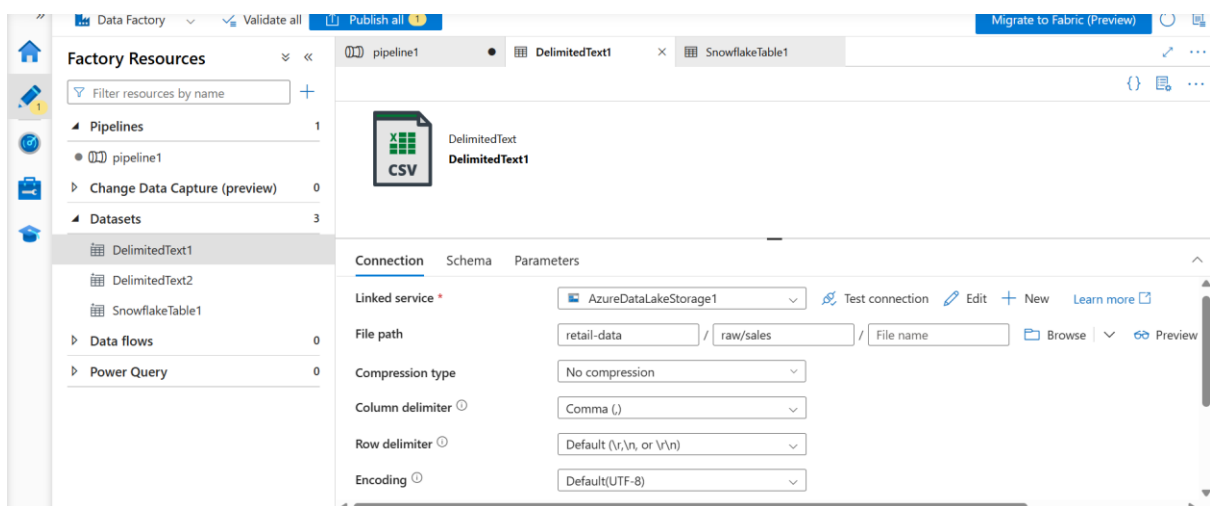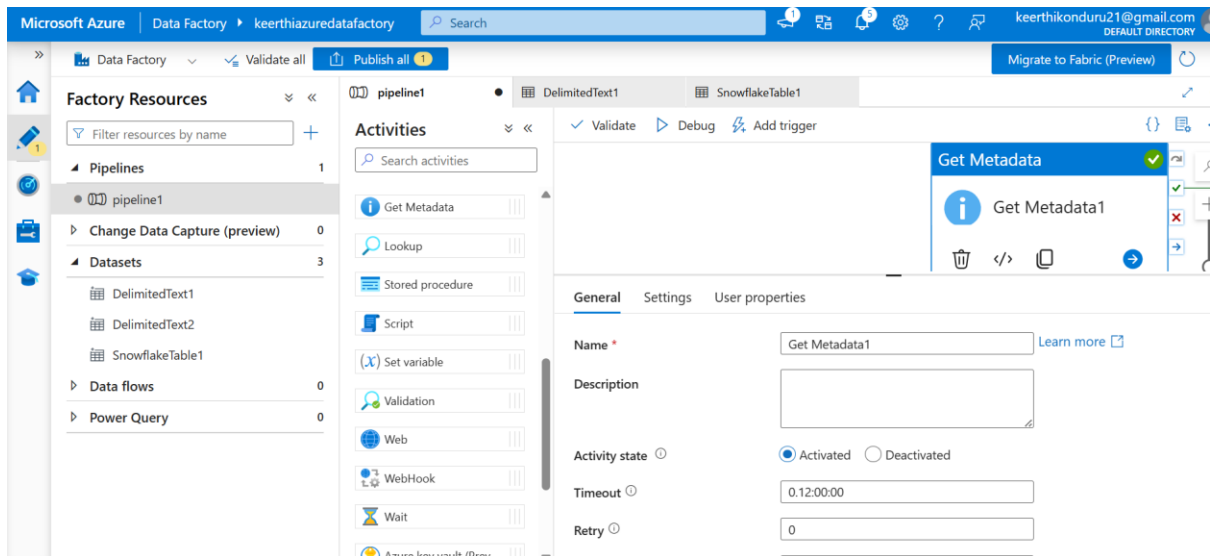


**CREATE A DATASET GIVE LINKED SERVICE DATA LAKE
FILE PATH OF THE ORDERS.CSV(EX)**

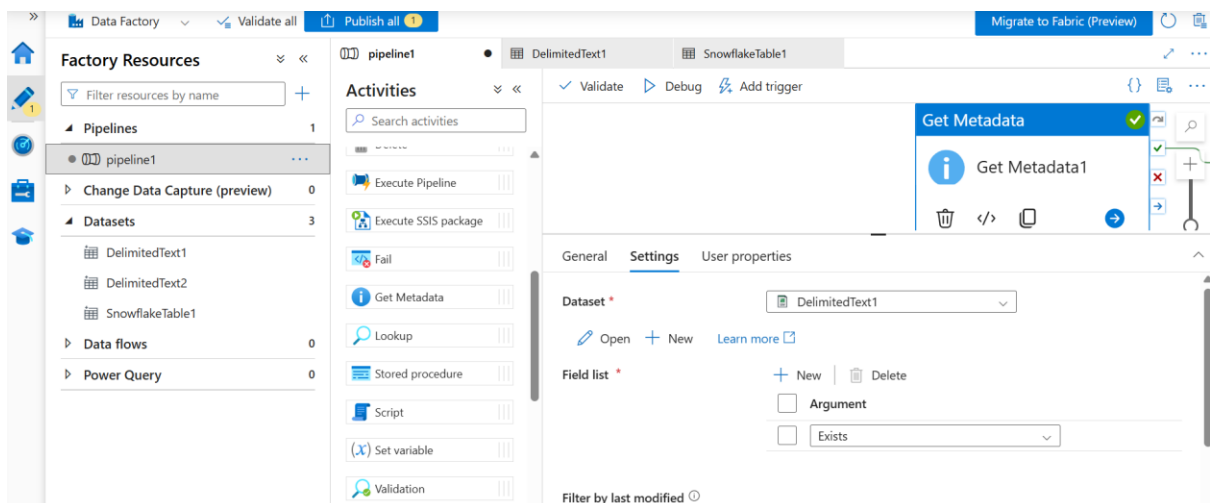

GET META DATA WILL CHECK FOR FILE EXISTS OR NOT


STEP B:

IF CONDITION

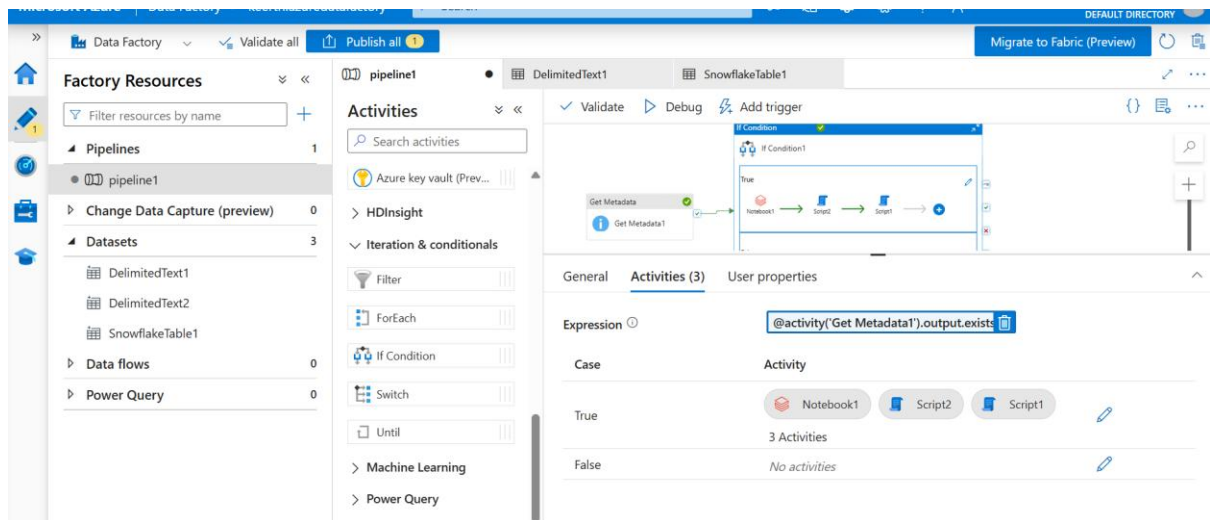

DRAG AND DROP IF CONDITION

IN ACTIVITIES

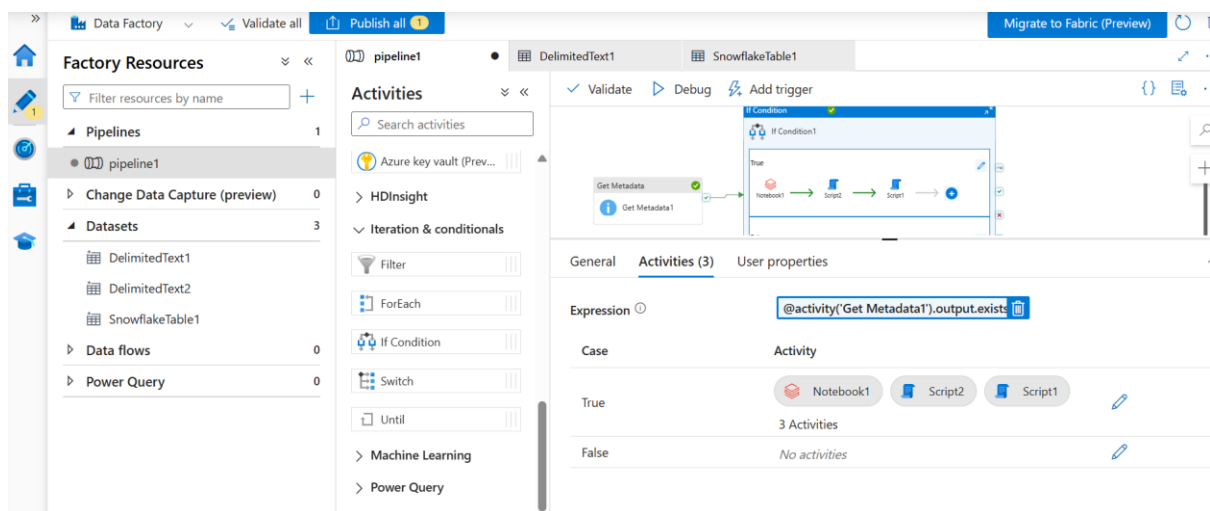

WHEN YOU CLICK PEN SUBLO IN TRUE

IT WILL SHOW LIKE

METADATA > IF CONDITION

AND BLACK SCREEN

CONNECT METADATA WITH IF BLOCK WITH GREEN LINE

PART C:

IN THE IF CONDITION


NOTEBOOK


FROM

ACTIVITIES


DATABRICKS

NOTEBOOK

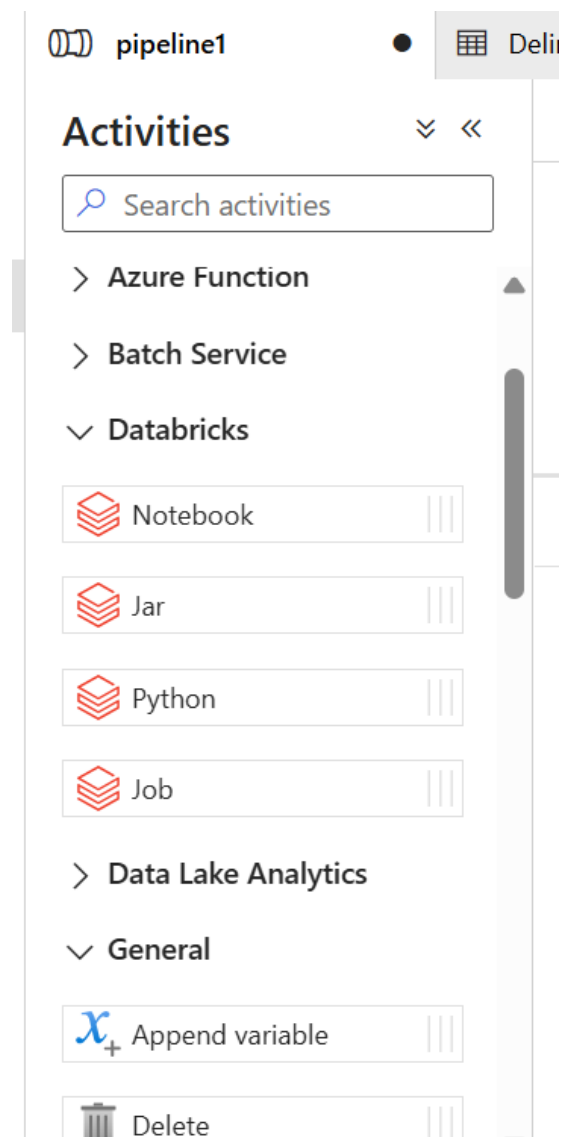

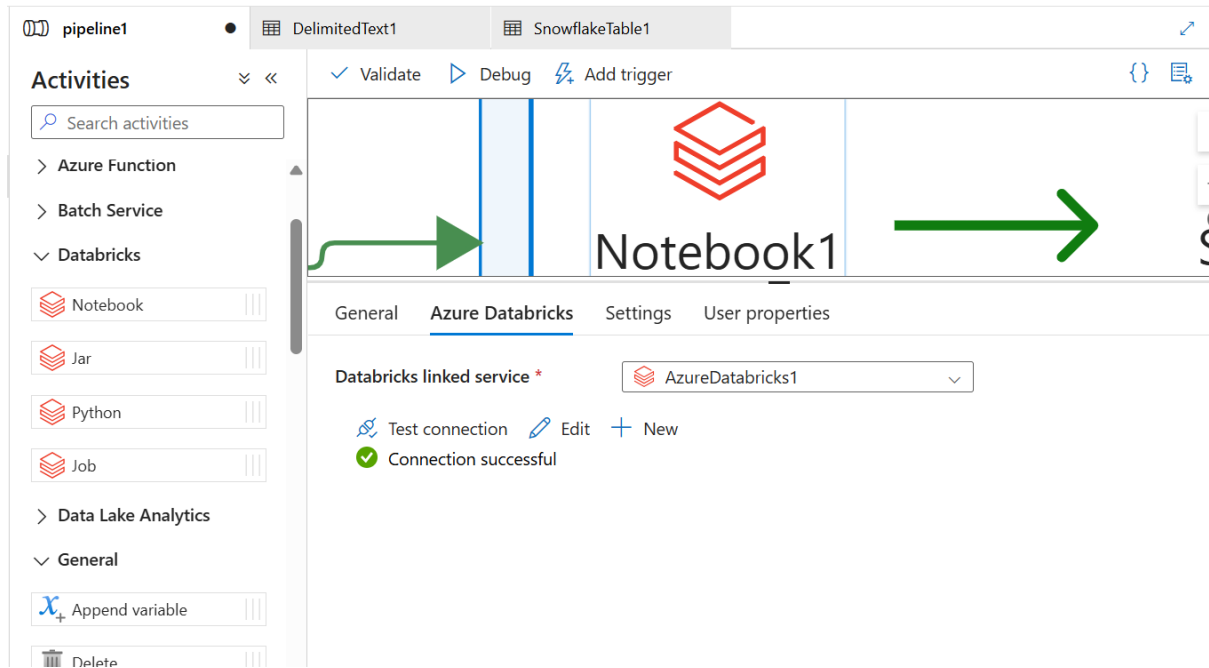

IGNORE IMAGE AS IT WAS TAKEN AFTER SUCCESSFUL RUNNING OF PIPELINE

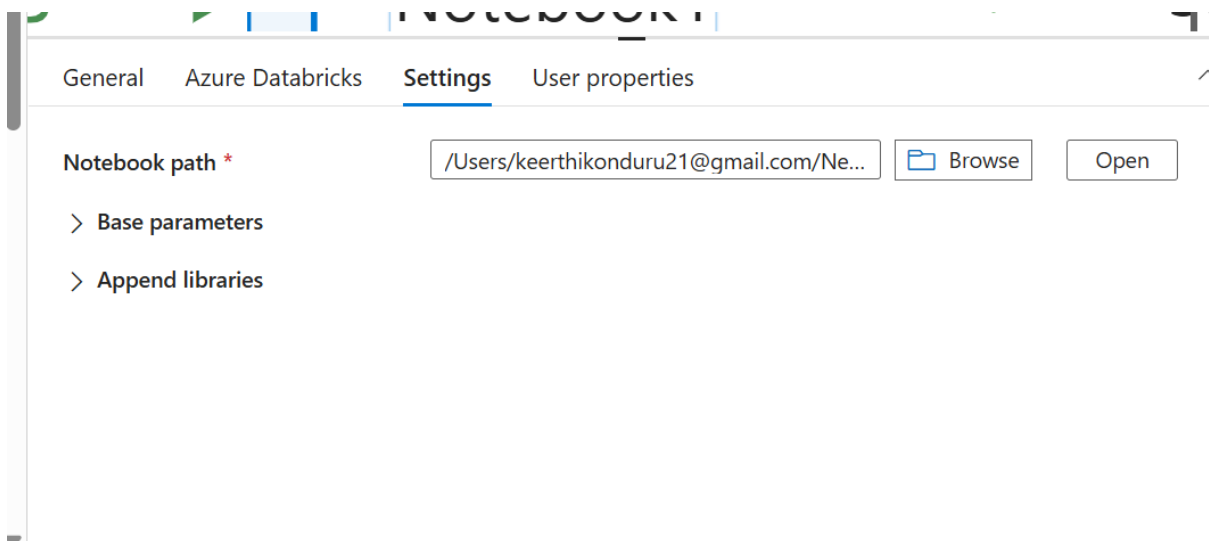

BROWSE TO SET THE PATH

Browse

Select a file or folder.

[Root folder](#) > [Users](#) > [keerthikonduru21@gmail.com](#)

 New Notebook 2026-05-22 10:41:10

Showing 1 item

OK

Cancel

STEP D:

NAME SET IN GENERAL IS SCRIPT 2(OWR WISH)



AIM:

**COPY INTO RAW TABLE FROM STAGE (WHICH WAS ALREADY
CREATED IN THE SNOWFALKE AND RUNNED MAUALLY)**

IN ACTIVITIES

DRAG AND DROP SCRIPT

CONNECT NOTEBOOK WITH SCRIPT

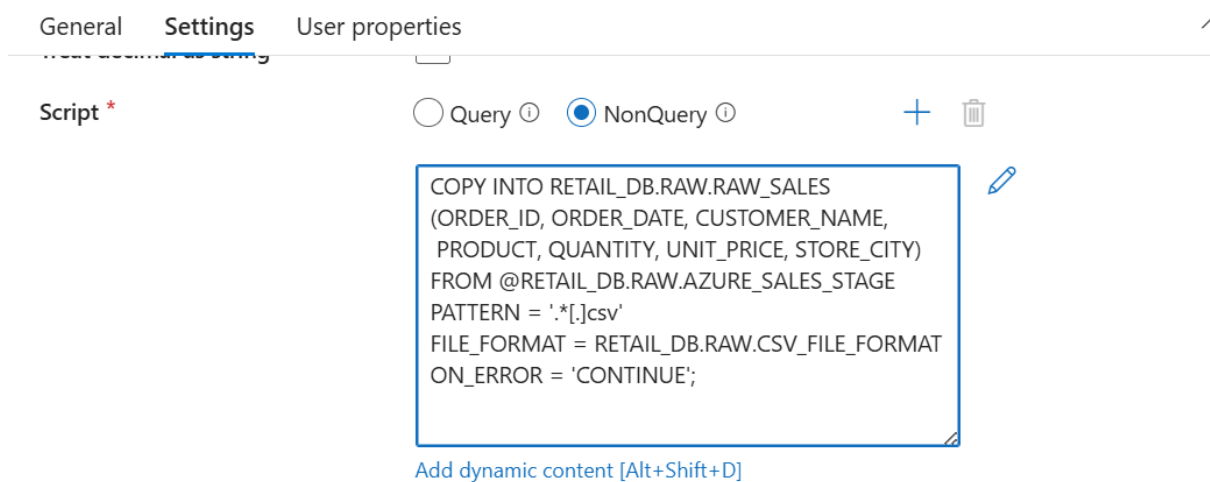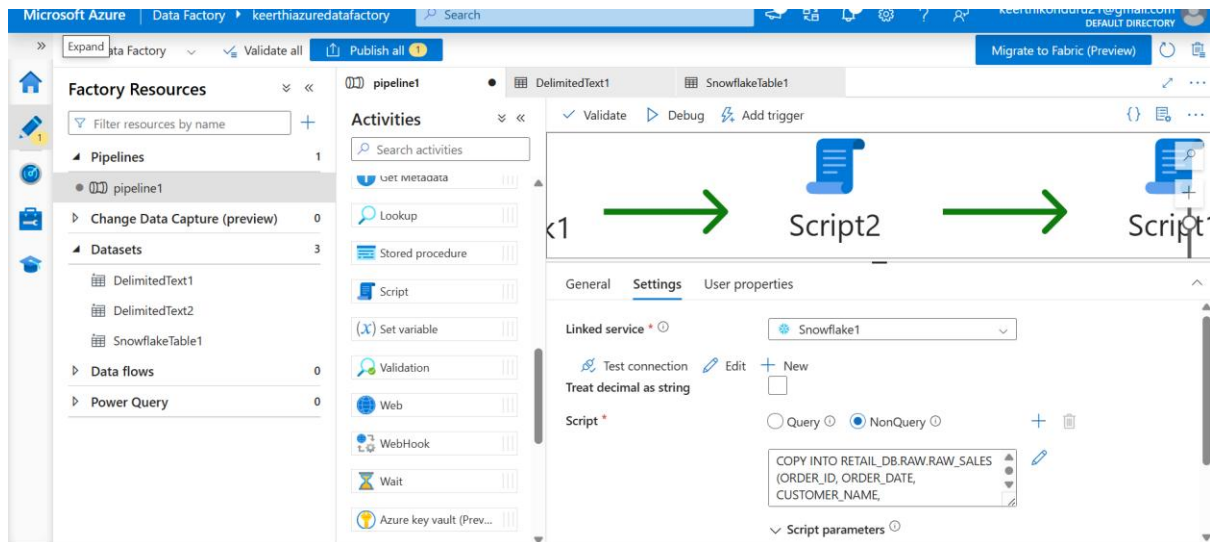


STEP E:

AIM:

CALLING THE PROCEDURE(WHICH WAS CREATED IN THE SWONFLAKE)

SAME SET IN GENEARL IS SCRIPT 1(OUR WISH)

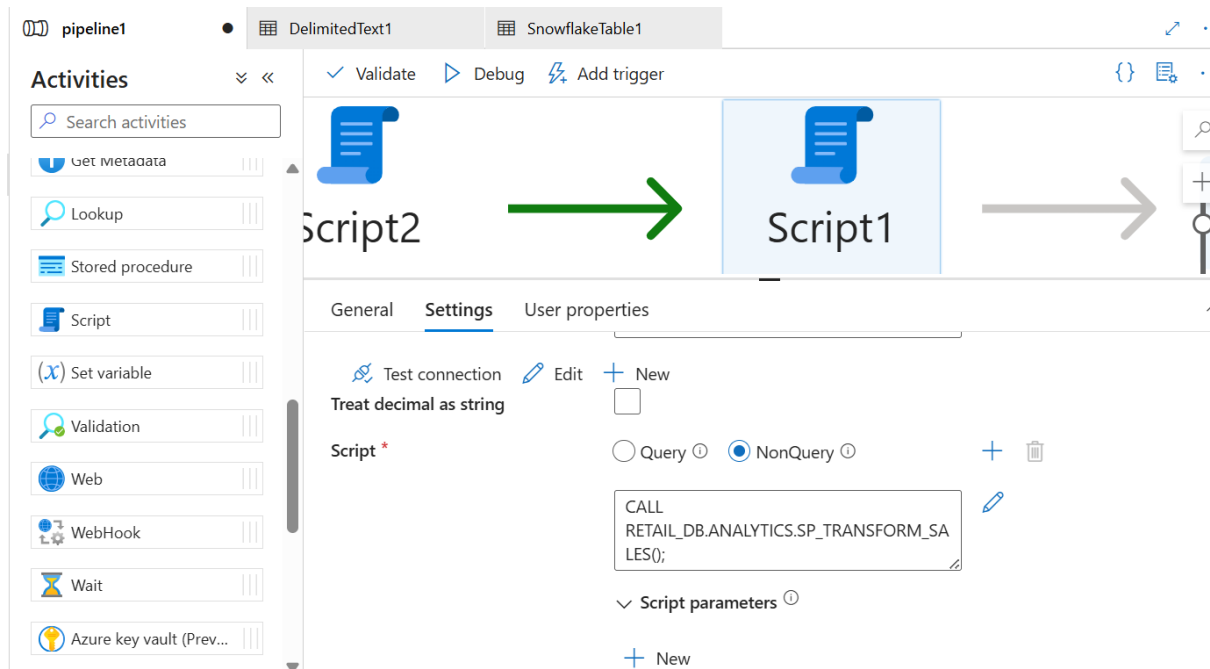


VALIDATE

IF NOW ERRORS

PUBLISH(IMPORTANT)

DEBUG

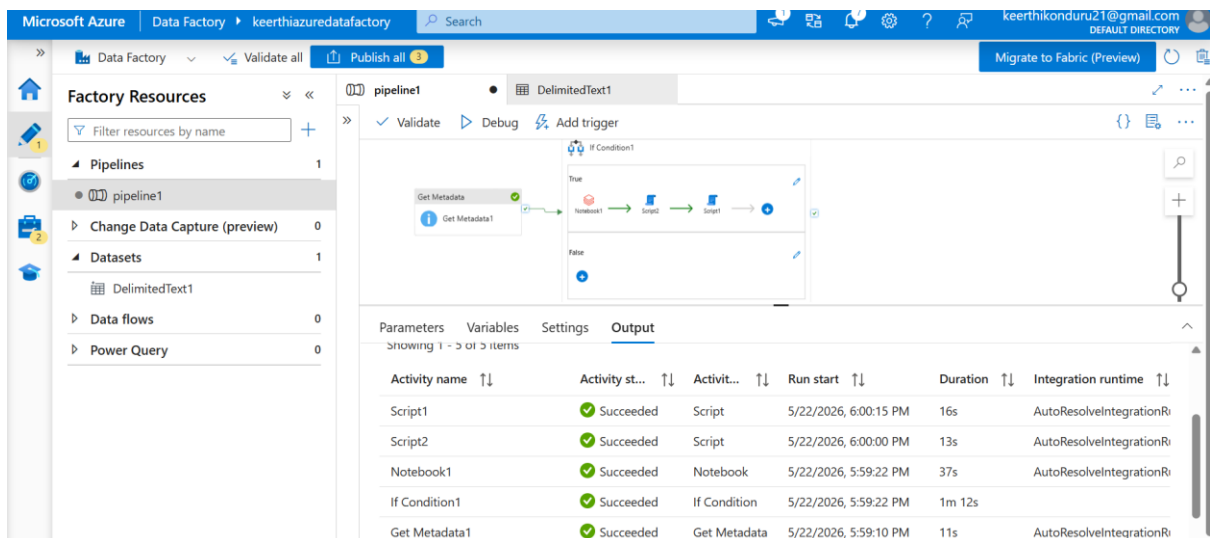

PIPELINE RUNNED SUSSESFULLY

FLOW:

STORAGE ACCOUNT(DATA LAKE)

|

PLACE FILE IN RAW DIRECTORY OF DATA LAKE

|

DATABRICKS(PUT PROCESSED PROCESSED FILE TO PROCESSED)

|

**SNOWFLAKE(CREATE WAREHOUSE,DATABASE,SCHEMAS,RAW
TABLE,FINAL TABLE,STAGE,PROCEDURE)**

|(COPY INTO,CALL PROCEDURE WILL BE DONE BY PIPELINE)

RUN THEM MANUALLY

|

NOW SET PIPELINE

|

**CHECK FILE EXISTENCE – DATABRICKS RUN – FILES GOES TO
PROCESSED – COPY INTO COPY FILE TO RAW TABLE – CALL
PROCEDURE MOVE DATA TO FINAL TABLE**