

## 配重 Counter Weight

| 臂长<br>Jib Length(m) | 样式<br>Type |           |           | 配重<br>Counter Weight(t) |
|---------------------|------------|-----------|-----------|-------------------------|
|                     | A (2.58t)  | B (2.00t) | B (1.00t) |                         |
| 25m                 | 1          | 1         | 7         | 7                       |
| 30m                 | 1          | 1         | 3         | 7.59                    |
| 35m                 | 1          | 1         | 4         | 8.59                    |
| 40m                 | 1          | 1         | 5         | 9.59                    |
| 45m                 | 1          | 1         | 6         | 10.59                   |
| 50m                 | 1          | 1         | 7         | 11.59                   |
| 55m                 | 1          | 1         | 7         | 11.59                   |

## 机构性能 Mechanisms

| 机构特性<br>Mechanisms specification                                                                    |                                                                                     |              |       |       |     |  |     |  |         |  |  | kW |  |
|-----------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------|--------------|-------|-------|-----|-----------------------------------------------------------------------------------|-----|-----------------------------------------------------------------------------------|---------|-----------------------------------------------------------------------------------|--|----|--|
| 起升<br>Hoisting                                                                                      |    | 24PFC15      | m/min | 40    | 80  | 20                                                                                | 40  | 400m                                                                              | 24      |                                                                                   |  |    |  |
|                                                                                                     |                                                                                     |              | t     | 3,0   | 1,5 | 6,0                                                                               | 3,0 |                                                                                   |         |                                                                                   |  |    |  |
| 变幅<br>Trolleying                                                                                    |    | 4D3V2        | m/min | 0-54  |     |                                                                                   |     |                                                                                   | 4       |                                                                                   |  |    |  |
| 回转<br>Slewing                                                                                       |  | RCV95(JH13E) | r/min | 0-0,7 |     |                                                                                   |     |                                                                                   | 6000N.M |                                                                                   |  |    |  |
|  电源 Power Supply |                                                                                     |              |       |       |     | 380V(±10%)/50Hz                                                                   |     |                                                                                   |         |                                                                                   |  |    |  |

沈阳宝泉商贸有限公司

地址: 辽宁省沈阳市大东区东北大马路264号, ADD: ROOM NO.509-511, NO.264 DONGBEI DAMALU  
509-511室 ROAD, DADONG DISTRICT, SHENYANG CHINA

电话：0086-24-26210512

邮箱: [bq@bq-sy.com](mailto:bq@bq-sy.com)

网址: <http://www.bq-sy.com>

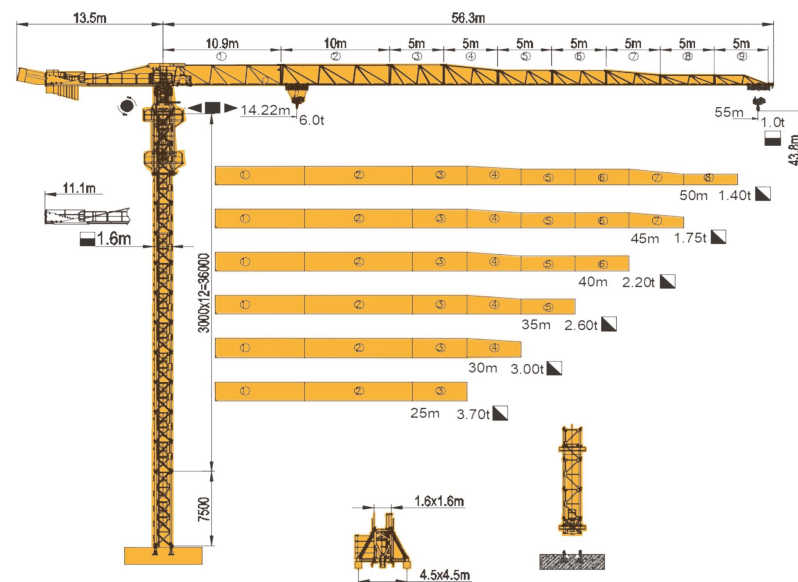
SHENYANG BAOQUAN BUSINESS CO., LTD

ADD: ROOM NO.509-511, NO.264 DONGBEI DAMALU  
ROAD, DADONG DISTRICT, SHENYANG CHINA

Tel: 0086-24-26210512


E-mail: bq@bq-sy.com

Url: <http://www.bq-sy.com>



沈阳宝泉商贸有限公司 SHEN YANG BAO QUAN BUSINESS CO., LTD

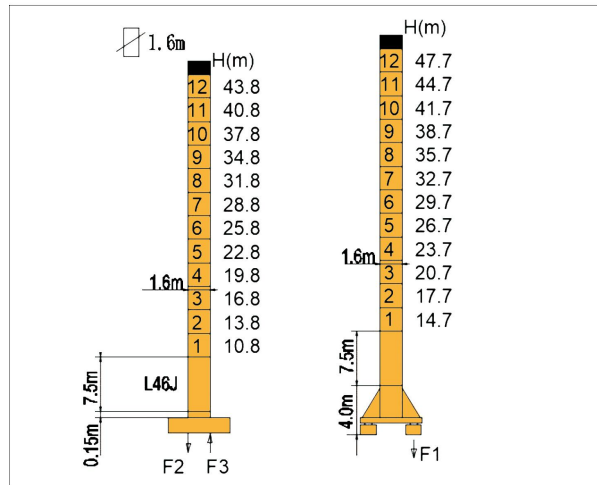塔身 Tower



|    |        |        |
|----|--------|--------|
| F2 | ● 161t | ■ 137t |
| F3 | ● 127t | ■ 108t |
|    | 34.9t  |        |


|    |       |       |
|----|-------|-------|
| F1 | ● 73t | ■ 87t |
|    | 41.9t |       |

| F 反力 Reactions | ● 工作状态  | In service     | 自重        | 独立高度自重 (不含配重) | Total weight of free standing height (excludes counter weight ballast) |
|----------------|---------|----------------|-----------|---------------|------------------------------------------------------------------------|
|                | ■ 非工作状态 | Out of service | Self-load |               |                                                                        |





载荷特性 Load Diagrams

|     | C(max) | R(cmax) | 10   | 15   | 18   | 20   | 22   | 25   | 28   | 30   | 32   | 35   | 40   | 45   | 50   | 55   | m |
|-----|--------|---------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|---|
| 55m | 3.00   | 23.44   | 3.00 | 3.00 | 3.00 | 3.00 | 3.00 | 2.78 | 2.42 | 2.23 | 2.06 | 1.84 | 1.55 | 1.32 | 1.15 | 1.10 | t |
|     | 6.00   | 12.36   | 6.00 | 4.75 | 3.79 | 3.32 | 2.93 | 2.48 | 2.12 | 1.93 | 1.76 | 1.54 | 1.25 | 1.02 | 0.84 | 0.70 | t |
| 50m | 3.00   | 27.08   | 3.00 | 3.00 | 3.00 | 3.00 | 3.00 | 2.88 | 2.66 | 2.46 | 2.20 | 1.87 | 1.61 | 1.40 |      |      | t |
|     | 6.00   | 14.22   | 6.00 | 5.63 | 4.52 | 3.97 | 3.52 | 2.99 | 2.58 | 2.36 | 2.16 | 1.90 | 1.57 | 1.31 | 1.10 |      | t |
| 45m | 3.00   | 28.80   | 3.00 | 3.00 | 3.00 | 3.00 | 3.00 | 3.00 | 2.87 | 2.66 | 2.39 | 2.03 | 1.75 |      |      |      | t |
|     | 6.00   | 15.15   | 6.00 | 6.00 | 4.88 | 4.30 | 3.82 | 3.25 | 2.81 | 2.57 | 2.36 | 2.09 | 1.73 | 1.45 |      |      | t |
| 40m | 3.00   | 30.87   | 3.00 | 3.00 | 3.00 | 3.00 | 3.00 | 3.00 | 3.00 | 2.88 | 2.59 | 2.20 |      |      |      |      | t |
|     | 6.00   | 16.15   | 6.00 | 6.00 | 5.27 | 4.65 | 4.14 | 3.53 | 3.06 | 2.80 | 2.58 | 2.28 | 1.90 |      |      |      | t |
| 35m | 3.00   | 31.00   | 3.00 | 3.00 | 3.00 | 3.00 | 3.00 | 3.00 | 3.00 | 2.89 | 2.60 |      |      |      |      |      | t |
|     | 6.00   | 16.22   | 6.00 | 6.00 | 5.30 | 4.67 | 4.16 | 3.55 | 3.08 | 2.82 | 2.59 | 2.30 |      |      |      |      | t |
| 30m | 3.00   | 30.00   | 3.00 | 3.00 | 3.00 | 3.00 | 3.00 | 3.00 | 3.00 | 3.00 |      |      |      |      |      |      | t |
|     | 6.00   | 16.57   | 6.00 | 6.00 | 5.44 | 4.79 | 4.27 | 3.65 | 3.17 | 2.90 |      |      |      |      |      |      | t |
| 25m | 3.00   | 25.00   | 3.00 | 3.00 | 3.00 | 3.00 | 3.00 | 3.00 |      |      |      |      |      |      |      |      | t |
|     | 6.00   | 16.74   | 6.00 | 6.00 | 5.51 | 4.86 | 4.33 | 3.70 |      |      |      |      |      |      |      |      | t |

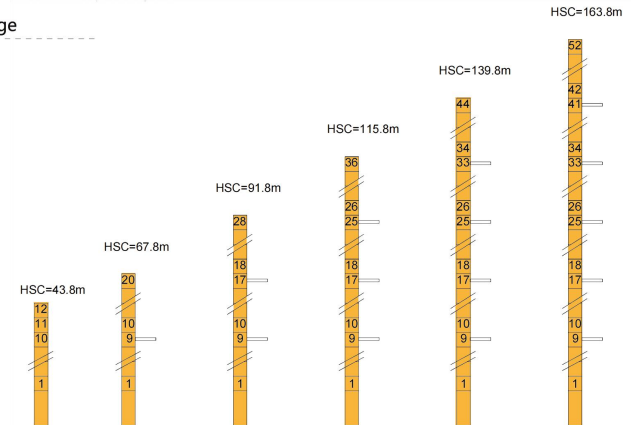附着 Anchorage






外形尺寸重量表 Dimensions Weights

| Description           |       | Sketch                                                                              | L(m)  | W(m) | H(m) | Weight per piece(t) | Q'ty |
|-----------------------|-------|-------------------------------------------------------------------------------------|-------|------|------|---------------------|------|
| Jib Section           | No.1  |    | 10.18 | 1.00 | 2.38 | 1.64                | 1    |
|                       | No.2  |    | 10.20 | 0.80 | 2.15 | 1.03                | 1    |
|                       | No.3  |    | 5.18  | 0.80 | 2.10 | 0.46                | 1    |
|                       | No.4  |    | 5.16  | 0.80 | 2.08 | 0.39                | 1    |
|                       | No.5  |    | 5.14  | 0.80 | 1.49 | 0.35                | 1    |
|                       | No.6  |    | 5.12  | 0.80 | 1.48 | 0.27                | 1    |
|                       | No.7  |    | 5.10  | 0.80 | 1.47 | 0.25                | 1    |
|                       | No.8  |    | 5.10  | 0.80 | 1.00 | 0.23                | 1    |
|                       | No.9  |    | 5.10  | 0.80 | 1.00 | 0.21                | 1    |
|                       | No.10 |   | 1.00  | 1.01 | 0.53 | 0.08                | 1    |
| CounterJib-Turn table |       |  | 11.94 | 1.61 | 2.30 | 4.45                | 1    |
| Cabin                 |       |  | 2.01  | 2.12 | 3.98 | 0.39                | 1    |
| Trolley               |       |  | 2.10  | 1.02 | 0.72 | 0.36                | 1    |
| Hook                  |       |  | 1.09  | 0.14 | 1.47 | 0.28                | 1    |

外形尺寸重量表 Dimensions Weights

Lower Part

| Description   | Sketch                                                                              | L(m) | W(m) | H(m) | Weight per piece(t) | Q'ty |
|---------------|-------------------------------------------------------------------------------------|------|------|------|---------------------|------|
| Basic mast    |  | 7.80 | 1.74 | 1.74 | 3.10                | 1    |
| L46A1mast     |  | 3.24 | 1.74 | 1.74 | 1.18                | 12   |
| Climbing cage |  | 6.80 | 2.31 | 2.34 | 3.46                | 1    |
| fixing angle  |  | 0.68 | 0.5  | 0.5  | 0.14                | 4    |