


附着 Anchorages

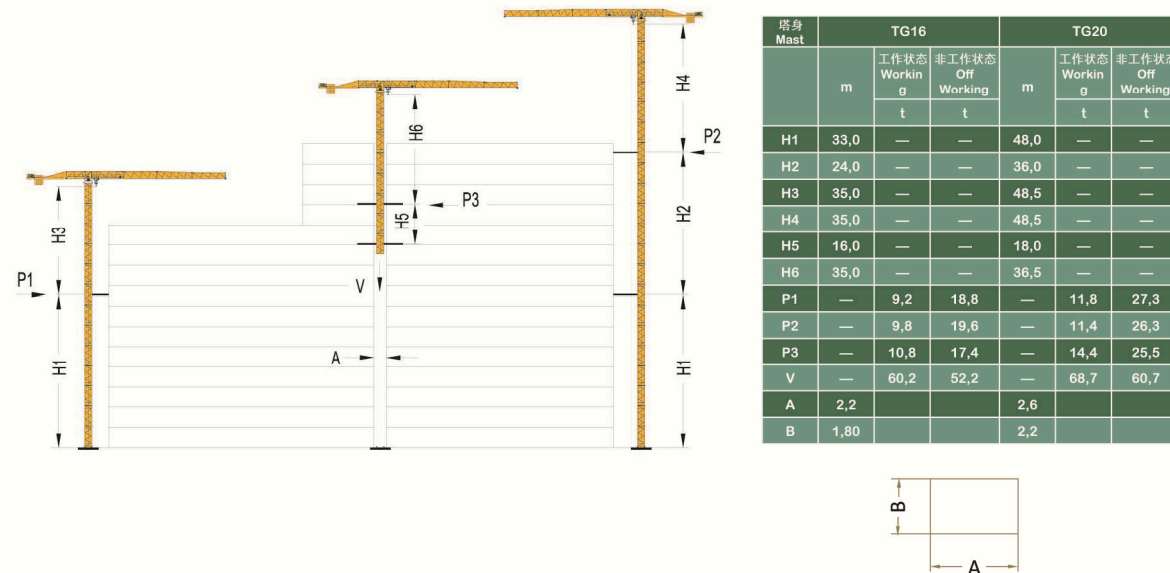


机构性能 Mechanisms


机构特性 Mechanisms specification											kW		
起升 Hoisting		24PQC20	m/min	56,8	28,0	5,0	28,0	14,8	2,5	410m	24/24/4,5	可选择 Optionsl winch	
			t	2,0	4,0	4,0	4,0	8,0	8,0				
	30LVF20	m/min	80,0		40,0	40,0		20,0		450m	30		
		t	2,0		4,0	4,0		8,0					
变幅 Trolleying		95JXL2	m/min	0-58							95Nm		
回转 Slewing		RCV95 (JH08)	r/min	0,64							95Nm x 2		
行走 Travelling		RT443 (L68B2)	m/min	12,1 / 24,1							3,4/1,7 x 4		
		RT324 (L46A1)	m/min	12,7 / 25,4							2,6/5,2 x 2		
 电源 Power Supply						380V 50Hz / 440V 60Hz							
 供电容量 Necessary Electric Power						43kVA / 50kVA							

沈阳宝泉商贸有限公司
地址：辽宁省沈阳市大东区东北大马路264号，509-511室
电话：0086-24-26210512
传真：0086-415-3165597
邮箱：bqswgs@163.com
网址：http://www.bq-sy.com

SHENYANG BAOQUAN BUSINESS CO., LTD
ADD: ROOM NO.509-511 , NO.264 DONGBEI DAMALU ROAD, DADONG DISTRICT, SHENYANG CHINA
Tel: 0086-24-26210512
Fax: 0086-415-3165597
E-mail: bqswgs@163.com
Url: http://www.bq-sy.com

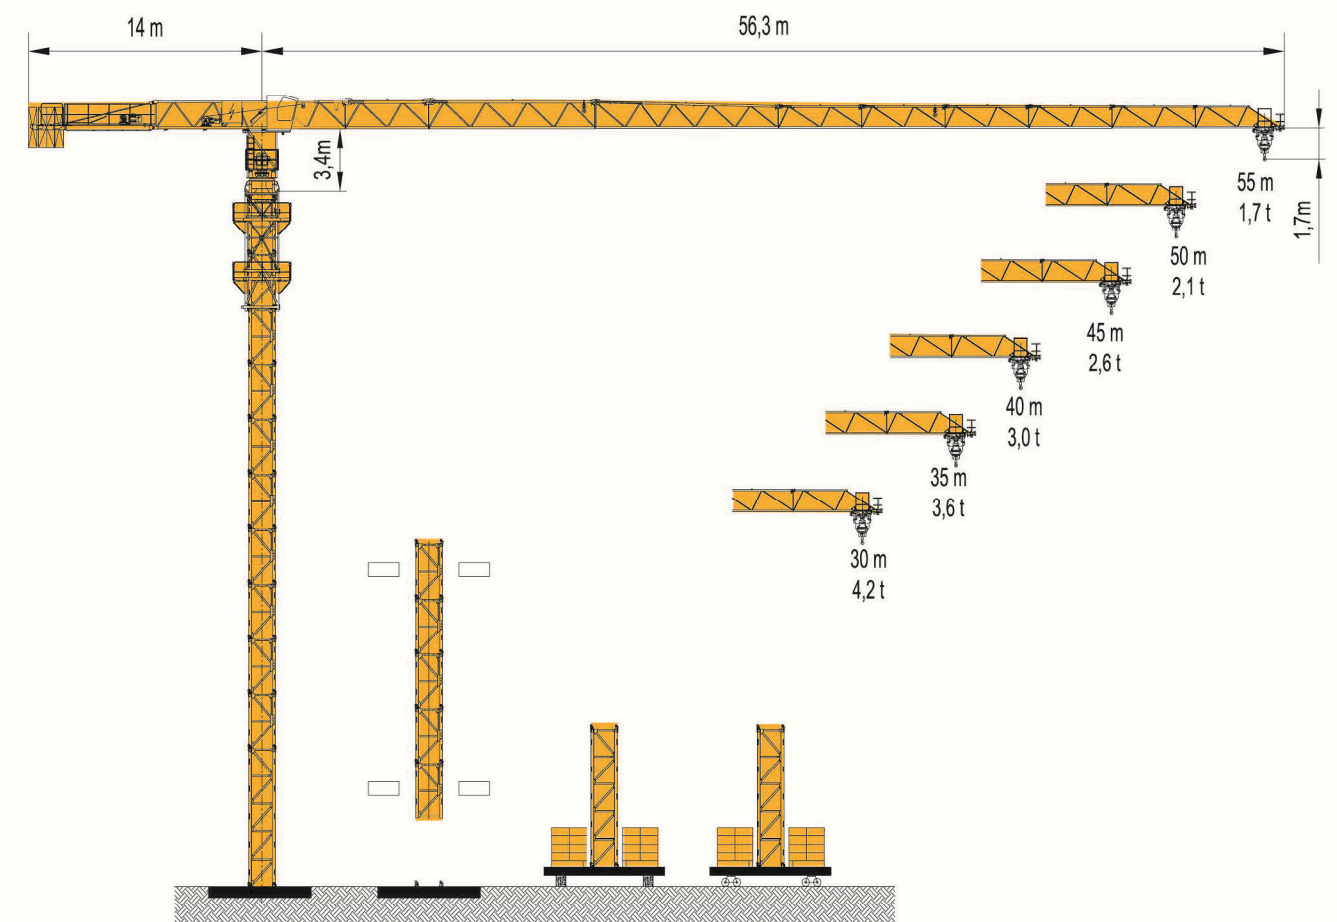


起重臂 Jib

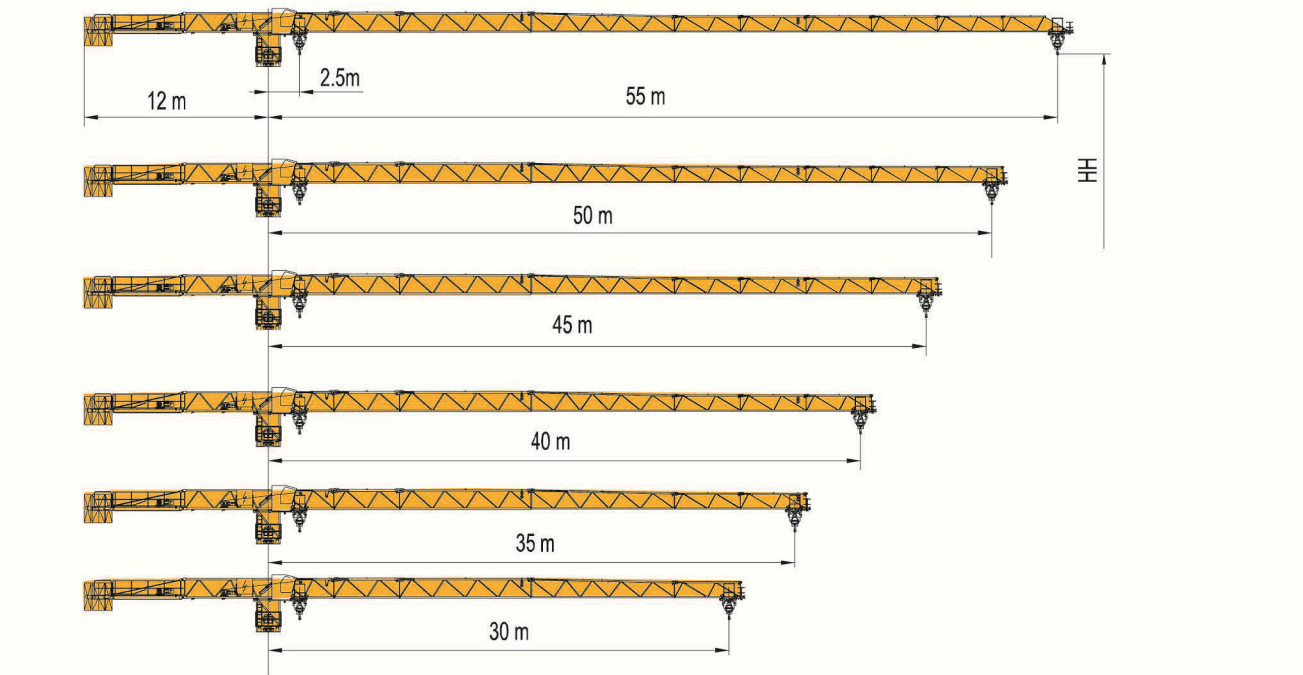

载荷特性 Load Diagrams

55m		2,5 ▶	14,4	15	18	20	23	25	26,4	26,8	30	35	40	45	50	55	m	
			4,00	4,00	4,00	4,00	4,00	4,00	4,00	4,00	3,52	2,94	2,51	2,18	1,92	1,70	t	
			8,00	7,66	6,23	5,53	4,71	4,27	4,00	4,00	3,52	2,94	2,51	2,18	1,92	1,70	t	
		2,5 ▶	15,5	18	20	23	25	28,5	28,9	30	35	40	45	50	m			
50m			4,00	4,00	4,00	4,00	4,00	4,00	4,00	3,83	3,21	2,74	2,39	2,10	t			
			8,00	6,75	5,99	5,11	4,64	4,00	4,00	3,83	3,21	2,74	2,39	2,10	t			
45m		2,5 ▶	16,6	18	20	23	25	30	30,5	31,0	35	40	45	m				
			4,00	4,00	4,00	4,00	4,00	4,00	4,00	4,00	3,48	2,99	2,60	t				
			8,00	7,29	6,47	5,53	5,02	4,07	4,00	4,00	3,48	2,99	2,60	t				
		2,5 ▶	16,6	18	20	23	25	30	30,5	31,1	35	40	m					
40m			4,00	4,00	4,00	4,00	4,00	4,00	4,00	4,00	3,50	3,00	t					
			8,00	7,31	6,49	5,54	5,04	4,08	4,00	4,00	3,50	3,00	t					
35m		2,5 ▶	17,0	18	20	23	25	30	31,4	31,9	35	m						
			4,00	4,00	4,00	4,00	4,00	4,00	4,00	4,00	3,60	t						
			8,00	7,50	6,66	5,69	5,17	4,19	4,00	4,00	3,60	t						
		2,5 ▶	17,0	18	20	23	25	30	m									
30m			4,00	4,00	4,00	4,00	4,00	4,00	t									
			8,00	7,51	6,67	5,70	5,18	4,20	t									

塔身 Tower

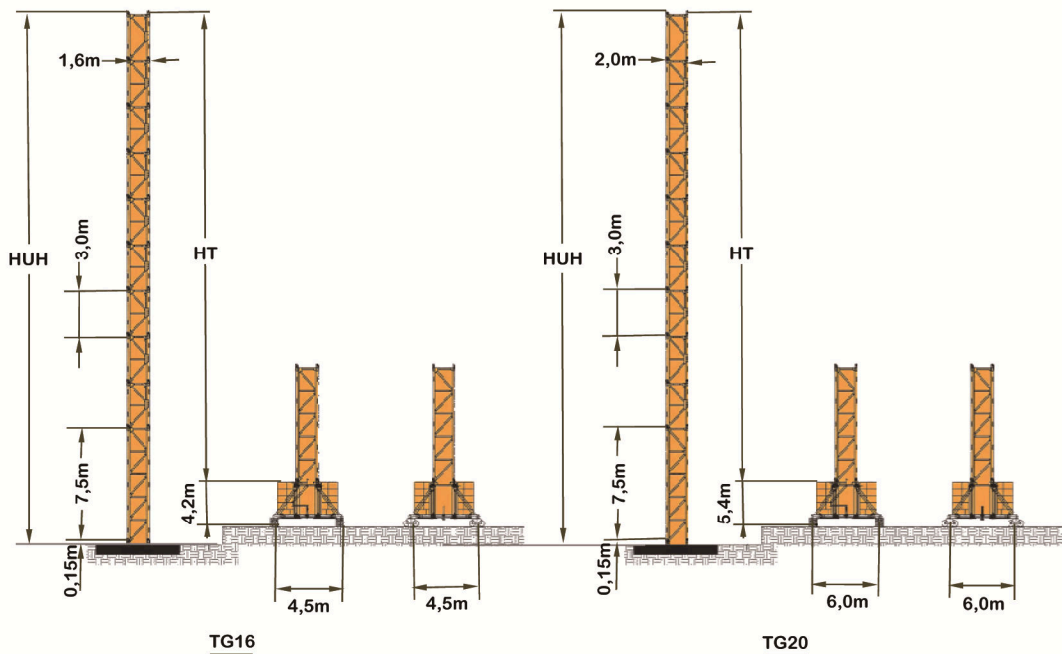

固定式 Stationary type										
塔身 Mast TG16		臂架长度 Boom								
No.	HT (m)	30	35	40	45	50	55			
1	7,6	●	●	●	●	●	●			
2	10,6	●	●	●	●	●	●			
3	13,6	●	●	●	●	●	●			
4	16,6	●	●	●	●	●	●			
...	...	...	...	...	...	...	...			
10	34,6	●	●	●	●	●	●			
11	37,6	●	●	●	●	●	●			
12	40,6	●	●	●	●	●	●			
13	43,6	●	●	●	●	●	●			

压重式或行走式 Travelling type										
塔身 Mast TG16		臂架长度 Boom								
No.	HT (m)	30	35	40	45	50	55			
1	11,7	●	●	●	●	●	●			
2	14,7	●	●	●	●	●	●			
3	17,7	●	●	●	●	●	●			
4	20,7	●	●	●	●	●	●			
...	...	...	...	...	...	...	...			
10	38,7	●	●	●	●	●	●			
11	41,7	●	●	●	●	●	●			

固定式 Stationary type										
塔身 Mast TG20		臂架长度 Boom								
No.	HT (m)	30	35	40	45	50	55			
1	7,6	●	●	●	●	●	●			
2	10,6	●	●	●	●	●	●			
3	13,6	●	●	●	●	●	●			
4	16,6	●	●	●	●	●	●			
...	...	...	...	...	...	...	...			
15	49,6	●	●	●	●	●	●			
16	52,6	●	●	●	●	●	●			
17	55,6	●	●	●	●	●	●			
18	58,6	●	●	●	●	●	●			

压重式或行走式 Travelling type										
塔身 Mast TG20		臂架长度 Boom								
No.	HT (m)	30	35	40	45	50	55			
1	12,9	●	●	●	●	●	●			
2	15,9	●	●	●	●	●	●			
3	18,9	●	●	●	●	●	●			
4	21,9	●	●	●	●	●	●			
...	...	...	...	...	...	...	...			
15	54,9	●	●	●	●	●	●			
16	57,9	●	●	●	●	●	●			