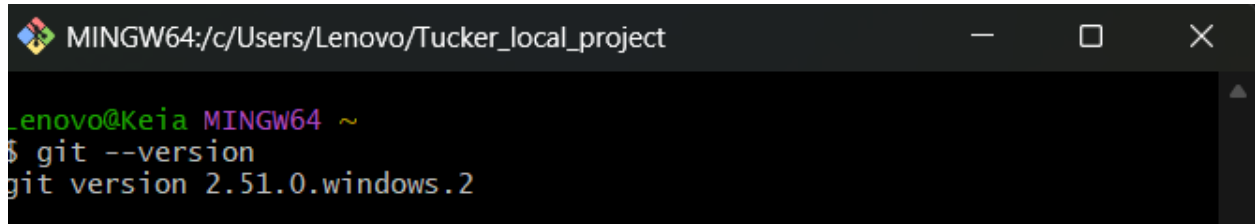


Tucker, Keiameere Ayesa S.
IV - CCSAD

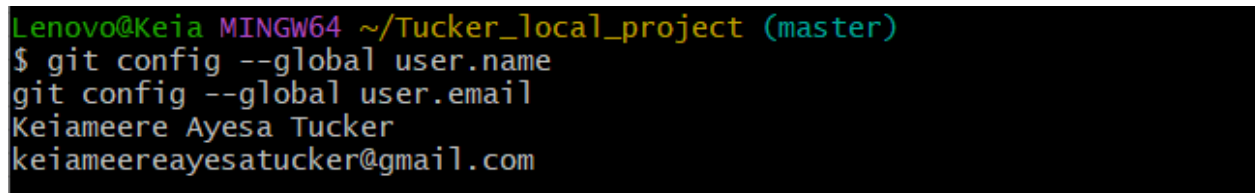
Machine Problem #1: Managing a Project with Git (Local Repository Only)

- Ensure Git is installed on your machine.

A terminal window titled 'MINGW64:/c/Users/Lenovo/Tucker_local_project' with standard window controls. The prompt is 'Lenovo@Keia MINGW64 ~'. The command '\$ git --version' is entered, and the output is 'git version 2.51.0.windows.2'.


```
Lenovo@Keia MINGW64 ~  
$ git --version  
git version 2.51.0.windows.2
```

- Set up your Git username and email (if not already configured)

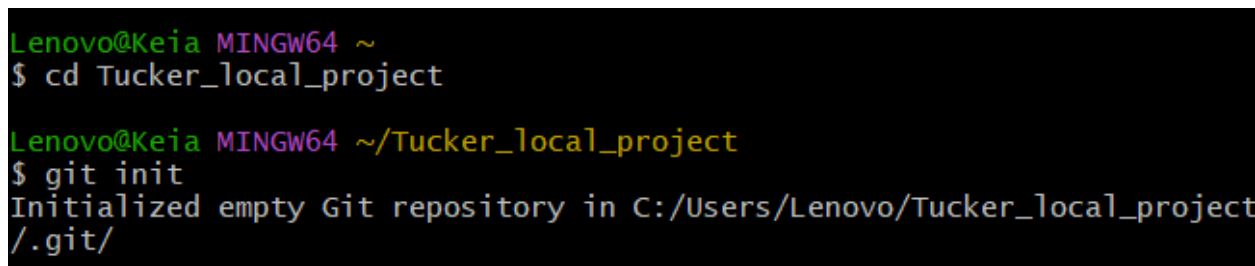
A terminal window showing the configuration of Git user information. The prompt is 'Lenovo@Keia MINGW64 ~/Tucker_local_project (master)'. The command '\$ git config --global user.name' is entered, followed by 'git config --global user.email'. The output for the name is 'Keiameere Ayesa Tucker' and for the email is 'keiameereayesatucker@gmail.com'.

```
Lenovo@Keia MINGW64 ~/Tucker_local_project (master)  
$ git config --global user.name  
git config --global user.email  
Keiameere Ayesa Tucker  
keiameereayesatucker@gmail.com
```

- Create a directory called <YourLastname>_local_project, navigate into it, and initialize it as a Git repository

A terminal window showing the creation of the project directory. The prompt is 'Lenovo@Keia MINGW64 ~'. The command '\$ mkdir Tucker_local_project' is entered.

```
Lenovo@Keia MINGW64 ~  
$ mkdir Tucker_local_project
```

A terminal window showing the navigation into the project directory and its initialization as a Git repository. The prompt is 'Lenovo@Keia MINGW64 ~'. The command '\$ cd Tucker_local_project' is entered. The prompt changes to 'Lenovo@Keia MINGW64 ~/Tucker_local_project'. The command '\$ git init' is entered, and the output is 'Initialized empty Git repository in C:/Users/Lenovo/Tucker_local_project/.git/'.

```
Lenovo@Keia MINGW64 ~  
$ cd Tucker_local_project  
  
Lenovo@Keia MINGW64 ~/Tucker_local_project  
$ git init  
Initialized empty Git repository in C:/Users/Lenovo/Tucker_local_project/.git/
```

- Multiple commits reflecting changes in different branches.
- Evidence of conflict resolution during branch merging (optional).
- A Git tag-marking version v1.0 (optional).

1. Create a new branch:

- Create a new branch named "feature_x" to isolate your experimental changes.

```
Lenovo@Keia MINGW64 ~/Tucker_local_project (master)
$ git checkout -b feature_x
Switched to a new branch 'feature_x'
```

2. Stage changes:

- Make modifications to your project files.
- Stage the changes using the *git add* command.

```
Lenovo@Keia MINGW64 ~/Tucker_local_project (feature_x)
$ echo "Jjok, Ddoie, Guineguy, Hanabit, Haepi, Hamtaengi" > twimi.txt

Lenovo@Keia MINGW64 ~/Tucker_local_project (feature_x)
$ git status
On branch feature_x

No commits yet

Untracked files:
  (use "git add <file>..." to include in what will be committed)
    twimi.txt

nothing added to commit but untracked files present (use "git add" to track)
```

```
Lenovo@Keia MINGW64 ~/Tucker_local_project (feature_x)
$ git add twimi.txt
warning: in the working copy of 'twimi.txt', LF will be replaced by CRLF
the next time Git touches it
```

```
Lenovo@Keia MINGW64 ~/Tucker_local_project (feature_x)
$ echo "This is TWS dolls" >> twimi.txt

Lenovo@Keia MINGW64 ~/Tucker_local_project (feature_x)
$ git status
On branch feature_x
Changes not staged for commit:
  (use "git add <file>..." to update what will be committed)
  (use "git restore <file>..." to discard changes in working directory)
    modified:   twimi.txt

no changes added to commit (use "git add" and/or "git commit -a")

Lenovo@Keia MINGW64 ~/Tucker_local_project (feature_x)
$ git add twimi.txt
warning: in the working copy of 'twimi.txt', LF will be replaced by CRLF
the next time Git touches it
```

(changes made po sa main branch to show commit across branches):

```
Lenovo@Keia MINGW64 ~/Tucker_local_project (main)
$ echo "Final Twimi Dolls touch" >> twimi.txt

Lenovo@Keia MINGW64 ~/Tucker_local_project (main)
$ git add twimi.txt
warning: in the working copy of 'twimi.txt', LF will be replaced by CRLF
the next time Git touches it
```

3. Commit changes:

- Commit the staged changes to your local repository using the git commit command. Provide a clear and concise commit message.

First commit:

```
Lenovo@Keia MINGW64 ~/Tucker_local_project (feature_x)
$ git commit -m "First commit"
[feature_x (root-commit) 09c8264] First commit
1 file changed, 1 insertion(+)
create mode 100644 twimi.txt
```

Second commit:

```
Lenovo@Keia MINGW64 ~/Tucker_local_project (feature_x)
$ git commit -m "Add feature x changes"
[feature_x 70971a0] Add feature x changes
1 file changed, 1 insertion(+)
```

Third commit:

```
Lenovo@Keia MINGW64 ~/Tucker_local_project (main)
$ git commit -m "Final update after merge"
[main fe61dfc] Final update after merge
1 file changed, 1 insertion(+)
```

(i forgot to create main branch sir sorry po,,)

```
Lenovo@Keia MINGW64 ~/Tucker_local_project (feature_x)
$ git branch main

Lenovo@Keia MINGW64 ~/Tucker_local_project (feature_x)
$ git branch
* feature_x
  main
```

4. Switch back to the main branch:

- Use the *git checkout* command to switch back to the main branch.

```
Lenovo@Keia MINGW64 ~/Tucker_local_project (feature_x)
$ git checkout main
Switched to branch 'main'

Lenovo@Keia MINGW64 ~/Tucker_local_project (main)
```

5. Merge changes from the feature branch:

- Use the *git merge* command to merge the changes from the "feature_x" branch into the main branch. Resolve any merge conflicts that may arise.

```
Lenovo@Keia MINGW64 ~/Tucker_local_project (main)
$ git merge feature_x
Updating 09c8264..70971a0
Fast-forward
 twimi.txt | 1 +
1 file changed, 1 insertion(+)
```

6. Viewing the Commit History:

- Use Git commands to view the commit history and ensure that all commits are in place.

```
Lenovo@Keia MINGW64 ~/Tucker_local_project (main)
$ git log
commit fe61dfc68dd467dc87be6565a305e5358e6b668e (HEAD -> main)
Author: Keiameere Ayesa Tucker <keiameereayesatucker@gmail.com>
Date: Tue Sep 15 16:14:07 2026 +0800

    Final update after merge

commit 70971a07a4be88b51d05564cfad653f88bef3d0b (feature_x)
Author: Keiameere Ayesa Tucker <keiameereayesatucker@gmail.com>
Date: Tue Sep 15 16:08:52 2026 +0800

    Add feature x changes

commit 09c826440973bb70c442784c1ed28420b4308735
Author: Keiameere Ayesa Tucker <keiameereayesatucker@gmail.com>
Date: Tue Sep 15 16:01:58 2026 +0800

    First commit
```

```
Lenovo@Keia MINGW64 ~/Tucker_local_project (main)
$ git log --oneline
fe61dfc (HEAD -> main) Final update after merge
70971a0 (feature_x) Add feature x changes
09c8264 First commit
```

7. Tagging Versions (Optional):

- After completing the merge, use the *git tag* command to create a tag named v1.0 to mark the first version of your project.

```
Lenovo@Keia MINGW64 ~/Tucker_local_project (main)
$ git tag -a v1.0 -m "Version 1.0"
```

```
Lenovo@Keia MINGW64 ~/Tucker_local_project (main)
$ git tag -l
v1.0
```