



RPT层搭建

RPT层，根据报表、专题分析的需求而计算生成的个性化数据。表结构与报表系统保持一致。

1. 建库

```
create database IF NOT EXISTS yp_rpt;
```

2. 销售主题报表

2.1 门店月销售单量排行

按月统计，各个门店的月销售单量。

2.1.1 建表

```
-- DROP TABLE IF EXISTS yp_rpt.rpt_sale_store_cnt_month;
CREATE TABLE yp_rpt.rpt_sale_store_cnt_month(
    year_code string COMMENT '年code',
    year_month string COMMENT '年月',
    province_id string COMMENT '省份id',
    province_name string COMMENT '省份名称',
    city_id string COMMENT '城市id',
    city_name string COMMENT '城市name',
    trade_area_id string COMMENT '商圈id',
    trade_area_name string COMMENT '商圈名称',
    store_id string COMMENT '店铺id',
    store_name string COMMENT '店铺名称',
```





```
order_store_cnt BIGINT COMMENT '店铺销售单量',
miniapp_order_store_cnt BIGINT COMMENT '店铺小程序销售单量',
android_order_store_cnt BIGINT COMMENT '店铺android销售单量',
ios_order_store_cnt BIGINT COMMENT '店铺ios销售单量',
pcweb_order_store_cnt BIGINT COMMENT '店铺pcweb销售单量',
sale_amt DECIMAL(38,4) COMMENT '销售收入',
mini_app_sale_amt DECIMAL(38,4) COMMENT '小程序成交额',
android_sale_amt DECIMAL(38,4) COMMENT '安卓APP成交额',
ios_sale_amt DECIMAL(38,4) COMMENT '苹果APP成交额',
pcweb_sale_amt DECIMAL(38,4) COMMENT 'PC商城成交额'
)
COMMENT '门店月销售单量排行'
-- 统计日期,不能用来分组统计
PARTITIONED BY(date_time STRING)
ROW format delimited fields terminated BY '\t'
stored AS orc tblproperties ('orc.compress' = 'SNAPPY');
```

2.1.2 导入数据

```
insert into yp_rpt.rpt_sale_store_cnt_month
select
    year_code,
    year_month,
    province_id,
    province_name,
    city_id,
    city_name,
    trade_area_id,
    trade_area_name,
    store_id,
    store_name,
    order_cnt,
    miniapp_order_cnt,
    android_order_cnt,
    ios_order_cnt,
    pcweb_order_cnt,
    sale_amt, mini_app_sale_amt, android_sale_amt, ios_sale_amt, pcweb_sale_amt,
    date_time
from yp_dm.dm_sale
where time_type='month' and group_type='store' and store_id is not null
order by order_cnt desc;
```

2.1.3 循环导入





循环计算月销售单量，只需获取最近一个月的累积数据即可，通过年月`year_month`字段过滤。

```
-- 先删后插
delete from yp_rpt.rpt_sale_store_cnt_month where date_time = '${TD_DATE}';

insert into yp_rpt.rpt_sale_store_cnt_month
select
    year_code,
    year_month,
    city_id,
    city_name,
    trade_area_id,
    trade_area_name,
    store_id,
    store_name,
    order_cnt,
    miniapp_order_cnt,
    android_order_cnt,
    ios_order_cnt,
    pcweb_order_cnt,
    sale_amt, mini_app_sale_amt, android_sale_amt, ios_sale_amt, pcweb_sale_amt,
    '${TD_DATE}' date_time
from yp_dm.dm_sale
where time_type = 'month' and group_type = 'store' and store_id is not null

-- 计算日期-最新计算的数据
and date_time = '${TD_DATE}'
-- 计算近一月的数据
and year_month = substring('${TD_DATE}', 1, 7)
order by order_cnt desc;
```

2.2 日销售曲线

按天统计，总销售金额和销售单量。

2.2.1 建表

```
-- DROP TABLE IF EXISTS yp_rpt.rpt_sale_day;
CREATE TABLE yp_rpt.rpt_sale_day(
    year_code string COMMENT '年code',
    month_code string COMMENT '月份编码',
    day_month_num string COMMENT '一月第几天',
    dim_date_id string COMMENT '日期',
```





```
sale_amt DECIMAL(38,4) COMMENT '销售收入',
order_cnt BIGINT COMMENT '订单量'
)
COMMENT '日销售曲线'
-- 统计日期,不能用来分组统计
PARTITIONED BY(date_time STRING)
ROW format delimited fields terminated BY '\t'
stored AS orc tblproperties ('orc.compress' = 'SNAPPY');
```

2.2.2 导入数据

```
insert into yp_rpt.rpt_sale_day
select
    year_code,
    month_code,
    day_month_num,
    dim_date_id,
    sale_amt,
    order_cnt,
    date_time
from yp_dm.dm_sale
where time_type = 'date' and group_type = 'all'
-- 计算日期-最新计算的数据
-- and date_time = '${TD_DATE}'
--按照日期排序显示曲线
order by dim_date_id;
```

2.2.3 循环导入

循环计算日销售曲线，只需要计算最新一天的数据即可：`dim_date_id = '${TD_DATE}'`

```
-- 先删后插
delete from yp_rpt.rpt_sale_day where date_time = '${TD_DATE}';

insert into yp_rpt.rpt_sale_day
select
    year_code,
    month_code,
    day_month_num,
    dim_date_id,
    sale_amt,
    order_cnt,
    '${TD_DATE}' date_time
from yp_dm.dm_sale
```





```
where time_type='date' and group_type='all'

-- 计算日期-最新计算的数据
and date_time = '${TD_DATE}'
-- 只导入最近一天数据即可

and dim_date_id = '${TD_DATE}'

--按照日期排序显示曲线

order by dim_date_id;
```

2.3 月销售曲线

按月统计，总销售金额和销售单量。

2.3.1 建表

```
-- DROP TABLE IF EXISTS yp_rpt.rpt_sale_month;
CREATE TABLE yp_rpt.rpt_sale_month(

    year_code string COMMENT '年code',

    month_code string COMMENT '月份编码',

    year_month string COMMENT '年月',

    sale_amt DECIMAL(38,4) COMMENT '销售收入',

    plat_amt DECIMAL(38,4) COMMENT '平台收入',

    mini_app_sale_amt DECIMAL(38,4) COMMENT '小程序成交额',

    android_sale_amt DECIMAL(38,4) COMMENT '安卓APP成交额',

    ios_sale_amt DECIMAL(38,4) COMMENT '苹果APP成交额',

    pcweb_sale_amt DECIMAL(38,4) COMMENT 'PC商城成交额',

    order_cnt BIGINT COMMENT '订单量',

    deliver_order_cnt BIGINT COMMENT '配送单量',

    refund_order_cnt BIGINT COMMENT '退款单量',

    bad_eva_order_cnt BIGINT COMMENT '差评单量',

    miniapp_order_cnt BIGINT COMMENT '小程序成交单量',

    android_order_cnt BIGINT COMMENT '安卓APP订单量',

    ios_order_cnt BIGINT COMMENT '苹果APP订单量',

    pcweb_order_cnt BIGINT COMMENT 'PC商城成交单量'

)
COMMENT '日销售曲线'

-- 统计日期,不能用来分组统计
PARTITIONED BY(date_time STRING)
```





```
ROW format delimited fields terminated BY '\t'  
stored AS orc tblproperties ('orc.compress' = 'SNAPPY');
```

2.3.2 导入数据

```
insert into yp_rpt.rpt_sale_month  
select  
    year_code,  
    month_code,  
    year_month,  
    sale_amt,  
    plat_amt, mini_app_sale_amt, android_sale_amt, ios_sale_amt, pcweb_sale_amt,  
    order_cnt,  
    deliver_order_cnt,  
    refund_order_cnt,  
    bad_eva_order_cnt, miniapp_order_cnt, android_order_cnt, ios_order_cnt, pcweb_order_cnt,  
    date_time  
from yp_dm.dm_sale  
where time_type = 'month' and group_type = 'all'  
--按照日期排序显示曲线  
order by dim_date_id;
```

2.3.3 循环导入

循环计算日销售曲线，只需要计算最新一天的数据即可：`dim_date_id = '${TD_DATE}'`

```
-- 先删后插  
delete from yp_rpt.rpt_sale_month where date_time = '${TD_DATE}';  
  
insert into yp_rpt.rpt_sale_month  
select  
    year_code,  
    month_code,  
    year_month,  
    sale_amt,  
    plat_amt, mini_app_sale_amt, android_sale_amt, ios_sale_amt, pcweb_sale_amt,  
    order_cnt,  
    deliver_order_cnt,  
    refund_order_cnt,  
    bad_eva_order_cnt, miniapp_order_cnt, android_order_cnt, ios_order_cnt, pcweb_order_cnt,  
    '${TD_DATE}', date_time  
from yp_dm.dm_sale  
where time_type = 'month' and group_type = 'all'  
-- 计算日期-最新计算的数据  
and date_time = '${TD_DATE}';  
-- 只导入最近月份数据即可  
and year_month = '${TD_YEAR_MONTH}';  
--按照日期排序显示曲线  
order by dim_date_id;
```





2.4 渠道销量占比

按年、月、日和城市统计，不同渠道的订单量占比。

2.4.1 建表

```
DROP TABLE IF EXISTS yp_rpt.rpt_sale_fromtype_ratio;
CREATE TABLE yp_rpt.rpt_sale_fromtype_ratio(
    time_type string COMMENT '统计时间维度: year、month、day',
    year_code string COMMENT '年code',
    year_month string COMMENT '年月',
    dim_date_id string COMMENT '日期',
    order_cnt BIGINT COMMENT '成交单量',
    order_turnover DECIMAL(38,4) COMMENT '成交额度',
    miniapp_order_cnt BIGINT COMMENT '小程序成交单量',
    miniapp_order_turnover DECIMAL(38,4) COMMENT '小程序成交额',
    miniapp_order_ratio DECIMAL(38,4) COMMENT '小程序成交量占比',
    android_order_cnt BIGINT COMMENT '安卓APP订单量',
    android_order_turnover DECIMAL(38,4) COMMENT '安卓APP成交额',
    android_order_ratio DECIMAL(38,4) COMMENT '安卓APP订单量占比',
    ios_order_cnt BIGINT COMMENT '苹果APP订单量',
    ios_order_turnover DECIMAL(38,4) COMMENT '苹果APP成交额',
    ios_order_ratio DECIMAL(38,4) COMMENT '苹果APP订单量占比',
    pcweb_order_cnt BIGINT COMMENT 'PC商城成交单量',
    pcweb_order_turnover DECIMAL(38,4) COMMENT 'PC商城成交额',
    pcweb_order_ratio DECIMAL(38,4) COMMENT 'PC商城成交单量占比'
)
COMMENT '渠道销量占比'
-- 统计日期,不能用来分组统计
PARTITIONED BY(date_time STRING)
ROW format delimited fields terminated BY '\t'
stored AS orc tblproperties ('orc.compress' = 'SNAPPY');
```





2.4.2 导入数据

```
insert into yp_rpt.rpt_sale_fromtype_ratio
select
    time_type,
    year_code,
    year_month,
    dim_date_id,
    order_cnt,
    sale_amt,
    miniapp_order_cnt,
    mini_app_sale_amt,
    cast(miniapp_order_cnt as DECIMAL(38,4)) / cast(order_cnt as DECIMAL(38,4))
        * 100
    miniapp_order_ratio,
    android_order_cnt,
    android_sale_amt,
    cast(android_order_cnt as DECIMAL(38,4)) / cast(order_cnt as DECIMAL(38,4))
        * 100
    android_order_ratio,
    ios_order_cnt,
    ios_sale_amt,
    cast(ios_order_cnt as DECIMAL(38,4)) / cast(order_cnt as DECIMAL(38,4))
        * 100
    ios_order_ratio,
    pcweb_order_cnt,
    pcweb_sale_amt,
    cast(pcweb_order_cnt as DECIMAL(38,4)) / cast(order_cnt as DECIMAL(38,4))
        * 100
    pcweb_order_ratio,
    date_time
from yp_dm.dm_sale
where group_type = 'all';
-- 计算日期-最新计算的数据
-- and date_time = '${TD_DATE}';
```

2.4.3 循环导入

时间维度有年、月、日，计算时需要按照最大时间维度年进行重算：`year_code >= substring('${TD_DATE}', 1, 4)`





```
-- 先删后插
delete from yp_rpt.rpt_sale_fromtype_ratio where date_time = '${TD_DATE}';

insert into yp_rpt.rpt_sale_fromtype_ratio
select
    time_type,
    year_code,
    year_month,
    dim_date_id,
    order_cnt,
    sale_amt,
    miniapp_order_cnt,
    mini_app_sale_amt,
    cast(miniapp_order_cnt as DECIMAL(38,4)) / cast(order_cnt as DECIMAL(38,4))
    * 100
    miniapp_order_ratio,
    android_order_cnt,
    android_sale_amt,
    cast(android_order_cnt as DECIMAL(38,4)) / cast(order_cnt as DECIMAL(38,4))
    * 100
    android_order_ratio,
    ios_order_cnt,
    ios_sale_amt,
    cast(ios_order_cnt as DECIMAL(38,4)) / cast(order_cnt as DECIMAL(38,4))
    * 100
    ios_order_ratio,
    pcweb_order_cnt,
    pcweb_sale_amt,
    cast(pcweb_order_cnt as DECIMAL(38,4)) / cast(order_cnt as DECIMAL(38,4))
    * 100
    pcweb_order_ratio,
    '${TD_DATE}' date_time
from yp_dm.dm_sale
where group_type = 'all'

-- 计算日期-最新计算的数据
and date_time = '${TD_DATE}'

-- 重算近一年的数据
and year_code >= substring('${TD_DATE}', 1, 4);
```





3. 商品主题报表

3.1 商品销量topn

统计出某天销量最多的top10商品。

3.1.1 建表

```
-- DROP table if exists yp_rpt.rpt_goods_sale_topn;
create table yp_rpt.rpt_goods_sale_topn(
  sku_id string COMMENT '商品ID',
  sku_name string COMMENT '商品名称',
  payment_num bigint COMMENT '销量',
  payment_amount decimal(38,4) comment '被支付金额'
) COMMENT '商品销量topn'
-- 统计日期,不能用来分组统计
PARTITIONED BY(dt STRING)
ROW format delimited fields terminated BY '\t'
stored AS orc tblproperties ('orc.compress' = 'SNAPPY');
```

3.1.2 导入数据

```
insert into yp_rpt.rpt_goods_sale_topn
select
  sku_id, sku_name,
  payment_count, payment_amount,
  dt
from
  yp_dws.dws_sku_daycount
order by payment_count desc;
```

3.1.3 循环导入

从DWS日统计宽表读取数据，循环导入时只计算昨天的数据即可。

```
-- 先删后插
delete from yp_rpt.rpt_goods_sale_topn where dt = '${TD_DATE}';
```





```
insert into yp_rpt.rpt_goods_sale_topn
select
    sku_id, sku_name,
    payment_count, payment_amount,
    '${TD_DATE}' dt
from
    yp_dws.dws_sku_daycount
where
    dt='${TD_DATE}'
order by payment_count desc;
```

3.2 商品月度消费监控

统计出某月，商品的整体消费信息。

3.2.1 建表

```
drop table if exists yp_rpt.rpt_goods_sale;
create table yp_rpt.rpt_goods_sale(
    year_month string COMMENT '年月',
    sku_id string COMMENT '商品ID',
    sku_name string COMMENT '商品名称',
    order_count bigint comment '被下单次数',
    order_num bigint comment '被下单件数',
    order_amount decimal(38,4) comment '被下单金额',
    payment_count bigint comment '被支付次数',
    payment_num bigint comment '被支付件数',
    payment_amount decimal(38,4) comment '被支付金额',
    refund_count bigint comment '退款次数',
    refund_num bigint comment '退款件数',
    refund_amount decimal(38,4) comment '退款金额',
    cart_count bigint comment '被加入购物车次数',
    cart_num bigint comment '被加入购物车件数',
    favor_count bigint comment '被收藏次数',
    refund_ratio decimal(38,4) COMMENT '退款率'
) COMMENT '商品月度消费监控'
-- 统计日期,不能用来分组统计
```





```
PARTITIONED BY(dt STRING)
ROW format delimited fields terminated BY '\t'
stored AS orc tblproperties ('orc.compress' = 'SNAPPY');
```

3.2.2 导入数据

```
insert into yp_rpt.rpt_goods_sale
select
    year_month,
    sku_id, sku_name,
    order_count,
    order_num,
    order_amount,
    payment_count,
    payment_num,
    payment_amount,
    refund_count,
    refund_num,
    refund_amount,
    cart_count,
    cart_num,
    favor_count,
    case when payment_num != 0
        then cast(refund_num as DECIMAL(38,4)) / cast(payment_num as DECIMAL(38,4)) * 100
        else 0.0000
    end
    as refund_ratio,
    '2021-08-31'
from yp_dm.dm_sku
where time_type='month';
```

3.2.3 循环导入

从DWS日统计宽表读取数据，循环导入时只计算昨天的数据即可。

```
-- 先删后插
delete from yp_rpt.rpt_goods_sale where dt = '${TD_DATE}';

insert into yp_rpt.rpt_goods_sale
```





```
select
    year_month,
    sku_id, sku_name,
    order_count,
    order_num,
    order_amount,
    payment_count,
    payment_num,
    payment_amount,
    refund_count,
    refund_num,
    refund_amount,
    cart_count,
    cart_num,
    favor_count,
    case when payment_num != 0
        then cast(refund_num as DECIMAL(38,4)) / cast(payment_num as DECIMAL(38,4)) * 100
        else 0.0000
    end
    as refund_ratio,
    '${TD_DATE}'
from yp_dm.dm_sku
where date_time='${TD_DATE}' and time_type='month'
order by refund_ratio desc;
```

3.3 商品评价月度排行

统计出某月，商品的好评中评差评数，以及对应的占比比率。

3.3.1 建表

```
-- DROP table if exists yp_rpt.rpt_evaluation_topn_month;
create table yp_rpt.rpt_evaluation_topn_month(
    year_month string COMMENT '年月',
    sku_id string COMMENT '商品ID',
    sku_name string COMMENT '商品名称',
    evaluation_good_count bigint comment '好评数',
    evaluation_mid_count bigint comment '中评数',
    evaluation_bad_count bigint comment '差评数',
```





```
evaluation_good_ratio DECIMAL(38,4) COMMENT '好评率',
evaluation_mid_ratio DECIMAL(38,4) COMMENT '中评率',
evaluation_bad_ratio DECIMAL(38,4) COMMENT '差评率'
) COMMENT '商品评价月度排行'
-- 统计日期,不能用来分组统计
PARTITIONED BY(dt STRING)
ROW format delimited fields terminated BY '\t'
stored AS orc tblproperties ('orc.compress' = 'SNAPPY');
```

3.3.2 导入数据

```
-- 商品评价月度排行
insert into yp_rpt.rpt_evaluation_topn_month
select
    year_month, sku_id, sku_name,
    evaluation_good_count, evaluation_mid_count, evaluation_bad_count,
    cast(evaluation_good_count as DECIMAL(38,4)) /
    (evaluation_good_count+evaluation_mid_count+evaluation_bad_count)
    * 100 as evaluation_good_ratio,
    cast(evaluation_mid_count as DECIMAL(38,4)) /
    (evaluation_good_count+evaluation_mid_count+evaluation_bad_count)
    * 100 as evaluation_mid_ratio,
    cast(evaluation_bad_count as DECIMAL(38,4)) /
    (evaluation_good_count+evaluation_mid_count+evaluation_bad_count)
    * 100 as evaluation_bad_ratio,
    '2021-08-31' dt
from
    yp_dm.dm_sku
where date_time='2021-08-31' and time_type='month' and
    (evaluation_good_count+evaluation_mid_count+evaluation_bad_count) != 0
order by evaluation_good_ratio desc;
```

3.3.3 循环导入

从DWS日统计宽表读取数据，循环导入时只计算昨天的数据即可。

```
-- 先删后插
delete from yp_rpt.rpt_evaluation_topn_month where dt='${TD_DATE}';

-- 商品评价月度排行
```





```
insert into yp_rpt.rpt_evaluation_topn_month
select
    year_month, sku_id, sku_name,
    evaluation_good_count, evaluation_mid_count, evaluation_bad_count,
    cast(evaluation_good_count as DECIMAL(38,4)) /
    (evaluation_good_count+evaluation_mid_count+evaluation_bad_count)
    * 100 as evaluation_good_ratio,
    cast(evaluation_mid_count as DECIMAL(38,4)) /
    (evaluation_good_count+evaluation_mid_count+evaluation_bad_count)
    * 100 as evaluation_mid_ratio,
    cast(evaluation_bad_count as DECIMAL(38,4)) /
    (evaluation_good_count+evaluation_mid_count+evaluation_bad_count)
    * 100 as evaluation_bad_ratio,
    '${TD_DATE}' dt
from
    yp_dm.dm_sku
where
    date_time='${TD_DATE}' and time_type='month' and
    (evaluation_good_count+evaluation_mid_count+evaluation_bad_count) != 0
order by evaluation_good_ratio desc;
```

4. 用户主题报表

4.1 用户数量日统计报表

统计活跃会员数、新增会员数、新增消费会员数、总付费会员数、总会员数、会员活跃率(活跃会员/总会员)、会员付费率(付费会员/活跃会员数)、会员新鲜度(新增会员/活跃会员数)。

4.1.1 建表

```
-- DROP table if exists yp_rpt.rpt_user_count;
create table yp_rpt.rpt_user_count(
    day_users BIGINT COMMENT '日活跃会员数',
    day_new_users BIGINT COMMENT '日新增会员数',
    day_new_payment_users BIGINT COMMENT '日新增消费会员数',
    day_payment_users BIGINT COMMENT '日付费会员数',
    payment_users BIGINT COMMENT '总付费会员数',
    users BIGINT COMMENT '总会员数',
```





```
day_users2users decimal(38,4) COMMENT '会员活跃度',
payment_users2users decimal(38,4) COMMENT '会员付费率',
day_new_users2users decimal(38,4) COMMENT '会员新鲜度'
)
COMMENT '用户数量统计报表'
-- 统计日期, 不能用来分组统计
PARTITIONED BY(dt STRING)
ROW format delimited fields terminated BY '\t'
stored AS orc tblproperties ('orc.compress' = 'SNAPPY');
```

4.1.2 导入数据

```
--用户数量统计
insert into yp_rpt.rpt_user_count
select
    sum(if(login_date_last='2021-08-31',1,0)) day_users,
    sum(if(login_date_first='2021-08-31',1,0)) day_new_users,
    sum(if(payment_date_first='2021-08-31',1,0)) day_new_payment_users,
    sum(if(payment_date_last='2021-08-31',1,0)) day_payment_users,
    sum(if(payment_count>0,1,0)) payment_users,
    count(*) users,
-- 会员活跃度 (活跃会员/总会员)
--    活跃会员数
    cast(sum(if(login_date_last='2021-08-31',1,0)) as DECIMAL(38,4))
--    总会员数
    /if(count(*) = 0, null , count(*))
    * 100
    as day_users2users,
-- 会员付费率 (付费会员/活跃会员数)
-- 付费会员
    cast(sum(if(payment_date_last='2021-08-31',1,0)) as DECIMAL(38,4))
-- 活跃会员数
    /if(sum(if(login_date_last='2021-08-31',1,0)) = 0,
        null,
        sum(if(login_date_last='2021-08-31',1,0))
    )
    * 100
    as payment_users2users,
-- 会员新鲜度 (新增会员/活跃会员数)
```





```
-- 新增会员
cast(sum(if(login_date_first='2021-08-31',1,0)) as DECIMAL(38,4))
-- 活跃会员数
/if(sum(if(login_date_last='2021-08-31',1,0)) = 0,
    null,
    sum(if(login_date_last='2021-08-31',1,0))
)
* 100
as day_new_users2users,
'2021-08-31' dt
from yp_dm.dm_user
where date_time='2021-08-31' and time_type='all';
```

4.1.3 循环导入

同首次导入。RPT计算时只读取DM集市昨天最新计算的累积数据。

```
-- 先删后插
delete from yp_rpt.rpt_user_count where dt = '${TD_DATE}';

--用户数量统计
insert into yp_rpt.rpt_user_count
select
    sum(if(login_date_last='${TD_DATE}',1,0)) day_users,
    sum(if(login_date_first='${TD_DATE}',1,0)) day_new_users,
    sum(if(payment_date_first='${TD_DATE}',1,0)) day_new_payment_users,
    sum(if(payment_date_last='${TD_DATE}',1,0)) day_payment_users,
    sum(if(payment_count>0,1,0)) payment_users,
    count(*) users,
-- 会员活跃率(活跃会员/总会员)
cast(
-- 活跃会员数
    sum(if(login_date_last='${TD_DATE}',1,0))
-- 总会员数
    /if(count(*) = 0, null , count(*))
    * 100 as DECIMAL(38,4))
as day_users2users,
-- 会员付费率(付费会员/活跃会员数)
-- 付费会员
```



```
cast(sum(if(payment_date_last='${TD_DATE}',1,0)) as DECIMAL(38,4))
-- 活跃会员数
/if(sum(if(login_date_last='${TD_DATE}',1,0)) = 0,
null,
sum(if(login_date_last='${TD_DATE}',1,0))
)
* 100
as payment_users2users,
-- 会员新鲜度（新增会员/活跃会员数）
-- 新增会员
cast(sum(if(login_date_first='${TD_DATE}',1,0)) as DECIMAL(38,4))
-- 活跃会员数
/if(sum(if(login_date_last='${TD_DATE}',1,0)) = 0,
null,
sum(if(login_date_last='${TD_DATE}',1,0))
)
* 100
as day_new_users2users,
'${TD_DATE}' dt
from yp_dm.dm_user
where date_time='${TD_DATE}' and time_type='all';
```

4.2 用户数量月统计报表

统计月度的活跃会员数、新增会员数、新增消费会员数、总付费会员数、总会员数、会员活跃率(活跃会员/总会员)、会员付费率(付费会员/活跃会员数)、会员新鲜度(新增会员/活跃会员数)。

4.2.1 建表

```
-- DROP table if exists yp_rpt.rpt_user_month_count;
create table yp_rpt.rpt_user_month_count(
    year_month string comment '月份',
    yoy_month string comment '同比月份',
    mom_month string comment '环比月份',
    month_users BIGINT COMMENT '月活跃会员数',
    month_new_users BIGINT COMMENT '月新增会员数',
    month_cart_users BIGINT COMMENT '月度购物车会员数',
    month_new_cart_users BIGINT COMMENT '月度新增购物车会员数',
```





```
month_order_users BIGINT COMMENT '月度下单会员数',
month_new_order_users BIGINT COMMENT '月度新增下单会员数',
month_payment_users BIGINT COMMENT '月度付费会员数',
month_new_payment_users BIGINT COMMENT '月度新增消费会员数',
users BIGINT COMMENT '总会员数',
cart_users BIGINT COMMENT '总购物车会员数',
order_users BIGINT COMMENT '总下单会员数',
payment_users BIGINT COMMENT '总付费会员数',
month_users2users decimal(38,4) COMMENT '月度会员活跃率',
payment_users2users decimal(38,4) COMMENT '月度会员付费率',
month_new_users2users decimal(38,4) COMMENT '月度会员新鲜度'
)
COMMENT '用户数量统计报表'
-- 统计日期,不能用来分组统计
PARTITIONED BY(dt STRING)
ROW format delimited fields terminated BY '\t'
stored AS orc tblproperties ('orc.compress' = 'SNAPPY');
```

4.2.2 导入数据

```
insert into yp_rpt.rpt_user_month_count
select
  '2021-08' as year_month,
  substr(max(d.date_id_mym), 1, 7) yoy_month,
  substr(max(d.date_id_mom), 1, 7) mom_month,
-- 活跃会员数: 当月登陆过
sum(if(u.year_month='2021-08' and login_count>0,1,0)) month_users,
-- 新增会员数: 首次登录日期是当月
sum(if(u.time_type='all' and SUBSTRING(login_date_first, 1, 7)='2021-08',1,0))
month_new_users,
-- 购物车会员数
sum(if(u.year_month='2021-08' and u.cart_count>0,1,0)) month_cart_users,
sum(if(u.time_type='all' and SUBSTRING(cart_date_first, 1, 7)='2021-08',1,0))
month_new_cart_users,
-- 下单会员数
sum(if(u.year_month='2021-08' and u.order_count>0,1,0)) month_order_users,
sum(if(u.time_type='all' and SUBSTRING(order_date_first, 1, 7)='2021-08',1,0))
month_new_order_users,
```





```
-- 月度付费会员数
sum(if(u.year_month='2021-08' and payment_count>0,1,0)) month_payment_users,
sum(if(u.time_type='all' and SUBSTRING(payment_date_first, 1, 7)='2021-08',1,0))
month_new_payment_users,
-- 总会员数
count(if(u.time_type='all', user_id, null)) users,
-- 购物车总会员数
count(if(u.time_type='all' and u.cart_count>0, user_id, null)) cart_users,
-- 下单总会员数
count(if(u.time_type='all' and u.order_count>0, user_id, null)) order_users,
-- 总付费会员数
sum(if(u.time_type='all' and payment_count>0,1,0)) payment_users,
-- ==会员活跃率
-- 当月活跃会员
cast(sum(if(u.year_month='2021-08' and login_count>0, 1, 0)) as DECIMAL(38,4))
-- / 总会员
/if(
count(if(u.time_type='all', user_id, null)) = 0,
null,
count(if(u.time_type='all', user_id, null))
)
* 100
as month_users2users,
-- ==会员付费率
-- 当月付费会员
cast(sum(if(u.year_month='2021-08' and payment_count>0,1,0)) as DECIMAL(38,4))
-- / 当月活跃会员
/if(
sum(if(u.year_month='2021-08' and login_count>0,1,0))= 0,
null,
sum(if(u.year_month='2021-08' and login_count>0,1,0))
)
* 100
as payment_users2users,
-- ==会员新鲜度
-- 当月新增会员
cast(sum(if(u.time_type='all' and SUBSTRING(login_date_first, 1, 7)='2021-08',1,0)) as
DECIMAL(38,4))
-- / 当月活跃会员
/if(sum(if(u.year_month='2021-08' and login_count>0,1,0)) = 0,
```





```
        null,
        sum(if(u.year_month='2021-08' and login_count>0,1,0))
    )
    * 100
as day_new_users2users,
'2021-08-31' dt
from yp_dm.dm_user u
-- 获取当前日期-以拿到同比月份
,yp_dwd.dim_date d
-- 根据统计日期获取数据（当月的统计数据 and 累计值统计数据）
where u.date_time='2021-08-31' and d.date_code='2021-08-31';

-- 7月份环比数据
insert into yp_rpt.rpt_user_month_count
select
    '2021-07' as year_month,
    substr(max(d.date_id_mym), 1, 7) yoy_month,
    substr(max(d.date_id_mom), 1, 7) mom_month,
-- 活跃会员数：当月登陆过
    sum(if(u.year_month='2021-07' and login_count>0,1,0)) month_users,
-- 新增会员数：首次登录日期是当月
    sum(if(u.time_type='all' and SUBSTRING(login_date_first, 1, 7)='2021-07',1,0))
month_new_users,
-- 购物车会员数
    sum(if(u.year_month='2021-07' and u.cart_count>0,1,0)) month_cart_users,
    sum(if(u.time_type='all' and SUBSTRING(cart_date_first, 1, 7)='2021-07',1,0))
month_new_cart_users,
-- 下单会员数
    sum(if(u.year_month='2021-07' and u.order_count>0,1,0)) month_order_users,
    sum(if(u.time_type='all' and SUBSTRING(order_date_first, 1, 7)='2021-07',1,0))
month_new_order_users,
-- 月度付费会员数
    sum(if(u.year_month='2021-07' and payment_count>0,1,0)) month_payment_users,
    sum(if(u.time_type='all' and SUBSTRING(payment_date_first, 1, 7)='2021-07',1,0))
month_new_payment_users,
-- 总会员数
    count(if(u.time_type='all', user_id, null)) users,
-- 购物车总会员数
    count(if(u.time_type='all' and u.cart_count>0, user_id, null)) cart_users,
-- 下单总会员数
    count(if(u.time_type='all' and u.order_count>0, user_id, null)) order_users,
```





```
-- 总付费会员数
sum(if(u.time_type='all' and payment_count>0,1,0)) payment_users,
-- ==会员活跃度
-- 当月活跃会员
cast(sum(if(u.year_month='2021-07' and login_count>0, 1, 0)) as DECIMAL(38,4))
-- / 总会员
/if(
count(if(u.time_type='all', user_id, null)) = 0,
null,
count(if(u.time_type='all', user_id, null))
)
* 100
as month_users2users,
-- ==会员付费率
-- 当月付费会员
cast(sum(if(u.year_month='2021-07' and payment_count>0,1,0)) as DECIMAL(38,4))
-- / 当月活跃会员
/if(
sum(if(u.year_month='2021-07' and login_count>0,1,0))= 0,
null,
sum(if(u.year_month='2021-07' and login_count>0,1,0))
)
* 100
as payment_users2users,
-- ==会员新鲜度
-- 当月新增会员
cast(sum(if(u.time_type='all' and SUBSTRING(login_date_first, 1, 7)='2021-07',1,0)) as
DECIMAL(38,4))
-- / 当月活跃会员
/if(sum(if(u.year_month='2021-07' and login_count>0,1,0)) = 0,
null,
sum(if(u.year_month='2021-07' and login_count>0,1,0))
)
* 100
as day_new_users2users,
'2021-08-31' dt
from yp_dm.dm_user u
-- 获取当前日期-以拿到同比月份
,yp_dwd.dim_date d
-- 根据统计日期获取数据（当月的统计数据和累计值统计数据）
```



```
where u.date_time='2021-08-31' and d.date_code='2021-07-31';
```

4.2.3 循环导入

同首次导入。RPT计算时只读取DM集市**昨天**最新计算的累积数据。

```
-- 先删后插
delete from yp_rpt.rpt_user_month_count where dt = '${TD_DATE}';

insert into yp_rpt.rpt_user_month_count
select
    '${TD_YEAR_MONTH}' as year_month,
    substr(max(d.date_id_mym), 1, 7) yoy_month,
    substr(max(d.date_id_mom), 1, 7) mom_month,
-- 活跃会员数：当月登陆过
    sum(if(u.year_month='${TD_YEAR_MONTH}' and login_count>0,
        1,0)) month_users,
-- 新增会员数：首次登录日期是当月
    sum(if(u.time_type='all' and SUBSTRING(login_date_first, 1, 7)='${TD_YEAR_MONTH}',
        1,0)) month_new_users,
-- 购物车会员数
    sum(if(u.year_month='${TD_YEAR_MONTH}' and u.cart_count>0,1,0)) month_cart_users,
    sum(if(u.time_type='all' and SUBSTRING(cart_date_first, 1, 7)='${TD_YEAR_MONTH}',1,0))
month_new_cart_users,
-- 下单会员数
    sum(if(u.year_month='${TD_YEAR_MONTH}' and u.order_count>0,1,0)) month_order_users,
    sum(if(u.time_type='all' and SUBSTRING(order_date_first, 1, 7)='${TD_YEAR_MONTH}',1,0))
month_new_order_users,
-- 月度付费会员数
    sum(if(u.year_month='${TD_YEAR_MONTH}' and payment_count>0,1,0)) month_payment_users,
    sum(if(u.time_type='all' and SUBSTRING(payment_date_first, 1, 7)='${TD_YEAR_MONTH}',1,0))
month_new_payment_users,
-- 总会员数
    count(if(u.time_type='all', user_id, null)) users,
-- 购物车总会员数
    count(if(u.time_type='all' and u.cart_count>0, user_id, null)) cart_users,
-- 下单总会员数
    count(if(u.time_type='all' and u.order_count>0, user_id, null)) order_users,
-- 总付费会员数
    sum(if(u.time_type='all' and payment_count>0,1,0)) payment_users,
```





```
-- ==会员活跃度
--      当月活跃会员
cast(sum(if(u.year_month='${TD_YEAR_MONTH}' and login_count>0, 1, 0)) as DECIMAL(38,4))
--      /      总会员
/if(
    count(if(u.time_type='all', user_id, null)) = 0,
    null,
    count(if(u.time_type='all', user_id, null))
)
* 100
as month_users2users,
-- ==会员付费率
--      当月付费会员
cast(sum(if(u.year_month='${TD_YEAR_MONTH}' and payment_count>0,1,0)) as DECIMAL(38,4))
--      /      当月活跃会员
/if(
    sum(if(u.year_month='${TD_YEAR_MONTH}' and login_count>0,1,0))= 0,
    null,
    sum(if(u.year_month='${TD_YEAR_MONTH}' and login_count>0,1,0))
)
* 100
as payment_users2users,
-- ==会员新鲜度
--      当月新增会员
cast(sum(if(u.time_type='all' and SUBSTRING(login_date_first, 1, 7)='${TD_YEAR_MONTH}',1,0))
as DECIMAL(38,4))
--      /      当月活跃会员
/if(sum(if(u.year_month='${TD_YEAR_MONTH}' and login_count>0,1,0)) = 0,
    null,
    sum(if(u.year_month='${TD_YEAR_MONTH}' and login_count>0,1,0))
)
* 100
as day_new_users2users,
'${TD_DATE}' dt
from yp_dm.dm_user u
-- 获取当前日期-以拿到同比月份
,yp_dwd.dim_date d
-- 根据统计日期获取数据（当月的统计数据和累计值统计数据）
where u.date_time='${TD_DATE}' and d.date_code='${TD_DATE}';
```



数据导出

Presto可以跨库执行SQL，因此也可以用来实现导入导出功能。

如果数仓使用了Presto，则可以省略导出过程，OLAP可以像使用mysql一样使用Presto，并自行读取数仓中的数据。

1. 建库 (Mysql)

```
-- 建库  
CREATE DATABASE yp_olap DEFAULT CHARACTER SET utf8mb4 COLLATE utf8mb4_unicode_ci;
```

2. 建表 (Presto-mysql)

建表时使用Presto来操作，create语法和hive大体相同，只需要将hive中的string类型改为varchar，另外文件格式、压缩格式这些mysql没有的配置去掉就可以了。

注意prestodb不能直接删除mysql的表或数据，trino可以。

2.1 Presto连接Mysql

2.1.1 配置Connector

在每台Presto服务的/presto_home/etc/catalog目录下，新建文件mysql.properties，设置以下属性：

```
connector.name=mysql  
connection-url=jdbc:mysql://192.168.88.80:3306?enabledTLSProtocols=TLSv1.2&useUnicode=true&characterEncoding=utf8  
connection-user=root  
connection-password=123456
```

报错：SSLHandshakeException: No appropriate protocol (protocol is disabled or cipher suites are inappropriate)



此问题是jdk8新版本导致的，不能连接mysql5.7，需要在mysqlurl中链接中加上：

```
?enabledTLSProtocols=TLSv1.2
```


2.1.2 重启集群

在每台Presto服务上执行


```
/presto_home/bin/launcher restart
```

2.1.3 Presto操作mysql

2.1.3.1 Presto数据库中F5刷新后显示mysql

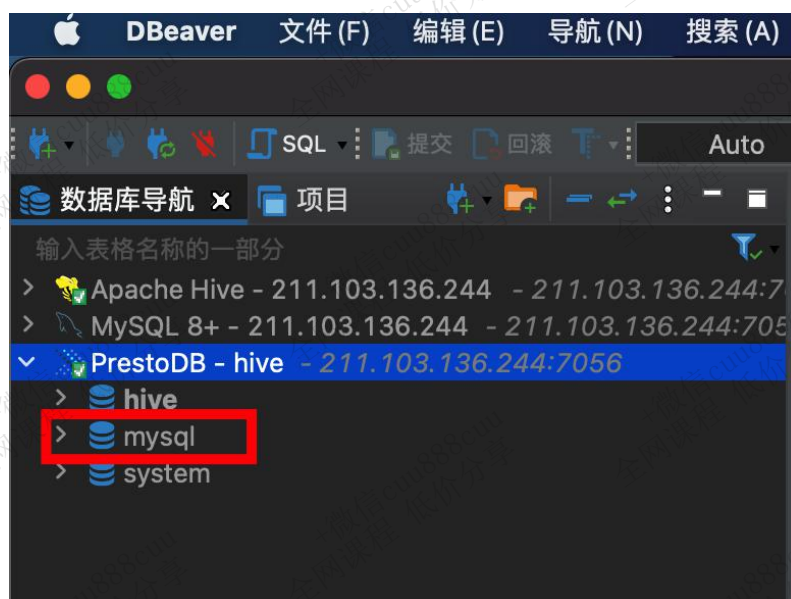

2.1.3.2 打开Presto-mysql编辑器

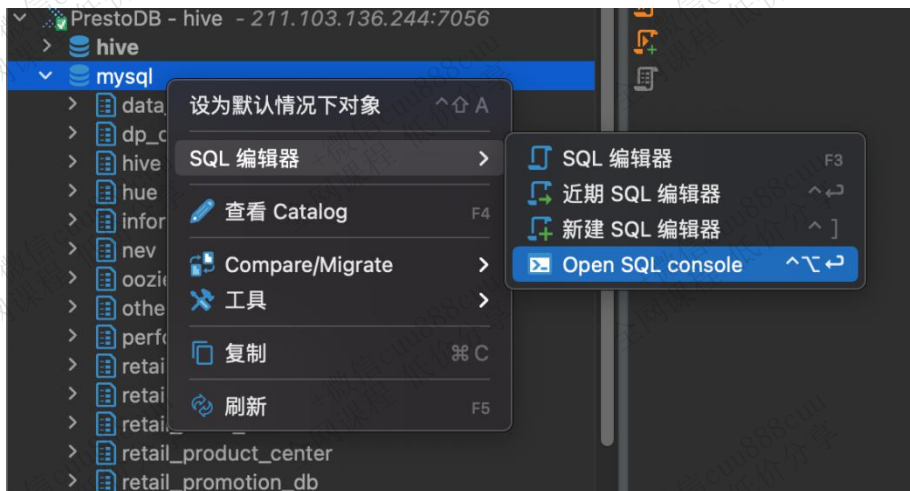

2.1.3.3 执行查询

```
select * from mysql.yipin_oltp.t_brand;
```

2.2 OLAP建表

2.2.1 销售

```
-- 门店月销售单量排行
-- DROP TABLE IF EXISTS yp_olap.rpt_sale_store_cnt_month;
CREATE TABLE mysql.yp_olap.rpt_sale_store_cnt_month(
    year_code varchar COMMENT '年code',
    year_month varchar COMMENT '年月',
    province_id varchar COMMENT '省份id',
    province_name varchar COMMENT '省份名称',
    city_id varchar COMMENT '城市id',
    city_name varchar COMMENT '城市name',
    trade_area_id varchar COMMENT '商圈id',
    trade_area_name varchar COMMENT '商圈名称',
    store_id varchar COMMENT '店铺id',
    store_name varchar COMMENT '店铺名称',
    order_store_cnt BIGINT COMMENT '店铺成交单量',
```





```
miniapp_order_store_cnt BIGINT COMMENT '店铺成交单量',
android_order_store_cnt BIGINT COMMENT '店铺成交单量',
ios_order_store_cnt BIGINT COMMENT '店铺成交单量',
pcweb_order_store_cnt BIGINT COMMENT '店铺成交单量',
sale_amt DECIMAL(38,4) COMMENT '销售收入',
mini_app_sale_amt DECIMAL(38,4) COMMENT '小程序成交额',
android_sale_amt DECIMAL(38,4) COMMENT '安卓APP成交额',
ios_sale_amt DECIMAL(38,4) COMMENT '苹果APP成交额',
pcweb_sale_amt DECIMAL(38,4) COMMENT 'PC商城成交额',
date_time varchar COMMENT '统计日期,不能用来分组统计'
)
COMMENT '门店月销售单量排行';
```

-- 日销售曲线

```
-- DROP TABLE IF EXISTS yp_olap.rpt_sale_day;
CREATE TABLE if not exists mysql.yp_olap.rpt_sale_day(
year_code varchar COMMENT '年code',
month_code varchar COMMENT '月份编码',
day_month_num varchar COMMENT '一月第几天',
dim_date_id varchar COMMENT '日期',
sale_amt DECIMAL(38,4) COMMENT '销售收入',
order_cnt BIGINT COMMENT '成交单量',
date_time varchar COMMENT '统计日期,不能用来分组统计'
)
COMMENT '日销售曲线';
```

-- 月销售曲线

```
-- DROP TABLE IF EXISTS yp_olap.rpt_sale_month;
CREATE TABLE if not exists mysql.yp_olap.rpt_sale_month(
year_code varchar COMMENT '年code',
month_code varchar COMMENT '月份编码',
year_month varchar COMMENT '年月',
sale_amt DECIMAL(38,4) COMMENT '销售收入',
plat_amt DECIMAL(38,4) COMMENT '平台收入',
mini_app_sale_amt DECIMAL(38,4) COMMENT '小程序成交额',
android_sale_amt DECIMAL(38,4) COMMENT '安卓APP成交额',
ios_sale_amt DECIMAL(38,4) COMMENT '苹果APP成交额',
```





```
pcweb_sale_amt DECIMAL(38,4) COMMENT 'PC商城成交额',
order_cnt BIGINT COMMENT '成交单量',
deliver_order_cnt BIGINT COMMENT '配送单量',
refund_order_cnt BIGINT COMMENT '退款单量',
bad_eva_order_cnt BIGINT COMMENT '差评单量',
miniapp_order_cnt BIGINT COMMENT '小程序成交单量',
android_order_cnt BIGINT COMMENT '安卓APP订单量',
ios_order_cnt BIGINT COMMENT '苹果APP订单量',
pcweb_order_cnt BIGINT COMMENT 'PC商城成交单量',
date_time varchar COMMENT '统计日期,不能用来分组统计'
)
COMMENT '月销售曲线';

-- 渠道销量占比
-- DROP TABLE IF EXISTS yp_olap.rpt_sale_fromtype_ratio;
CREATE TABLE if not exists mysql.yp_olap.rpt_sale_fromtype_ratio(
time_type varchar COMMENT '统计时间维度: year、month、day',
year_code varchar COMMENT '年code',
year_month varchar COMMENT '年月',
dim_date_id varchar COMMENT '日期',
order_cnt BIGINT COMMENT '成交单量',
order_turnover DECIMAL(38,4) COMMENT '成交额',
miniapp_order_cnt BIGINT COMMENT '小程序成交单量',
miniapp_order_turnover DECIMAL(38,4) COMMENT '小程序成交额',
miniapp_order_ratio DECIMAL(38,4) COMMENT '小程序成交量占比',
android_order_cnt BIGINT COMMENT '安卓APP订单量',
android_order_turnover DECIMAL(38,4) COMMENT '安卓APP成交额',
android_order_ratio DECIMAL(38,4) COMMENT '安卓APP订单量占比',
ios_order_cnt BIGINT COMMENT '苹果APP订单量',
ios_order_turnover DECIMAL(38,4) COMMENT '苹果APP成交额',
ios_order_ratio DECIMAL(38,4) COMMENT '苹果APP订单量占比',
pcweb_order_cnt BIGINT COMMENT 'PC商城成交单量',
pcweb_order_turnover DECIMAL(38,4) COMMENT 'PC商城成交额',
pcweb_order_ratio DECIMAL(38,4) COMMENT 'PC商城成交单量占比',
date_time varchar COMMENT '统计日期,不能用来分组统计'
)
COMMENT '渠道销量占比';
```





2.2.2 商品

```
-- drop table if exists mysql.yp_olap.rpt_goods_sale_topn;
CREATE TABLE if not exists mysql.yp_olap.rpt_goods_sale_topn(
    sku_id varchar COMMENT '商品ID',
    sku_name varchar COMMENT '商品名称',
    payment_num bigint COMMENT '销量',
    payment_amount decimal(38,4) comment '被支付金额',
    dt varchar COMMENT '统计日期'
) COMMENT '商品销量topn';

-- drop table if exists mysql.yp_olap.rpt_goods_sale;
create table mysql.yp_olap.rpt_goods_sale(
    year_month varchar COMMENT '年月',
    sku_id varchar COMMENT '商品ID',
    sku_name varchar COMMENT '商品名称',
    order_count bigint comment '被下单次数',
    order_num bigint comment '被下单件数',
    order_amount decimal(38,4) comment '被下单金额',
    payment_count  bigint comment '被支付次数',
    payment_num bigint comment '被支付件数',
    payment_amount decimal(38,4) comment '被支付金额',
    refund_count bigint comment '退款次数',
    refund_num bigint comment '退款件数',
    refund_amount decimal(38,4) comment '退款金额',
    cart_count bigint comment '被加入购物车次数',
    cart_num bigint comment '被加入购物车件数',
    favor_count bigint comment '被收藏次数',
    refund_ratio decimal(38,4) COMMENT '退款率',
    dt varchar COMMENT '统计日期'
) COMMENT '商品月度消费监控';

-- DROP table if exists mysql.yp_olap.rpt_evaluation_topn_month;
create table mysql.yp_olap.rpt_evaluation_topn_month(
    year_month varchar COMMENT '年月',
    sku_id varchar COMMENT '商品ID',
    sku_name varchar COMMENT '商品名称',
```





```
evaluation_good_count bigint comment '好评数',
evaluation_mid_count bigint comment '中评数',
evaluation_bad_count bigint comment '差评数',
evaluation_good_ratio DECIMAL(38,4) COMMENT '好评率',
evaluation_mid_ratio DECIMAL(38,4) COMMENT '中评率',
evaluation_bad_ratio DECIMAL(38,4) COMMENT '差评率',
dt varchar COMMENT '统计日期'
) COMMENT '商品评价月度排行';
```

2.2.3 用户

```
--drop table if exists mysql.yo_olap.rpt_user_count;
CREATE TABLE if not exists mysql.yo_olap.rpt_user_count(
    day_users BIGINT COMMENT '日活跃会员数',
    day_new_users BIGINT COMMENT '日新增会员数',
    day_new_payment_users BIGINT COMMENT '日新增消费会员数',
    day_payment_users BIGINT COMMENT '日付费会员数',
    payment_users BIGINT COMMENT '总付费会员数',
    users BIGINT COMMENT '总会员数',
    day_users2users decimal(38,4) COMMENT '会员活跃度',
    payment_users2users decimal(38,4) COMMENT '会员付费率',
    day_new_users2users decimal(38,4) COMMENT '会员新鲜度',
    dt varchar COMMENT '统计日期'
)
COMMENT '用户数量统计报表';

--drop table if exists mysql.yo_olap.rpt_user_month_count;
CREATE TABLE if not exists mysql.yo_olap.rpt_user_month_count(
    year_month varchar comment '月份',
    yoy_month varchar comment '同比月份',
    mom_month varchar comment '环比月份',
    month_users BIGINT COMMENT '月活跃会员数',
    month_new_users BIGINT COMMENT '月新增会员数',
    month_cart_users BIGINT COMMENT '月度购物车会员数',
    month_new_cart_users BIGINT COMMENT '月度新增购物车会员数',
```



```
month_order_users BIGINT COMMENT '月度下单会员数',
month_new_order_users BIGINT COMMENT '月度新增下单会员数',
month_payment_users BIGINT COMMENT '月度付费会员数',
month_new_payment_users BIGINT COMMENT '月度新增消费会员数',
users BIGINT COMMENT '总会员数',
cart_users BIGINT COMMENT '总购物车会员数',
order_users BIGINT COMMENT '总下单会员数',
payment_users BIGINT COMMENT '总付费会员数',
month_users2users decimal(38,4) COMMENT '月度会员活跃率',
payment_users2users decimal(38,4) COMMENT '月度会员付费率',
month_new_users2users decimal(38,4) COMMENT '月度会员新鲜度',
dt varchar
)
COMMENT '用户数量统计报表';
```

3. 导出数据 (Presto)

Presto可以通过SQL，直接将hive中的表数据 insert 到mysql的表中。

```
--宽表
insert into mysql.yp_olap.dm_sale
select * from hive.yp_dm.dm_sale;

insert into mysql.yp_olap.dm_sku
select * from hive.yp_dm.dm_sku;

insert into mysql.yp_olap.dm_user
select * from hive.yp_dm.dm_user;

--促销
insert into mysql.yp_olap.rpt_sale_store_cnt_month
select * from hive.yp_rpt.rpt_sale_store_cnt_month;

insert into mysql.yp_olap.rpt_sale_day
select * from hive.yp_rpt.rpt_sale_day;

insert into mysql.yp_olap.rpt_sale_month
```





```
select * from hive.yr_rpt.rpt_sale_month;

insert into mysql.yr_olap.rpt_sale_fromtype_ratio
select * from hive.yr_rpt.rpt_sale_fromtype_ratio;

--商品
insert into mysql.yr_olap.rpt_goods_sale_topn
select * from hive.yr_rpt.rpt_goods_sale_topn;

insert into mysql.yr_olap.rpt_goods_sale
select * from hive.yr_rpt.rpt_goods_sale;

insert into mysql.yr_olap.rpt_evaluation_topn_month
select * from hive.yr_rpt.rpt_evaluation_topn_month;


--用户
insert into mysql.yr_olap.rpt_user_count
select * from hive.yr_rpt.rpt_user_count;

insert into mysql.yr_olap.rpt_user_month_count
select * from hive.yr_rpt.rpt_user_month_count;
```

展现

新零售项目的OLAP大屏展现是基于Java和Vue.js开发的。后端采用Java8、SpringBoot2.1.6和Mybatis3.2.7；前端采用vue3.0.2、nodejs10.15.3以上。



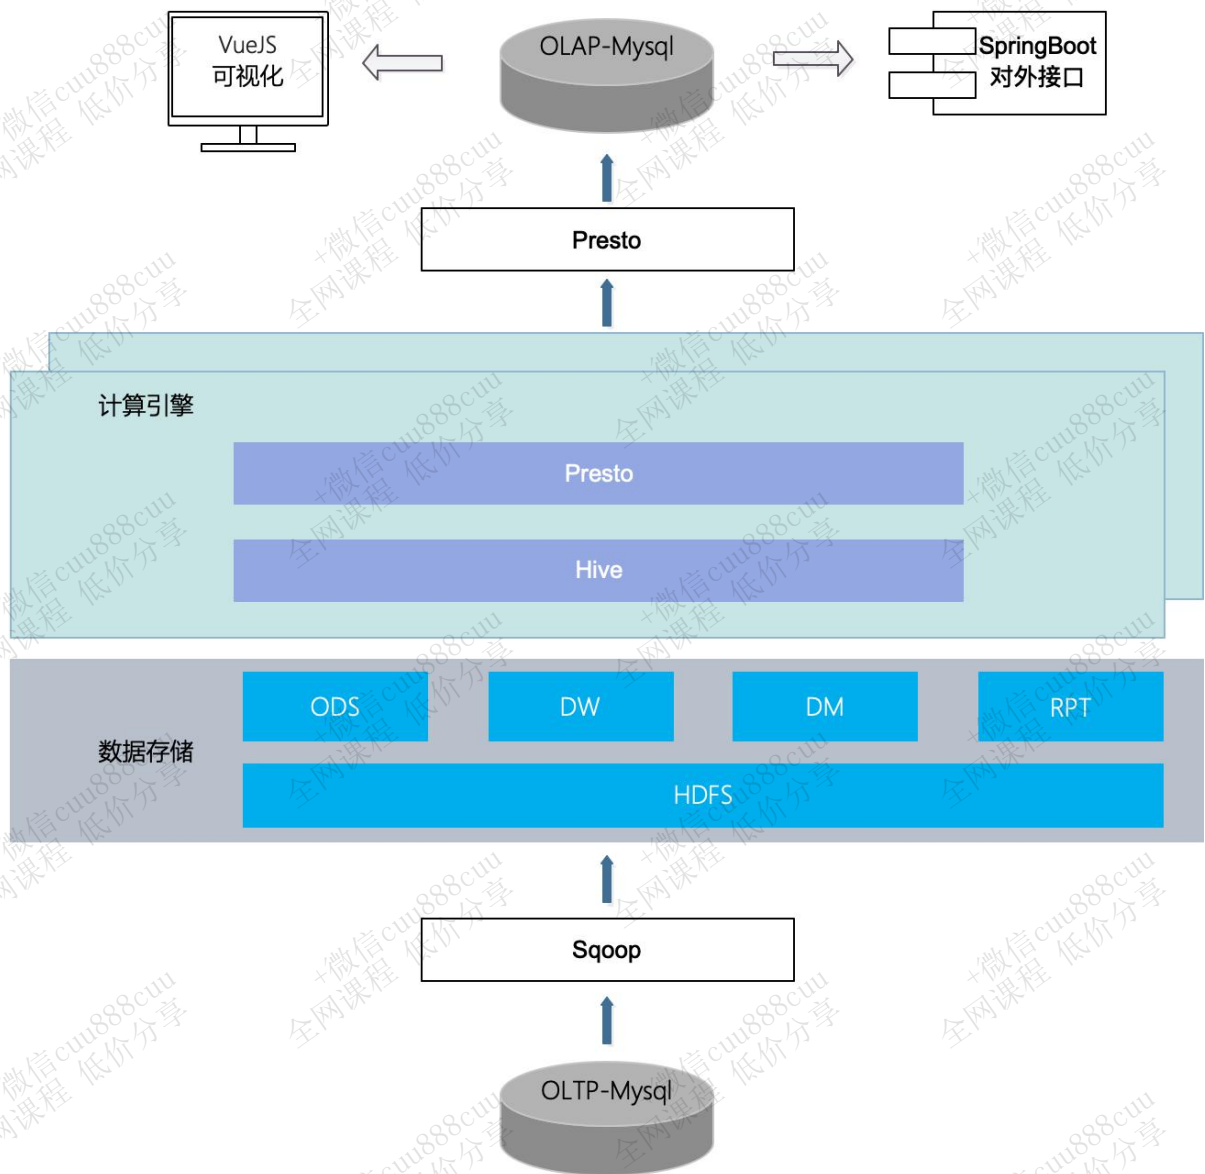

1. Java后端

代码路径：【Home\workspace-web\dms】




1.1 打开IDEA





1.2 配置maven依赖包仓库

1.2.1 解压缩Maven压缩包：

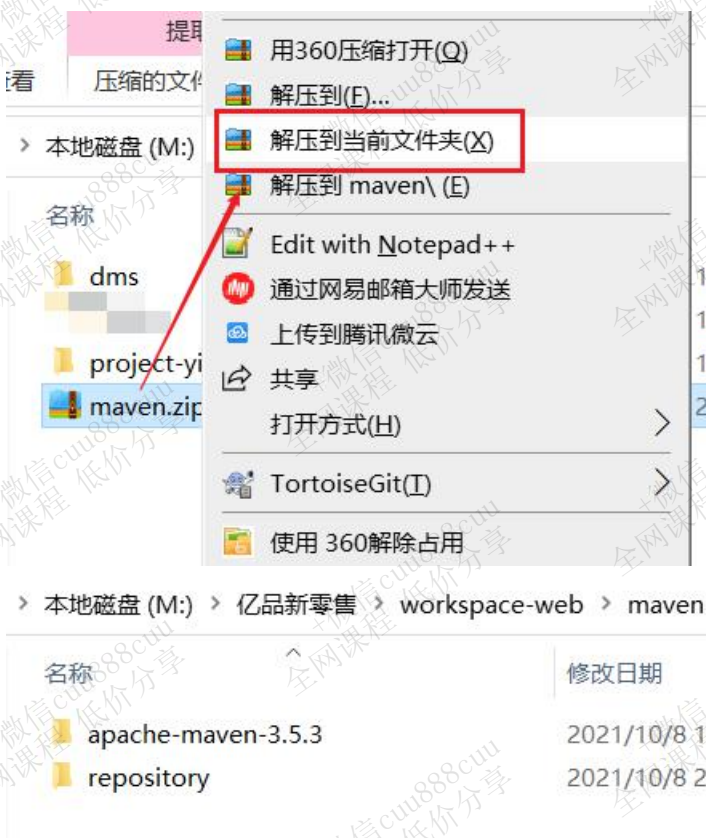


1.2.2 IDEA配置Maven路径



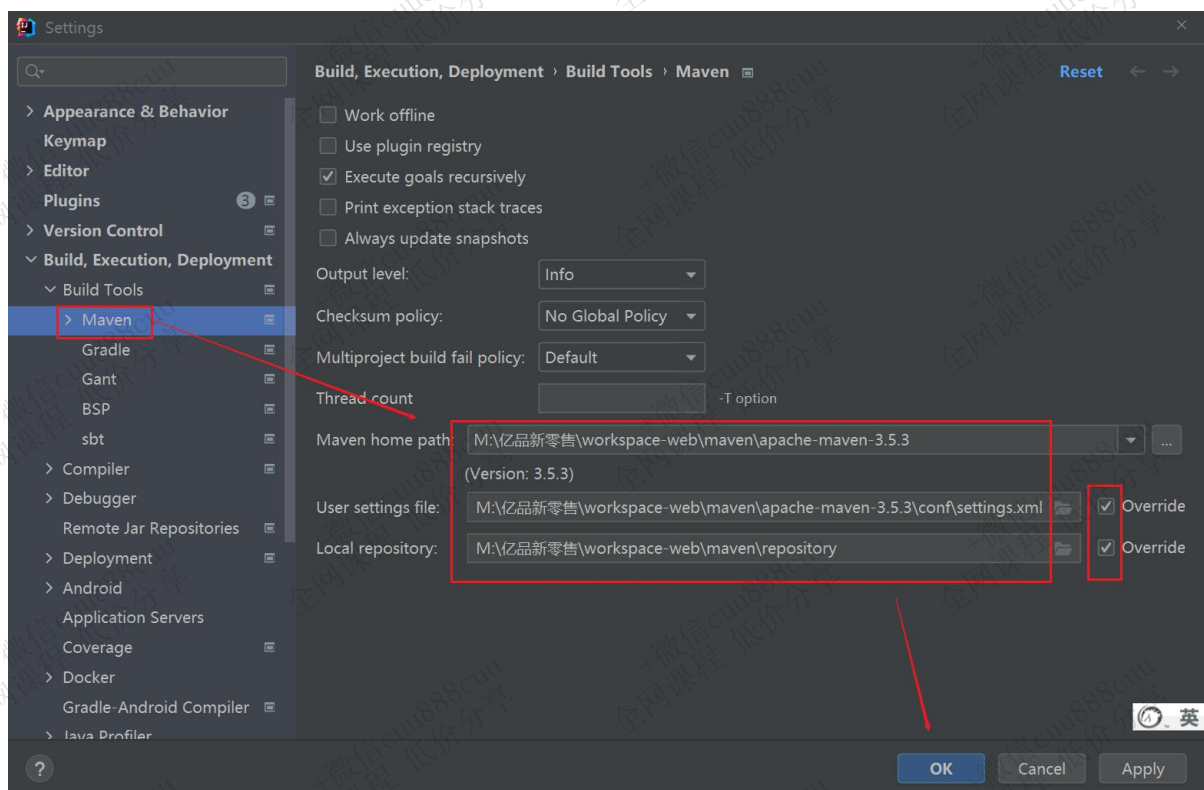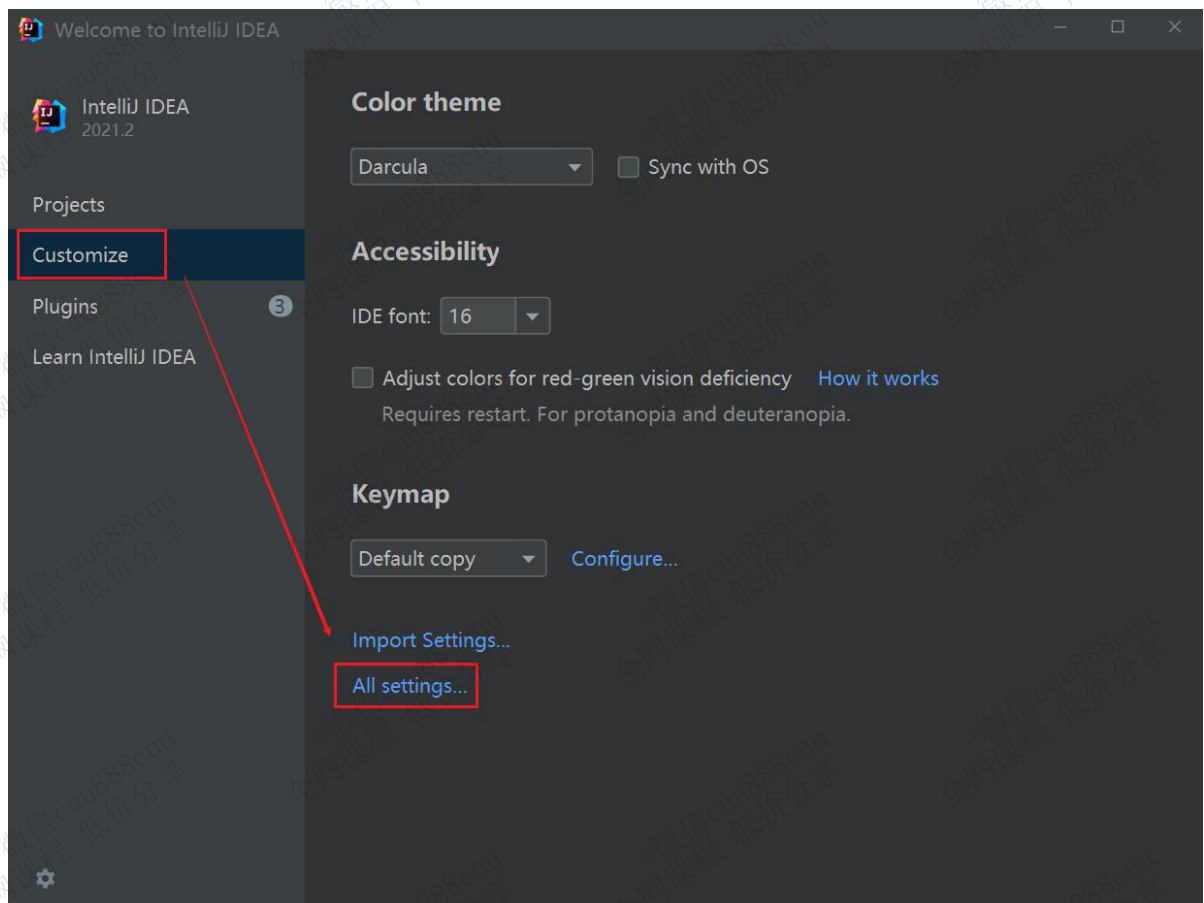


1.3 打开项目

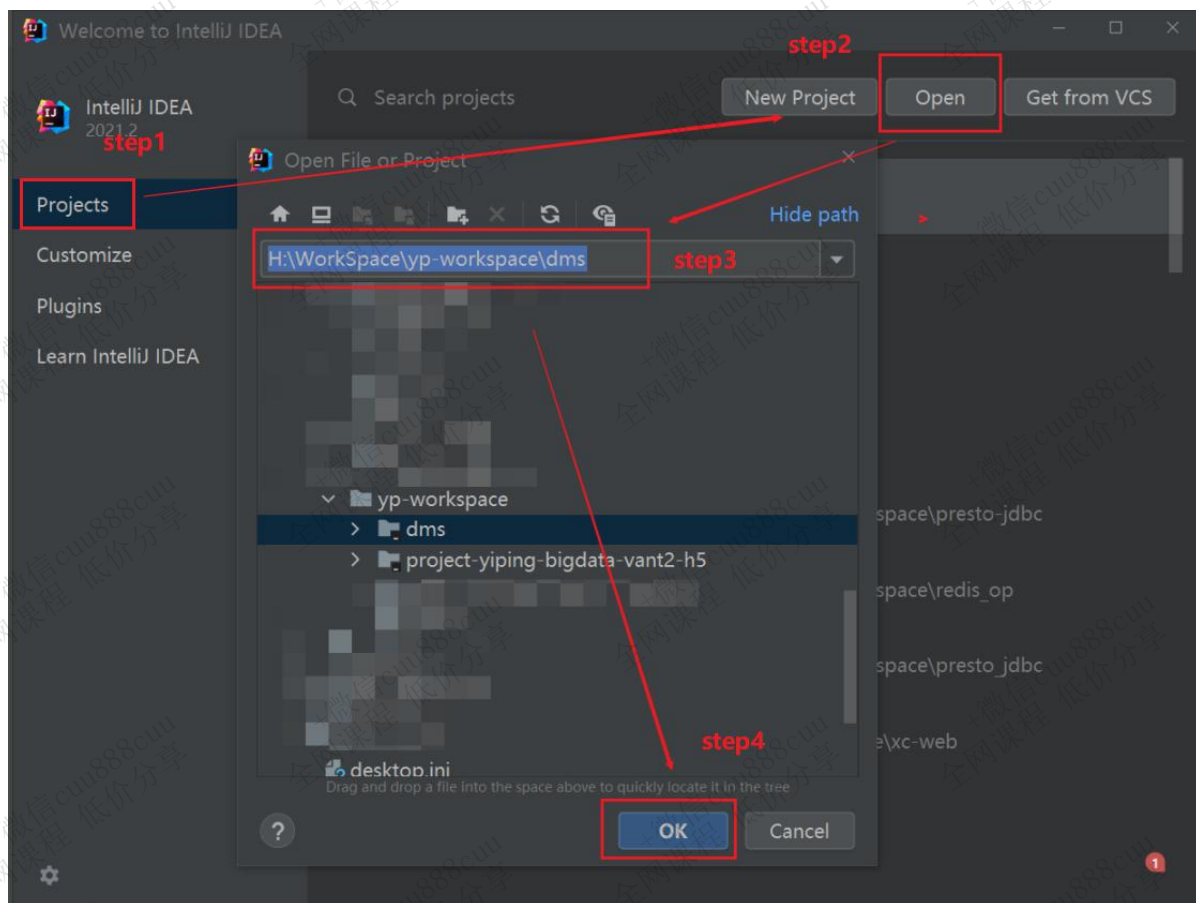


1.4 修改配置


确保mysql地址和密码配置正确:



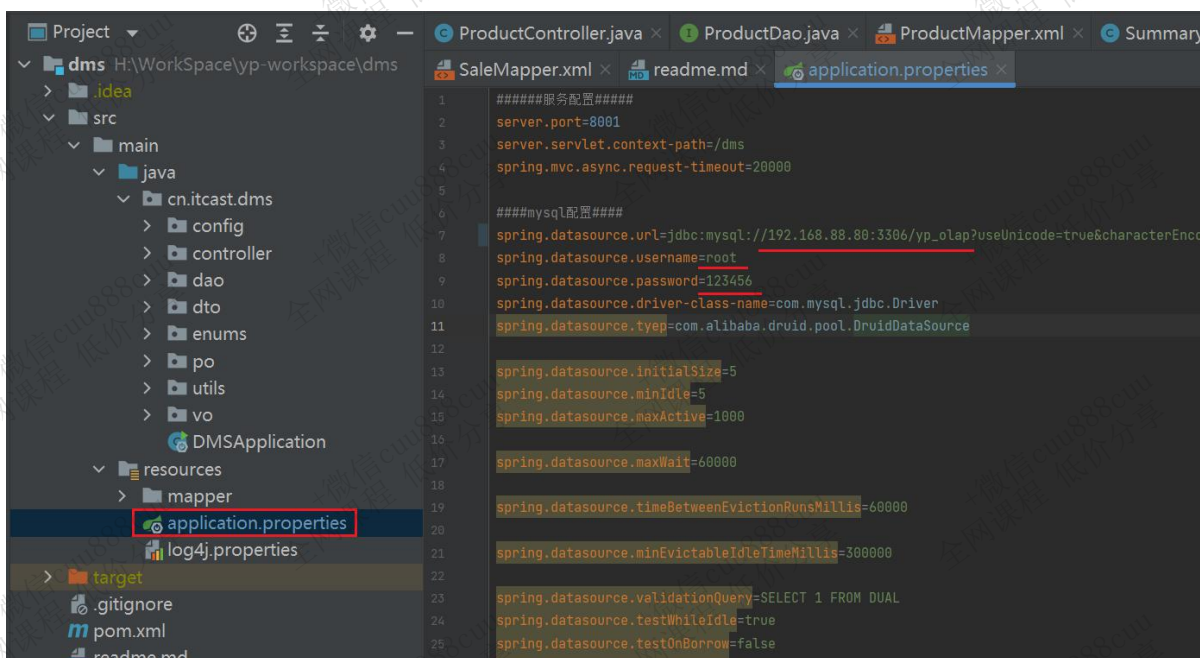

1.5 启动后端项目

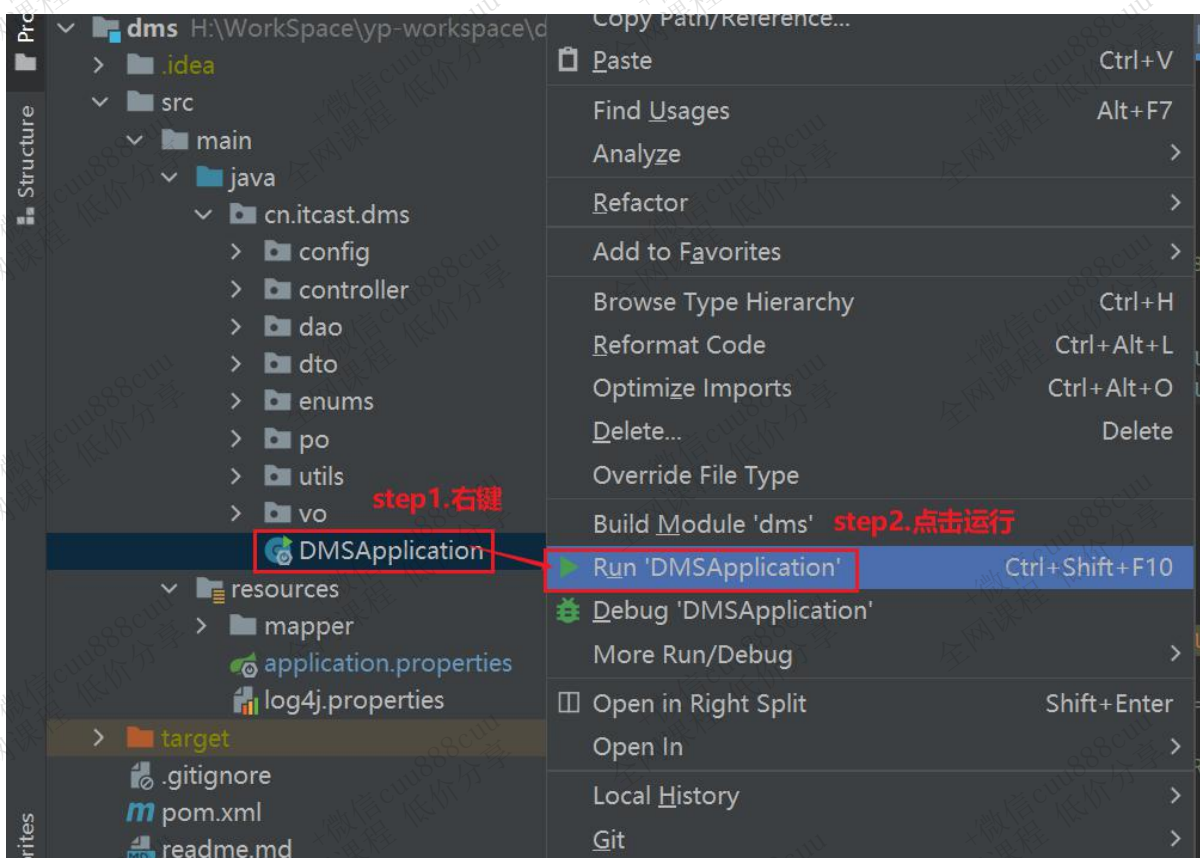

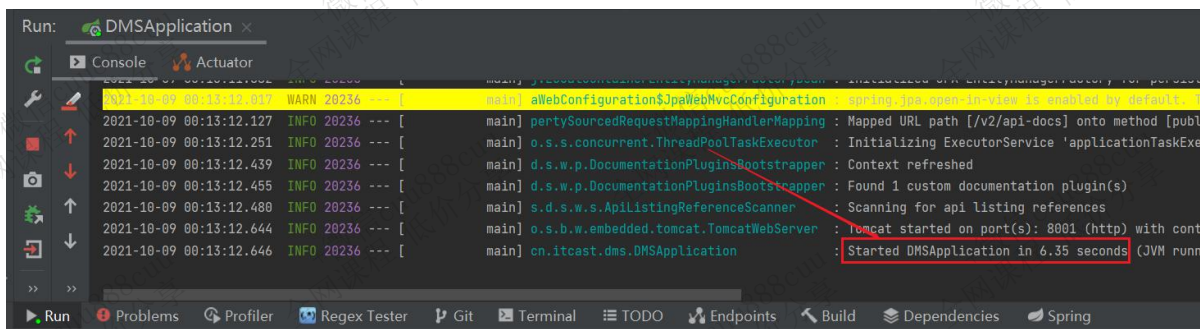

2. Vue前端

代码路径：【Home\workspace-web\project-yiping-bigdata-vue3-pc】

2.1 Node环境安装

<http://nodejs.cn/download/>



已下载安装包：Home\资料\安装包

一直回车，下一步，无需进行选择。

验证是否安装成功：






```
命令提示符
Microsoft Windows [版本 10.0.19043.1237]
(c) Microsoft Corporation。保留所有权利。

C:\Users\KongS>npm -v
6.14.10

C:\Users\KongS>node -v
v14.15.4


C:\Users\KongS>
```


2.2 打开WebStorm






2.3 配置NodeJS

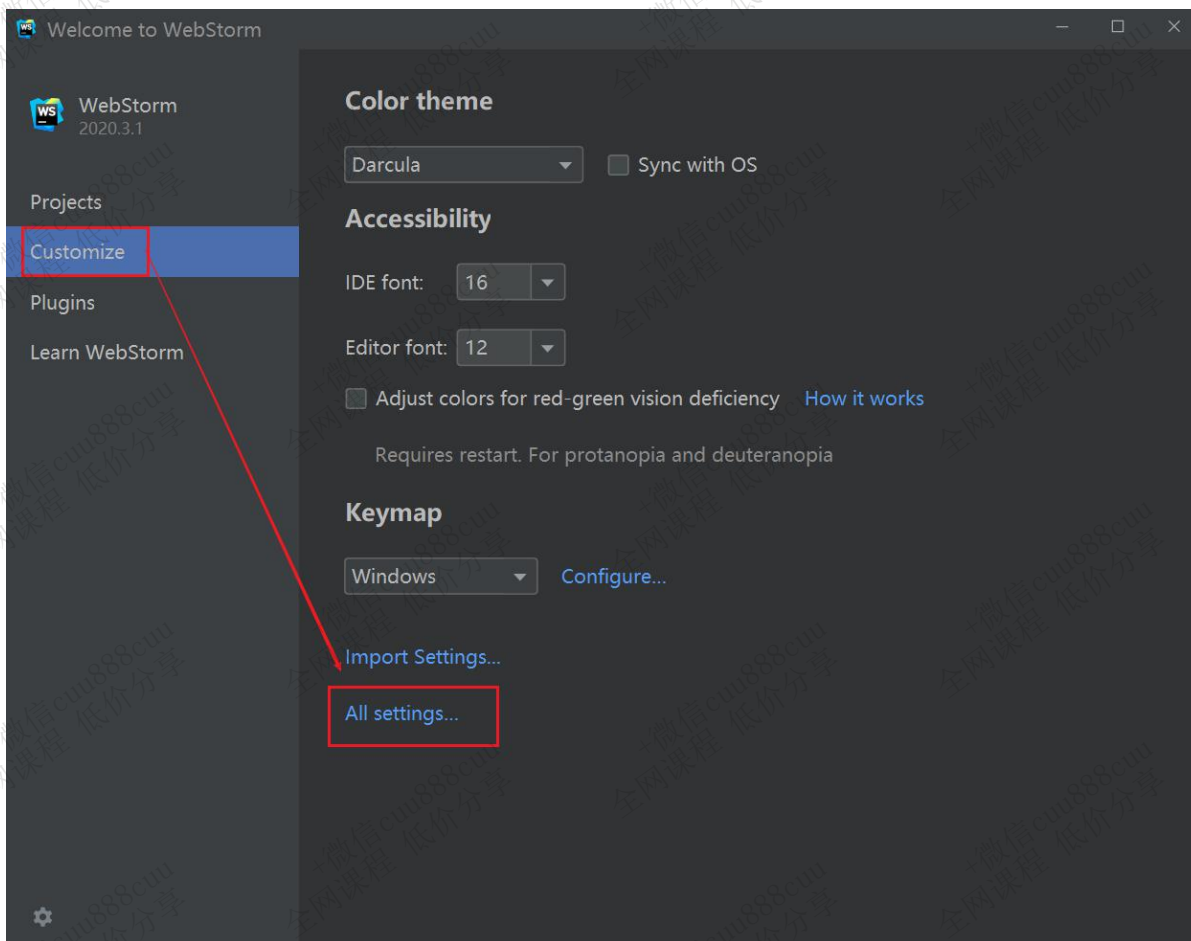

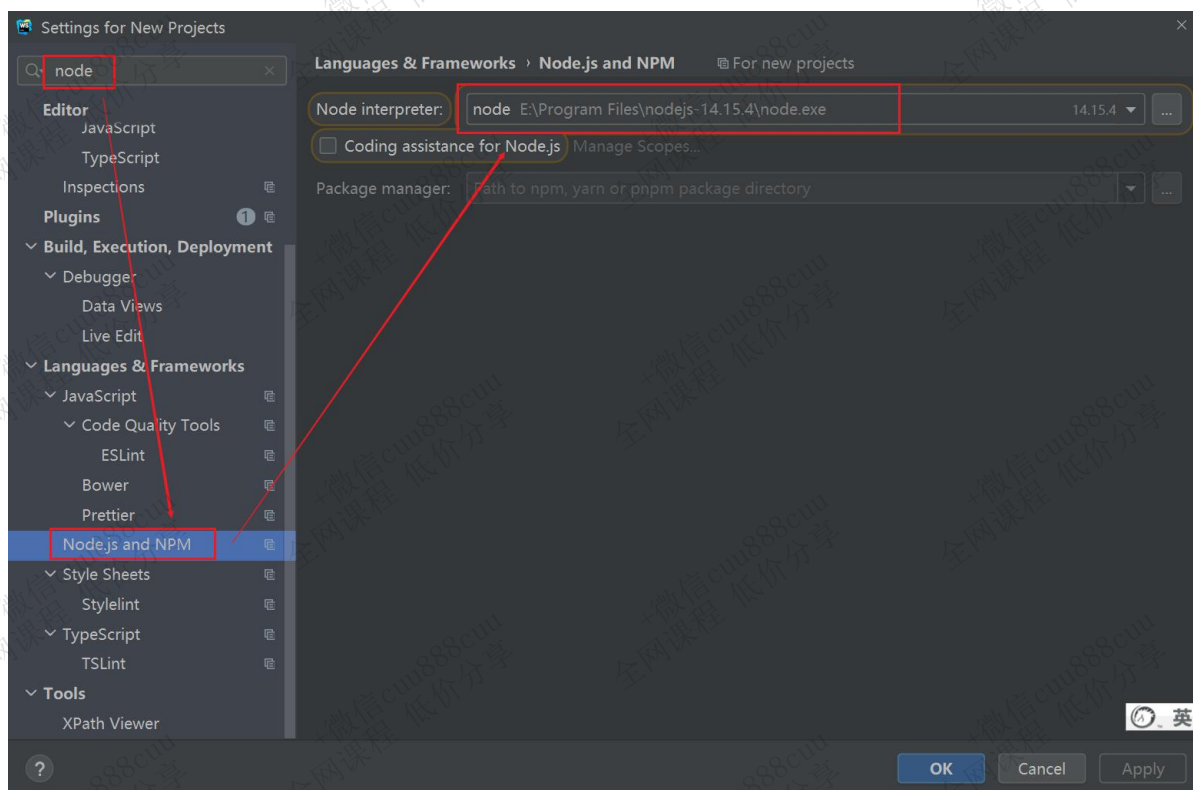

2.4 打开项目

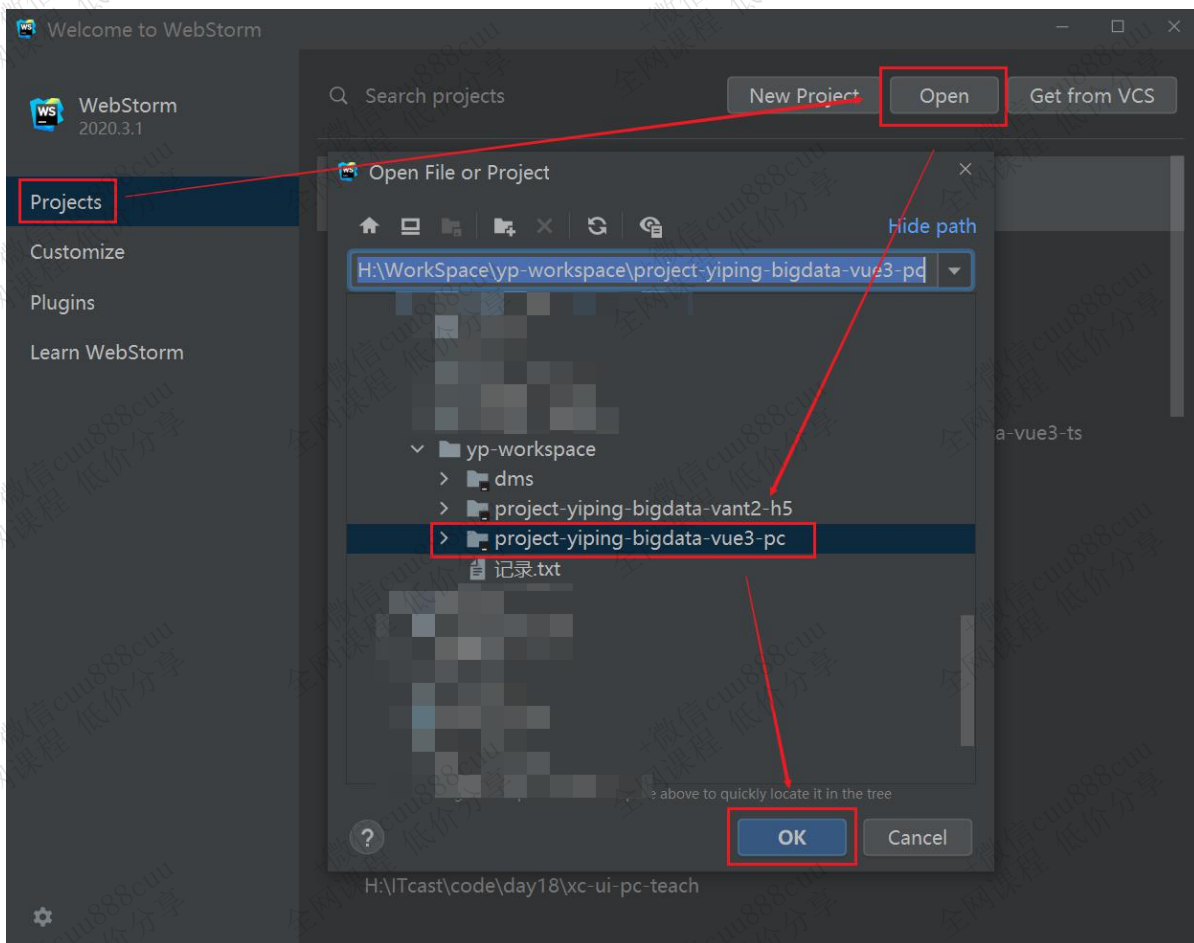

2.5 安装依赖

```
npm install
```



```
project-yiping-bigdata-vue3-pc README.md
31 ''bash
32 # 安装依赖
33 # 注意：请切换到项目目录下安装
34 cd base
35 # 本地开发
36 npm install
37 # 通过 http://localhost:3000/ 访问页面
38 npm run serve
39 npm run dev
40 # 生产环境构建
41 npm run build
42 # 代码格式检查
43 npm run lint
44
```

Terminal: Local x +

Microsoft Windows [版本 10.0.19043.1237]
(c) Microsoft Corporation。保留所有权利。

H:\Workspace\yp-workspace\project-yiping-bigdata-vue3-pc>npm install

npm WARN project-yiping-bigdata-vue3-pc@0.0.0 No repository field.
npm WARN project-yiping-bigdata-vue3-pc@0.0.0 No license field.
npm WARN optional SKIPPING OPTIONAL DEPENDENCY: fsevents@2.1.3 (node_modules\fsevents):
npm WARN notsup SKIPPING OPTIONAL DEPENDENCY: Unsupported platform for fsevents@2.1.3: wanted {"os":"darwin","arch":
audited 417 packages in 9.406s

21 packages are looking for funding
run 'npm fund' for details



found 117 vulnerabilities (93 moderate, 24 high)
run 'npm audit fix' to fix them, or 'npm audit' for details

H:\Workspace\yp-workspace\project-yiping-bigdata-vue3-pc>

2.6 启动项目

```
npm run dev
```



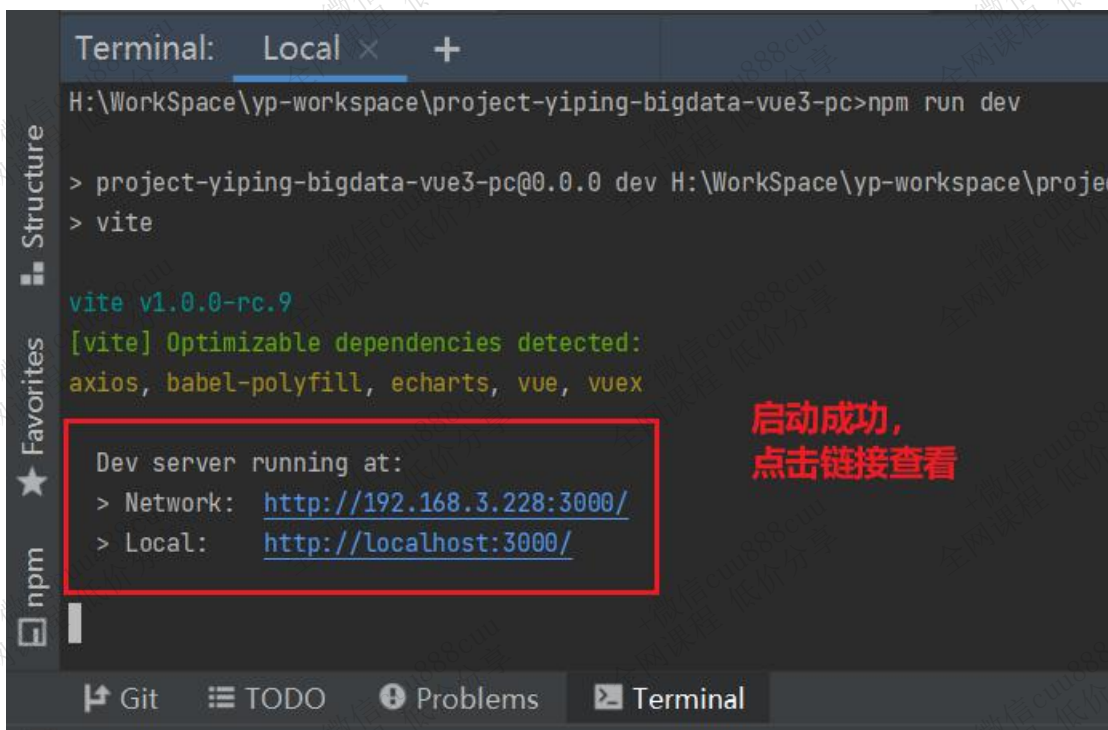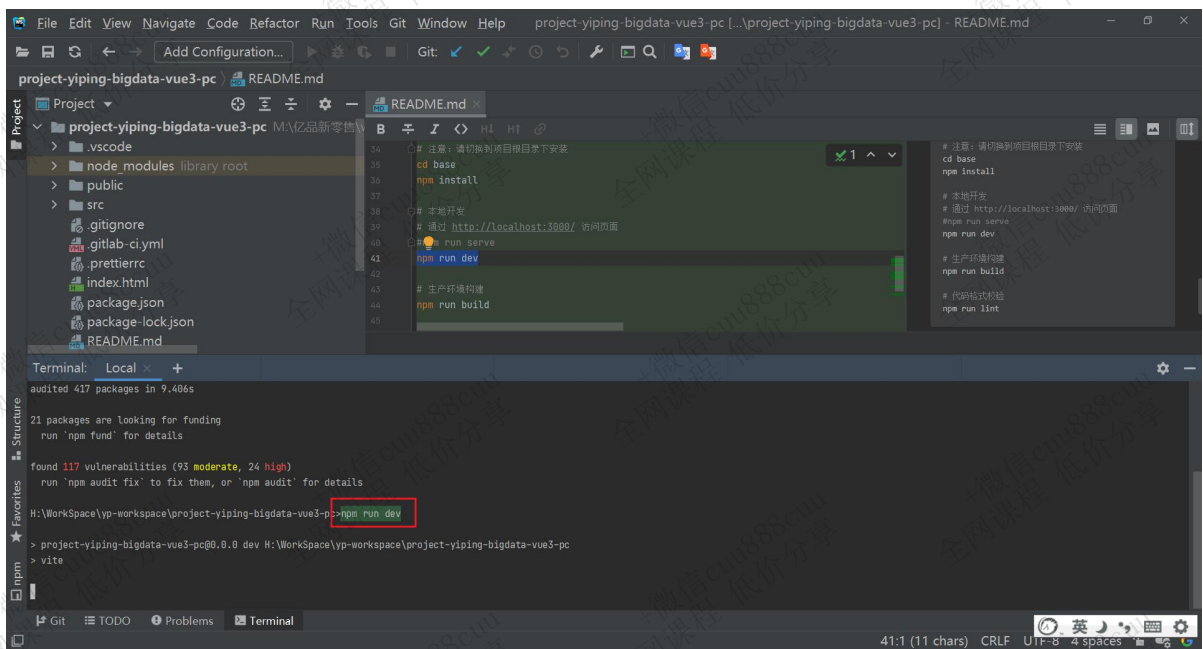

2.7 大屏效果

<http://localhost:3000/>



