

Webhook activity calling the callbackUri

Last updated by | Ranjith Katukojwala | Mar 7, 2023 at 11:35 AM PST


Contents

- [Issue](#)
- [Resolution](#)

Issue

When the Webhook activity runs, ADF adds a new property in the body of the request, called "callBackUri". The web job needs to read this value and use to create a POST request to this URL when the job is complete.

The web job should receive something like this:

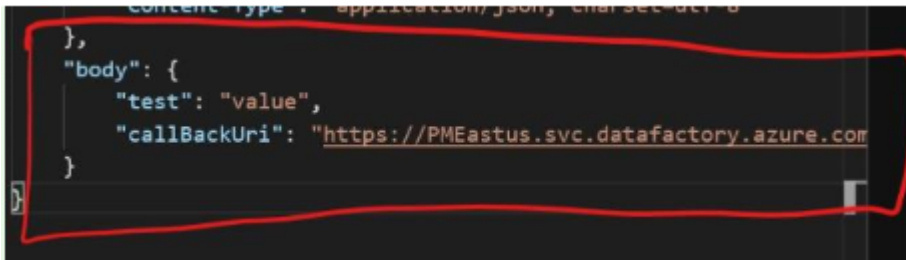

```
{
  "body": {
    "test": "value",
    "callBackUri": "https://PMEastus.svc.datafactory.azure.com"
  }
}
```

Resolution

Customer should deserialize the callBackUri property and invoke it :

```
if (req.body.callBackUri) {
    var XMLHttpRequest = require("xmlhttprequest").XMLHttpRequest;
    var xhr = new XMLHttpRequest();
    xhr.open("POST", req.body.callBackUri, true);
    xhr.setRequestHeader('Content-Type', 'application/json');
    xhr.send(JSON.stringify({
        value: 'Error in webhook'
    }));
}
```

Additional Information:

- **Icm References:**
- **Author:** Monica
- **Reviewer:** vimals
- **Keywords:**

How good have you found this content?

