

Ondemand HDI Error 'Cannot connect to Hive metastore'

Last updated by | Ranjith Katukojwala | Mar 7, 2023 at 11:35 AM PST

Contents

- [Issue](#)
- [Cause](#)
- [Resolution](#)

Issue

Pipeline run failed with error like:

"Cannot connect to Hive metastore using user provided connection string"


Cause

We've have a backend bug to handle hive metadata connection string with credentials managed by ADF.

Resolution

Suggest customer use AKV to manage the hive metadata store connection string with credentials instead, which is also the most recommended way to manage credentials in ADF.

Refer screenshots below:

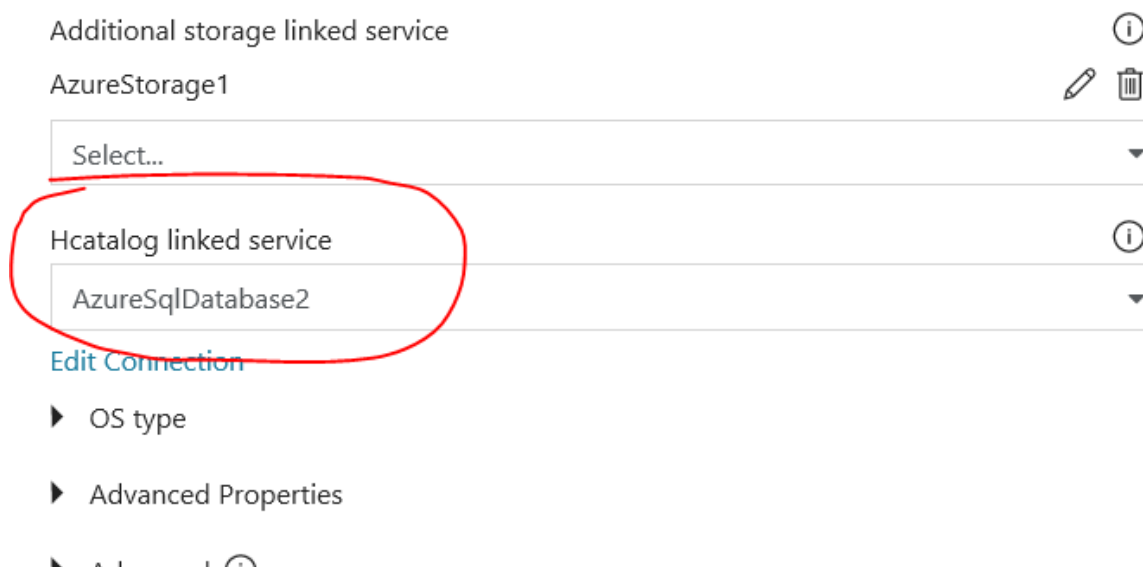

Edit Linked Service (Azure SQL Database) ✕

Connect via integration runtime *

WestEurope ▼

[Edit Integration Runtime](#)

Connection String	Azure Key Vault
-------------------	-----------------

AKV linked service *

AzureKeyVault1 ▼

[Edit Connection](#)

Secret name * ⓘ

sqlConnectionString

Additional Information:

- **Icm References:**
- **Author:** hvermis
- **Reviewer:** vimals
- **Keywords:**

How good have you found this content?

