

exp 1 data cleaning

K.G. Garner

this code

loads the raw data - assigns factors to variables etc, load functions

conducts piecewise linear functions to the data (collapsed over blocks)

removes trials up to the breakpoint

saves data as a dataframe

```
## Loading required package: wesanderson
## Loading required package: plyr
## Loading required package: ggplot2
## Warning in as.POSIXlt.POSIXct(Sys.time()): unknown timezone 'zone/tz/2020a.
## 1.0/zoneinfo/Australia/Brisbane'
## Loading required package: reshape2
## Warning in rows$sub = levels(dat$sub): Coercing LHS to a list
```

block switches

As learning should be demonstrated by a speeding of RTs over the block, I am now going to plot the RTs by trial number (collapsed across all blocks and conditions conditions) after each block switch, and apply piecewise linear regression method to remove trials contaminated by the switch (i.e. remove trials occurring prior to the breakpoint).

save data for analysis

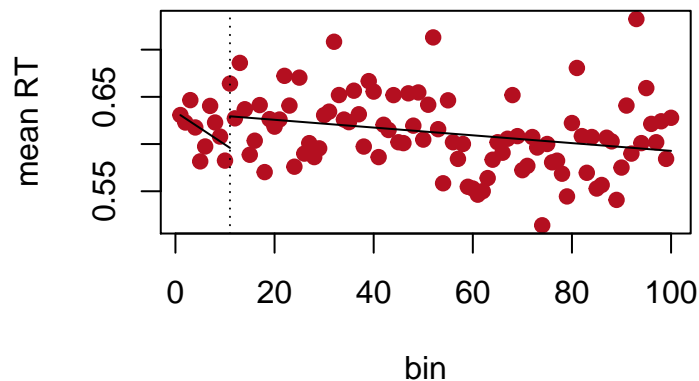


Figure 1: sub-301

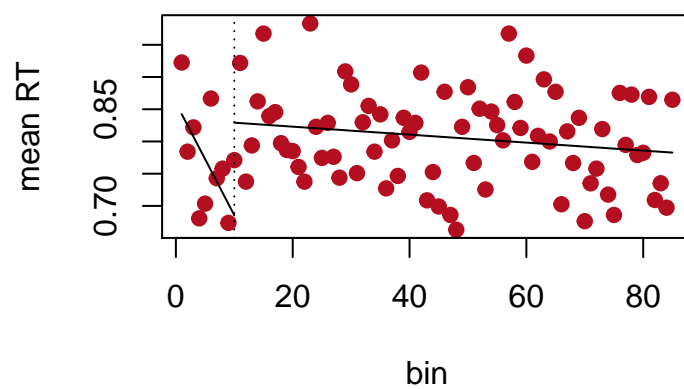


Figure 2: sub-302

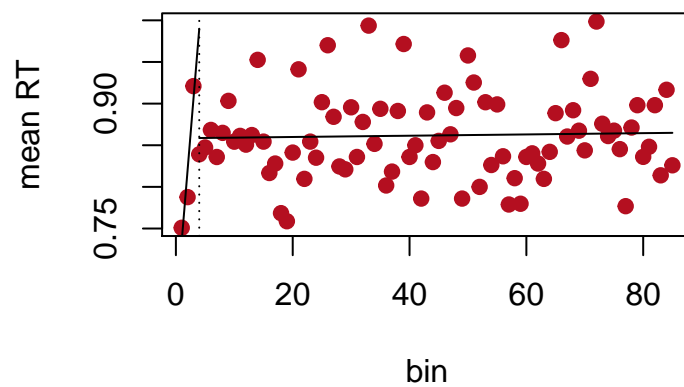


Figure 3: sub-303

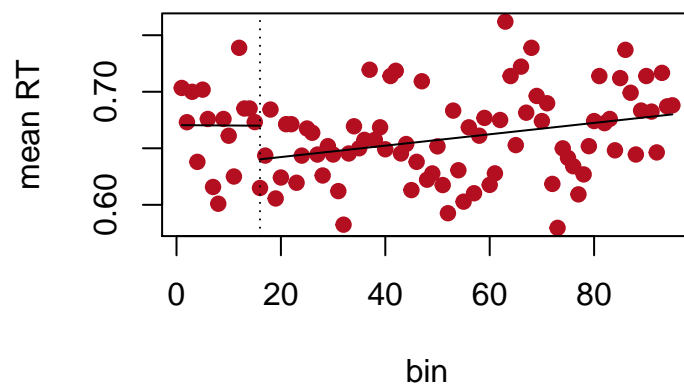


Figure 4: sub-304

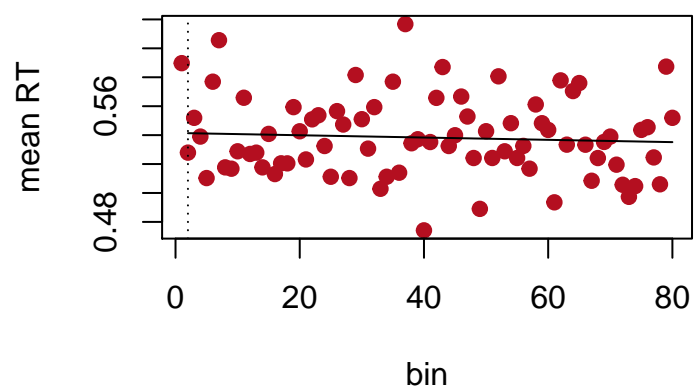


Figure 5: sub-305

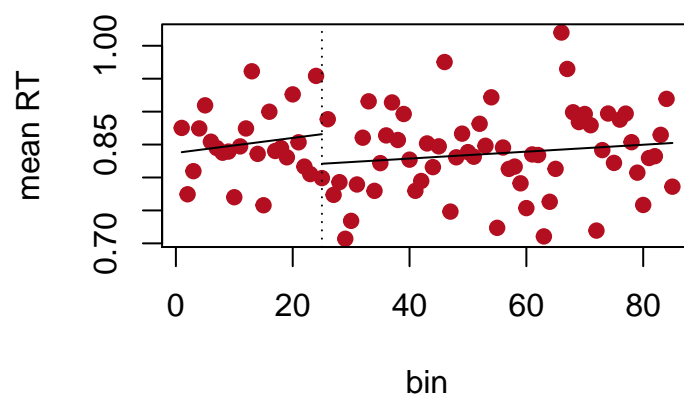


Figure 6: sub-306

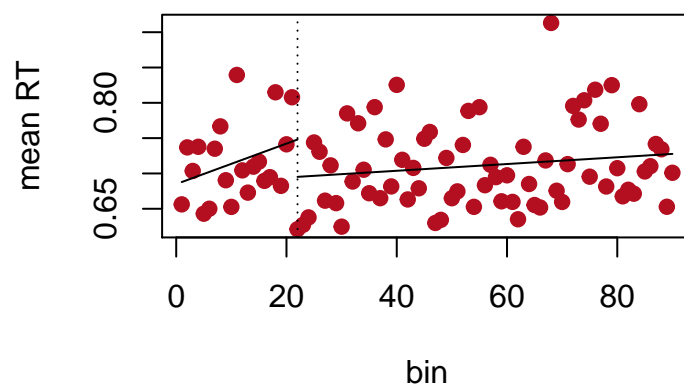


Figure 7: sub-307

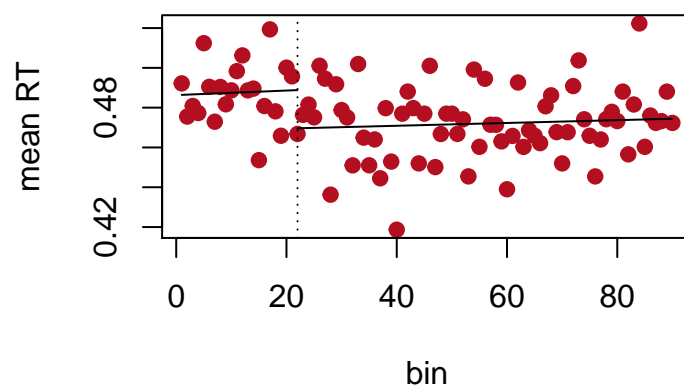


Figure 8: sub-308

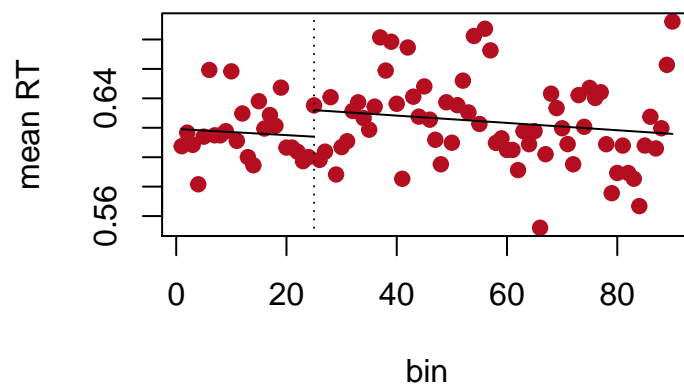


Figure 9: sub-309

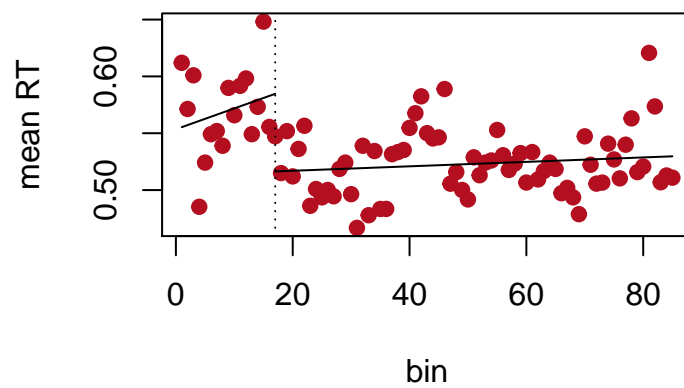


Figure 10: sub-310

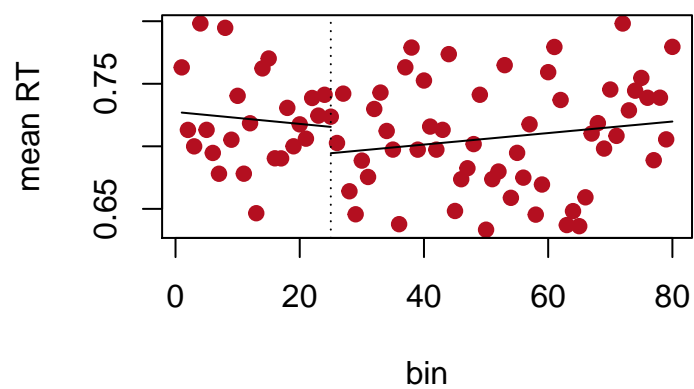


Figure 11: sub-311

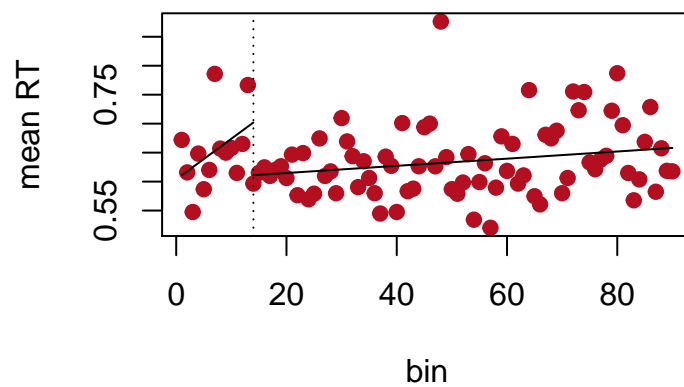


Figure 12: sub-312

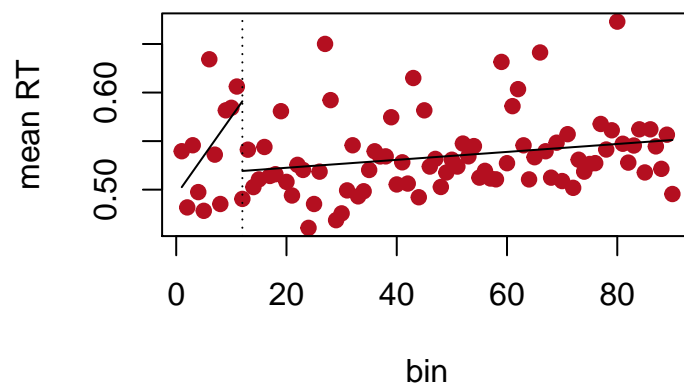


Figure 13: sub-313

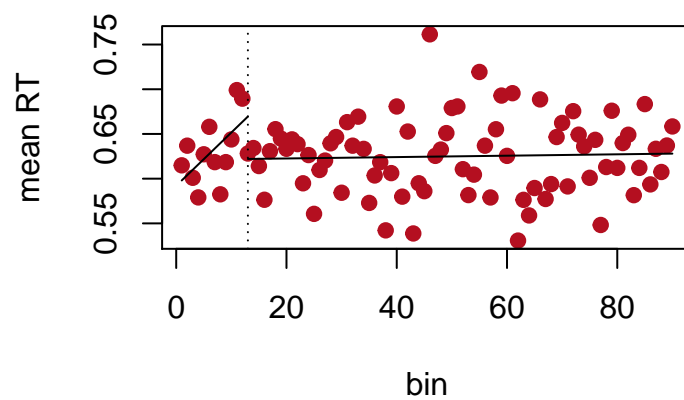


Figure 14: sub-314

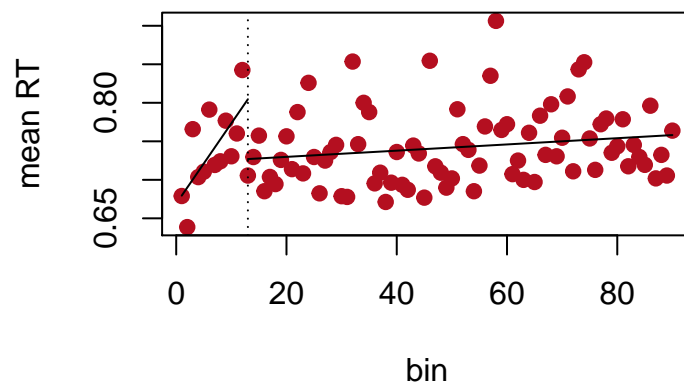


Figure 15: sub-315

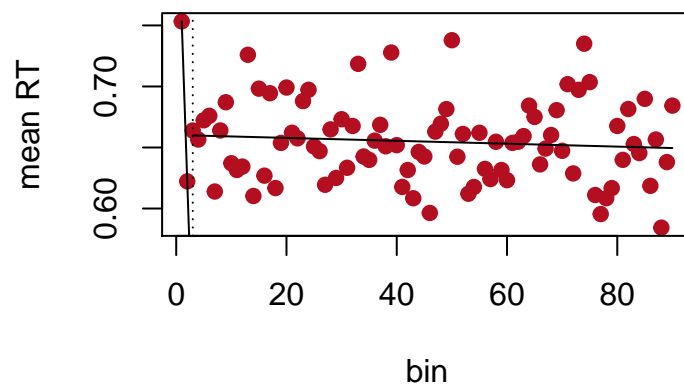


Figure 16: sub-316

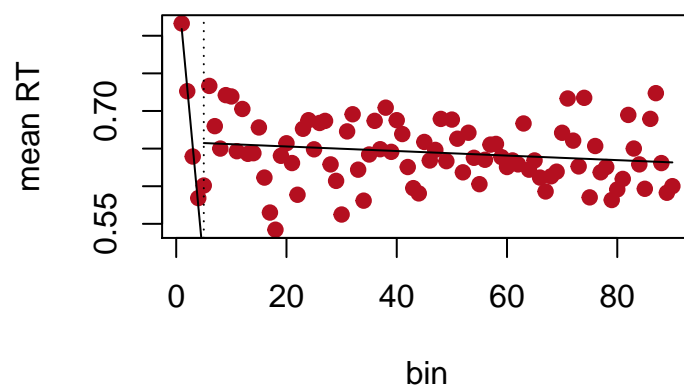


Figure 17: sub-317

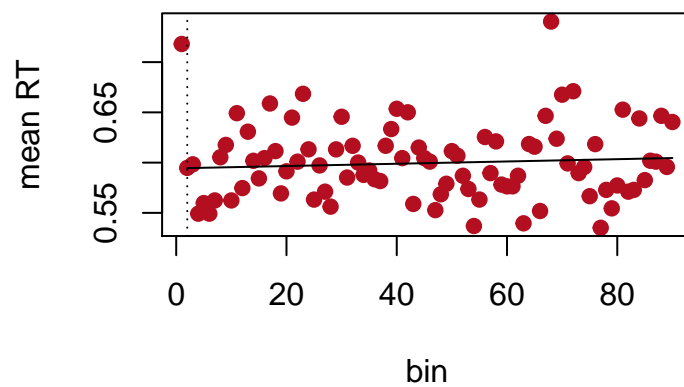


Figure 18: sub-318

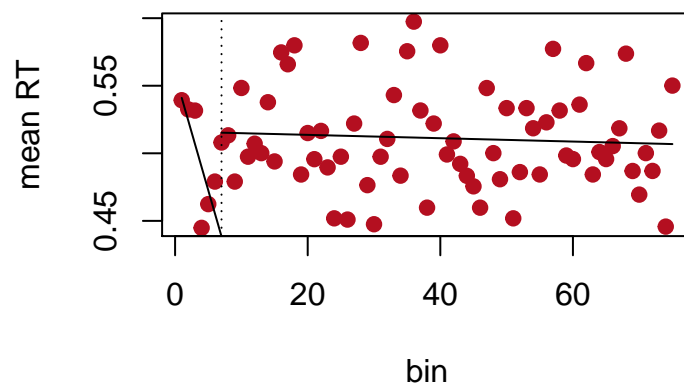


Figure 19: sub-320

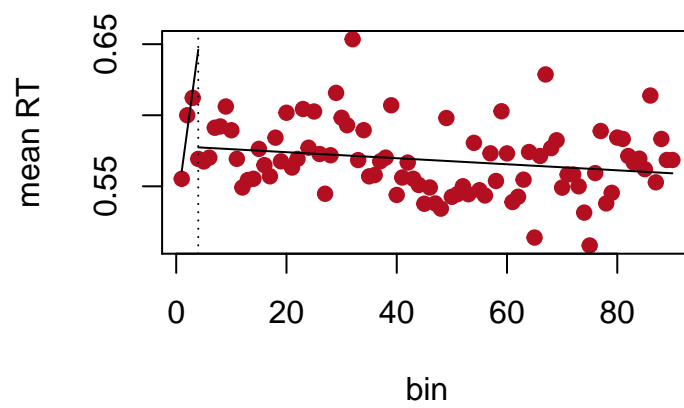


Figure 20: sub-321

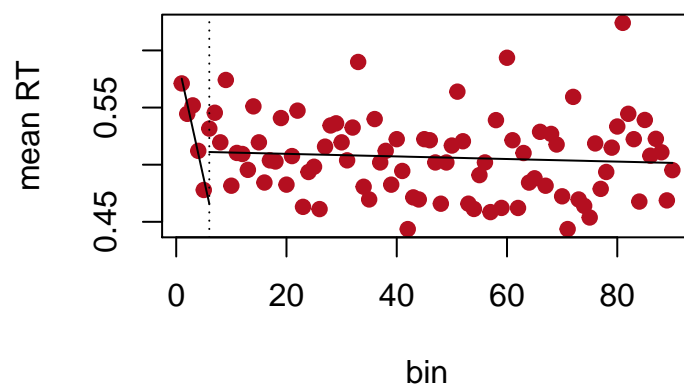


Figure 21: sub-323