



REACTJS

This documentation provides a complete guide to developing React applications using TypeScript. It covers the essential concepts, advanced techniques, and best practices that help you harness the full power of React and TypeScript together. Whether you're a beginner or an experienced developer, this guide will equip you with the knowledge and skills to create robust and efficient web applications.

© 2024 React with TypeScript Documentation. All rights reserved.

This documentation is provided under the MIT License. You are free to use, modify, and distribute it, provided that the original copyright notice is retained. For more details, please refer to the [LICENSE](./LICENSE.md) file.

Table of contents

Course Outline: React with TypeScript Documentation	4
1. Intro to React	11
Overview of React	12
Thinking in React	16
Introduction to TypeScript in React	23
React Concepts	25
Setting up the Development Environment	28
Installing Node.js and pnpm	30
PnPm Cheatsheet	32
Creating React with Vite	36
Various ways to create react app	38
Vite vs CRA	42
2. Fundamental Core Concepts	46
JSX & Props	48
What is JSX?	49
Passing Props to Components	55
Using Props for Reusable Components - V1	63
Using Props for Reusable Components - V2	69
Components in React	76
Functional vs. Class Components	79
Rendering Lists	87
Pure and impure Components	94
react data flow	98
3. Intro to State	101
useState Hook	102
Introduction to useState	103
Managing State in Functional Components	104
Example: Managing Form Inputs	105
useReducer Hook	106
Introduction to useReducer	107
Complex State Management	108
Example: Building a Counter with useReducer	109
4. Intermediate React Concepts	110

Handling Events	111
Event Handling in React	112
Passing Parameters to Event Handlers.....	113
Common Event Handlers (e.g., onClick, onChange, onSubmit)	114
Conditional Rendering.....	115
Using Ternary Operators for Conditional RenderingTopic	116
Best Practices for Conditional Rendering	117
5. Hooks in React	118
Introduction to Hooks	119
What are Hooks?	120
Rules of Hooks	121
useEffect Hook	122
Synchronizing with External Systems	123
Fetching Data with useEffect	124
Dependency Arrays.....	125
useRef Hook	126
Managing DOM References	127
Persisting Values Across Renders	128
Example: Counting Renders	129
6. Custom Hooks	130
Introduction to Custom Hooks	131
Creating a Custom Hook.....	132
Example: useLocalStorage Hook	133
Example: useFetch Hook	134
7. Performance Optimization	135
Memoization in React	136
What is Memoization?	137
useCallback Hook	138
useMemo Hook	139
React.memo for Component Optimization	140
Avoiding Prop Drilling	141
Issues with Prop Drilling	142
Solutions: Context API, Redux, Component Composition	143
8. Routing with React Router	144
Setting Up React Router	145
Basic Routing Concepts	146

Nested Routes and URL Parameters	147
Route Protection with Private Routes	148
Handling 404 Pages	149
9. Form Management with React Hook Form & Yup	150
Why Use React Hook Form?	151
Setting Up React Hook Form	152
Handling Form Validation with Yup	153
10. React Styling	154
11. Best Practices and Common Pitfalls	155
Code Structuring	156
Organizing Files and Folders	157
Naming Conventions and Best Practices	158
Avoiding Common Mistakes	159
12. Advanced State Management with Redux Toolkit	160
Introduction to Redux	161
Centralized State Management	162
Benefits of Redux	163
Setting Up Redux Toolkit	164
Handling Asynchronous Actions	165
RTK Query for Data Fetching	166
all	167

Course Outline: React with TypeScript Documentation

Here is the course outline for a React.js and TypeScript documentation written in Markdown (.md) format:

1. Introduction to React

- Overview of React
- Benefits of using React
- Introduction to TypeScript in React
- Setting up the Development Environment
 - Installing Node.js and npm
 - Setting up a React project with Create React App (CRA) or Vite
 - Configuring TypeScript in a React Project

2. Core Concepts

- JSX & Props
 - What is JSX?
 - Embedding JavaScript in JSX
 - Passing Props to Components
 - Using Props for Reusable Components
- Components in React
 - Functional vs. Class Components
 - Creating Components with TypeScript

- Default and Named Exports
- Rendering Components

3. State Management

- **useState Hook**
 - Introduction to useState
 - Managing State in Functional Components
 - Example: Managing Form Inputs
- **useReducer Hook**
 - Introduction to useReducer
 - Complex State Management
 - Example: Building a Counter with useReducer

4. Advanced React Concepts

- **Handling Events**
 - Event Handling in React
 - Passing Parameters to Event Handlers
 - Common Event Handlers (e.g., onClick, onChange, onSubmit)
- **Conditional Rendering**
 - Using Ternary Operators for Conditional Rendering
 - Best Practices for Conditional Rendering
- **Rendering Lists**
 - Mapping Data to Components

- Understanding Keys in React
- Handling Dynamic Lists

5. Hooks in React

- **Introduction to Hooks**
 - What are Hooks?
 - Rules of Hooks
- **useEffect Hook**
 - Synchronizing with External Systems
 - Fetching Data with useEffect
 - Dependency Arrays
- **useRef Hook**
 - Managing DOM References
 - Persisting Values Across Renders
 - Example: Counting Renders

6. Custom Hooks

- **Introduction to Custom Hooks**
 - When and Why to Create Custom Hooks
 - Naming Conventions
- **Creating a Custom Hook**
 - Example: useLocalStorage Hook
 - Example: useFetch Hook

7. Performance Optimization

- **Memoization in React**
 - What is Memoization?
 - useMemo Hook
 - useCallback Hook
 - React.memo for Component Optimization
- **Avoiding Prop Drilling**
 - Issues with Prop Drilling
 - Solutions: Context API, Redux, Component Composition

8. Advanced State Management with Redux Toolkit

- **Introduction to Redux**
 - Centralized State Management
 - Benefits of Redux
- **Setting Up Redux Toolkit**
 - Installing Redux Toolkit
 - Creating a Redux Store
 - Using createSlice and configureStore
- **Handling Asynchronous Actions**
 - Using createAsyncThunk for Async Operations
 - Integrating with Redux Slices
- **RTK Query for Data Fetching**

- Introduction to RTK Query
- Queries and Mutations in RTK Query
- Handling Caching and Error States

9. Routing with React Router

- **Introduction to React Router**
 - Setting Up React Router
 - Basic Routing Concepts
 - Nested Routes and URL Parameters
- **React Router DOM V6**
 - New Features in React Router V6
 - Route Protection with Private Routes
 - Handling 404 Pages

10. Form Management with React Hook Form & Yup

- **Introduction to React Hook Form**
 - Why Use React Hook Form?
 - Setting Up React Hook Form
 - Handling Form Validation with Yup
- **Advanced Form Handling**
 - Dynamic Forms
 - Handling Form Submissions

11. Deploying React Applications

- **Preparing for Deployment**
 - Optimizing Your React App for Production
 - Managing Environment Variables
- **Deployment Strategies**
 - Deploying to Vercel, Netlify, and Azure
 - Continuous Integration/Continuous Deployment (CI/CD) with GitHub Actions

12. Best Practices and Common Pitfalls

- **Code Structuring**
 - Organizing Files and Folders
 - Naming Conventions and Best Practices
- **Avoiding Common Mistakes**
 - Managing State and Props Effectively
 - Ensuring Performance Optimization
 - Handling Errors Gracefully


13. Conclusion

- Recap of Key Concepts
- Further Learning Resources
- Next Steps in React and TypeScript Mastery

This outline should help you structure comprehensive and detailed documentation for React.js and TypeScript. Each section can be expanded with code examples, explanations, and best practices tailored to your audience.

See also

1. Intro to React

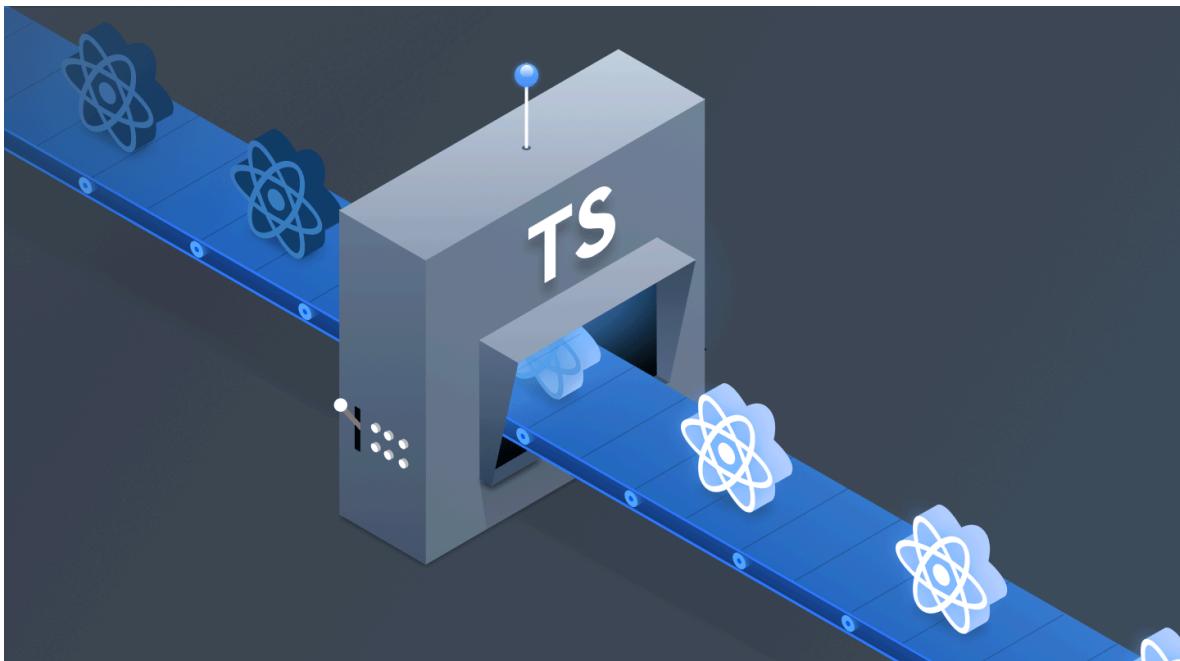

React TypeScript


Overview of React

React Quickstart

Before you start, you should have a basic understanding of:

1. [x] What is HTML
2. [x] What is CSS
3. [x] What is DOM
4. [x] What is ES6
5. [x] What is Node.js
6. [x] What is npm

What is React?

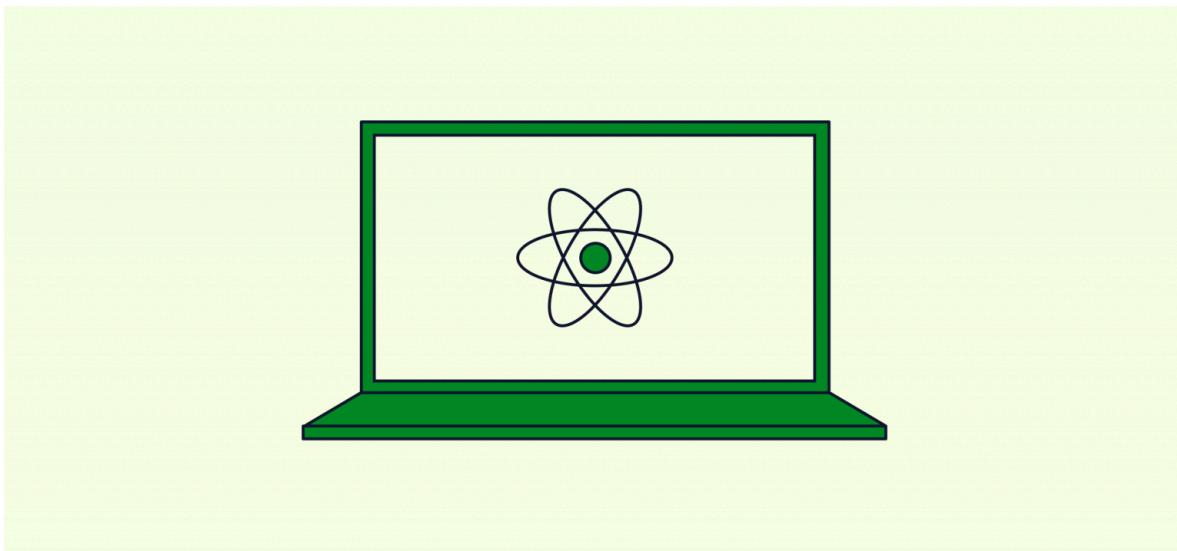

react

- React, sometimes referred to as a frontend JavaScript framework, is a JavaScript library created by Facebook.
- React is a tool for building UI components.

- React has solidified its position as the go-to JavaScript front-end framework in the current tech landscape. It's fascinating to see how it's seamlessly woven itself into the development practices of well-established corporations and budding startups alike.

What is React used for?

1. Web development :

- This is where React got its start and where you'll find it used most often. React is component-based. An example of a component could be a form or even just a form field or button on a website. In React, you build up complete applications using components like these by nesting them.
- Components in React can manage their own state and communicate that state to child components. By "state," we mean the data that populates the web application.

2. Mobile app development :

- React Native is a JavaScript framework that uses React. With React Native, developers can apply web-based React principles to creating mobile apps for Android and iOS. Here, React is used to connect the mobile user interface of the application to the phone's operating system.

3. Desktop app development :

- Developers can also use React with Electron, another JavaScript library, to create cross-platform desktop apps. Some apps you may know about that are built with Electron include Visual Studio Code, Slack, Skype, Discord, WhatsApp, and WordPress Desktop.

React.JS History

React.js, a popular JavaScript library for building user interfaces, particularly for single-page applications, has a fascinating history that reflects its evolution and growing adoption in the web development community. Here's a brief history of React.js in bullet points:

- **2011:** React.js created by Facebook's Jordan Walke for internal use.

- **2013:** Open-sourced at JSConf US; introduced virtual DOM.
- **2014:** Facebook introduced Flux, influencing state management in React.
- **2015:** React Native launched, expanding React to mobile apps.
- **2015:** React v0.14 split core into `react` and `react-dom`.
- **2016:** React v15 brought performance improvements and `prop-types`.
- **2017:** React Fiber (v16) restructured core for better responsiveness.
- **2018:** Hooks introduced in v16.8, transforming component design.
- **2019:** Experimental Suspense and Concurrent Mode introduced.
- **2020:** React v17 focused on easier upgrades.
- **2022:** React 18 brought full Concurrent Mode and enhanced UI responsiveness.
- **2023:** React 19 is the latest major release of the React JavaScript library, bringing a range of new features and improvements aimed at enhancing both developer experience and application performance. Some of the key updates include:
 - 1. React Compiler:** A significant new feature, the React Compiler automates many performance optimizations, like memoization, which were previously handled manually using hooks like `useMemo` and `useCallback`. This simplifies the code and makes React apps faster and more efficient.
 - 2. Actions and Form Handling:** React 19 introduces a new way to handle form submissions and state changes using "Actions." This feature simplifies managing asynchronous operations, making it easier to handle loading states, errors, and successful form submissions.
 - 3. New Hooks:** Several new hooks have been introduced, such as `useOptimistic`, which allows for optimistic UI updates (i.e., updating the UI immediately while awaiting server confirmation), and `use`, which simplifies asynchronous operations within components. Additionally, the `useFormStatus` and `useActionState` hooks make managing form state more intuitive.
 - 4. Server Components:** React 19 enhances server-side rendering by allowing server components, similar to features in frameworks like Next.js. This can lead to faster

page loads and improved SEO.

5. **Improved Metadata Management:** Managing document metadata like titles and meta tags is now easier and more integrated into React components, eliminating the need for third-party libraries like react-helmet.
6. **Background Asset Loading:** React 19 introduces background loading of assets (like images and scripts), which helps improve page load times and overall user experience by preloading resources in the background as users navigate through the app.

Thinking in React

"Thinking in React" is a concept that describes the process of designing and building user interfaces with React.js. It emphasizes breaking down the UI into components, managing data flow, and structuring the application in a way that aligns with React's component-based architecture. Here's a concise breakdown:

1. Break Down the UI into Components

1. Start with a Mockup: Look at your UI and identify the different parts that can be broken down into components.

- Imagine that you already have a JSON API and a mockup from a designer.
 - The JSON API returns some data that looks like this:

```
[  
  { category: "Fruits", price: "$1", stocked: true, name: "Apple" },  
  { category: "Fruits", price: "$1", stocked: true, name:  
    "Dragonfruit" },  
  { category: "Fruits", price: "$2", stocked: false, name:  
    "Passionfruit" },  
  { category: "Vegetables", price: "$2", stocked: true, name:  
    "Spinach" },  
  { category: "Vegetables", price: "$4", stocked: false, name:  
    "Pumpkin" },  
  { category: "Vegetables", price: "$1", stocked: true, name: "Peas"  
 }  
]
```

The mockup looks like this:

Search...

Only show products in stock

Name	Price
------	-------

Fruits


Apple	\$1
Dragonfruit	\$1
Passionfruit	\$2

Vegetables

Spinach	\$2
Pumpkin	\$4
Peas	\$1

[product page](#)

2. There are five components on this screen:

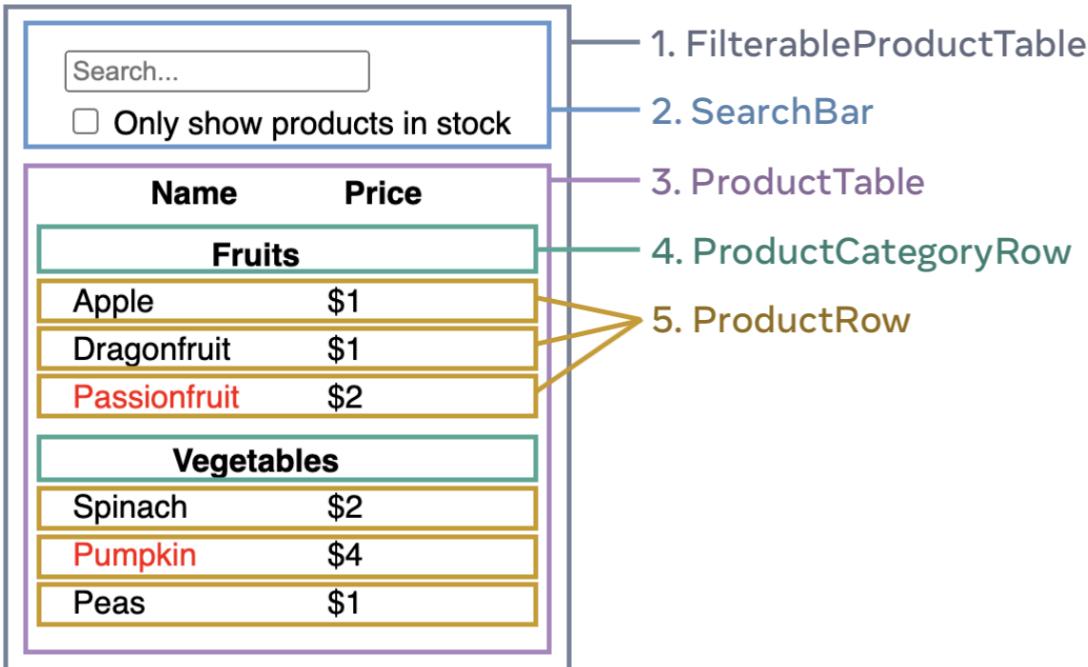

products page decoupled

- FilterableProductTable (grey) contains the entire app.
- SearchBar (blue) receives the user input.
- ProductTable (lavender) displays and filters the list according to the user input.
- ProductCategoryRow (green) displays a heading for each category.
- ProductRow (yellow) displays a row for each product.

2. Build a Static Version in React

- **Create Stateless Components:** Initially, build components that don't manage their own state, simply taking in props and rendering UI.
- In the App.js add

```
function ProductCategoryRow({ category }) {
  return (
    <tr>
      <th colSpan="2">
        {category}
```

```

        </th>
    </tr>
);
}

function ProductRow({ product }) {
    const name = product.stocked ? product.name :
    <span style={{ color: 'red' }}>
{product.name}
</span>;
return (
    <tr>
        <td>{name}</td>
        <td>{product.price}</td>
    </tr>
);
}

function ProductTable({ products }) {
    const rows = [];
    let lastCategory = null;

products.forEach((product) => {
    if (product.category !== lastCategory) {
        rows.push(
            <ProductCategoryRow
                category={product.category}
                key={product.category}
            />
        );
    }
    rows.push(
        <ProductRow
            product={product}
            key={product.name}
        />
    );
    lastCategory = product.category;
}

```

```

    });

    return (
      <table>
        <thead>
          <tr>
            <th>Name</th>
            <th>Price</th>
          </tr>
        </thead>
        <tbody>{rows}</tbody>
      </table>
    );
}

function SearchBar() {
  return (
    <form>
      <input type="text" placeholder="Search..." />
      <label>
        <input type="checkbox" />
        { ' '}
        Only show products in stock
      </label>
    </form>
  );
}

function FilterableProductTable({ products }) {
  return (
    <div>
      <SearchBar />
      <ProductTable products={products} />
    </div>
  );
}

const PRODUCTS = [

```

```

        {category: "Fruits", price: "$1", stocked: true, name: "Apple"},  

        {category: "Fruits", price: "$1", stocked: true, name:  

        "Dragonfruit"},  

        {category: "Fruits", price: "$2", stocked: false, name:  

        "Passionfruit"},  

        {category: "Vegetables", price: "$2", stocked: true, name:  

        "Spinach"},  

        {category: "Vegetables", price: "$4", stocked: false, name:  

        "Pumpkin"},  

        {category: "Vegetables", price: "$1", stocked: true, name:  

        "Peas"}  

    ];  
  

    export default function App() {  

        return <FilterableProductTable products={PRODUCTS} />;  

    }
}

```

3. Identify the Minimal Representation of UI State

- **Determine What State Your UI Needs:** Consider what needs to change in your UI and represent it in the component's state.
- **Single Source of Truth:** Identify where the state should live—often in the highest common ancestor component that needs to share the state.

4. Identify Where Your State Should Live

- **Lift State Up:** When multiple components need to share state, lift it up to their closest common ancestor.
- **Controlled Components:** Ensure components only control their own state or receive state from a parent component.

5. Add Inverse Data Flow


- **Pass Callbacks to Update State:** Child components that need to modify the parent's state should do so via callbacks passed down as props.

6. Implement the Final UI

- **Refine Components:** Continue to break down components, manage state efficiently, and ensure the data flows in a top-down manner.

"Thinking in React" is about modularity, clarity, and a clear data flow, which together make building complex UIs more manageable.

Introduction to TypeScript in React

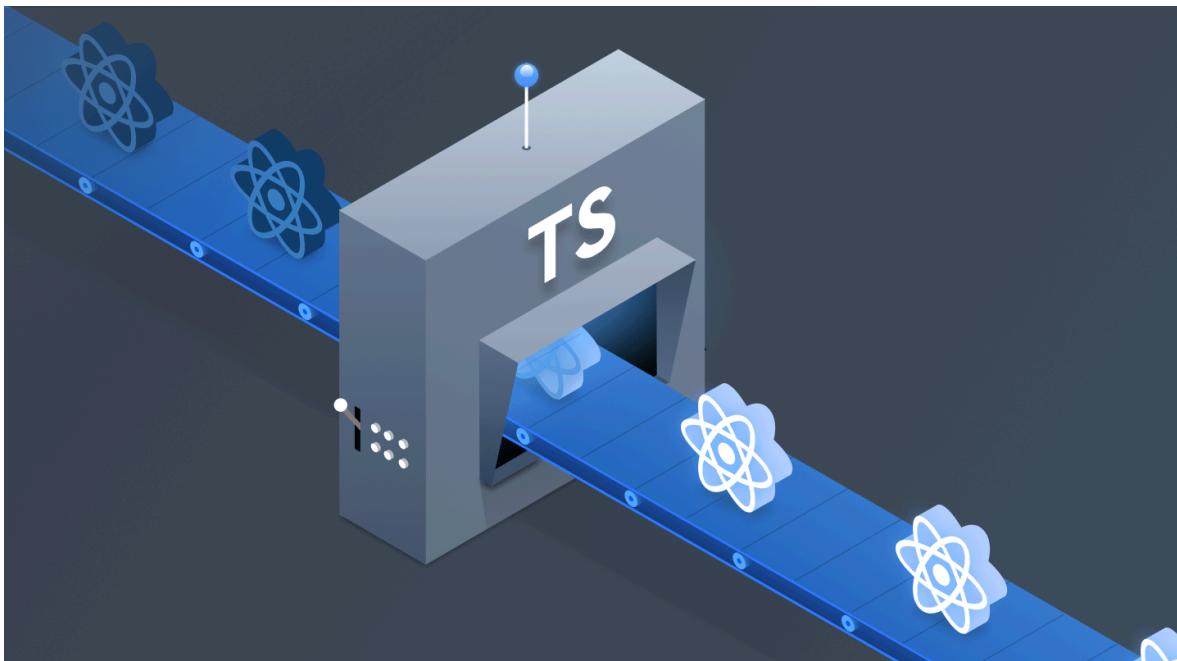

React TypeScript

TypeScript is a statically typed superset of JavaScript that provides better tooling and helps catch errors early during development. Using TypeScript with React improves code quality and readability, especially in large projects.

Using TypeScript

TypeScript is a popular way to add type definitions to JavaScript codebases. Out of the box, TypeScript supports JSX and you can get full React Web support by adding `@types/react` and `@types/react-dom` to your project.

TypeScript with React Components

Writing TypeScript with React is very similar to writing JavaScript with React. The key difference when working with a component is that you can provide types for your component's props. These types can be used for correctness checking and providing inline documentation in editors.

Button Component with TS

```
function MyButton({ title }: { title: string }) {
  return (
    <button>{title}</button>
  );
}


export default function MyApp() {
  return (
    <div>
      <h1>Welcome to my app</h1>
      <MyButton title="I'm a button" />
    </div>
  );
}
```

Welcome to my app

I'm a button

Ts button

React Concepts

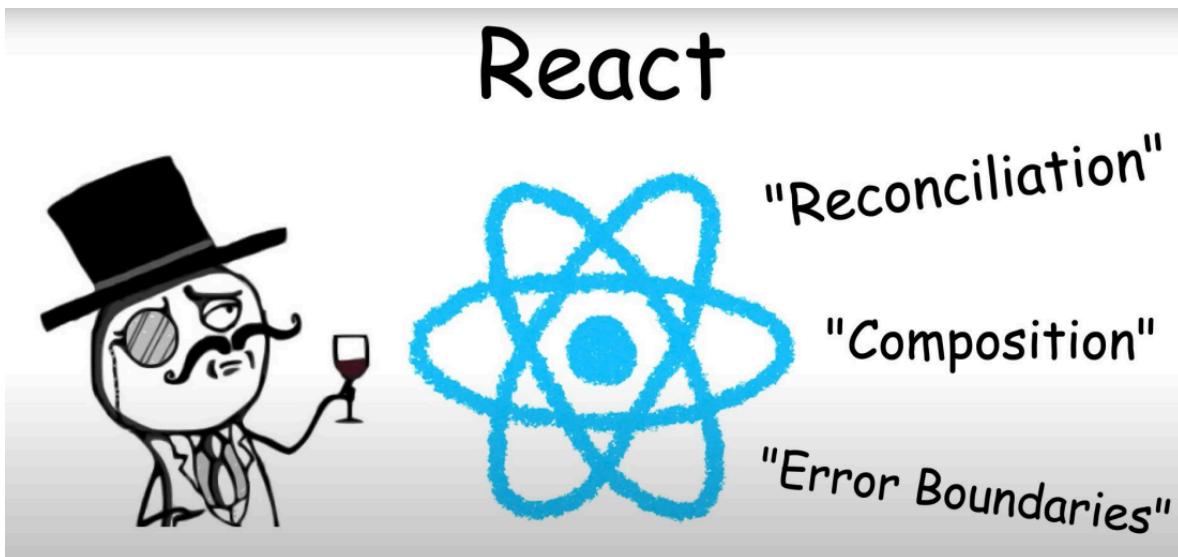

react_concepts

- Reconciliation: This is the process React uses to update the user interface (UI) efficiently. When something changes in your app (like a piece of data), React compares the new state with the old state and only updates the parts of the UI that need to change. This comparison is what "reconciliation" refers to.
- Composition: React encourages breaking down your UI into small, reusable pieces called components. Composition is the process of combining these components to create more complex UIs. Instead of creating one big component, you compose multiple smaller ones.
- Error Boundaries: These are special components in React that catch errors in any components below them in the component tree. This prevents the whole app from crashing if something goes wrong in a small part of your UI.

Rendering



```
function App() {  
  return <App />  
}
```


react_rendering



Rendering in React

- Rendering in React is the process of taking your React components and turning them into something that users can see on their screen (usually HTML). The code example shown (a simple function returning JSX) illustrates how you define a React component. When this component is rendered, React translates the JSX into HTML and updates the browser's DOM to reflect this.

React Rendering Steps

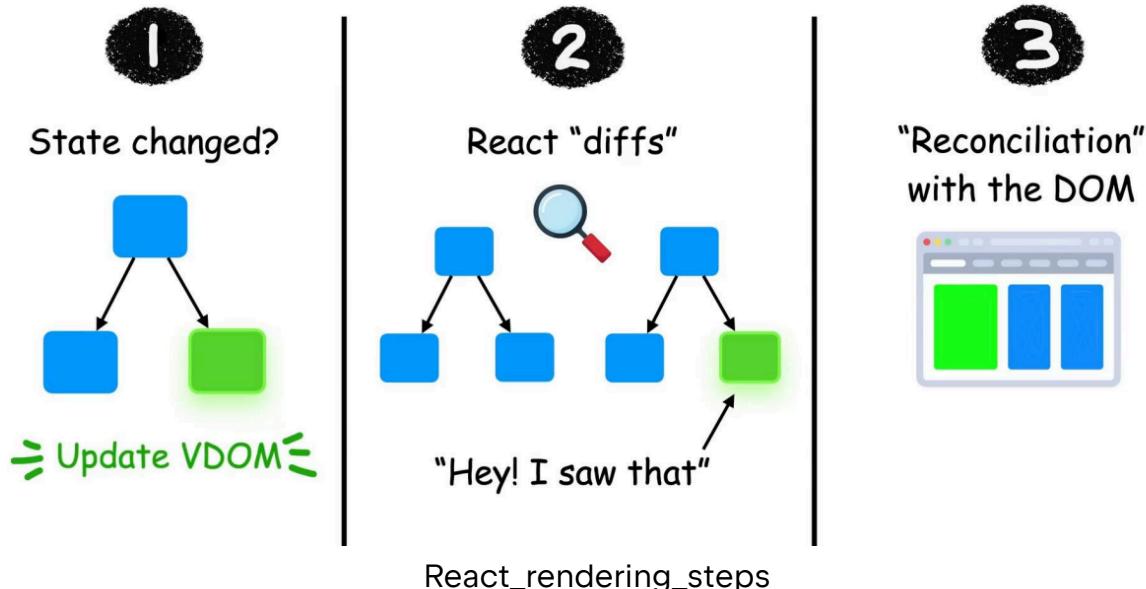


React Rendering Steps

- **Step 1:** State Change? React checks if any part of your application's state has changed. If it has, React creates a new "virtual" version of the UI (Virtual DOM).
- **Step 2:** React "diffs" React compares the new Virtual DOM with the previous version (this process is called "differencing"). It identifies what has changed.
- **Step 3:** Reconciliation with the DOM React updates only the parts of the actual DOM that need to change, based on the differencing process. This is the reconciliation step, where React ensures that the UI reflects the latest state efficiently without re-rendering the entire page.

These images illustrate core concepts and the process by which React efficiently updates and renders UIs, ensuring that changes are reflected quickly and with minimal performance impact.

Setting up the Development Environment

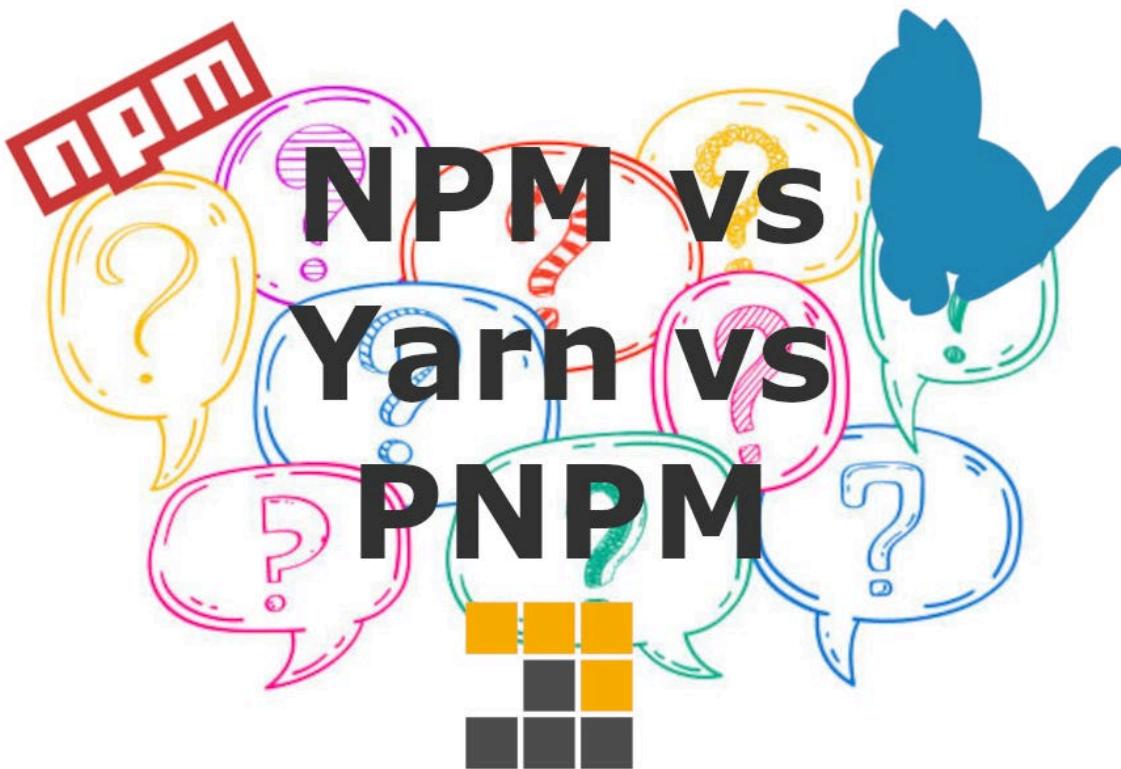

NPM vs Yarn vs PNPM

For as long as Node has existed, or should we say as long as these package-managers have existed — **NPM**; **Yarn**; **PNPM** — there has been an ongoing dispute in the developer community about which of these is best.

1. **NPM:** (Node Package Manager) is the default package manager for Node.js and has the largest repository of packages. Below, the NPM basic commands
2. **Yarn:** (Yet Another Resource Negotiator) was created by Facebook as an alternative to npm with improved performance and security features. You can install Yarn using npm ;)
3. **PNPM:** (performant NPM), a fast, disk space efficient package manager. Is focused on performance and efficiency and is designed to save disk space.

Package Commands

COMMAND	NPM	YARN	PNPM
init	npm init	yarn init	pnpm init
install from package.json	npm install	yarn	pnpm install
add package	npm install <package> [--location=global]		
add package as devDependencies	npm install <package> --save-dev	yarn add <package> --dev	pnpm add <package> --save-dev
remove package	npm uninstall <package> [--location=global]	yarn [global] remove <package>	pnpm uninstall <package> [--global]
remove package as devDependencies	npm uninstall <package> --save-dev	yarn remove <package> --dev	pnpm uninstall <package> --save-dev
audit vulnerable dependencies	npm list --depth 0 [--location=global]	yarn [global] list --depth 0	pnpm list --depth 0 [--global]
Run	npm run <script-name>	yarn run <script-name>	pnpm run <script-name>
build	npm build	yarn build	pnpm build
test	npm test	yarn test	pnpm test

npm yarn pnpm commands.png

Installing Node.js and pnpm

1. Installing PNPM

PNPM is a fast, disk space-efficient package manager for Node.js. More information on <https://pnpm.io/installation> (<https://pnpm.io/installation>)

1. Install PNPM:

- Using Powershell:

```
Invoke-WebRequest https://get.pnpm.io/install.ps1 -UseBasicParsing |  
Invoke-Expression
```

- On POSIX systems, you can use curl or wget:

```
curl -fsSL https://get.pnpm.io/install.sh | sh -
```

If you don't have curl installed, you would like to use wget:

```
wget -qO- https://get.pnpm.io/install.sh | sh -
```

2. Verify Installation:

After the installation completes, verify it by typing:

```
pnpm -v
```

This should display the installed PNPM version.

3. Updating pnpm:

To update pnpm, run the `self-update` command:

```
pnpm self-update
```

To install Node.js with PNPM on your system, follow the steps below:

1. Installing Node.js

Node.js is a JavaScript runtime that allows you to run JavaScript code on your server or local machine. Here's how to install it:

use

- Install and use the specified version of Node.js. Install the LTS version of Node.js:

```
pnpm env use --global lts
```

- Or if you prefer a specific Install Node.js v16:

```
pnpm env use --global 16
```

PnPM Cheatsheet

Here's a cheat sheet for using PNPM to perform common tasks. PNPM is a fast and efficient package manager for Node.js projects, and this guide will help you get started with some of the most frequently used commands.

1. Initialization

- Initialize a new project (create `package.json`):

```
pnpm init
```

2. Installing Packages

- Install all dependencies listed in `package.json`:

```
pnpm install
```

- Install a specific package (e.g., `lodash`):

```
pnpm add lodash
```

- Install a package as a development dependency:

```
pnpm add eslint --save-dev
```

or

```
pnpm add -D eslint
```

- Install a specific version of a package:

```
pnpm add lodash@4.17.20
```

- Install dependencies without modifying `package.json` (useful for CI/CD):

```
pnpm install --frozen-lockfile
```

3. Removing Packages

- Uninstall a package:

```
pnpm remove lodash
```

4. Running Scripts

- Run a script defined in `package.json`:

```
pnpm run <script_name>
```

Example:

```
pnpm run build
```

- Run a package binary without installing it globally:

```
pnpm dlx <package_name>
```

Example:

```
pnpm dlx create-react-app my-app
```

5. Working with Global Packages

- Install a package globally:

```
pnpm add -g eslint
```

- List globally installed packages:

```
pnpm list -g --depth 0
```

6. Managing Dependencies

- Update all dependencies to the latest versions:

```
pnpm update --latest
```

- Install dependencies without running `preinstall` and `postinstall` scripts:

```
pnpm install --ignore-scripts
```

7. Managing the PNPM Cache

- Clear the PNPM cache:

```
pnpm cache clean
```

8. Workspaces

- Create a new workspace:

```
pnpm init
```

- Add a package to a workspace:

```
pnpm add <package_name> -w
```

- Run a command in all workspace packages:

```
pnpm -r <command>
```

Example:

```
pnpm -r build
```

9. Linking Packages

- Link a package globally:

```
pnpm link
```

- Link a package locally within a project:

```
pnpm link <package_name>
```

10. Miscellaneous

- Check for outdated packages:


```
pnpm outdated
```

- List all installed packages:


```
pnpm list
```

Creating React with Vite

- All ways to get started with React

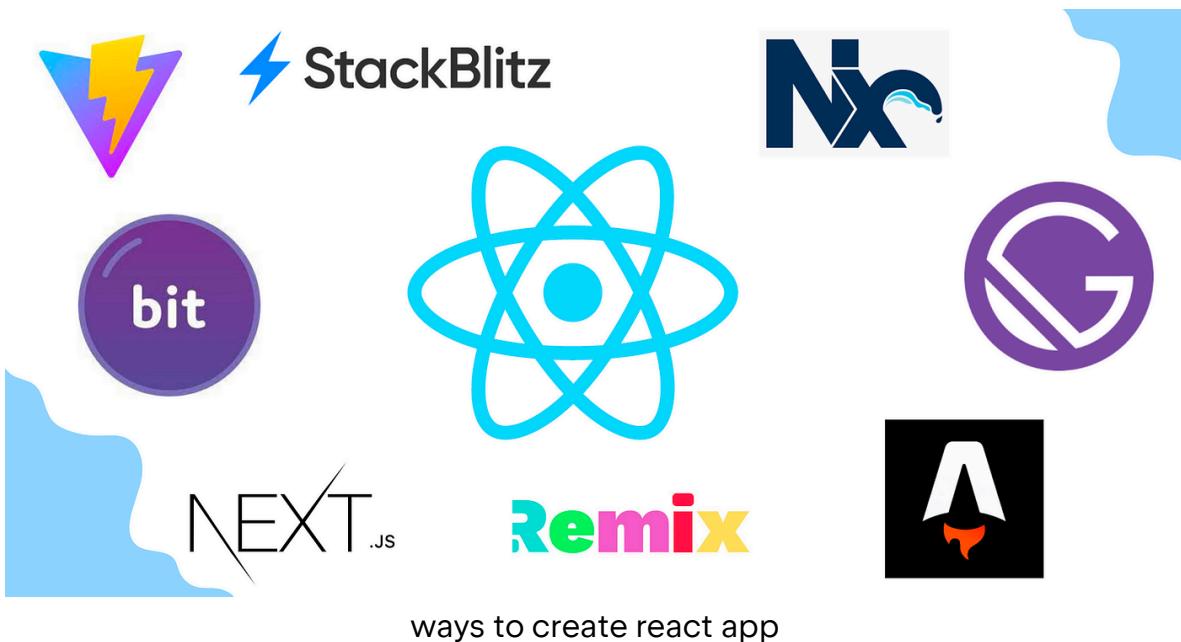


- Most common

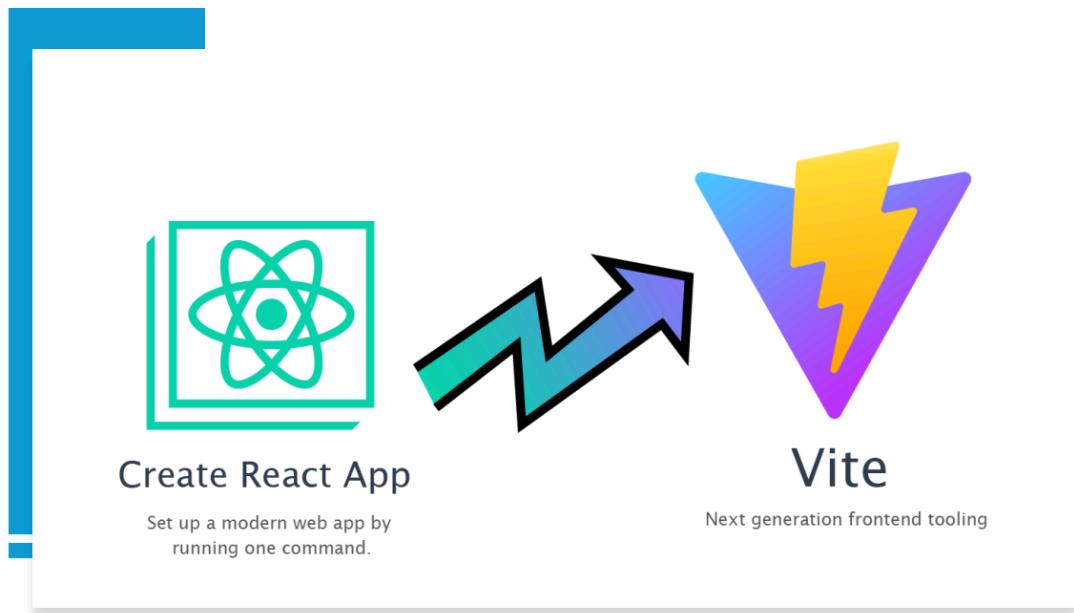

vite Vs CRA

Various ways to create react app

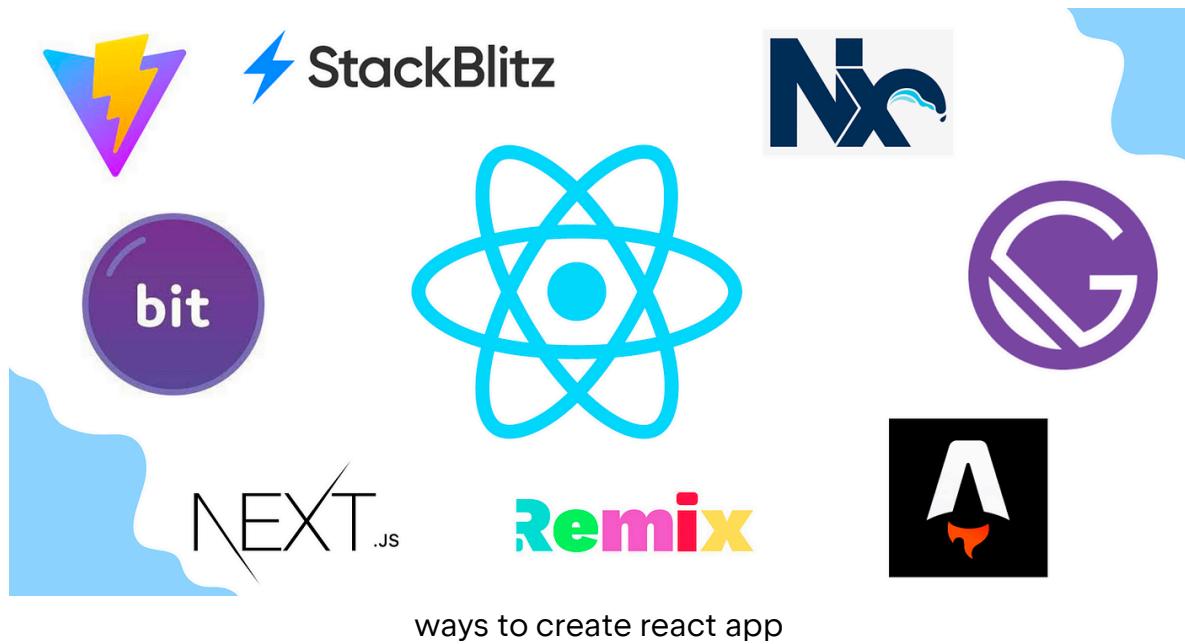

Here are several ways to create a React app, each associated with the tools or frameworks shown in the image:

1. Vite

- **What it is:** Vite is a next-generation frontend tooling that offers fast build times and an efficient development experience.
- **How to use it:**

```
pnpm create vite my-app --template react-ts
```

- **Why use it:** It provides faster builds and hot module replacement (HMR), making it ideal for modern development.

2. StackBlitz

- **What it is:** An online IDE that allows you to create and run React apps directly in the browser.

- **How to use it:**
 - Go to StackBlitz (<https://stackblitz.com/>), select "React" from the project templates, and start coding instantly.
- **Why use it:** Ideal for quick prototypes, demos, or when you want to start coding without setting up a local environment.

3. NX

- **What it is:** A powerful build system with monorepo support, optimized for full-stack development.
- **How to use it:**

```
pnpm create nx-workspace my-workspace --preset=react
```

- **Why use it:** Useful for large projects that require a monorepo setup and need to manage multiple applications and libraries within a single workspace.

4. Bit

- **What it is:** A tool for component-driven development, allowing you to build and manage React components across different projects.
- **How to use it:**

```
pnpm create-bit-app my-app
```

- **Why use it:** Perfect for teams that want to build reusable components and share them across multiple projects.

5. Next.js

- **What it is:** A React framework that enables server-side rendering and static site generation.

- **How to use it:**

```
pnpm create-next-app my-app
```

- **Why use it:** Excellent for building performant, SEO-friendly web applications with React.

6. Remix

- **What it is:** A full-stack framework that focuses on web standards and allows you to build both client and server-side React apps.
- **How to use it:**

```
pnpm create remix@latest
```

- **Why use it:** Ideal for developers who want more control over their app's routing, data loading, and server-side rendering.

7. Gatsby

- **What it is:** A React-based framework designed for building fast static websites and apps.
- **How to use it:**

```
pnpm create gatsby my-app
```

- **Why use it:** Great for building static sites with React that require advanced features like GraphQL and plugins for performance optimization.

8. Blitz.js

- **What it is:** A full-stack React framework that abstracts away most of the complexity and allows you to focus on building features.


- **How to use it:**

```
pnpm create blitz-app my-app
```

- **Why use it:** Ideal for building full-stack applications with minimal setup and code.

Each of these tools or frameworks offers unique advantages depending on the nature of your project, from quick prototyping to full-stack development. Choose the one that best fits your project's needs.

Vite vs CRA

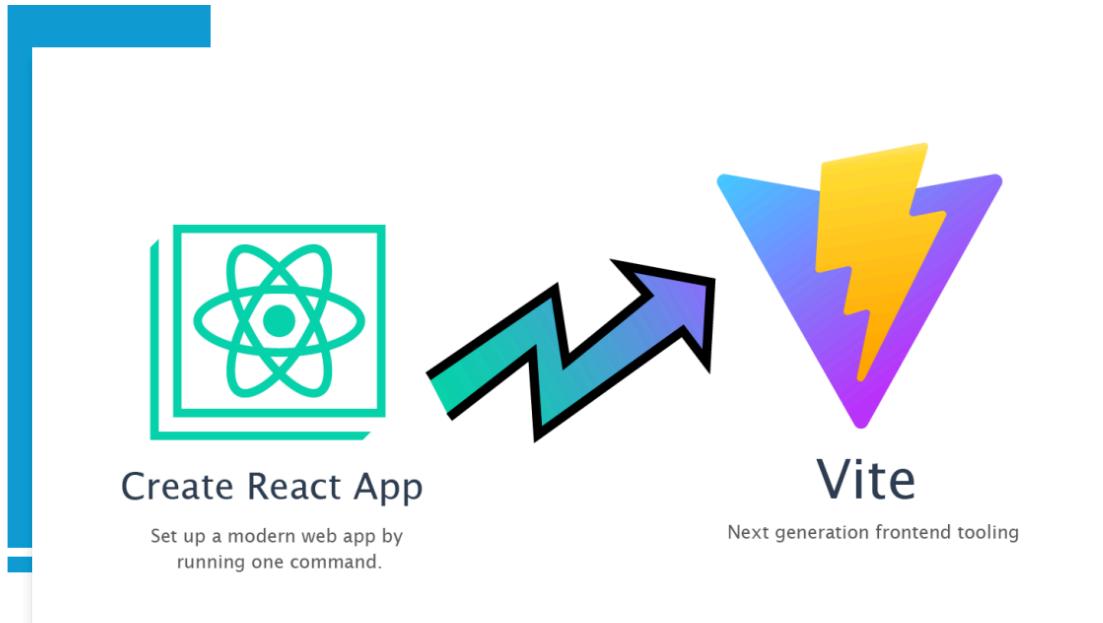

Vite Vs CRA

The preferred way between **Create React App (CRA)** and **Vite** depends on your specific needs and preferences: In summary, if you prioritize ease of use and community support, go with CRA. If you want faster builds and a modern toolchain, Vite is likely the better option.

Create React App (CRA):

- **Pros:**
 - **Established and widely used:** CRA has been the go-to tool for creating React apps for years, with extensive documentation and community support.
 - **Easy to use:** It's beginner-friendly, with minimal configuration needed to get started.
 - **Comprehensive setup:** CRA includes everything you need for a React project, including testing and build tools.
- **Cons:**
 - **Performance:** CRA can be slower, especially with larger projects, due to its older

build tools.

- **Limited customization:** While CRA abstracts away configuration for simplicity, this can be limiting for developers who need more control.

Vite:

- **Pros:**

- **Faster:** Vite is designed with performance in mind, offering faster build times and a more responsive development experience.
- **Modern toolchain:** Vite uses modern build tools (like ESBUILD) that take advantage of new web standards and are optimized for speed.
- **Flexibility:** Vite provides more flexibility and control over the configuration, making it easier to customize for specific project needs.

- **Cons:**

- **Less established:** While growing rapidly, Vite is newer compared to CRA, so there might be less community support or documentation for very niche use cases.
- **More setup required:** Vite might require slightly more setup, especially if you're accustomed to CRA's out-of-the-box simplicity.

Recommendation:

- **For beginners or small projects:** Create React App is still a solid choice due to its simplicity and extensive support.
- **For more advanced users or larger projects:** Vite is often preferred because of its performance benefits and modern tooling, especially if you're looking for a more optimized development experience.

To create a new React application using the tools mentioned in the image (Create React App and Vite), here are the brief commands:

Using Vite:

1. Create a new React app with Vite with JavaScript:

```
pnpm create vite my-app --template react
```

with TypeScript

```
pnpm create vite my-app --template react-ts
```

2. Navigate to the project directory:

```
cd my-app
```

3. Install dependencies:

```
pnpm install
```

4. Start the development server:

```
pnpm dev
```

Using Create React App:

1. Create a new React app:

```
npx create-react-app my-app
```

2. Navigate to the project directory:

```
cd my-app
```

3. Start the development server:

```
npm start
```

2. Fundamental Core Concepts

Here's a brief explanation of some fundamental concepts in React:

Props

- **Definition:** Props, short for properties, are a mechanism for passing data from parent components to child components. They are immutable, meaning that once passed to a child component, they cannot be altered by that component.
- **Usage:** Props are used to render dynamic content in React components. For example, you can pass user data as props to display different information in a reusable UI component.

JSX

- **Definition:** JSX (JavaScript XML) is a syntax extension for JavaScript that allows you to write HTML-like code directly within your JavaScript files. It makes the structure of React components easier to visualize.
- **Usage:** JSX allows you to create React elements using HTML syntax. React transforms these into JavaScript objects that are rendered to the DOM.

Composition

- **Definition:** Composition is the process of building complex components by combining simpler ones. This allows for better code reuse and maintainability.
- **Usage:** In React, composition is used to nest components within each other, passing props as needed to create more complex UIs from simpler building blocks.

Functional vs Class Components

- **Functional Components:** These are simple functions that return JSX. They are stateless by default but can manage state and side effects using hooks like `useState` and `useEffect`.
- **Class Components:** These are ES6 classes that extend `React.Component` and have additional features like lifecycle methods and local state management. However, with the introduction of hooks, functional components are now the preferred way of building React components.

Rendering Components

- **Definition:** Rendering in React refers to the process of displaying React elements on the screen. React updates the DOM to reflect the current state of the components.
- **Usage:** Components are rendered initially when the React app loads, and re-rendered whenever the state or props of a component change, ensuring that the UI is always in sync with the underlying data.

JSX & Props

JSX & Props in React

In this guide, we'll dive into JSX and props, two fundamental concepts in React, using Vite and TypeScript for code examples. We will cover what JSX is, how to pass props to components, and how to use props for creating reusable components.

What is JSX?

JSX is a fundamental concept in React that allows you to write HTML-like syntax directly in JavaScript (or TypeScript). It's a powerful tool that simplifies the process of creating UI components. Below, we'll cover various aspects of JSX, including syntax, using curly braces for dynamic content, embedding JavaScript functions, and the importance of returning a single element from a JSX function. Additionally, we'll include key rules to follow when working with JSX.

Simple JSX Syntax

JSX (JavaScript XML) allows you to write HTML elements directly in JavaScript. It's the most common way to define React elements.

Basic Example of JSX Syntax:

```
import React from 'react';

const SimpleComponent: React.FC = () => {
  return <h1>Hello, World!</h1>;
};

export default SimpleComponent;
```

Key Points:

- JSX looks like HTML but is actually transformed into JavaScript by Babel.
- The above code snippet returns an `h1` element with "Hello, World!" as its content.

Using Curly Braces in JSX

Curly braces `{}` in JSX allow you to embed JavaScript expressions within your HTML-like JSX code.

Example: Embedding JavaScript Expressions:

```
import React from 'react';

const NameComponent: React.FC = () => {
  const name = "Alice";
  return <h1>Hello, {name}!</h1>;
};

export default NameComponent;
```

Explanation:

- In this example, the variable `name` is embedded within the JSX using curly braces.
- Any valid JavaScript expression can be placed inside curly braces.

Dynamic Attributes in JSX

You can also use curly braces to set attributes dynamically based on JavaScript expressions.

Example: Dynamic Attributes:

```
import React from 'react';

const ImageComponent: React.FC = () => {
  const imageUrl = "https://example.com/image.jpg";
  return <img src={imageUrl} alt="Dynamic Image" />;
};

export default ImageComponent;
```

Explanation:

- The `src` attribute of the `img` element is set dynamically using the `imageUrl` variable.

Double Curly Braces for Dynamic Styles

In JSX, styles are applied using a `style` attribute, which accepts an object. To use dynamic styles, you'll often see double curly braces.

Example: Dynamic Styles:

```
import React from 'react';

const StyledComponent: React.FC = () => {
  const isActive = true;
  const style = {
    color: isActive ? 'green' : 'red',
    fontSize: '20px'
  };
  return <h1 style={style}>Styled Text</h1>;
};

export default StyledComponent;
```

Explanation:

- The `style` attribute is used to apply inline styles.
- The object inside the first set of curly braces contains the CSS properties, while the outer curly braces are required by JSX to evaluate the JavaScript expression.

Embedding a JavaScript Function in JSX

You can call JavaScript functions directly within JSX by embedding them inside curly braces.

Example: Embedding a Function:

```
import React from 'react';

const getGreeting = () => {
  const hour = new Date().getHours();
  if (hour < 12) return "Good Morning!";
  if (hour < 18) return "Good Afternoon!";
  return "Good Evening!";
```

```
};

const GreetingComponent: React.FC = () => {
  return <h1>{getGreeting()}</h1>;
};

export default GreetingComponent;
```

Explanation:

- The `getGreeting` function determines the current greeting based on the time of day.
- This function is called within the JSX using curly braces.

JSX or TSX Function Must Return One Thing

In React, every component (JSX or TSX) must return a single element. If you need to return multiple elements, they must be wrapped in a parent element or a React fragment.

Example: Returning a Single Parent Element:

```
import React from 'react';

const MultiElementComponent: React.FC = () => {
  return (
    <div>
      <h1>Title</h1>
      <p>This is a paragraph.</p>
    </div>
  );
};

export default MultiElementComponent;
```

Explanation:

- All elements are wrapped inside a single `div` element, fulfilling the requirement of

returning a single JSX element.

Example: Using React Fragments:

```
import React from 'react';

const FragmentComponent: React.FC = () => {
  return (
    <>
      <h1>Title</h1>
      <p>This is a paragraph.</p>
    </>
  );
};

export default FragmentComponent;
```

Explanation:

- React fragments (`<>...</>`) allow you to group multiple elements without adding an extra node to the DOM.

Key Rules for JSX

1. Must Have a Single Parent Element:

- JSX expressions must return a single parent element. Use a `div` or React Fragment (`<>...</>`) to wrap multiple elements.

2. Use Curly Braces for JavaScript Expressions:

- Embed JavaScript expressions inside curly braces `{}` to include dynamic content or evaluate logic within JSX.

3. HTML Attributes Are CamelCase:

- Use camelCase for HTML attributes (e.g., `className`, `onClick`). This differs from regular HTML where attributes are lowercase.

4. Style Attribute Must Be an Object:

- When adding inline styles, the `style` attribute must be an object with camelCase property names.

5. JavaScript Functions and Variables:

- You can use JavaScript functions and variables inside JSX by wrapping them in curly braces.

6. Self-Closing Tags:


- All JSX tags must be properly closed. For example, `` instead of ``.

7. Avoid Returning Multiple Elements Without a Wrapper:

- Returning multiple JSX elements without a parent element will cause an error. Always wrap them inside a parent element or React Fragment.

Passing Props to Components

Can you pass anything as a prop?

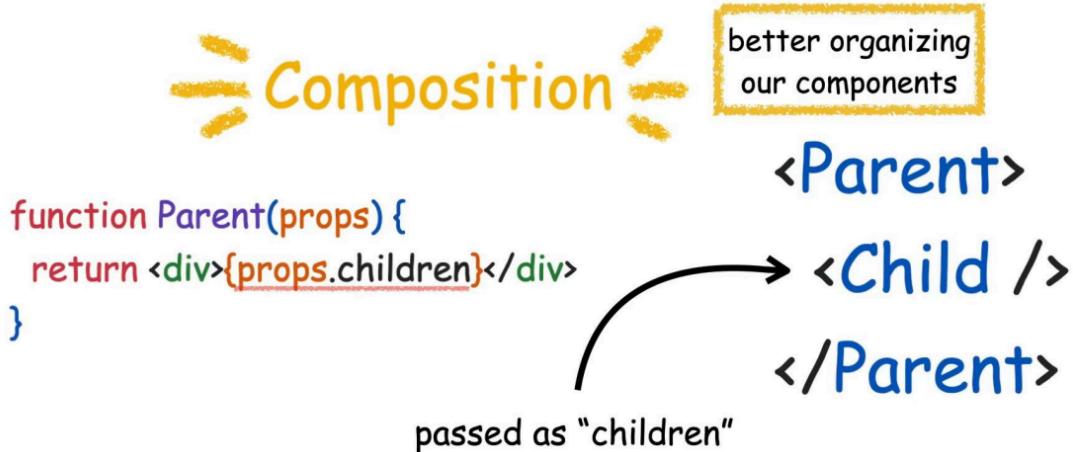

can you pass props

What are Props?

- **Props**, short for "properties," are one of the key concepts in React. They are used to pass data from one component to another, typically from a parent component to a child component. Understanding how to effectively use props is crucial for building dynamic and reusable components in React.
- Props are a way to pass data from a parent component down to a child component. They are immutable, meaning that a child component cannot modify its own props. This immutability ensures that the data flow in a React application is predictable and easier to debug.

Basic Example:

```
import React from 'react';

interface GreetingProps {
```

```

    name: string;
    age: number;
    isMember: boolean;
}

const Greeting: React.FC<GreetingProps> = ({ name, age, isMember }) => {
  return (
    <div>
      <h1>Hello, {name}!</h1>
      <p>You are {age} years old.</p>
      <p>Membership status: {isMember ? "Active" : "Inactive"}</p>
    </div>
  );
};

export default Greeting;

```

In this example:

- We define a `GreetingProps` interface to specify the types of the `name`, `age`, and `isMember` props.
- The `Greeting` component receives these props and uses them to display the name, age, and membership status.

To use this component:

```

import React from 'react';
import Greeting from './Greeting';

const App: React.FC = () => {
  return <Greeting name="Alice" age={30} isMember={true} />;
};

export default App;

```

Explanation:

- The Greeting component is used in the App component, with the name, age, and isMember props passed to it.
- This renders the appropriate greeting, age, and membership status on the page.

Why Use Props?

Props allow you to create components that are more flexible and reusable. Instead of hardcoding values inside components, you can pass data to them as props, making it easier to use the same component with different data.

Example: Reusable Button Component with Multiple Props:

```
import React from 'react';

interface ButtonProps {
  label: string;
  onClick: () => void;
  disabled?: boolean; // Optional prop
}

const Button: React.FC<ButtonProps> = ({ label, onClick, disabled =
false }) => {
  return <button onClick={onClick} disabled={disabled}>{label}</button>;
};

export default Button;
```

To use this Button component:

```
import React from 'react';
import Button from './Button';

const App: React.FC = () => {
  const handleClick = () => {
    alert('Button clicked!');
  };
};
```

```

    return (
      <div>
        <Button label="Click Me" onClick={handleClick} />
        <Button label="Submit" onClick={handleClick} disabled={true} />
      </div>
    );
}

export default App;

```

Explanation:

- The `Button` component now also accepts an optional `disabled` prop. If `disabled` is not provided, it defaults to `false`.
- This allows you to create multiple buttons with different labels, behaviors, and states.

Handling Different Data Types with Props

Props can hold any type of data, including strings, numbers, template literals, booleans, objects, arrays, and even other components.

Example: Passing Multiple Prop Types:

```

import React from 'react';

interface UserProfileProps {
  username: string;
  age: number;
  isAdmin: boolean;
  hobbies: string[];
  address: {
    street: string;
    city: string;
  };
}

```

```

const UserProfile: React.FC<UserProfileProps> = ({ username, age,
isAdmin, hobbies, address }) => {
  return (
    <div>
      <h2>`User: ${username}`</h2>
      <p>Age: {age}</p>
      <p>Status: {isAdmin ? "Administrator" : "User"}</p>
      <p>Hobbies: {hobbies.join(", ")})</p>
      <p>Address: {address.street}, {address.city}</p>
    </div>
  );
};

export default UserProfile;

```

To use the `UserProfile` component:

```

import React from 'react';
import UserProfile from './UserProfile';

const App: React.FC = () => {
  const user = {
    username: "JohnDoe",
    age: 25,
    isAdmin: false,
    hobbies: ["Reading", "Gaming", "Cooking"],
    address: {
      street: "123 Main St",
      city: "Springfield"
    }
  };

  return <UserProfile {...user} />;
};

```

```
export default App;
```

Explanation:

- The `UserProfile` component accepts multiple props, including strings, numbers, booleans, arrays, and objects.
- The `App` component demonstrates the use of the prop spread syntax (`{...user}`) to pass all properties of the `user` object as individual props to the `UserProfile` component.

Optional Props

Props can be optional, meaning that they do not have to be passed by the parent component. You can define optional props in TypeScript by using a question mark (?) or by providing a default value.

Example: Using Optional Props:

```
import React from 'react';

interface GreetingProps {
  name?: string;
  age?: number;
}

const Greeting: React.FC<GreetingProps> = ({ name = "Guest", age }) => {
  return (
    <div>
      <h1>Hello, {name}!</h1>
      {age && <p>You are {age} years old.</p>}
    </div>
  );
};
```

```
export default Greeting;
```

Explanation:

- The `name` and `age` props are optional. If `name` is not provided, it defaults to "Guest".
- The `age` prop is conditionally rendered only if it is provided.

Prop Spread Syntax

The prop spread syntax (`{...props}`) allows you to pass all properties of an object as individual props to a component. This is particularly useful when you have an object with a lot of properties that need to be passed to a child component.

Example: Prop Spread Syntax:

```
import React from 'react';

interface UserProps {
  username: string;
  age: number;
  isAdmin: boolean;
}

const UserInfo: React.FC<UserProps> = ({ username, age, isAdmin }) => {
  return (
    <div>
      <h2>{username}</h2>
      <p>Age: {age}</p>
      <p>Status: {isAdmin ? "Admin" : "User"}</p>
    </div>
  );
};

const App: React.FC = () => {
  const user = {
    username: "JaneDoe",
  };
  return (
    <div>
      <h1>Welcome</h1>
      <UserInfo {...user} />
    </div>
  );
};
```

```
    age: 28,  
    isAdmin: true  
};  
  
return <UserInfo {...user} />;  
};  
  
export default App;
```

Explanation:

- The `App` component uses the prop spread syntax to pass all properties of the `user` object to the `UserInfo` component.

Key Points to Remember

1. **Immutable:** Props are immutable, meaning they cannot be changed by the component receiving them.
2. **Reusable Components:** Props allow you to create components that are highly reusable and flexible.
3. **Prop Types:** You can use TypeScript interfaces or types to define the shape of props, ensuring type safety and better documentation.
4. **Default and Optional Props:** Use default values for props when appropriate, and define optional props to make components more versatile.
5. **Prop Spread Syntax:** The spread syntax (`{...props}`) is a powerful way to pass multiple props from an object to a component.

Using Props for Reusable Components - V1

Props make your components more flexible and reusable by allowing you to change what gets displayed or how it behaves depending on the data passed. In this section, we'll extend the concept of reusable components by creating reusable input fields that can be used across different forms, such as registration and login forms. These input fields will include labels, input elements, and icons.

Example: Creating a Reusable Input Field Component

We'll start by defining a reusable `InputField` component that can be used to create labeled input fields with optional icons.

```
import React from 'react';

interface InputFieldProps {
  label: string;
  type: string;
  placeholder: string;
  value: string;
  onChange: (e: React.ChangeEvent<HTMLInputElement>) => void;
  icon?: React.ReactNode;
}

const InputField: React.FC<InputFieldProps> = ({ label, type,
placeholder, value, onChange, icon }) => {
  return (
    <div style={{ marginBottom: '16px' }}>
      <label style={{ display: 'block', marginBottom: '8px' }}>{label}</label>
      <div style={{ display: 'flex', alignItems: 'center', border: '1px solid #ccc', borderRadius: '4px', padding: '8px' }}>
        {icon && <div style={{ marginRight: '8px' }}>{icon}</div>}
        <input
          type={type}>
      </div>
    </div>
  );
}
```

```

        placeholder={placeholder}
        value={value}
        onChange={onChange}
        style={{ flex: 1, border: 'none', outline: 'none' }}
      />
    </div>
  </div>
);
};

export default InputField;

```

Explanation:

- **Props:**

- `label`: The text label displayed above the input field.
- `type`: The type of the input (e.g., `text`, `password`, `email`).
- `placeholder`: Placeholder text inside the input field.
- `value`: The current value of the input field.
- `onChange`: A function to handle changes in the input field.
- `icon`: An optional icon to be displayed inside the input field.

- **Component Structure:**

- The component returns a `div` that contains a `label` and a `div` wrapping the input field and the optional icon.
- The input field is styled to occupy the remaining space next to the icon.

Using the Reusable Input Field in Forms

Let's use the `InputField` component in a registration form and a login form.

Registration Form Example:

```

import React, { useState } from 'react';
import InputField from './InputField';
import { FaUser, FaLock, FaEnvelope } from 'react-icons/fa';

const RegistrationForm: React.FC = () => {
    interface TData {
        username: string;
        email: string;
        password: string;
    }
    const [username, setUsername] = useState<string>('');
    const [email, setEmail] = useState<string>('');
    const [password, setPassword] = useState<string>('');
    const [data, setData] = useState<TData>();

    const handleSubmit = (e: React.FormEvent) => {
        e.preventDefault();
        if (!username || !email || !password) {
            return alert('Please fill in all required fields');
        }
        // Handle form submission
        setData({ username, email, password });
        console.log({ username, email, password });
    };

    return (
        <>
            <form onSubmit={handleSubmit} style={{ maxWidth: '400px', margin: '0 auto' }}>
                <InputField
                    label="Username"
                    type="text"
                    placeholder="Enter your username"
                    value={username}
                    onChange={(e) => setUsername(e.target.value)}
                    icon={<FaUser />}
                />
            </form>
        </>
    );
}

```

```

<InputField
    label="Email"
    type="email"
    placeholder="Enter your email"
    value={email}
    onChange={(e) => setEmail(e.target.value)}
    icon={<FaEnvelope />}
/>
<InputField
    label="Password"
    type="password"
    placeholder="Enter your password"
    value={password}
    onChange={(e) => setPassword(e.target.value)}
    icon={<FaLock />}
/>
<button type="submit" style={{ padding: '10px 20px',
marginTop: '20px' }}>Register</button>
</form>
<section>
{
    // display string fields
    data && Object.keys(data).map((key, index) => (
        <p key={index}>{key}: {data[key as keyof TData]}>
    ))
}
</section>
</>
);
};

export default RegistrationForm;

```

Explanation:

- The `RegistrationForm` component uses three instances of the `InputField` component, each with different labels, types, placeholders, and icons (`FaUser`, `FaEnvelope`, `FaLock` from `react-icons`).
- `useState` is used to manage the state of each input field.
- The form's `onSubmit` event is handled by the `handleSubmit` function, which prevents the default form submission behavior and logs the input values.

Login Form Example:

```

import React, { useState } from 'react';
import InputField from './InputField';
import { FaUser, FaLock } from 'react-icons/fa';

const LoginForm: React.FC = () => {
  const [username, setUsername] = useState('');
  const [password, setPassword] = useState('');

  const handleSubmit = (e: React.FormEvent) => {
    e.preventDefault();
    console.log({ username, password });
    // Handle form submission
  };

  return (
    <form onSubmit={handleSubmit} style={{ maxWidth: '400px', margin: '0 auto' }}>
      <InputField
        label="Username"
        type="text"
        placeholder="Enter your username"
        value={username}
        onChange={(e) => setUsername(e.target.value)}
        icon={<FaUser />}
      />
      <InputField
        label="Password"
        type="password"
      />
    </form>
  );
}

```

```

        placeholder="Enter your password"
        value={password}
        onChange={(e) => setPassword(e.target.value)}
        icon={<FaLock />}
      />
      <button type="submit" style={{ padding: '10px 20px', marginTop: '20px' }}>Login</button>
    </form>
  );
};

export default LoginForm;

```

Explanation:

- The `LoginForm` component reuses the `InputField` component for username and password inputs.
- The form is similar to the registration form but simpler, with only two input fields and a submit button.

Using Props for Reusable Components - V2

Props make your components more flexible and reusable by allowing you to change what gets displayed or how it behaves depending on the data passed. Let's extend this concept further by creating reusable components for different types of input fields, such as file inputs, radio buttons, range sliders, and checkboxes. These reusable components will be utilized in different forms, showcasing how they can be adapted for various use cases.

Example: Creating Reusable Input Components

We'll define a few reusable input components: `FileInput`, `RadioInput`, `RangeInput`, and `CheckboxInput`.

Reusable Input Components

```
import React from 'react';

interface FileInputProps {
  label: string;
  onChange: (e: React.ChangeEvent<HTMLInputElement>) => void;
}

const FileInput: React.FC<FileInputProps> = ({ label, onChange }) => {
  return (
    <div style={{ marginBottom: '16px' }}>
      <label style={{ display: 'block', marginBottom: '8px' }}>{label}</label>
      <input type="file" onChange={onChange} />
    </div>
  );
};

interface RadioInputProps {
  label: string;
}
```

```

    name: string;
    options: string[];
    onChange: (e: React.ChangeEvent<HTMLInputElement>) => void;
}

const RadioInput: React.FC<RadioInputProps> = ({ label, name, options,
onChange }) => {
  return (
    <div style={{ marginBottom: '16px' }}>
      <label>{label}</label>
      <div>
        {options.map((option) => (
          <label key={option} style={{ marginRight: '16px' }}>
            <input type="radio" name={name} value={option} onChange={onChange} />
            {option}
            </label>
        ))}
      </div>
    </div>
  );
};

interface RangeInputProps {
  label: string;
  min: number;
  max: number;
  value: number;
  onChange: (e: React.ChangeEvent<HTMLInputElement>) => void;
}

const RangeInput: React.FC<RangeInputProps> = ({ label, min, max, value,
onChange }) => {
  return (
    <div style={{ marginBottom: '16px' }}>
      <label>{label}</label>
      <input type="range" min={min} max={max} value={value} onChange={onChange} />
    </div>
  );
};

```

```

        <span>{value}</span>
    </div>
);

};

interface CheckboxInputProps {
    label: string;
    checked: boolean;
    onChange: (e: React.ChangeEvent<HTMLInputElement>) => void;
}

const CheckboxInput: React.FC<CheckboxInputProps> = ({ label, checked,
onChange }) => {
    return (
        <div style={{ marginBottom: '16px' }}>
            <label>
                <input type="checkbox" checked={checked} onChange={onChange} />
                {label}
            </label>
        </div>
    );
};

export { FileInput, RadioInput, RangeInput, CheckboxInput };

```

Explanation:

- **FileInput**: A reusable component for `<input type="file">`, allowing users to select files.
- **RadioInput**: A reusable component for `<input type="radio">`, supporting multiple options.
- **RangeInput**: A reusable component for `<input type="range">`, including a slider with a label.
- **CheckboxInput**: A reusable component for `<input type="checkbox">`, with a label and toggle functionality.

Using Reusable Input Components in Forms

Let's use these reusable input components in two different forms: a survey form and a settings form.

Survey Form Example:

```
import React, { useState } from 'react';
import { FileInput, RadioInput, RangeInput, CheckboxInput } from
'./ReusableInputs';

const SurveyForm: React.FC = () => {
  const [file, setFile] = useState<File | null>(null);
  const [rating, setRating] = useState(5);
  const [favoriteColor, setFavoriteColor] = useState('');
  const [agree, setAgree] = useState(false);

  const handleFileChange = (e: React.ChangeEvent<HTMLInputElement>) => {
    setFile(e.target.files ? e.target.files[0] : null);
  };

  const handleColorChange = (e: React.ChangeEvent<HTMLInputElement>) =>
{
  setFavoriteColor(e.target.value);
};

  const handleRangeChange = (e: React.ChangeEvent<HTMLInputElement>) =>
{
  setRating(Number(e.target.value));
};

  const handleCheckboxChange = (e: React.ChangeEvent<HTMLInputElement>) => {
  setAgree(e.target.checked);
};

  const handleSubmit = (e: React.FormEvent) => {
    e.preventDefault();
  };
}
```

```

        console.log({ file, rating, favoriteColor, agree });
        // Handle form submission
    };

    return (
        <form onSubmit={handleSubmit} style={{ maxWidth: '400px', margin: '0 auto' }}>
            <FileInput label="Upload Your Profile Picture" onChange={handleFileChange} />
            <RadioInput
                label="Favorite Color"
                name="color"
                options={['Red', 'Green', 'Blue']}
                onChange={handleColorChange}
            />
            <RangeInput label="Rate our service" min={1} max={10} value={rating} onChange={handleRangeChange} />
            <CheckboxInput label="I agree to the terms and conditions"
                checked={agree} onChange={handleCheckboxChange} />
            <button type="submit" style={{ padding: '10px 20px', marginTop: '20px' }}>Submit</button>
        </form>
    );
};

export default SurveyForm;

```

Explanation:

- **FileInput:** Used for uploading a profile picture.
- **RadioInput:** Used to select a favorite color from a set of options.
- **RangeInput:** Used to rate the service on a scale from 1 to 10.
- **CheckboxInput:** Used to agree to the terms and conditions.

Settings Form Example:

```

import React, { useState } from 'react';
import { FileInput, RadioInput, RangeInput, CheckboxInput } from
'./ReusableInputs';

const SettingsForm: React.FC = () => {
  const [avatar, setAvatar] = useState<File | null>(null);
  const [theme, setTheme] = useState('Light');
  const [volume, setVolume] = useState(50);
  const [notifications, setNotifications] = useState(true);

  const handleFileChange = (e: React.ChangeEvent<HTMLInputElement>) => {
    setAvatar(e.target.files ? e.target.files[0] : null);
  };

  const handleThemeChange = (e: React.ChangeEvent<HTMLInputElement>) =>
  {
    setTheme(e.target.value);
  };

  const handleRangeChange = (e: React.ChangeEvent<HTMLInputElement>) =>
  {
    setVolume(Number(e.target.value));
  };

  const handleCheckboxChange = (e: React.ChangeEvent<HTMLInputElement>) => {
    setNotifications(e.target.checked);
  };

  const handleSubmit = (e: React.FormEvent) => {
    e.preventDefault();
    console.log({ avatar, theme, volume, notifications });
    // Handle form submission
  };

  return (
    <form onSubmit={handleSubmit} style={{ maxWidth: '400px', margin: '0

```

```

    auto' />} >
      <FileInput label="Upload Avatar" onChange={handleFileChange} />
      <RadioInput
        label="Select Theme"
        name="theme"
        options={['Light', 'Dark']}
        onChange={handleThemeChange}
      />
      <RangeInput label="Adjust Volume" min={0} max={100} value={volume}
      onChange={handleRangeChange} />
      <CheckboxInput label="Enable Notifications" checked=
      {notifications} onChange={handleCheckboxChange} />
      <button type="submit" style={{ padding: '10px 20px', marginTop:
      '20px' }}>Save Settings</button>
    </form>
  );
};


export default SettingsForm;

```

Explanation:

- **FileInput**: Used for uploading an avatar.
- **RadioInput**: Used to select a theme (Light or Dark).
- **RangeInput**: Used to adjust the volume level.
- **CheckboxInput**: Used to toggle notifications on or off.

Components in React

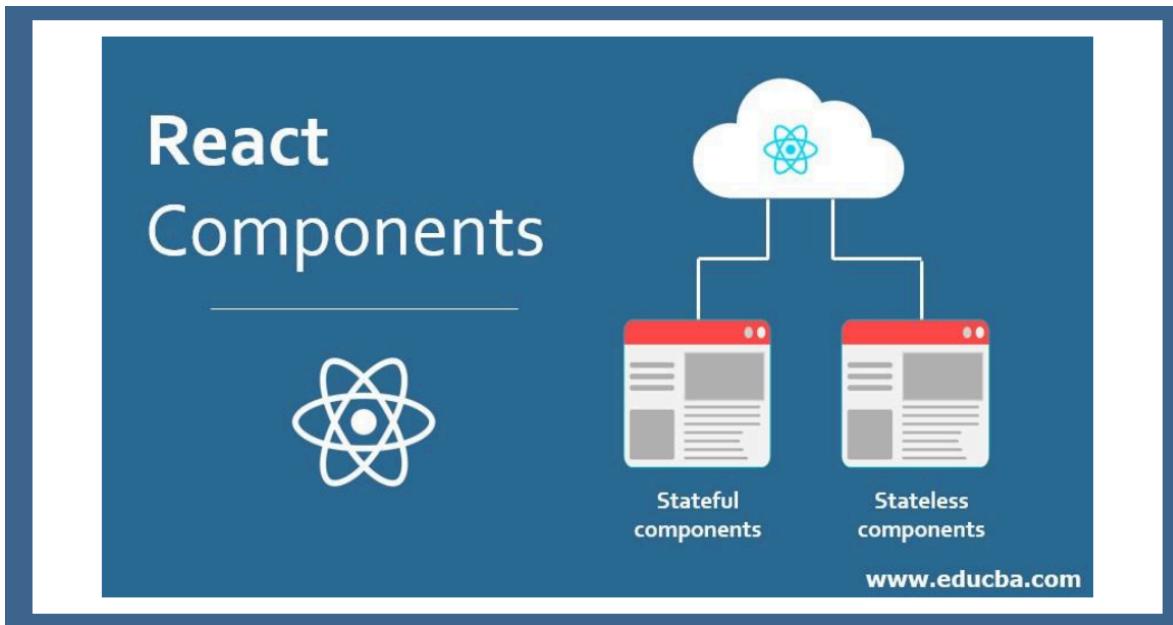

React components

What is a Component?

- A **component** in React is a reusable piece of UI that can be nested, managed, and handled independently. Components can be thought of as JavaScript functions that return HTML (in the form of JSX). Components enable developers to break down the UI into smaller, manageable parts, each responsible for a specific piece of the user interface.
- React components are the building blocks of any React application. They encapsulate parts of the user interface (UI) and the logic associated with it, making it easier to manage, reuse, and maintain code.

Key Aspects of React Components:

1. Types of Components:

- **Functional Components:** These are simple JavaScript functions that return JSX. Functional components are stateless by default, but with the introduction of React

hooks like `useState` and `useEffect`, they can now manage state and side effects, making them highly versatile.

- **Class Components:** These are ES6 classes that extend `React.Component`. Class components can hold and manage their own state and have access to lifecycle methods (e.g., `componentDidMount`, `componentDidUpdate`, `componentWillUnmount`). However, with the rise of hooks, functional components have become the preferred approach in modern React development.

2. Component Structure:

- **JSX:** Components in React typically return JSX, a syntax extension that looks similar to HTML but is transformed into JavaScript by React. JSX makes it easy to visualize the structure of the UI.
- **Props:** Components can accept inputs called "props" (short for properties) that allow you to pass data and functions between components. Props are immutable within the receiving component, meaning they cannot be modified.
- **State:** While props are passed from parent to child components, the state is managed locally within a component. The state can be changed within the component, causing the component to re-render and update the UI accordingly.

3. **Component Reusability:** One of the core benefits of React components is their reusability. A component can be used multiple times across an application, potentially with different props each time, to build complex UIs from smaller, reusable pieces.

4. **Composition:** React allows you to compose components, meaning you can nest components within each other to create more complex UIs. This composability makes React components highly modular and manageable.

5. **Encapsulation:** Each component manages its own structure and behavior.

6. **Rendering:** Components are rendered to the DOM by React, and the rendering process is efficient due to React's virtual DOM, which minimizes direct manipulation of the actual DOM, enhancing performance.

Example of a Functional Component:

```
import React from 'react';
```

```
const WelcomeMessage: React.FC = () => {
  return <h1>Welcome to My Website!</h1>;
};

export default WelcomeMessage;
```


In this example:

- **WelcomeMessage** is a simple functional component that returns a piece of JSX, which renders an `h1` element displaying "Welcome to My Website!".

This component can be reused anywhere in your application by importing and including it in the JSX of another component.

Functional vs. Class Components

Components

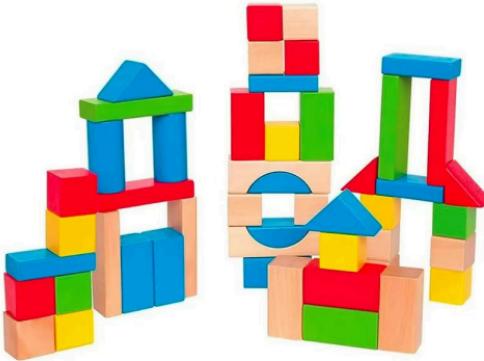

<Header />
<Content />
<Footer />

used like this

building blocks of apps

building blocks of apps

React Functional Components

React functional components are the backbone of modern React applications. They offer a straightforward way to define components and are preferred over class components for their simplicity and performance benefits. Let's explore functional components in more detail.

How do Components Differ from Normal Functions?

While functional components in React are defined using JavaScript functions, they differ from regular functions in a few significant ways:

1. Return Value:

- **Normal Function:** Typically returns a primitive value (like a number, string, or object).
- **Functional Component:** Returns JSX, which React transforms into HTML to render on the screen.

2. Side Effects:

- **Normal Function:** Executes its code and returns a result; typically stateless and effect-free.
- **Functional Component:** Can manage state (using hooks like `useState`) and handle side effects (using hooks like `useEffect`).

3. Usage:

- **Normal Function:** Invoked directly in the code, typically to perform calculations or process data.
- **Functional Component:** Used as a part of the React component tree and rendered by React to produce a user interface.

Ways to Write Functional Components

React functional components can be written in two main ways: using a normal function declaration or using an arrow function.

1. Normal Function Declaration

This is the traditional way to define a function in JavaScript.

```
import React from 'react';

function Greeting() {
  return <h1>Hello, World!</h1>;
}

export default Greeting;
```

Features:

- Uses the `function` keyword.
- Can be named or anonymous (though in React, it's typically named for clarity).
- `this` refers to the global context unless bound.

2. Arrow Function

Arrow functions offer a shorter syntax and are often used in modern React applications.

```
import React from 'react';

const Greeting = () => {
  return <h1>Hello, World!</h1>;
};

export default Greeting;
```

Features:

- Uses the `=>` syntax.
- `this` refers to the context in which the function is defined, not where it is invoked (important for handling state and props in React).
- Typically more concise, especially for simple components.

Exporting and Importing Components

React allows you to export and import components using either named or default exports. The choice between them depends on how you want to organize and use your components.

1. Default Export

A module can have only one default export. The `default` keyword is used, and when importing, the name of the import can be different from the exported name.

```
// Greeting.js
import React from 'react';

const Greeting = () => <h1>Hello, World!</h1>;

export default Greeting;
```

```
// App.js
import GreetingComponent from './Greeting'; // Can be named anything
```

```
function App() {
  return <GreetingComponent />;
}

export default App;
```

Key Points:

- Only one default export per file.
- Import can be named anything.

2. Named Export

You can have multiple named exports in a module. The import statement must match the export's name.

```
// utils.js
export const Greeting = () => <h1>Hello, World!</h1>;
export const Farewell = () => <h1>Goodbye, World!</h1>;
```

```
// App.js
import { Greeting, Farewell } from './utils';

function App() {
  return (
    <>
      <Greeting />
      <Farewell />
    </>
  );
}

export default App;
```

Key Points:

- Multiple named exports per file.
- Must use the exact name when importing.

What Are Class Components in React?

Class components are one of the fundamental ways to define components in React. They are ES6 classes that extend from `React.Component`, and they allow you to define components with state and lifecycle methods.

Key Characteristics of Class Components:

- **State Management:** Class components have a built-in mechanism to manage local state using `this.state`.
- **Lifecycle Methods:** Class components provide access to lifecycle methods like `componentDidMount`, `componentDidUpdate`, and `componentWillUnmount`, which allow you to run code at specific points during the component's lifecycle.
- **this Keyword:** In class components, you often need to bind methods to the component instance (`this`) to ensure they have the correct context.
- **Render Method:** Every class component must have a `render` method, which returns the JSX that defines the component's UI.

Example of a Class Component

Here's a simple example of a counter implemented as a class component in React with TypeScript:

```
import React, { Component } from 'react';

// Define the state interface
interface CounterState {
  count: number;
}

// Create a class component
class Counter extends Component<{}, CounterState> {
```

```
constructor(props: {}) {
  super(props);
  // Initialize the state in the constructor
  this.state = {
    count: 0, // Set the initial count value
  };
}

// Method to increment the count
incrementCount = (): void => {
  this.setState((prevState) => ({
    count: prevState.count + 1, // Increase the count by 1
  }));
};

// Method to decrement the count
decrementCount = (): void => {
  this.setState((prevState) => ({
    count: prevState.count - 1, // Decrease the count by 1
  }));
};

// Render method to display the component
render() {
  return (
    <div>
      <h2>Counter: {this.state.count}</h2>
      <button onClick={this.incrementCount}>Increment</button>
      <button onClick={this.decrementCount}>Decrement</button>
    </div>
  );
}

export default Counter;
```

Why Class Components Are Not Used as Much Anymore

Over time, React has introduced new features that have made functional components more powerful and preferred over class components. Here's why class components are becoming less common:

1. Introduction of Hooks:

- **React Hooks** were introduced in React 16.8 and allow you to use state and other React features in functional components. With hooks like `useState`, `useEffect`, `useContext`, etc., you can manage state, side effects, and more within functional components, which previously could only be done in class components.
- Hooks provide a simpler, more intuitive API for managing component logic compared to the often cumbersome and verbose class component approach.

2. Simplicity and Readability:

- Functional components are generally more straightforward and easier to read than class components. They require less boilerplate code since there's no need to manage the `this` context or bind methods.
- The logic in functional components tends to be more concise, leading to cleaner and more maintainable code.

3. Performance Considerations:

- Functional components can be optimized more easily through techniques like memoization using `React.memo` and hooks like `useMemo` and `useCallback`. This can lead to better performance, especially in large applications.
- Since functional components are just functions, they can take advantage of React's optimization techniques more effectively.

4. Consistency and Modern Practices:

- The React community has largely adopted functional components as the standard for writing new React code. This shift has also influenced tooling, libraries, and best

practices to favor functional components.

- As a result, developers are encouraged to use functional components for new development to align with modern React patterns and community standards.

Summary:

- **Class components** are a traditional way to create stateful components in React, using ES6 classes. They are still supported in React but are gradually being replaced by functional components with hooks.
- **Functional components with hooks** are now the preferred approach in React due to their simplicity, readability, and ease of use. They allow you to write less code while achieving the same functionality, making your components more maintainable and efficient.
- **Why the Shift?** The shift away from class components is primarily due to the introduction of hooks, which brought powerful new capabilities to functional components, making them a more attractive option for modern React development.

Rendering Lists

Key props



```
{items.map(item => (
  <Component key={item.id} />
))}
```

keys are often used with lists

keys props

Rendering lists is a common task in React applications, especially when you are working with dynamic data like items fetched from an API or entries in an array. React makes it easy to render lists of elements using JavaScript's `.map()` method.

Basic Example of Rendering a List

```
import React from 'react';

const fruits = ['Apple', 'Banana', 'Cherry'];

const FruitList: React.FC = () => {
  return (
    <ul>
      {fruits.map((fruit, index) => (
        <li key={index}>{fruit}</li>
      ))}
    </ul>
  );
};
```

```
export default FruitList;
```

Explanation:

- The `FruitList` component maps over the `fruits` array and returns a list item (``) for each fruit.
- Each list item is rendered inside an unordered list (``).

Mapping Data to Components

Mapping data to components is an essential concept when dealing with lists in React. Instead of rendering plain text, you often want to map your data to more complex components that display different aspects of each data item.

Example: Mapping Data to Custom Components

```
import React from 'react';

interface Product {
  id: number;
  name: string;
  price: number;
}

const products: Product[] = [
  { id: 1, name: 'Laptop', price: 999 },
  { id: 2, name: 'Phone', price: 499 },
  { id: 3, name: 'Tablet', price: 299 }
];

const ProductCard: React.FC<Product> = ({ id, name, price }) => {
  return (
    <div key={id} style={{ border: '1px solid #ccc', padding: '16px', marginBottom: '8px' }}>
      <h2>{name}</h2>
      <p>Price: ${price}</p>
    </div>
  );
}
```

```

        </div>
    );
};

const ProductList: React.FC = () => {
  return (
    <div>
      {products.map(product => (
        <ProductCard key={product.id} {...product} />
      ))}
    </div>
  );
};

export default ProductList;

```

Explanation:


- The `ProductCard` component represents a single product.
- The `ProductList` component maps over the `products` array, creating a `ProductCard` for each product.
- The `key` prop is used on `ProductCard` to uniquely identify each component in the list (discussed in the next section).

Understanding Keys in React

Key props

(built into React)

<Component key={'1'} />

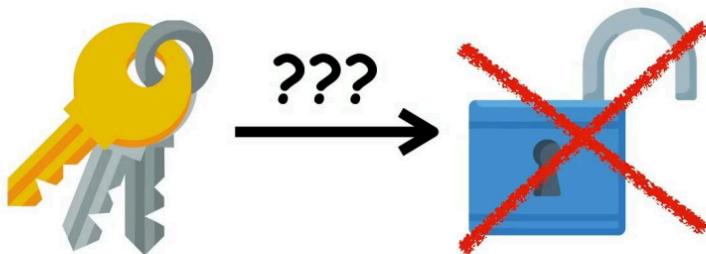

keys in react

Keys are a special string attribute you need to include when creating lists of elements in React. They help React identify which items have changed, been added, or removed, and optimize rendering performance.

Why are Keys Important?

- **Efficient Updates:** Keys allow React to efficiently update and reorder elements in the DOM.
- **Stable Identity:** Each key must be unique among siblings. It ensures that elements with the same key are treated as the same component, which prevents unnecessary re-renders.

Example: Using Keys in a List

```
import React from 'react';

const users = [
  { id: 1, name: 'John Doe' },
  { id: 2, name: 'Jane Smith' },
  { id: 3, name: 'Alice Johnson' }
];
```

```

const UserList: React.FC = () => {
  return (
    <ul>
      {users.map(user => (
        <li key={user.id}>{user.name}</li>
      )))
    </ul>
  );
}

export default UserList;

```

Explanation:

- In this example, each `` is given a unique `key` based on the user's `id`.
- React uses these keys to determine which items need to be re-rendered when the list changes.

Handling Dynamic Lists

Dynamic lists in React often involve adding, removing, or updating items. Handling these operations correctly ensures that your UI remains in sync with the underlying data.

Example: Handling Dynamic List Updates

```

import React, { useState } from 'react';

interface Task {
  id: number;
  description: string;
}

const TaskList: React.FC = () => {
  const [tasks, setTasks] = useState<Task[]>([
    { id: 1, description: 'Learn React' },
    { id: 2, description: 'Write Code' },
  ]);

  const handleAddTask = () => {
    const newTask = { id: 3, description: 'Practice Coding' };
    setTasks([newTask, ...tasks]);
  };

  const handleDeleteTask = (id: number) => {
    const updatedTasks = tasks.filter(task => task.id !== id);
    setTasks(updatedTasks);
  };

  return (
    <div>
      <h2>Task List</h2>
      <ul>
        {tasks.map(task => (
          <li key={task.id}>{task.description}</li>
        ))
      }
      <button onClick={handleAddTask}>Add Task</button>
      <button onClick={() => handleDeleteTask(1)}>Delete Task</button>
    </div>
  );
}

export default TaskList;

```

```

        { id: 3, description: 'Read a Book' }
    ]);

    const addTask = () => {
        const newTask: Task = { id: tasks.length + 1, description: `New Task
${tasks.length + 1}` };
        setTasks([...tasks, newTask]);
    };

    const removeTask = (id: number) => {
        setTasks(tasks.filter(task => task.id !== id));
    };

    return (
        <div>
            <ul>
                {tasks.map(task => (
                    <li key={task.id}>
                        {task.description}
                        <button onClick={() => removeTask(task.id)}>Remove</button>
                    </li>
                ))}
            </ul>
            <button onClick={addTask}>Add Task</button>
        </div>
    );
};

export default TaskList;

```

Explanation:


- **State Management:** The `TaskList` component manages the `tasks` array using the `useState` hook.
- **Adding Items:** The `addTask` function creates a new task and adds it to the `tasks` array.

- **Removing Items:** The `removeTask` function filters out the task with the specified `id`, updating the state and re-rendering the list.

Pure and impure Components

To create a simplified explanation with code examples of the two topics shown in the images, I'll break them down as follows:

Impure Component

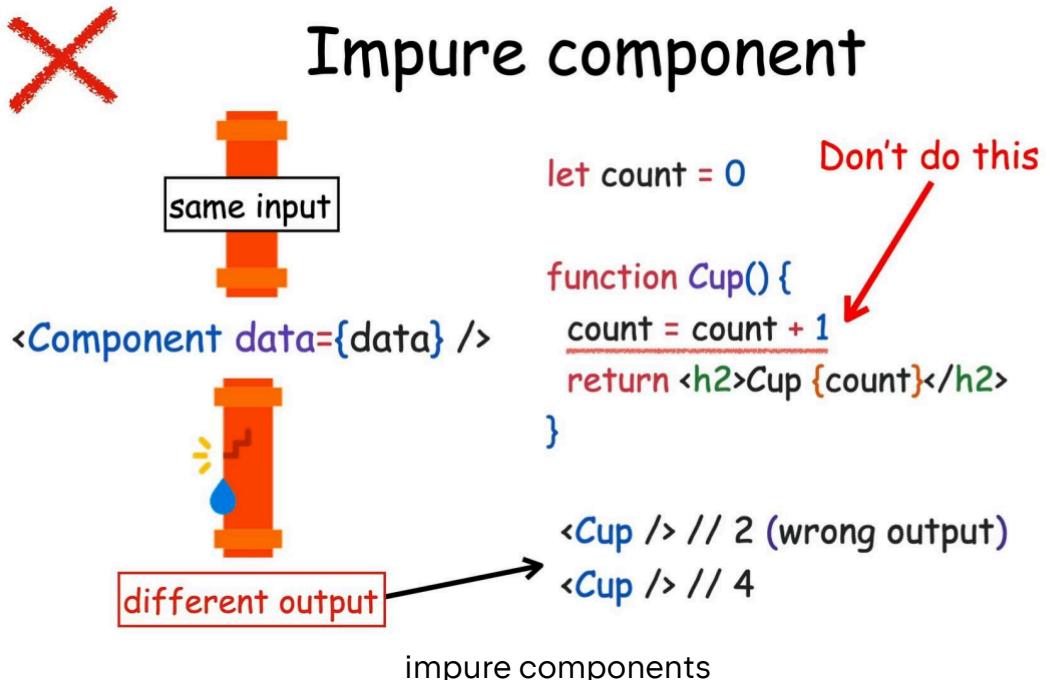

- An impure component is one where the same input doesn't always produce the same output. This inconsistency often arises when the component modifies external states or variables, leading to unexpected behavior.

Code Example:

```
// This is an impure component example

let count = 0; // External variable

function ImpureComponent() {
  count = count + 1; // Modifying external state
  return <h2>Cup {count}</h2>; // Returns different output each time
```


```
}

// Usage:
// <ImpureComponent /> // First render: Cup 1
// <ImpureComponent /> // Second render: Cup 2 (Wrong output)
```

Why it's bad:

- The component produces different outputs (like "Cup 2", "Cup 4") even if it is called with the same input, which makes debugging and testing difficult.

Pure Component

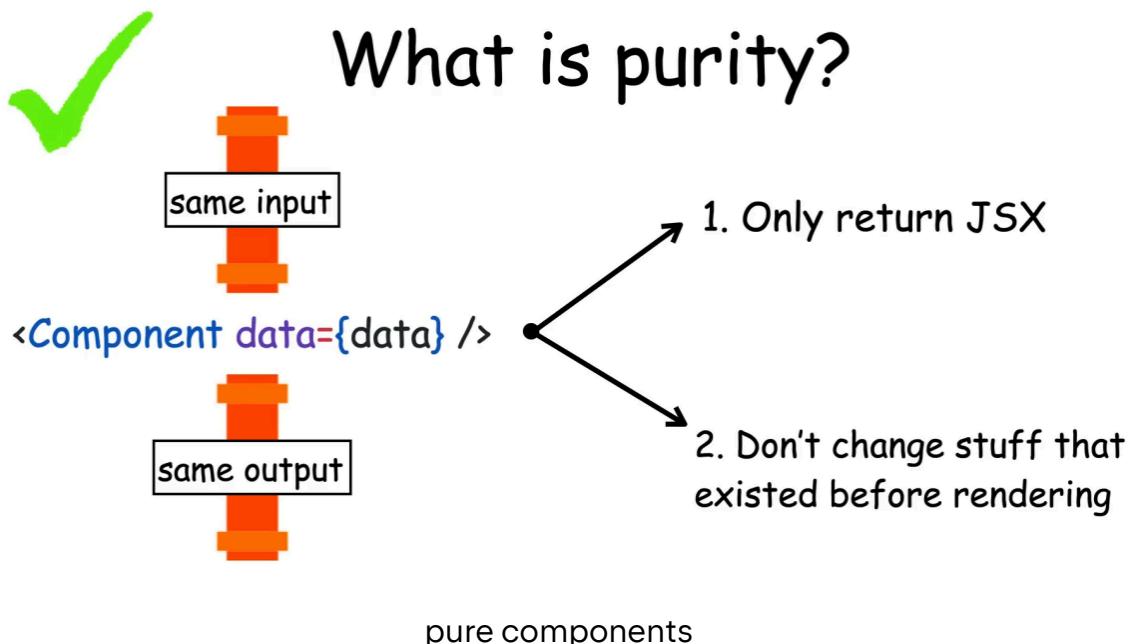

- A pure component always returns the same output for the same input. It doesn't modify external states or variables, ensuring consistency and predictability in the application.

Code Example 1:

```
// This is a pure component example
```

```
function PureComponent({ data }) {
  return <h2>Cup {data}</h2>; // Always returns the same output for the
  same input
}

// Usage:
// <PureComponent data={2} /> // Always renders: Cup 2
// <PureComponent data={2} /> // Always renders: Cup 2 (Consistent
output)
```

Why it's good:

- Pure components are easier to reason about, test, and debug. They behave predictably, making your application more reliable.

Key Takeaways:

- Pure Components** modify external state and produce different outputs with the same input. Avoid using them as they make your application unpredictable.
- Pure Components** always return the same output for the same input, ensuring consistency and reliability.

Certainly! Here's how you can implement the same pure component with counting functionality in TypeScript:

Code Example 2 :

```
import React, { useState } from 'react';

const PureComponent: React.FC = () => {
  const [count, setCount] = useState<number>(0); // Local state with
  type annotation

  const incrementCount = (): void => {
    setCount(count + 1); // Updates the count state
  };
}
```

```
return (
  <div>
    <h2>Cup {count}</h2>
    <button onClick={incrementCount}>Increment</button>
  </div>
);
}

// Usage:
// < PureComponent />
```


Explanation:

- 1. Type Annotation with useState:** In TypeScript, we annotate the type of the `count` state as `number` by using `useState<number>(0)`. This ensures that `count` is always treated as a number.
- 2. Function Component Type Annotation (React.FC):** The `PureComponent` is typed as a functional component using `React.FC`. This provides type-checking for props and ensures that the component adheres to React's functional component structure.
- 3. Increment Function:** The `incrementCount` function has a return type of `void`, indicating that it doesn't return any value.

Usage:

- Initially, `count` is 0.
- Clicking the "Increment" button will increase the count by 1, and the component will re-render with the updated count.

react data flow

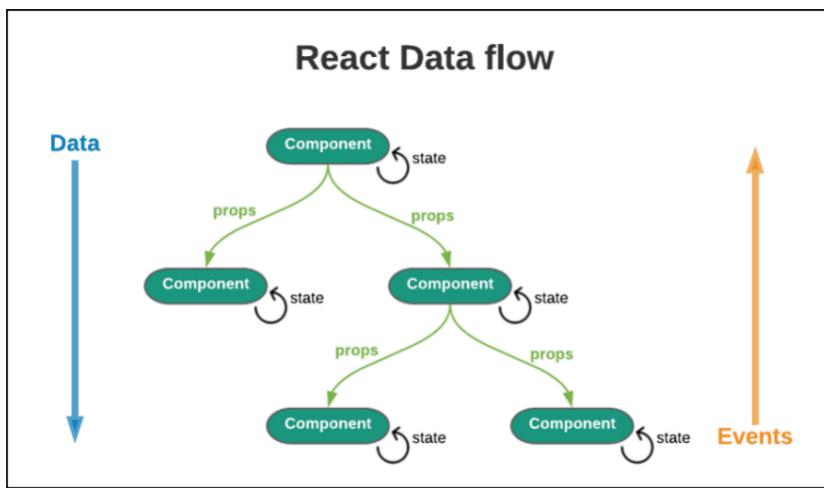

react data flow

The image you provided illustrates the **React Data Flow** concept, which is crucial for understanding how data is passed and managed within a React application. Let's break down what the diagram represents and how it relates to React's core principles of data handling:

React Data Flow Overview

1. Unidirectional Data Flow:

- **Top-Down Data Flow:** In React, data flows from the parent components to the child components via props. This is depicted by the blue arrow labeled "Data" pointing downward in the diagram. The parent component holds the data and passes it down to its children through props.
- **State Management:** Each component may manage its own state. The state is local to the component and can influence the rendering of that component. This is shown by the circular arrows within each component, indicating that a component's state can trigger re-renders when updated.

2. Props:

- **Passing Data:** Props are how data is passed from one component to another. In the diagram, green arrows labeled "props" show the flow of data from parent to child components. Props are read-only, meaning the child components cannot modify them; they are solely for rendering purposes.
- **Reacting to Props Changes:** When a parent component's state or props change, it triggers a re-render of its child components if those props are used within the child. This ensures that the UI always reflects the latest data.

3. Handling Events:

- **Bottom-Up Communication:** Events such as user interactions (e.g., clicks, form submissions) originate in child components and can trigger functions passed down from parent components via props. This is represented by the orange arrow labeled "Events" pointing upwards. Essentially, events bubble up to inform parent components of any changes or actions taken by the user.
- **State Updates:** These events can then lead to state updates in the parent component, which may trigger a re-render of the entire component tree, ensuring that the UI is updated accordingly.

4. State:

- **Local State:** Each component can maintain its own local state, which is represented by the circular arrows within each component in the diagram. This local state can influence how a component behaves or how it is rendered.
- **State Changes and Re-Renders:** When a component's state changes, React automatically re-renders that component to reflect the new state.

Key Takeaways:

- **Unidirectional Flow:** React enforces a unidirectional data flow, meaning data always moves in one direction—from parents to children. This makes the application more predictable and easier to debug.
- **Props and State:** Understanding the difference between props (immutable and passed down) and state (mutable and managed within a component) is crucial for

React development.

- **Event Handling:** Events are handled in child components but often result in state changes in parent components, enabling complex interactions and data updates.

3. Intro to State

Start typing here...

useState Hook

Start typing here...

Introduction to useState

Start typing here...

Managing State in Functional Components

Start typing here...

Example: Managing Form Inputs

Start typing here...

useReducer Hook

Start typing here...

Introduction to useReducer

Start typing here...

Complex State Management

Start typing here...

Example: Building a Counter with useReducer

Start typing here...

4. Intermediate React Concepts

Start typing here...

Handling Events

Start typing here...

Event Handling in React

Start typing here...

Passing Parameters to Event Handlers

Start typing here...

Common Event Handlers (e.g., onClick, onChange, onSubmit)

Start typing here...

Conditional Rendering

Start typing here...

Using Ternary Operators for Conditional Rendering Topic

Start typing here...

Best Practices for Conditional Rendering

Start typing here...

5. Hooks in React

Start typing here...

Introduction to Hooks

Start typing here...

What are Hooks?

Start typing here...

Rules of Hooks

Start typing here...

useEffect Hook

Start typing here...

Synchronizing with External Systems

Start typing here...

Fetching Data with useEffect

Start typing here...

Dependency Arrays

Start typing here...

useRef Hook

Start typing here...

Managing DOM References

Start typing here...

Persisting Values Across Renders

Start typing here...

Example: Counting Renders

Start typing here...

6. Custom Hooks

Start typing here...

Introduction to Custom Hooks

Start typing here...

Creating a Custom Hook

Start typing here...

Example: useLocalStorage Hook

Start typing here...

Example: useFetch Hook

Start typing here...

7. Performance Optimization

Start typing here...

Memoization in React

Start typing here...

What is Memoization?

Start typing here...

useCallback Hook

Start typing here...

useMemo Hook

Start typing here...

React.memo for Component Optimization

Start typing here...

Avoiding Prop Drilling

Start typing here...

Issues with Prop Drilling

Start typing here...

Solutions: Context API, Redux, Component Composition

Start typing here...

8. Routing with React Router

Start typing here...

Setting Up React Router

Start typing here...

Basic Routing Concepts

Start typing here...

Nested Routes and URL Parameters

Start typing here...

Route Protection with Private Routes

Start typing here...

Handling 404 Pages

Start typing here...

9. Form Management with React Hook Form & Yup

Start typing here...

Why Use React Hook Form?

Start typing here...

Setting Up React Hook Form

Start typing here...

Handling Form Validation with Yup

Start typing here...

10. React Styling

Start typing here...

11. Best Practices and Common Pitfalls

Start typing here...

Code Structuring

Start typing here...

Organizing Files and Folders

Start typing here...

Naming Conventions and Best Practices

Start typing here...

Avoiding Common Mistakes

Start typing here...

12. Advanced State Management with Redux Toolkit

Start typing here...

Introduction to Redux

Start typing here...

Centralized State Management

Start typing here...

Benefits of Redux

Start typing here...

Setting Up Redux Toolkit

- Installing Redux Toolkit
- Creating a Redux Store
- Using `createSlice` and `configureStore`

Handling Asynchronous Actions

- Using `createAsyncThunk` for Async Operations
- Integrating with Redux Slices

RTK Query for Data Fetching

- Introduction to RTK Query
- Queries and Mutations in RTK Query
- Handling Caching and Error States

all

Certainly! Let's go into detail on topics 1 and 2, using React with Vite, along with code examples and explanations.

1. Introduction to React with TypeScript

Overview of React

React is a JavaScript library for building user interfaces, particularly single-page applications where you can develop reusable UI components. It allows developers to create large web applications that can update and render efficiently in response to data changes.

Benefits of Using React

- **Component-Based Architecture:** React's component-based structure allows for better modularization and reusability.
- **Virtual DOM:** React uses a virtual DOM to optimize rendering and update only the necessary parts of the UI.
- **Strong Community and Ecosystem:** React has a vast ecosystem of libraries, tools, and a large community, making it easier to find solutions and resources.

Introduction to TypeScript in React

TypeScript is a statically typed superset of JavaScript that provides better tooling and helps catch errors early during development. Using TypeScript with React improves code quality and readability, especially in large projects.

Setting Up the Development Environment

Installing Node.js and npm

First, you need to have Node.js and npm installed on your machine. You can download them from Node.js official website (<https://nodejs.org/>).

Setting up a React Project with Vite

Vite is a next-generation front-end build tool that is faster and leaner than traditional bundlers like Webpack. It's perfect for setting up a React project with TypeScript due to its speed and ease of use.

1. Create a New React Project Using Vite:

Open your terminal and run the following command:

```
npm create vite@latest my-react-app --template react-ts
```

This command does the following:

- **my-react-app**: The name of your project directory.
- **--template react-ts**: Specifies that you want to use the React template with TypeScript.

2. Navigate to Your Project Directory:

```
cd my-react-app
```

3. Install the Project Dependencies:

```
npm install
```

4. Start the Development Server:

```
npm run dev
```

This command will start a local development server and open your project in the browser. You can now begin developing your React app.

Configuring TypeScript in a React Project

Vite automatically configures TypeScript when you create a project using the **react-ts** template. The **tsconfig.json** file in the root directory allows you to customize TypeScript settings.

Here's a basic **tsconfig.json** configuration:

```
{  
  "compilerOptions": {  
    "target": "ESNext",  
    "useDefineForClassFields": true,  
    "lib": ["DOM", "DOM.Iterable", "ESNext"],  
    "allowJs": false,  
    "skipLibCheck": true,  
    "esModuleInterop": false,  
    "allowSyntheticDefaultImports": true,  
    "strict": true,  
    "forceConsistentCasingInFileNames": true,  
    "module": "ESNext",  
    "moduleResolution": "Node",  
    "resolveJsonModule": true,  
    "isolatedModules": true,  
    "noEmit": true,  
    "jsx": "react-jsx"  
  },  
  "include": ["src"],  
  "references": [{ "path": "./tsconfig.node.json" }]  
}
```

This configuration is tailored for modern React development and ensures that TypeScript and JSX work together seamlessly.

2. Core Concepts

JSX & Props

What is JSX?

JSX stands for JavaScript XML. It's a syntax extension for JavaScript that looks similar to HTML. JSX allows you to write HTML elements directly in your React code, making it easier to create UI components.

Example:

```
import React from 'react';
```

```
const Greeting: React.FC = () => {
  const name = 'John';
  return <h1>Hello, {name}!</h1>;
};

export default Greeting;
```

In this example:

- **JSX:** The HTML-like syntax `<h1>Hello, {name}</h1>` is JSX.
- **Curly Braces:** `{name}` allows you to embed a JavaScript expression inside the JSX.

Passing Props to Components

Props are a way to pass data from a parent component to a child component. They allow you to customize and reuse components with different data.

Example:

```
import React from 'react';

interface GreetingProps {
  name: string;
}

const Greeting: React.FC<GreetingProps> = ({ name }) => {
  return <h1>Hello, {name}!</h1>;
};

const App: React.FC = () => {
  return <Greeting name="Alice" />;
};

export default App;
```

In this example:

- **GreetingProps**: An interface that defines the type of the props expected by the Greeting component.
- **Greeting**: A functional component that receives `name` as a prop and displays it.
- **App**: The main component that passes the `name` prop to the Greeting component.

Using Props for Reusable Components

By using props, you can create reusable components that can be customized with different data.

Example:

```
import React from 'react';

interface ButtonProps {
  label: string;
  onClick: () => void;
}

const Button: React.FC<ButtonProps> = ({ label, onClick }) => {
  return <button onClick={onClick}>{label}</button>;
};

const App: React.FC = () => {
  const handleClick = () => {
    alert('Button clicked!');
  };

  return (
    <div>
      <Button label="Click Me" onClick={handleClick} />
      <Button label="Submit" onClick={() => console.log('Submitted!')} />
    </div>
  );
};
```

```
export default App;
```

In this example:

- **ButtonProps**: The `Button` component can accept different `label` and `onClick` functions, making it reusable in different scenarios.
- **App**: Demonstrates the use of the `Button` component with different props.

Components in React

Functional vs. Class Components

React allows you to create components as either functions or classes. However, functional components are now the preferred way, especially with hooks like `useState` and `useEffect`.

Example: Functional Component

```
import React from 'react';

const Welcome: React.FC = () => {
  return <h1>Welcome to React with TypeScript!</h1>;
};

export default Welcome;
```

Example: Class Component

```
import React, { Component } from 'react';

class Welcome extends Component {
  render() {
    return <h1>Welcome to React with TypeScript!</h1>;
  }
}
```

```
export default Welcome;
```

Functional components are simpler and more concise. With the introduction of hooks, they can manage state and side effects without the complexity of class components.

Creating Components with TypeScript

TypeScript enhances React components by providing type safety, which helps catch errors at compile-time rather than at runtime.

Example:

```
import React from 'react';

interface UserCardProps {
  name: string;
  age: number;
}

const UserCard: React.FC<UserCardProps> = ({ name, age }) => {
  return (
    <div>
      <h2>{name}</h2>
      <p>Age: {age}</p>
    </div>
  );
};

export default UserCard;
```

In this example:

- **UserCardProps**: Specifies the types for the props `name` and `age`.
- **React.FC**: React's `FunctionComponent` type, ensuring that the component adheres to functional component standards.

Default and Named Exports

React components can be exported using default or named exports.

Example: Default Export

```
// UserCard.tsx
const UserCard: React.FC<UserCardProps> = ({ name, age }) => {
  return (
    <div>
      <h2>{name}</h2>
      <p>Age: {age}</p>
    </div>
  );
};

export default UserCard;
```

Example: Named Export

```
// UserCard.tsx
export const UserCard: React.FC<UserCardProps> = ({ name, age }) => {
  return (
    <div>
      <h2>{name}</h2>
      <p>Age: {age}</p>
    </div>
  );
};
```

Usage in Other Files:

```
// Default import
import UserCard from './UserCard';

// Named import
import { UserCard } from './UserCard';
```

Using default exports is common when you have a single main component in a file, whereas named exports are useful when you have multiple components or utilities in a single file.

Rendering Components

Rendering components is straightforward in React. You can render them directly within other components or within the `ReactDOM.render` method at the root of your application.

Example:

```
import React from 'react';
import ReactDOM from 'react-dom/client';
import App from './App';

const root = ReactDOM.createRoot(document.getElementById('root') as
HTMLElement);
root.render(
  <React.StrictMode>
    <App />
  </React.StrictMode>
);
```

In this example:

- `ReactDOM.createRoot`: Initializes the root of your React application.
- `App`: The main component that gets rendered within the