


```
mysql> REPLACE INTO profiles VALUES ('2', '吉田茂', '090-1122-3344', '37', '1987-08-12');
```

Query OK, 1 row affected (0.01 sec)

```
mysql> SELECT * FROM profiles
```

-> WHERE name = '吉田茂';

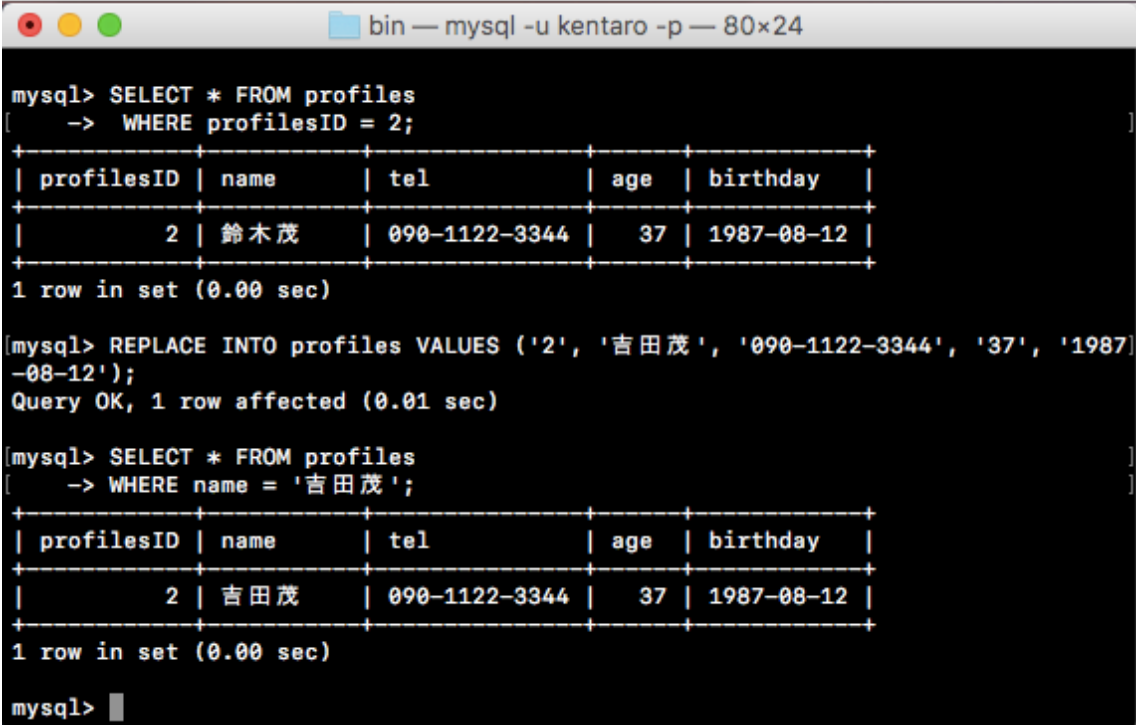

The screenshot shows a MySQL terminal window with the title bar "bin — mysql -u kentaro -p — 80x24". The terminal displays the following sequence of commands and results:

```
mysql> SELECT * FROM profiles
[ -> WHERE profilesID = 2; ]
```

profilesID	name	tel	age	birthday
2	鈴木茂	090-1122-3344	37	1987-08-12

```
1 row in set (0.00 sec)
```

```
[mysql> REPLACE INTO profiles VALUES ('2', '吉田茂', '090-1122-3344', '37', '1987-08-12');
Query OK, 1 row affected (0.01 sec)
```

```
[mysql> SELECT * FROM profiles
[ -> WHERE name = '吉田茂'; ]
```

profilesID	name	tel	age	birthday
2	吉田茂	090-1122-3344	37	1987-08-12

```
1 row in set (0.00 sec)
```

```
mysql>
```