



1

2 Non-Destructive Carabao Mango Sorter and Grader based on Physical Characteristics  
3 using Machine Learning

4

---

5 A Thesis  
6 Presented to the Faculty of the  
7 Department of Electronics and Computer Engineering  
8 Gokongwei College of Engineering  
9 De La Salle University

10

---

11 In Partial Fulfillment of the  
12 Requirements for the Degree of  
13 Bachelor of Science in Computer Engineering

14

---

15 by

16 BANAL Kenan A.  
17 BAUTISTA Francis Robert Miguel F.  
18 HERMOSURA Don Humphrey L.  
19 SALAZAR Daniel G.

20 May, 2025



21

## ORAL DEFENSE RECOMMENDATION SHEET

22

23

24

25

26

27

28

29

This thesis, entitled **Non-Destructive Carabao Mango Sorter and Grader based on Physical Characteristics using Machine Learning**, prepared and submitted by thesis group, AISL-1-2425-C5, composed of:

BANAL, Kenan A.

BAUTISTA, Francis Robert Miguel F.

HERMOSURA, Don Humphrey L.

SALAZAR, Daniel G.

30

31

32

33

in partial fulfillment of the requirements for the degree of **Bachelor of Science in Computer Engineering (BS-CPE)** has been examined and is recommended for acceptance and approval for **ORAL DEFENSE**.

34

35

36

---

**Dr. Reggie C. Gustilo**  
*Adviser*

37

May 7, 2025



38

## ABSTRACT

39 Carabao Mangoes are one of the sweetest mangoes in the world and one of the major pro-  
40 ducers of this is the Philippines. However, mangoes go through many screening processes,  
41 one of them being sorting and grading during post harvesting which is labor intensive,  
42 prone to human error, and can be inefficient if done manually. Previous researchers have  
43 taken steps to automate the process, however, their works often focus on only specific traits,  
44 and do not try to encapsulate all the physical traits of the mangoes altogether. Furthermore,  
45 previous researchers made the grading system static or unchangeable to the user. In this  
46 study, the researchers will develop an automated Carabao mango grader and sorter based  
47 on ripeness, size, and bruises with an interchangeable mango attribute priority through  
48 non-destructive means. Using machine vision, image processing, Machine Learning, mi-  
49 crocontrollers and sensors the mangoes will be physically sorted into designated bins via a  
50 conveyor belt system which can be controlled and monitored via a graphical user interface.  
51 The approach will streamline the post-harvest process and cut down on human errors and  
52 labor costs, helping maintain the high quality of Carabao mango exports.

53  
54

*Index Terms*—Machine Learning, Carabao Mangoes, Sorting and Grading Mangoes, Ma-  
chine Vision, Microcontroller.



## TABLE OF CONTENTS

55	<b>Oral Defense Recommendation Sheet</b>	ii
56	<b>Abstract</b>	iii
57	<b>Table of Contents</b>	iv
58	<b>List of Figures</b>	viii
59	<b>List of Tables</b>	ix
60	<b>Abbreviations and Acronyms</b>	x
61	<b>Notations</b>	xi
62	<b>Glossary</b>	xii
63	<b>Listings</b>	xiv
64	<b>Chapter 1 INTRODUCTION</b>	1
65	1.1 Background of the Study . . . . .	2
66	1.2 Prior Studies . . . . .	4
67	1.3 Problem Statement . . . . .	5
68	1.4 Objectives and Deliverables . . . . .	6
69	1.4.1 General Objective (GO) . . . . .	6
70	1.4.2 Specific Objectives (SOs) . . . . .	7
71	1.4.3 Expected Deliverables . . . . .	7
72	1.5 Significance of the Study . . . . .	9
73	1.5.1 Technical Benefit . . . . .	10
74	1.5.2 Social Impact . . . . .	11
75	1.5.3 Environmental Welfare . . . . .	11
76	1.6 Assumptions, Scope, and Delimitations . . . . .	11
77	1.6.1 Assumptions . . . . .	11
78	1.6.2 Scope . . . . .	12
79	1.6.3 Delimitations . . . . .	12
80	1.7 Estimated Work Schedule and Budget . . . . .	13
81	1.8 Overview of the Thesis . . . . .	14



83	<b>Chapter 2 LITERATURE REVIEW</b>	<b>15</b>
84	2.1 Existing Work . . . . .	16
85	2.1.1 Sorting Algorithms . . . . .	19
86	2.2 Lacking in the Approaches . . . . .	20
87	2.3 Summary . . . . .	21
88	<b>Chapter 3 THEORETICAL CONSIDERATIONS</b>	<b>23</b>
89	3.1 Introduction . . . . .	24
90	3.2 Relevant Theories and Models . . . . .	24
91	3.3 Technical Background . . . . .	25
92	3.4 Conceptual Framework Background . . . . .	25
93	3.5 Software Concepts . . . . .	26
94	3.5.1 Thresholding . . . . .	26
95	3.5.2 Object Size Calculation . . . . .	27
96	3.5.3 Convolutional Neural Network . . . . .	28
97	3.6 Hardware Concepts . . . . .	28
98	3.6.1 Camera Module . . . . .	28
99	3.6.2 4 Channel Relay . . . . .	29
100	3.6.3 Gear Ratio . . . . .	30
101	3.7 Summary . . . . .	30
102	<b>Chapter 4 DESIGN CONSIDERATIONS</b>	<b>31</b>
103	4.1 Introduction . . . . .	32
104	4.2 System Architecture . . . . .	32
105	4.3 Hardware Considerations . . . . .	34
106	4.3.1 General Prototype Framework . . . . .	34
107	4.3.2 Prototype Flowchart . . . . .	35
108	4.3.3 Prototype 3D Model . . . . .	38
109	4.3.4 Hardware Specifications . . . . .	38
110	4.3.4.1 Raspberry Pi . . . . .	38
111	4.3.4.2 Raspberry Pi Camera . . . . .	40
112	4.3.4.3 DC Motor . . . . .	41
113	4.3.4.4 MicroSD Card . . . . .	43
114	4.3.4.5 LED Lights . . . . .	44
115	4.3.4.6 Power Supply . . . . .	45
116	4.3.4.7 4 Channel Relay Module . . . . .	47
117	4.4 Software Considerations . . . . .	48
118	4.4.1 PyTorch . . . . .	48
119	4.4.2 OpenCV . . . . .	49
120	4.4.3 CustomTkinter . . . . .	49



# De La Salle University

121	4.5 Security and Reliability Considerations . . . . .	49
122	4.6 Scalability and Efficiency Considerations . . . . .	50
123	4.7 User Interface . . . . .	50
124	4.8 Constraints and Limitations . . . . .	50
125	4.9 Technical Standards . . . . .	50
126	4.10 Prototyping and Simulation . . . . .	51
127	4.11 Design Validation . . . . .	51
128	4.12 Summary . . . . .	51
129	<b>Chapter 5 METHODOLOGY</b>	<b>52</b>
130	5.1 Introduction . . . . .	55
131	5.2 Research Approach . . . . .	55
132	5.3 Hardware Design . . . . .	55
133	5.4 Software Design . . . . .	56
134	5.5 Data Collection Methods . . . . .	57
135	5.6 Testing and Evaluation Methods . . . . .	57
136	5.6.1 Classification Report . . . . .	58
137	5.6.1.1 Confusion Matrix . . . . .	58
138	5.6.1.2 Precision . . . . .	58
139	5.6.1.3 Recall . . . . .	59
140	5.6.1.4 F1 Score . . . . .	59
141	5.6.1.5 Accuracy . . . . .	59
142	5.6.2 Ripeness Training and Testing . . . . .	60
143	5.6.3 Bruises Training and Testing . . . . .	60
144	5.6.4 Size Determination . . . . .	61
145	5.7 Formula for User Priority . . . . .	61
146	5.8 Ethical Considerations . . . . .	61
147	5.9 Summary . . . . .	62
148	<b>Chapter 6 RESULTS AND DISCUSSIONS</b>	<b>63</b>
149	6.1 Training and Testing Results of the Model . . . . .	68
150	6.1.1 Ripeness Classification Results . . . . .	68
151	6.1.2 Bruises Classification Results . . . . .	70
152	6.2 Size Determination Results . . . . .	71
153	6.3 User Priority Formula . . . . .	71
154	6.4 Physical Prototype . . . . .	71
155	6.5 Software Application . . . . .	75
156	6.6 Summary . . . . .	75



157	<b>Chapter 7 CONCLUSIONS, RECOMMENDATIONS, AND FUTURE DIRECTIVES</b>	<b>77</b>
159	7.1 Concluding Remarks . . . . .	78
160	7.2 Contributions . . . . .	78
161	7.3 Recommendations . . . . .	78
162	7.4 Future Prospects . . . . .	79
163	<b>References</b>	<b>80</b>
164	<b>Appendix A STUDENT RESEARCH ETHICS CLEARANCE</b>	<b>82</b>
165	<b>Appendix B ANSWERS TO QUESTIONS TO THIS THESIS</b>	<b>84</b>
166	<b>Appendix C REVISIONS TO THE PROPOSAL</b>	<b>93</b>
167	<b>Appendix D REVISIONS TO THE FINAL</b>	<b>99</b>
168	<b>Appendix E ARTICLE PAPER(S)</b>	<b>103</b>



## LIST OF FIGURES

169	<b>LIST OF FIGURES</b>	
170	1.1 Carabao Mangoes at Different Ripeness Stages (Guillermo et al., 2019) . . . . .	2
171	1.2 Gantt Chart . . . . .	13
172	3.1 Theoretical Framework Diagram. . . . .	24
173	3.2 Conceptual Framework Diagram. . . . .	25
174	4.1 Hardware Schematic . . . . .	33
175	4.2 Prototype Framework . . . . .	34
176	4.3 Prototype Main Flowchart . . . . .	36
177	4.4 Initial 3D Model of the Prototype . . . . .	37
178	4.5 Raspberry Pi 4 Model B . . . . .	38
179	4.6 Raspberry Pi Camera Module Version 2 . . . . .	40
180	4.7 12 Volt DC Gear Motor . . . . .	42
181	4.8 SanDisk Ultra MicroSD Card . . . . .	43
182	4.9 LED Light Strip . . . . .	44
183	4.10 Bench Power Supply . . . . .	46
184	4.11 4 Channel Relay Module . . . . .	47
185	5.1 Carabao Mango Ripeness Stages . . . . .	61
186	5.2 Different Kinds of Mango Defects . . . . .	61
187	6.1 Ripeness Confusion Matrix using kNN . . . . .	69
188	6.2 Ripeness Confusion Matrix using Naive Bayes . . . . .	70
189	6.3 Bruises Confusion Matrix using CNN . . . . .	71
190	6.4 Prototype Top View . . . . .	72
191	6.5 Entrance Conveyor Belt View . . . . .	72
192	6.6 Side Conveyor Belt View . . . . .	73
193	6.7 Prototype Main Hardware . . . . .	73
194	6.8 DC Motor and Pulley . . . . .	74
195	6.9 LED Lights and Camera Module . . . . .	74
196	6.10 Raspberry Pi App UI Version 1 . . . . .	75
197	6.11 Raspberry Pi App UI Version 2 . . . . .	76
198	6.12 Raspberry Pi App UI Version 3 . . . . .	76



199

## LIST OF TABLES

200	1.1 Expected Deliverables per Objective . . . . .	8
201	1.1 Expected Deliverables per Objective . . . . .	9
202	2.1 Comparison of Existing Studies . . . . .	18
203	2.2 Comparison of Sorting Algorithm Models . . . . .	21
204	5.1 Summary of methods for reaching the objectives . . . . .	53
205	5.2 Confusion Matrix Example . . . . .	58
206	6.1 Summary of methods for achieving the objectives . . . . .	64
207	6.2 Performance Metrics for different EfficientNet versions . . . . .	68
208	6.3 Ripeness Classification Report using kNN . . . . .	69
209	6.4 Ripeness Classification Report using Naive Bayes . . . . .	69
210	6.5 Bruises Classification Report using CNN . . . . .	70
211	6.6 Summarized Classification Report using CNN . . . . .	70
212	D.1 Summary of Revisions to the Thesis . . . . .	100



213

## ABBREVIATIONS

214	AC	Alternating Current .....	13
215	CNN	Convolution Neural Network .....	14
216	GUI	Graphical User Interface .....	50
217	LED	Light Emitting Diode .....	44
218	UI	User Interface .....	50



219

## NOTATION

220	$B(P)$	Bruises Priority .....	71
221	$b(p)$	Bruises Prediction .....	71
222	$R(P)$	Ripeness Priority .....	71
223	$r(p)$	Ripeness Prediction .....	71
224	$S(P)$	Size Priority .....	71
225	$s(p)$	Size Prediction .....	71
226	$D(p, d, f)$	Real World Dimension .....	27
227	$p$	Pixel Dimension .....	27
228	$d$	Distance from Camera to Object .....	27
229	$f$	Focal Length .....	27



## 230 GLOSSARY

231	bruises	The black or brown area of the mango that is visible on the skin of the mango.
232	Carabao mango	A popular variety of mango grown in the Philippines, known for its sweet and juicy flesh.
233	accuracy score	A performance metric that measures the overall proportion of correct predictions made by a machine learning model.
234	confusion matrix	A table that summarizes the performance of a classification model, showing the number of true positives, true negatives, false positives, and false negatives.
235	CNN	A type of deep neural network that is highly effective in analyzing and processing visual data, such as images.
236	F1-Score	A balanced performance metric that is the harmonic mean of precision and recall, taking both into account.
237	machine learning	A subset of Artificial Intelligence that enables systems to learn and improve from data.
238	computer vision	The use of cameras and algorithms to provide imaging-based inspection and analysis.
239	microcontroller	A small computing device that controls other parts of a system such as sensors.
240	Precision	A performance metric that reflects the percentage of instances classified as positive that are truly positive.
241	recall	A performance metric that measures the proportion of actual positive instances that the model correctly identified.



# De La Salle University

242

User Priority-Based Grading

A customizable grading system where users can assign weights to grading factors.



De La Salle University

243

## LISTINGS



De La Salle University

244

## **Chapter 1**

245

# **INTRODUCTION**



## 246      **1.1 Background of the Study**

247      Mangoes, also known as the *Mangifera indica*, are a member of the cashew family. This  
248      fruit can often be seen being farmed by countries such as Myanmar, the Philippines, and  
249      India as they have a tropical dry season. Being in a tropical country is an important  
250      aspect for mango cultivation as it ensures proper growth for mangoes. If aspects such as  
251      temperature and rainfall are not ideal, it may affect the quality of the mango (Britannica,  
nd). Carabao mangoes is a variety of a mango that is found and cultivated in the Philippines.



Fig. 1.1 Carabao Mangoes at Different Ripeness Stages (Guillermo et al., 2019)

252  
253      It is known for its sweet signature taste that was recognized sweetest in the world in the  
254      Guinness Book of World Records in 1995. The mango was named after the national animal  
255      of the Philippines, a native breed of buffalo. On average, it is 12.5 cm in length and 8.5  
256      cm in diameter, having a bright yellow color when ripe as seen in Figure 1.1. It is often  
257      cultivated during late May to early July (DBpedia, nd).

258      As the Philippines is a tropical country, mangoes are a highly valued fruit as it is not  
259      only the country's national fruit but also amongst the leading agricultural exports of the  
260      country, ranking only third below bananas and pineapples. This gives the country the 9th  
261      slot amongst the leading exporters of Mangoes across the world. Attributed to this ranking



# De La Salle University

262 is the country's export of both fresh and dried mangoes, as well as low tariff rates. This  
263 allows the country to export a large quantity of the fruit in countries such as Singapore,  
264 Japan, and the USA as they can enter duty free markets provided by the World Trade  
265 Organization and Japan. Due to this, the mangoes have become a major source of income  
266 to an estimated 2.5 million farmers in the country (Centino et al., 2020).

267 Before mangoes are sold in markets, they first undergo multiple post-harvest processes.  
268 This is to ensure that the mangoes that arrive in markets are utmost quality before being  
269 sold to consumers. Moreover, it ensures that mangoes are contained and preserved properly  
270 such that they do not incur damages and/or get spoiled on its transportation to the market.  
271 Processing of the mango involves pre-cooling, cleaning, waxing, classification, grading,  
272 ripening, packaging, preservation, storage, packing, and transportation (Patel et al., 2019)  
273 (Rizwan Iqbal and Hakim, 2022).

274 Among the processes that mangoes undergo, classification and grading is important as  
275 it allows the manufacturer to separate mangoes with good qualities versus mangoes with  
276 poor qualities. According to a study by (Lacap et al., 2021), size, length, width, volume,  
277 density, indentation, and grooves are aspects that determine the maturity of mangoes. These  
278 traits are being checked along with the ripeness of the mango, sightings of bruise injury,  
279 and cracks on the fruit (Lacap et al., 2021) as these aspects affect the sellability of the fruit  
280 as well as the chances of it getting spoiled sooner.

281 Previous studies have been made to automate the sortation process of the mangoes.  
282 Among these is a research done by Abbas et al. (2018), which focuses on classification  
283 of mangoes using their texture and shape features. They do this by, first, acquiring an  
284 image of the mango using a digital camera. Then, these images are fed to the MaZda  
285 package, which is a software originally developed for magnetic resonance imaging. Within



286 the MaZda package is the B11 program, which uses Principal Component Analysis, Linear  
287 Discriminant Analysis, Nonlinear Discriminant Analysis, and texture classification to  
288 extract features from the mango, which in this case are the length, width, and texture. This  
289 data is then compared to a database in order to classify any given mango (Abbas et al.,  
290 2018).

291 Another study is done by Rizwan Iqbal and Hakim (2022), which classifies mangoes  
292 based on their color, volume, size, and shape. This is done by making use of Charge Coupled  
293 Devices, Complementary Metal-Oxide Semiconductor sensors, and 3-layer Convolutional  
294 Neural Network. To classify the mangoes, images are first captured and preprocessed to  
295 be used as a data set (Rizwan Iqbal and Hakim, 2022). This data set is then augmented  
296 to be used as a model for the 3-layer Convolutional Neural Network. After extracting the  
297 features of the mango, the 3-layer Convolutional Neural Network is used as a method for  
298 their classification as it can mimic the human brain in pattern recognition, and process  
299 data for decision making. This is important as some mangoes have very subtle differences  
300 which make it difficult to differentiate them.

## 301 1.2 Prior Studies

302 A paper written by Amna et al. (2023), designed an automated fruit sorting machine based  
303 on the quality through an image acquisition system and CNN. Furthermore, the results  
304 of the paper show that the image processing detection score was 89% while that of the  
305 tomatoes was 92% while the CNN model had higher validity of 95% for mangoes and  
306 93% for tomatoes. 15%, while the percentage of distinction between the two groups was  
307 reported to be 5% respectively (Amna et al., 2023). Despite the high accuracy score in



308 detecting mango defects, the fruit sorting system only sorts based on the mango defects  
309 and not on ripeness, and weight.

310 Furthermore, the research paper presented by Guillergan et al. (2024) designed an  
311 Automated Carabao mango classifier, in which the mango image database is used to extract  
312 the features like size, area along with the ratio of the spots for grading using Naïve Bayes  
313 Model. For the results, the Naïve Bayes' model recognized large and rejected mangoes with  
314 95% accuracy and the large and small/medium difference with a 7% error, suggesting an  
315 application for quality differentiation and sorting in the mango business industry. Despite  
316 the high accuracy of classifying Carabao mangoes, the researchers used a high quality  
317 DSLR camera for the image acquisition system without any microcontroller to control the  
318 mangoes (Guillergan et al., 2024).

### 319 **1.3 Problem Statement**

320 As mangoes are among the top exports of the Philippines (Centino et al., 2020), assessing  
321 the physical deformities is a necessity. The physical deformities of the Carabao mango  
322 can determine the global competitiveness of the country. Having higher quality exports  
323 can often lead to gaining competitive edge, increase in demand, increase export revenues,  
324 and becoming less susceptible to low-wage competition (D'Adamo, 2018). In order to  
325 increase the quality of mango fruit exports, a key post-harvest process is done, which is  
326 sorting and grading. Mango sorting and grading then becomes important to determine  
327 which batches are of high quality and can be sold for a higher price, and which batches are  
328 of low quality and can only be sold for a low price (Co., nd). Traditionally, fruit sorting  
329 and grading is inefficient as it is done manually by hand. Some tools are used such as



330 porous ruler to determine fruit size and color palette for color grading (Co., nd). However,  
331 among the problems encountered in the process of manually sorting and grading mangoes  
332 are susceptibility to human error and requiring a number of laborers to do the task.

333 With the current advancements in technology, some researchers have already taken steps  
334 to automate the process of sorting and grading mangoes. However, these attempts would  
335 often only consider some of the aspects pertaining to size, ripeness, and bruises but not all  
336 of them at the same time. Lastly, not all research approaches were able to implement a  
337 hardware for their algorithm, limiting their output to only a software implementation and not  
338 an embedded system. As such the proposed system would assess the export quality of the  
339 Carabao mango based on all the mentioned mango traits, namely size, bruises, and ripeness  
340 while also taking into consideration being non-destructive. These aspects are important  
341 because, as was previously mentioned, there is a need to develop a Carabao mango sorter  
342 that takes into account all these aspects at the same time while being non-destructive.

## 343 **1.4 Objectives and Deliverables**

### 344 **1.4.1 General Objective (GO)**

- 345 • GO: To develop a user-priority-based grading and sorting system for Carabao man-  
346 goes, using machine learning and computer vision techniques to assess ripeness, size,  
347 and bruises. ;



### 348      **1.4.2 Specific Objectives (SOs)**

- 349      • SO1: To make an image acquisition system with a conveyor belt for automatic sorting  
350      and grading mangoes. ;
- 351      • SO2: To get the precision, recall, F1 score, confusion matrix, and train and test  
352      accuracy metrics for classifying the ripeness and bruises with an accuracy score of at  
353      least 90%.;
- 354      • SO3: To create a microcontroller-based system to operate the image acquisition  
355      system, control the conveyor belt, and process the mango images through machine  
356      learning. ;
- 357      • SO4: To grade mangoes based on user priorities for size, ripeness, and bruises. ;
- 358      • SO5: To classify mango ripeness based on image data using machine learning  
359      algorithms such as kNN, k-mean, and Naïve Bayes. ;
- 360      • SO6: To classify mango size based on image data by getting its length and width  
361      using OpenCV, geometry, and image processing techniques. ;
- 362      • SO7: To classify mango bruises based on image data by employing machine learning  
363      algorithms.

### 364      **1.4.3 Expected Deliverables**

365      Table 1.1 shows the outputs, products, results, achievements, gains, realizations, and/or  
366      yields of the Thesis.



TABLE 1.1 EXPECTED DELIVERABLES PER OBJECTIVE

Objectives	Expected Deliverables
GO: To develop a user-priority-based grading and sorting system for Carabao mangoes, using machine learning and computer vision techniques to assess ripeness, size, and bruises.	<ul style="list-style-type: none"> <li>• To develop a Carabao mango grading and sorting system.</li> <li>• To grade Carabao mangoes into three categories based on ripeness, size, and bruises using machine learning.</li> <li>• To integrate sensors and actuators to control the conveyor belt and image acquisition system.</li> </ul>
SO1: To make an image acquisition system with a conveyor belt for automatic sorting and grading mangoes.	<ul style="list-style-type: none"> <li>• To make an image acquisition system with a camera and LED light source.</li> <li>• To build a flat belt conveyor for moving the mangoes.</li> </ul>
SO2: To get the precision, recall, F1 score, confusion matrix, and train and test accuracy metrics for classifying the ripeness and bruises with an accuracy score of at least 90%.	<ul style="list-style-type: none"> <li>• To use a publicly available dataset of at least 10,000 mango images for classification of ripeness and bruises.</li> </ul>
SO3: To create a microcontroller-based system to operate the image acquisition system, control the conveyor belt, and process the mango images through machine learning.	<ul style="list-style-type: none"> <li>• To develop an intuitive UI where users can start and stop the system.</li> <li>• To implement a priority-based grading system with sliders for ripeness, bruises, and size.</li> </ul>
SO4: To grade mangoes based on user priorities for size, ripeness, and bruises.	<ul style="list-style-type: none"> <li>• To utilize a linear combination formula as the overall mango score, where each classification level contributes a grade, weighted by the priority assigned to the three properties.</li> <li>• To assign score values for each classification level of the mango.</li> </ul>

*Continued on next page*



TABLE 1.1 EXPECTED DELIVERABLES PER OBJECTIVE

Objectives	Expected Deliverables
SO5: To classify mango ripeness based on image data using machine learning algorithms such as kNN, k-mean, and Naïve Bayes.	<ul style="list-style-type: none"> <li>To train a machine learning model such as kNN, k-means, or Naïve Bayes capable of classifying mango ripeness based on the image color.</li> <li>To gather a dataset of annotated images with ripeness labels.</li> <li>To obtain an evaluation report of performance metrics of the model.</li> </ul>
SO6: To classify mango size based on image data by getting its length and width using OpenCV, geometry, and image processing techniques.	<ul style="list-style-type: none"> <li>To develop an image processing algorithm capable of determining mango size using OpenCV, NumPy, and imutils.</li> <li>To classify mangoes based on size into small, medium, and large based on measurements.</li> </ul>
SO7: To classify mango bruises based on image data by employing machine learning algorithms.	<ul style="list-style-type: none"> <li>To train a machine learning model such as CNN capable of distinguishing bruised and non-bruised mangoes.</li> <li>To train a machine learning model such as kNN, k-means, and Naïve Bayes capable of assessing the extent of bruising on the mangoes if it is significant or partial.</li> <li>To gather a dataset of annotated images based on bruises.</li> <li>To obtain an evaluation report of performance metrics of both CNN and other machine learning models.</li> </ul>

367

## 1.5 Significance of the Study

368

Automating the process of sorting and grading mangoes increases efficiency and productivity for the user which would in effect remove human error in sorting and grading and decrease the human labor and time taken to sort and grade the mangoes. This is especially important for farmers with a large amount of fruit such as mangoes and a lesser labor force.

369

370

371



372 A recent study showed that their automated citrus sorter and grader using computer vision  
373 can reduce the human labor cost and time to sort and grade when comparing the automated  
374 citrus sorter and grader to manual human labor Chakraborty et al. (2023).

375 Another benefit to automating sorting and grading mangoes is the improvement in  
376 quality control. This implies that compared to human labor, automating sorting and  
377 grading mangoes can uniformly assess the quality of mangoes based on size, color, and  
378 bruises, ensuring that the expected grade and high-quality mangoes reach the consumer.  
379 By accurately identifying substandard mangoes, the system helps in reducing waste and  
380 ensuring that only marketable fruits are processed further.

381 Likewise, the scalability of automating sorting and grading mangoes is simpler, es-  
382 pecially for lower labor force farmers with large volumes of mangoes. Because of the  
383 possibility of large-scale operations by automating sorting and grading mangoes, farmers  
384 can now handle large volumes of mangoes, making them suitable for commercial farms  
385 and processing plants. Moreover, it can be adapted to different varieties of mangoes and  
386 potentially other fruits with minor modifications.

### 387 **1.5.1 Technical Benefit**

- 388 1. The development of an automated Carabao mango sorter would increase the quality  
389 control of classifying Carabao mango based on ripeness, size, and bruising.
- 390 2. The accuracy in sorting Carabao mangoes will be significantly improved while  
391 reducing the errors due to human factors in manual sorting.
- 392 3. The automated Carabao mango sorter carefully sorts the mangoes while ensuring  
393 that they remain free from bruising or further damage during the process



394	<h3>1.5.2 Social Impact</h3>
395	<ol style="list-style-type: none"><li>1. The reduction in manual labor creates opportunities in maintenance and technologies in the automated Carabao mango sorter.</li></ol>
396	
397	<ol style="list-style-type: none"><li>2. The automated Carabao mango sorter system improves Carabao mango standards and enhances the satisfaction of the buyers and the customers through guaranteeing consistent Carabao mango grade.</li></ol>
398	
399	
400	<ol style="list-style-type: none"><li>3. Opportunity to increase sales and profit for the farmers through consistent quality and grade Carabao mangoes while reducing the physical labor to sort it.</li></ol>
401	
402	<h3>1.5.3 Environmental Welfare</h3>
403	<ol style="list-style-type: none"><li>1. With the utilization of non-destruction methods of classifying Carabao mangoes together with an accurate sorting system, overall waste from Carabao mangoes is reduced and the likelihood of improperly sorted mangoes is decreased.</li></ol>
404	
405	
406	<ol style="list-style-type: none"><li>2. Automation of sorting and grading Carabao mangoes promotes sustainable farming practices.</li></ol>
407	
408	<h2>1.6 Assumptions, Scope, and Delimitations</h2>
409	<h3>1.6.1 Assumptions</h3>
410	<ol style="list-style-type: none"><li>1. The Carabao mangoes are from the same source together with the same variation</li></ol>
411	<ol style="list-style-type: none"><li>2. The Carabao mangoes do not have any fruit borer and diseases</li></ol>






## 1.6.2 Scope

- 419 1. The prototype would be specifically designed to grade and sort Carabao Mangoes  
420 based on only ripeness, size, and visible skin bruises.

421 2. The mangoes used as the subject will be solely sourced from markets in the Philip-  
422 pines.

423 3. The Carabao mangoes would be graded into three levels.

424 4. The prototype will be using a microcontroller-based system locally stored on the  
425 device itself to handle user interaction.

426 5. Computer vision algorithms to be used will include image classification.

### **1.6.3 Delimitations**



- 430        2. Additionally, the project prototype will only be able to capture, sort, and grade one  
 431        mango subject at a time which means the mangoes have to be placed in the conveyor  
 432        belt in a single file line for accurate sorting.
- 433        3. For the bruises, the system will only be able to detect external bruises and may not  
 434        identify the non-visible and internal bruises.
- 435        4. The system does not load the mangoes onto the conveyor belt itself. Assistance is  
 436        required to put mangoes into the conveyor belt to start the sorting process
- 437        5. The prototype will be powered using Alternating Current (AC) power and will be  
 438        plugged into a wall socket which is only suitable for indoor use.

439        **1.7 Estimated Work Schedule and Budget**

TASKS	THSCP4A				THSCP4B				THSCP4C			
	Week 1-3	Week 4-6	Week 7-9	Week 10-13	Week 1-3	Week 4-6	Week 7-9	Week 10-13	Week 1-3	Week 4-6	Week 7-9	Week 10-13
Topic Proposal and Defense	BANAL, BAUTISTA, HERMOSURA, SALAZAR				HERMOSURA AND SALAZAR							
Buying and Collecting of Materials					BANAL AND BAUTISTA							
Training and Testing the CNN model						HERMOSURA AND SALAZAR						
Integrating the sensors and actuators to the Arduino Uno						BANAL AND BAUTISTA						
Coding of the Application with CNN model to the Raspberry Pi and connecting it to the Arduino Uno							BANAL AND BAUTISTA					
Polishing and Revising the UI App							BANAL AND BAUTISTA					
Testing and Surviving of the System with the Carabao Mangoes							BANAL, BAUTISTA, HERMOSURA, SALAZAR					
Data Gathering								BANAL, BAUTISTA, HERMOSURA, SALAZAR				

Fig. 1.2 Gantt Chart

440        As seen above, Table 1.2 shows the Gantt Chart together with the assigned task. For  
 441        the first part of the THSCP4A, the group would primarily revise and fine tune Chapters  
 442        1 and 2 while also preparing for the defense. After that for THSCP4B, the yellow team  
 443        which consists of two members, Hermosura and Salazar, would start buying and collecting



444 the materials needed for assembling the prototype. While team yellow is doing that,  
445 team purple which consists of Banal and Baustista would start training and validating the  
446 Convolution Neural Network (cnn) model based on the Carabao mango image dataset.  
447 After that integration of the sensors and actuators together with the integration of the cnn  
448 model and beginning of coding of the Application to the Raspberry Pi would be done. Once  
449 that cnn model is deployed and the Application works testing of the Carabao mangoes to  
450 the prototype would be done. During THSCP4C, data gathering would be done together  
451 with polishing and revising of the final paper.

## 452 **1.8 Overview of the Thesis**

453 There are seven succeeding chapters. To recall, chapter 1 involves the introduction of  
454 the thesis topic containing the background of the study, previous studies, objectives and  
455 deliverables, assumptions, scope, and delimitation, significance of the study, description  
456 of the project together with the methodology, and Gantt chart and budget. Chapter 2  
457 involves the existing articles, the lacking in their approaches, and the summary of chapter 2.  
458 Chapter 3 involves the theoretical considerations of the thesis topic while chapter 4 would  
459 consist of the design consideration involving the thesis topic. Chapter 5 would involve the  
460 research methodology containing the testing procedure and setup. Chapter 6 would involve  
461 the results and discussion based on the methodology while Chapter 7 would involve the  
462 conclusion, recommendations, and future suggestions.



De La Salle University

463

## Chapter 2

464

## LITERATURE REVIEW



## 465      **2.1 Existing Work**

466      The research paper written by Adam et al. (2022) developed a ripeness grader for Carabao  
467      mangoes. The Carabao mango ripeness grade calculated based on object and color detection  
468      which were written in microcontroller. These are the systems designed by the researchers  
469      that consists of Raspberry Pi 4, Arduino Uno, camera, touch screen LCD, MQ3 gas sensor,  
470      ventilation system. The proposed system was able to ascertain an overall reliability of 95%:  
471      therefore, the specified objective of ascertaining the ripeness level of the mangoes was  
472      met with success. However, accuracy and reliability of the software system are there since  
473      the hardware design does not seem to be workable when one must deal with the scores of  
474      mangoes (Adam et al., 2022). In addition, the design of the hardware does not integrate  
475      any form of physical automating, say like the conveyor belt. Besides, the hardware system  
476      only works efficiently when deciding the ripeness grade of mangoes separately.

477      A study done by Samaniego et al. (2023) is another research paper that supports and  
478      has relevant information concerning the topic. The researchers proposed a fully-perovskite  
479      photonic system which has the capability to identify and sort or grade mango based on  
480      features such as color, weight and, conversely, signs of damages (Samaniego et al., 2023).  
481      Some of the techniques in image processing that the researchers used included image  
482      enhancement, image deblurring, edge detection using MATLAB and Arduino as well as  
483      color image segmentation. By carrying out the multiple trials on the device they achieved a  
484      classification speed of 8.132 seconds and an accuracy of 91.2%. The proponents' metrics  
485      used for the ratings were speed wherein the results were rated "excellent" while the accuracy  
486      rating given was "good". One of the limitations of the paper is that the researchers were  
487      only limited to the color, texture, and size of the Carabao mango



488 Furthermore, the research paper presented by Guillergan et al. (2024) designed an  
489 Automated Carabao mango classifier, in which the mango image database is used to extract  
490 the features like weight, size, area along with the ratio of the spots for grading using  
491 Naïve Bayes Model. Concerning the quantitative test design, one had to control and  
492 experiment with various methods of image processing that would improve the likelihood  
493 of improved classification. The paper methodology entailed sample collection from 300  
494 Carabao mangoes, picture taking using a DSLR camera, and feature deconstruction for  
495 categorization (Guillergan et al., 2024). The system prototype and the software were  
496 designed with the programming language C# with integration of Aforge. NET routines.  
497 The performance of this model was checked with the help of the dataset containing 250  
498 images, precision, recall, F-score key indicators were used. The investigation discovered  
499 that the Naïve Bayes' model recognized large and rejected mangoes with 95% accuracy  
500 and the large and small/medium difference with a 7% error, suggesting an application for  
501 quality differentiation and sorting in the mango business industry. The limitations in the  
502 researchers' paper include the researchers were able to achieve high accuracy after using a  
503 high quality DSLR camera and the fact that the researchers were not able to incorporate the  
504 use of microcontrollers.

505 Another study by Tomas et al. (2022) proposed SVM-based system for classifying  
506 the maturity stages of bananas, mangoes, and calamansi. With the use of 1729 images of  
507 bananas together with 711 mango images and 589 calamansi, the researchers were able to  
508 achieve a high accuracy score of above 90% for all fruits. Some pre-processing techniques  
509 used to get this high accuracy are the change in hue, saturation, and value channels in the  
510 mango image (Tomas et al., 2022). To better understand the harvest time of mangoes, the  
511 paper by Abu et al. (2021) examined the association of the harvest season with seasonal



# De La Salle University

512 heat units, rainfall, and physical fruit attributes for Haden, Kent, Palmer, and Keitt mango  
 513 varieties to establish export and domestic market maturity standards. For the results of  
 514 the paper, it shows that temperature, rainfall, and physical characteristics have a reliable,  
 515 non-destructive indicators for determining mango maturity (Abu et al., 2021). This shows  
 516 that physical characteristics and temperature are important when exporting fruits such as  
 517 mangoes.

TABLE 2.1 COMPARISON OF EXISTING STUDIES

Existing Study	Limitations	Accuracy Rating
Adam et al. (2022)	No physical automation, not suitable for large amounts of mangoes, only classifies ripeness and only a sample size of 10 mangoes.	95%
Samaniego et al. (2023)	Focuses only on color and size.	91.2%
Guillergan et al. (2024)	Relies on high-quality DSLR cameras, and limited automation due to not integrating microcontrollers.	95%
Supekar and Wakode (2020)	No physical automation implemented. Ripeness, size, and shape-based classification achieved 100%, 98.19%, and 99.20% accuracy respectively on their own. However, errors occurred when taking into account all these aspects together for grading mangoes, causing an accuracy rating deduction.	88.88%

518 Previous studies on mango grading have achieved an accuracy rating of up to 95%, as  
 519 shown in Table 2.1. However, these studies either relied on a small sample size, which  
 520 limits statistical significance, or utilized expensive equipment, which may be impractical.  
 521 In light of this, the researchers have set a target accuracy rating of greater than or equal  
 522 to 90%. This target ensures that the system being developed is comparable to, or better  
 523 than, existing studies that used larger sample sizes or assessed multiple mango traits at the



524 same time. Furthermore, this research aims to distinguish itself by not only maintaining or  
525 exceeding the 90% accuracy rating but also incorporating a graphical user interface (GUI)  
526 for selective priority-based mango classification. The system will integrate both software  
527 and hardware components, and it will evaluate a greater number of mango traits for grading  
528 purposes.

529 **2.1.1 Sorting Algorithms**

530 In previous studies, researchers have implemented various artificial intelligence algorithms  
531 in order to determine the optimal and most effective method for sorting mangoes. One of  
532 the algorithms that was used in the classification of mangoes was the CNN or Convolutional  
533 Neural Networks. A study done by Zheng and Huang (2021) explored the effectiveness of  
534 CNN, specifically in classifying mangoes through image processing. The system that the  
535 researchers developed graded mangoes into four groups which was based on the Chinese  
536 National Standard (Zheng and Huang, 2021). These mangoes were examined by their  
537 shape, color uniformity, and external defects. The system that was developed had an  
538 impressive accuracy of 97.37% in correctly classifying the mangoes into these grading  
539 categories Support Vector Machine was also one of the classification algorithms that was  
540 implemented to detect flaws in mangoes. In that study by Veling (2019), SVM was used in  
541 the classification of diseases from mangoes. The study used 4 different diseases/defects for  
542 testing (Veling, 2019). The diseases were Anthracnose, Powdery Mildew, Black Banded,  
543 and Red Rust. and provided 90% accuracy for both the leaves and the fruit

544 In the study done by Schulze et al. (2015), Simple Linear Regression, Multiple Linear  
545 Regression, and Artificial Neural Network models were all studied and compared for  
546 the purpose of size-mass estimation for mango fruits. The researchers found that the



547 Artificial Neural Network yielded a high accuracy rating for mass estimation and for mango  
548 classification based on size with a success rate of 96.7% (Schulze et al., 2015). This is  
549 attributed to the Artificial Neural Network model's ability to learn both linear and nonlinear  
550 relationships between the inputs and the outputs. However, a problem can occur with the  
551 use of the model, which is overfitting. This issue occurs when the model is overtrained  
552 with the data set such that it will start to recognize unnecessary details such as image noise  
553 which results in poor generalization when fed with new data. With this in mind, additional  
554 steps will be necessary to mitigate the issue. Another research article written by Alejandro  
555 et al. (2018) implements a method for sorting and grading Carabao mangoes. This research  
556 focuses on the use of Probabilistic Neural Network, which is another algorithm that is used  
557 for pattern recognition and classification of objects. For this study, the researchers focused  
558 on the area, color, and the black spots of the mango for their Probabilistic Neural Network  
559 model (Alejandro et al., 2018). Their research using the model yielded an accuracy rating  
560 of 87.5% for classification of the mangoes which means it is quite accurate for classifying  
561 mangoes within the predefined categories. However, problems were encountered with  
562 the use of the model when trying to identify mangoes that did not fit the predefined size  
563 categories of small, medium, and large. This means that the PNN model may become  
564 challenged when presented with a mango with outlying traits or traits that were very  
565 different from the data set.

## 566 2.2 Lacking in the Approaches

567 The majority of past researchers such as Amna et al. (2023) and Guillermo et al. (2019)  
568 were able to implement a fruit and mango sorter together with an accurate AI algorithm



TABLE 2.2 COMPARISON OF SORTING ALGORITHM MODELS

Sorting Algorithm Model	Accuracy Rating	Criteria	Problems Encountered
Convolution Neural Network	97.37%	shape, color, defects	Minor blemishes affected the accuracy.
Support Vector Machine	90%	mango defects and diseases	The model is sensitive to noise, which requires intensive image preprocessing.
Artificial Neural Network	96.7%	for mango size and mass	Overfitting
Probabilistic Neural Network	87.5%	for mango area, color, and black spots	Difficulty in identifying mangoes that have outlying features or did not fit the predefined categories

569 to detect the ripeness defects. This means that none of the previous research papers were  
 570 able to integrate an interchangeable user-priority-based grading together with size, ripeness,  
 571 and bruises using machine learning for Carabao mango sorter and grader. Our research  
 572 however would implement an automated Carabao mango sorter in terms of size, ripeness,  
 573 and bruises with its own UI, conveyor belt, stepper motors, and bins for collecting the  
 574 different ripeness and defect grade of the Carabao mango.

## 575 2.3 Summary

576 To reiterate, there is an innovative gap that needs to be filled with regards to the process of  
 577 sorting and grading Carabao mangoes. The traditional methods for conducting this process  
 578 manually by hand, by a porous ruler, by a sugar meter, and by a color palette can be prone  
 579 to human error and expensive costs due to the number of laborers required to do the task.



580 On the other hand, although researchers have already taken steps to automate the process  
581 of mango sorting and grading, there is still a need for an implementation that takes into  
582 account size, ripeness, and bruises altogether whilst being non-destructive and having its  
583 own embedded system. The research articles shown above show the different computer  
584 vision and CNN approaches for sorting and classifying mangoes. For example, a system  
585 created by Adam et al. (2022) was more focused on ripeness detection. Samaniego et al.  
586 (2023) considered photonic systems for grading mango fruit based on color and weight.  
587 On the other hand, Guillermo et al. (2019) implemented the Naïve Bayes classification  
588 model on mangoes with high accuracy, which thereby did not include any microcontroller.  
589 There was an attempt to study each of those parameters separately and that is why the  
590 multifactorial approach was not used. With this in mind, the system being proposed does  
591 exactly what was mentioned, to implement a non-destructive and automated sorting and  
592 grading system for Carabao mangoes that takes into account size, ripeness, and bruises  
593 altogether using machine learning, as well as having its own embedded system. This system  
594 will be mainly composed of a conveyor belt, servo motors, a camera, microcontrollers, and  
595 an LCD display for the user interface. By doing so, the system should be able to improve  
596 the efficiency and productivity of mango sorting and grading, remove the effect of human  
597 error and reduce time consumption. The studies also provided critical insights regarding the  
598 effective algorithms that can be used in classification stages in image processing. The use  
599 of CNN had the most accuracy with manageable potential challenges. Lastly, by scaling  
600 the implementation, the overall export quality of the Carabao mangoes can be improved.



601

## Chapter 3

602

# THEORETICAL CONSIDERATIONS



### 603    3.1 Introduction

604    Likewise, the purpose of this chapter is to go through the important theories in developing  
 605    the prototype together with training and testing the machine learning model.

### 606    3.2 Relevant Theories and Models

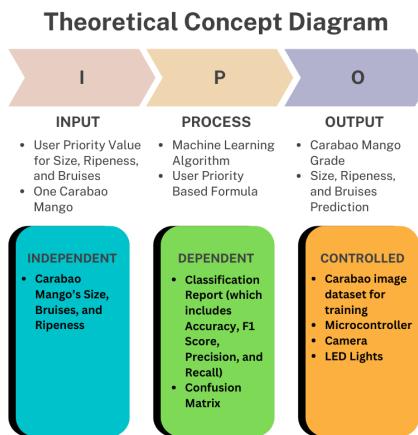


Fig. 3.1 Theoretical Framework Diagram.

607    The theoretical framework seen in figure 3.1 follows the IPO (Input-Process-Output)  
 608    Model for a Carabao Mango Sorting System. The Input section includes user-defined  
 609    priority values for size, ripeness, and bruises, along with a single mango for analysis. The  
 610    Process section highlights the use of a machine learning algorithm and a user-priority-based  
 611    formula to classify the mango. The Output consists of the mango's grade, predicted size,  
 612    ripeness, and bruises. Below the IPO model, the diagram categorizes variables into three  
 613    groups: Independent (mango's size, ripeness, and bruises), Dependent (classification report  
 614    with accuracy, precision, recall, and confusion matrix), and Controlled (image dataset,  
 615    microcontroller, camera, and LED lights).



### 3.3 Technical Background

At its core, the system will be using machine learning concepts pertaining to CNN and OpenCV, and may use other algorithms such as Naive Bayes and k-Nearest Neighbors to supplement the classification tasks, particularly for assessing mango ripeness, bruise detection, and size determination. The system will be built on an embedded framework, integrating a Raspberry Pi microcontroller to control the RaspberryPi camera, actuators, LED lights, and motors. A user-friendly GUI will also be utilized to ensure users can customize the prioritization of the mango sorting system.

### 3.4 Conceptual Framework Background

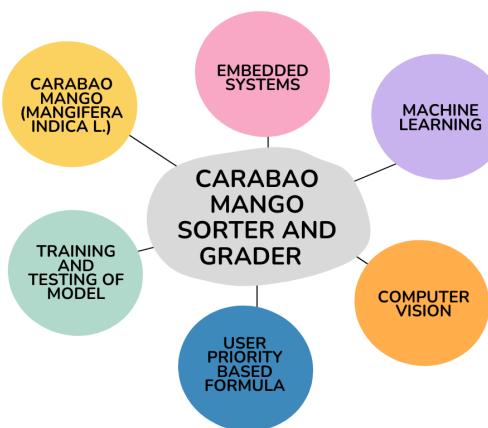


Fig. 3.2 Conceptual Framework Diagram.

The conceptual framework seen in figure 3.2 illustrates the key components involved in the Carabao Mango Sorter and Grader system. At the center, the system is represented as the core element, surrounded by six interconnected components: Carabao Mango (Mangifera indica L.), Embedded Systems, Machine Learning, Computer Vision, User



629 Priority-Based Formula, and Training and Testing of the Model. These elements represent  
630 the different technologies, methodologies, and considerations required for the development  
631 and operation of the sorter and grader. The diagram provides an overview of how various  
632 disciplines contribute to the project's functionality.

## 633 **3.5 Software Concepts**

### 634 **3.5.1 Thresholding**

635 Thresholding is a computer vision image segmentation technique that is used to separate  
636 objects from their surroundings by converting a grayscale image to binary. The conversion  
637 is done by choosing a certain threshold intensity value. It is usually done by assigning pixels  
638 with an intensity higher than the threshold are mapped to one value (commonly white),  
639 and pixels with an intensity lower than the threshold are mapped to another (commonly  
640 black). The result of this technique is in a high-contrast image that makes it easy to detect  
641 the object's boundary and shape in the image.

642

643 In this project, two types of thresholding were applied:

- 644 • Absolute Difference Thresholding – This method involves computing the absolute  
645 difference between two images. The first image is one of the object, and the other  
646 of the same background without the object. The result isolates only the pixels that  
647 have changed between the two images, thus isolating the mango from its background  
648 successfully.
- 649 • Binary Thresholding – Once the difference image has been created, binary threshold-



650       ing is used. A threshold value is employed to threshold the difference image into a  
 651       binary image. Values greater than the threshold are made white (foreground), and  
 652       values less than that are made black (background). This creates a clear silhouette of  
 653       the mango, which is appropriate for size estimation and contour detection.

654       **3.5.2 Object Size Calculation**

655       Object size calculation is the calculation of a certain object's true size from image data. This  
 656       is essential in computer vision systems to efficiently process object features in real-time.  
 657       In this research, the size of the Carabao mango is estimated through image measurement  
 658       techniques based on geometric principles and camera calibration.

659       The size of the mango can be determined given:

$$\text{Real World Dimension} = \frac{\text{Pixel Dimension} \times \text{Distance from Camera to Object}}{\text{Focal Length}} \quad (3.1)$$

$$D(p, d, f) = \frac{p \cdot d}{f} \quad (3.2)$$

660       where  $D(p, d, f)$  is the real world dimension of the object,  $p$  is the pixel dimension  
 661       of the object,  $d$  is the distance from the camera to the object, and  $f$  is the focal length of  
 662       the camera.

663       After capture and preprocessing of the image, the binary image so obtained is processed  
 664       with contour detection to find the largest object, which is assumed to be the mango. The  
 665       contour is then bounded with a minimum-area bounding box, and pixel-based length and  
 666       width are calculated using Euclidean distance between the corner points.



667        This size estimation method offers a consistent and efficient way of taking the mea-  
668        surements with only standard camera input, providing consistency in classification and  
669        reducing the necessity for physical measuring devices.

670        **3.5.3 Convolutional Neural Network**

671        Convolutional Neural Networks are a class of deep learning models commonly used in  
672        analyzing visual data. CNNs are particularly effective in image classification tasks due to  
673        their ability to automatically extract and effectively learn the spatial hierarchies of features  
674        directly from the pixels of a given image. This makes it highly suitable for functions such  
675        as object detection and, in the case of this study, image classification.

676        CNN usually applies filters to input images. These filters are designed to detect local  
677        patterns such as edges, textures, and color gradients. The network is able to learn more  
678        patterns as the data goes through the layers. This enables it to recognize effectively the  
679        characteristics that it is looking for.

680        The use of CNNs in this study allows for accurate, automated classification of mango  
681        images which contributes to the development of a reliable, non-destructive grading system  
682        that minimizes human error and ensures consistent quality assessment

683        **3.6 Hardware Concepts**

684        **3.6.1 Camera Module**

685        The camera module serves as the main image acquisition tool in the mango sorter and  
686        grader system. Its role is to capture clear, high-resolution images of each mango as it moves



687 along the conveyor. These images are critical for analyzing physical traits like ripeness,  
688 bruising, and size through computer vision and machine learning techniques.

689 The camera is directly connected to the Raspberry Pi, which manages both image  
690 capture and processing. It is fixed in position to ensure consistent distance and angle for  
691 all images. It is also paired with a lighting system to provide a consistent lighting for the  
692 images. The system captures images of both the top and bottom sides of each mango to  
693 ensure a more accurate grading. The prototype integrates the Raspberry Pi Camera Module  
694 Version 2. This camera is chosen for its 8MP resolution which is critical in capturing  
695 real-time images. Another reason for integrating this camera is because of its compatibility  
696 with the Raspberry Pi 4, and reliability in capturing detailed images needed for accurate  
697 classification. It is also cost effective and lightweight which is important for the prototype.

### 698 **3.6.2 4 Channel Relay**

699 The relay module in this project is used to control the direction and movement of the  
700 motors that operate the conveyor system and mango sorting mechanism. As an electrically  
701 operated switch, the relay allows the low-power signals from the Raspberry Pi to safely  
702 manage the higher voltage and current required by the DC motors.

703 For the prototype, the relay module is responsible for changing the polarity of motor  
704 connections which enables the motors to rotate in both forward and reverse directions.  
705 This will drive the conveyor belt system. This is essential for moving mangoes along the  
706 conveyor, rotating them for the top and bottom image capture, and directing them to the  
707 appropriate bin based on their grade.



### 708    **3.6.3 Gear Ratio**

709    In this prototype, gear ratios are used to control the rotational speed of the conveyor belts  
710    that move and rotate the mango. A gear ratio of 1:3 was applied, meaning the motor gear  
711    completes one full rotation for every three rotations of the driven gear. This is also done in  
712    order to avoid overspeeding and make sure that the conveyor belt moves in a controlled  
713    manner. This setup slows down one belt relative to the other, creating a differential speed  
714    between the left and right belts. As a result, the mango rotates in place while being moved  
715    forward. This rotation is essential for capturing both the top and bottom views of the mango  
716    for accurate classification and grading.

### 717    **3.7 Summary**

718    Overall, chapter 3 establishes key concepts and theoretical considerations that form the  
719    foundation of the Carabao mango sorter and grading system. It discusses and connects  
720    each component together, explaining how each component such as the RaspberryPi and  
721    DC motors work together to create a system that utilizes machine learning and computer  
722    vision techniques to classify mangoes based on user priority.



723

## Chapter 4

724

# DESIGN CONSIDERATIONS



725 Likewise, the objective of chapter 4 is to describe the researcher's design consideration  
726 when developing and testing the prototype. For an overview of the design of the prototype,  
727 the researchers considered different computer vision models in classifying the ripeness  
728 and bruises together with other algorithms to determine the size of the mango. Likewise,  
729 the hardware design was also taken into consideration where the physical design of the  
730 conveyor belt was taken into account.

## 731 **4.1 Introduction**

732 This chapter discusses the design considerations for the mango sorting and grading system,  
733 focusing on the technical and engineering decisions required for its development. The  
734 design process aims to create a scalable, efficient, and user-friendly system that leverages  
735 machine learning for accurate mango classification.

## 736 **4.2 System Architecture**

737 The system architecture is represented through a block diagram, showcasing modules  
738 such as image acquisition, preprocessing, feature extraction, machine learning model, and  
739 grading output. Each module is described in detail, emphasizing its role in the overall  
740 system. For instance, the image acquisition module uses high-resolution cameras to capture  
741 mango images, while the preprocessing module enhances image quality for better feature  
742 extraction.

743 In figure 4.1 presents the electronic circuit diagram, designed using Proteus. The  
744 diagram illustrates a system where a Raspberry Pi 4 serves as the central control unit,

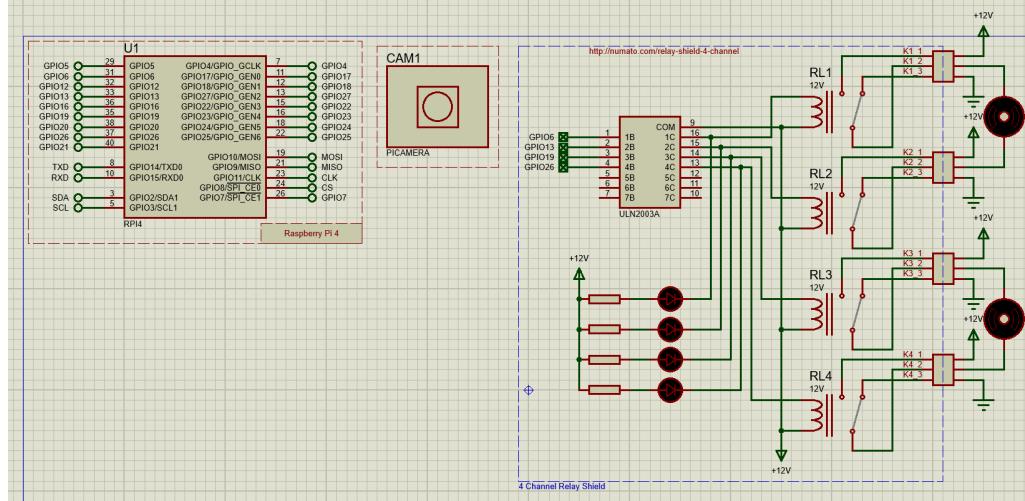


Fig. 4.1 Hardware Schematic

745 managing four motors through a relay mechanism. The Raspberry Pi 4, represented by  
 746 a rectangular box on the left, showcases various pin connections, including GPIO pins,  
 747 power supply pins (5V and 3V3), ground pins (GND), and communication pins (TXD,  
 748 RXD, SDA, SCL).

749 In the center of the diagram, an 18-pin integrated circuit labeled "ULN2803A" is  
 750 depicted. This component, a Darlington transistor array, likely functions as a buffer,  
 751 providing the necessary current to drive the relays. Four relays, designated as RL1, RL2,  
 752 RL3, and RL4, are positioned on the right side of the diagram, each connected to a motor  
 753 (represented by a circle with an "M" inside) and a +12V power source. Additionally, four  
 754 resistors are placed between the ULN2803A and the relays, serving to limit current. The  
 755 circuit section containing these resistors is labeled "4 Channel Relay Driver," indicating its  
 756 purpose.

757 The camera module is labeled "PICAMERA" is located in the top center of the diagram.  
 758 It is represented by a square with a circle inside, symbolizing the camera lens. The camera



759 module is connected to the Raspberry Pi 4 through the CSI (Camera Serial Interface) pins.  
 760 The overall circuit is designed for a 12V system, with the +12V power supply indicated at  
 761 various points. The Raspberry Pi 4's GPIO pins are used to control the relays.

### 762 4.3 Hardware Considerations

763 The hardware components include high-resolution cameras, lighting systems for consistent  
 764 image capture, and microcontrollers like Raspberry Pi or Arduino for system control,  
 765 actuators like DC and stepper motors to move the mangoes. The choice of hardware is  
 766 justified based on cost, performance, and compatibility with the software framework.

#### 767 4.3.1 General Prototype Framework

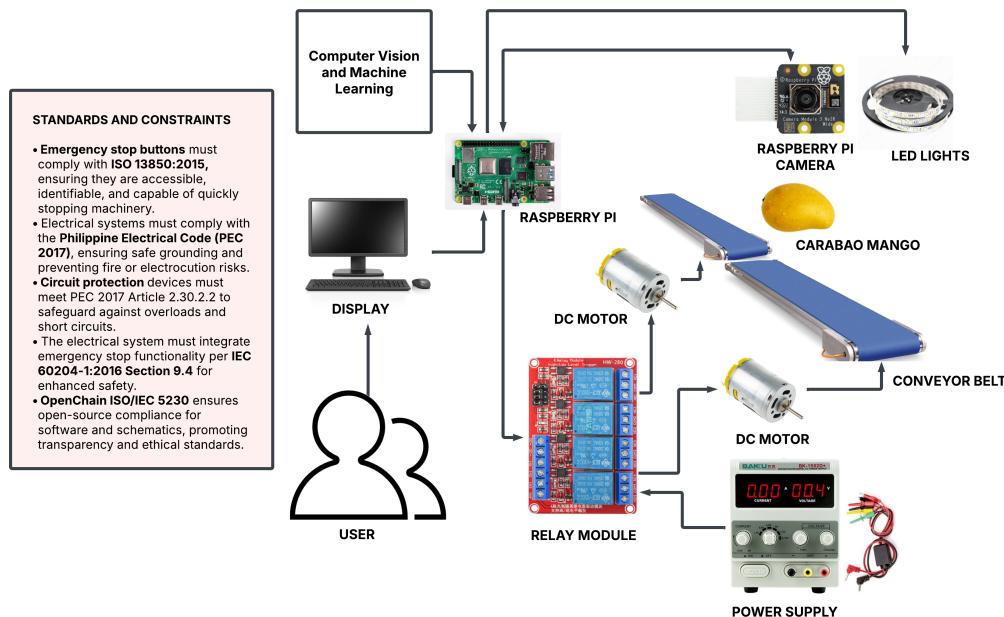


Fig. 4.2 Prototype Framework



768        The Figure 4.2 presents the overall prototype layout of the automated Carabao mango  
769        sorter and grader. The diagram illustrates the flow of operations from mango loading onto  
770        the conveyor belt to sorting them. It illustrates the major elements of the system, that is,  
771        the image acquisition area, lighting system, camera module, Raspberry Pi controller, and  
772        mechanical actuators. The layout illustrates how all the subsystems work together to ensure  
773        mangoes are scanned, processed, sorted based on ripeness, size, and bruises, and eventually  
774        sorted based on the calculated priority score. The layout served as the basis for actual  
775        prototype development.

### 776        **4.3.2 Prototype Flowchart**

777        The flowchart in Figure 4.3 represents the overall operational logic of the mango grading  
778        and sorting system. The process starts with system initialization, where the camera and  
779        lighting modules are switched on and the machine learning algorithms are initialised. The  
780        input of the user priority values as well as the detection of the mango on the conveyor  
781        belt triggers the capture of both the top and bottom cheek of the mango. The captured  
782        image is processed using machine learning algorithms to determine its ripeness, size, and  
783        bruises. Depending on these classifications along with priority weights given by the user,  
784        the system calculates an overall score. Once this calculation is done, the mango is routed to  
785        the respective bin through the respective actuator. Having this logical sequence is important  
786        to know the system's decision-making and automation process.

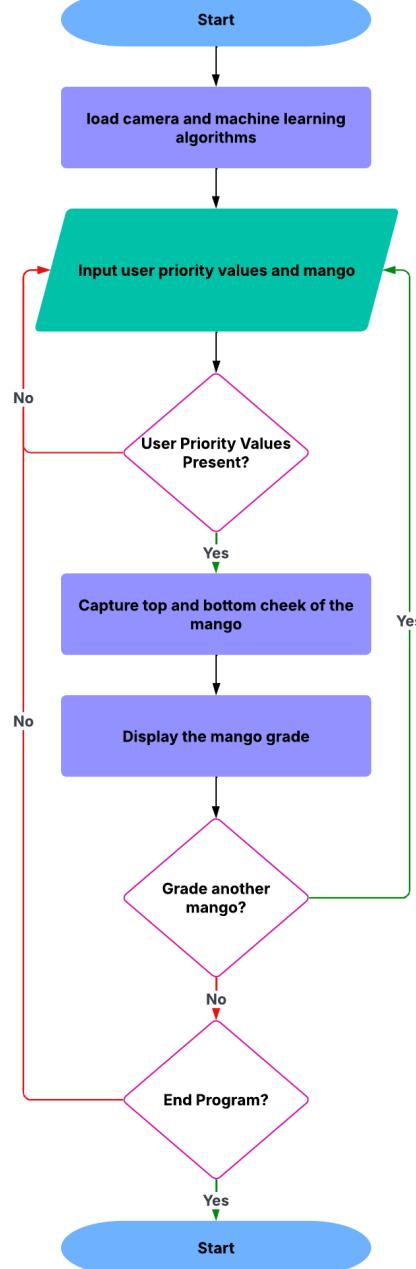


Fig. 4.3 Prototype Main Flowchart



De La Salle University

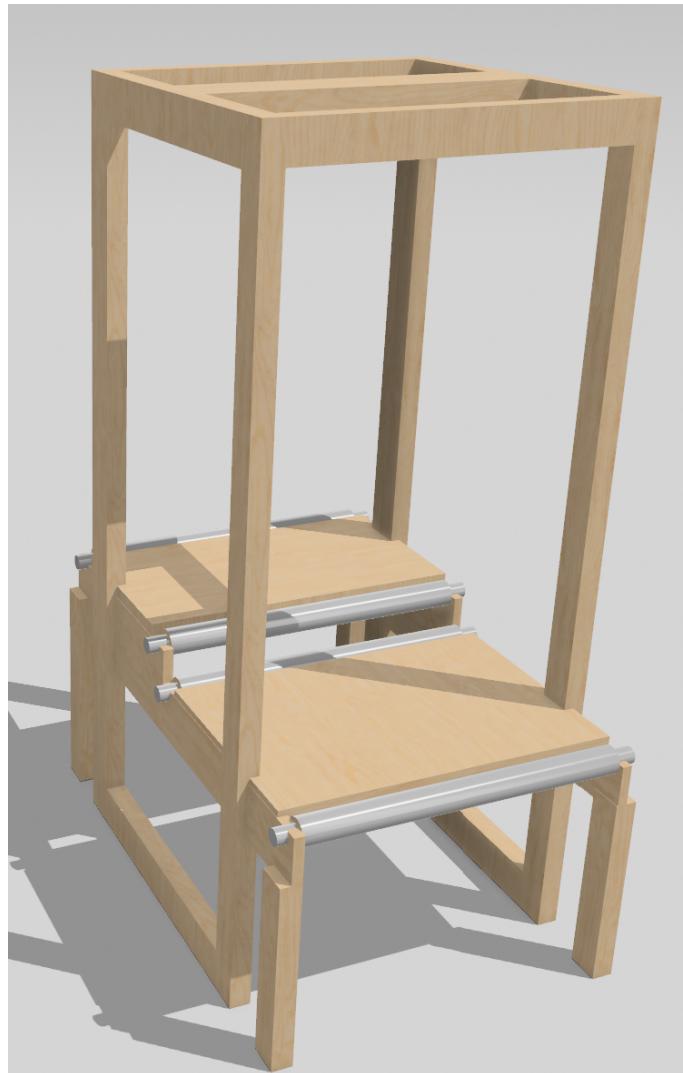


Fig. 4.4 Initial 3D Model of the Prototype



### 787    4.3.3 Prototype 3D Model

788    Figure 4.4 shows the first 3D model of the initial physical prototype developed for the  
789    sorting and grading system. This model shows the skeleton of the system and where  
790    the conveyor system is going to be placed strategically in order to flip the mango for  
791    image acquisition. It is useful for where the hardware components would be arranged  
792    and assembled. This 3D model helped the researchers visualize the spacing, alignment,  
793    and where to mount parts before assembling the prototype making sure all electronic and  
794    mechanical components are effectively integrated.

### 795    4.3.4 Hardware Specifications

#### 796    4.3.4.1 Raspberry Pi



Fig. 4.5    Raspberry Pi 4 Model B

797    Figure 4.5 depicts the Raspberry Pi 4 Model B which is the core of the processing unit



798 of the prototype. It was selected due to its small size, low cost, and high computing power  
799 for image processing and machine learning. The image depicts the most critical aspects  
800 of the board, such as the GPIO (General Purpose Input/Output) pins for sensor, actuator,  
801 and relay connections, and the USB and HDMI ports for other device connections. Its  
802 capability to support a full operating system makes it suitable for supporting both the user  
803 interface and the control logic of the mango grading system.

804 **Specifications:**

- 805 • SoC: Broadcom BCM2711
- 806 • CPU: Quad-core ARM Cortex-A72 (64-bit)
- 807 • Clock Speed: 1.5 GHz (base, overclockable)
- 808 • RAM: 8GB LPDDR4-3200 SDRAM
- 809 • Wireless: Dual-band 2.4 GHz / 5 GHz Wi-Fi (802.11ac)
- 810 • Bluetooth: Bluetooth 5.0 (BLE support)
- 811 • Ethernet: Gigabit Ethernet (full throughput)
- 812 • USB: 2 x USB 3.0 ports and 2 x USB 2.0 ports
- 813 • Video Output: 2 x micro-HDMI ports (supports 4K @ 60Hz, dual 4K display  
814 capability)
- 815 • Audio: 3.5mm audio/video composite jack
- 816 • Storage: MicroSD card slot (supports booting via SD card or USB)



- 817     • GPIO: 40-pin GPIO header (backward-compatible with older models)  
818     • Camera/Display: CSI (camera) and DSI (display) ports  
819     • Power Input: USB-C (5V/3A recommended)  
820     • Power Consumption: 3W idle, up to 7.5W under load

821     **4.3.4.2 Raspberry Pi Camera**

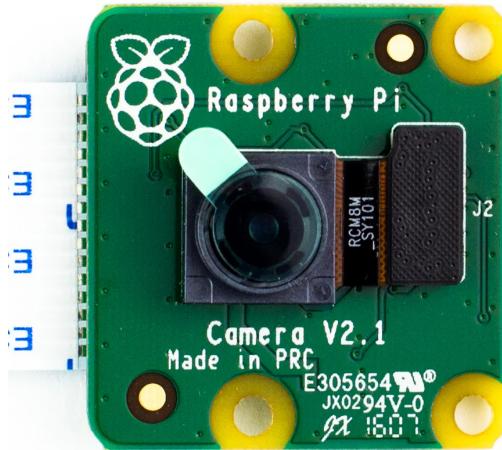


Fig. 4.6 Raspberry Pi Camera Module Version 2

822     The Raspberry Pi Camera Module Version 2 is a high-quality camera module designed  
823     for the Raspberry Pi platform. Likewise, it is capable of capturing still images at 8 megapix-  
824     els, and supports video recording at 1080p @ 30fps, 720p @ 60fps, and 480p @ 90fps.  
825     Moreover, it has a fixed-focus lens with a diagonal field of view of 62.2 degrees, and  
826     an optical format of 1/4 inch. Furthermore, it supports various Python libraries such as  
827     Picamera and OpenCV for image capture and processing. As such, it was selected for its



828 compact size, ease of integration, and ability to capture high-resolution images.

829

830 **Specifications:**

831 • Sensor: Sony IMX219PQ 8-megapixel CMOS sensor.

832 • Still Images Resolution: 8 MP (3280 x 2464 pixels).

833 • Video Resolution: Supports up to 1080p @ 30fps, 720p @ 60fps, and 480p @ 90fps.

834 • Focus: Fixed-focus lens (manual focus adjustment not supported without physical  
835 modification).

836 • Lens Size: 1/4-inch optical format.

837 • Field of View (FoV): Diagonal 62.2 degrees.

838 • Interface: Connected via 15-pin ribbon cable to the Raspberry Pi's CSI (Camera  
839 Serial Interface) port.

840 • APIs/Libraries: Supports Python libraries such as Picamera and OpenCV for image  
841 capture and processing.

842 • Dimensions: 25 mm x 24 mm x 9 mm.

843 **4.3.4.3 DC Motor**

844 The 12 Volt DC Gear Motor is a compact, high-torque, and low-noise motor suitable for a  
845 wide range of applications, including robotics, automation, and industrial control systems.  
846 It features a spur gear design, which provides a high reduction ratio for increased torque  
847 output. The motor is designed for continuous operation and has a low power consumption



Fig. 4.7 12 Volt DC Gear Motor

under standard load conditions. Likewise, it is also capable of withstanding high temperatures and has a high reliability. This motor was selected for its high torque output, low power consumption, and compact size, making it ideal for the conveyor system.

**Specifications:**

- Gearbox Type: Spur gear design
- Operating Voltage: 12V (operational range: 6-12V)
- No-load Current Consumption: 0.8A
- Rated Current Draw: 3A (under standard load)
- No-load Speed: 282 RPM (maximum)
- Operating Speed: 248 RPM (under rated load)



- 859     • Torque Output: 18 kg-cm (rated)  
860     • Stall Torque: 60 kg-cm (maximum)  
861     • Power Rating: 50W (maximum)  
862     • Unit Weight: 350 grams

863     **4.3.4.4 MicroSD Card**



Fig. 4.8 SanDisk Ultra MicroSD Card

864     The SanDisk Ultra MicroSD Card is a compact, high-capacity, and secure digital  
865     memory card that is suitable for a wide range of applications, including digital cameras,  
866     smartphones, and tablets. It features a high-speed data transfer rate, making it ideal for  
867     storing large files such as images and videos. This card was selected for its high capacity, se-  
868     cure data protection, and ease of use, making it ideal for the storage system for the prototype.  
869

870     **Specifications:**



- 871     • Capacity: 256GB  
872     • Type: MicroSDXC (Secure Digital eXtended Capacity)  
873     • Form Factor: MicroSD (11mm x 15mm x 1mm)  
874     • File System: Pre-formatted exFAT

875     **4.3.4.5 LED Lights**



Fig. 4.9 LED Light Strip

876     For the Light Emitting Diode (LED), they were used to provide consistent lighting for  
877     image capture, ensuring accurate color representation and feature extraction. The LED  
878     lights were selected for their energy efficiency, long lifespan, and ability to produce a  
879     uniform light output.

880

881     **Specifications:**



- 882 • Power Input: 5V DC (USB-powered, compatible with laptops, power banks, or USB  
883 adapters).
- 884 • Waterproof Design: Suitable for indoor/outdoor use.
- 885 • LED Type: SMD 2835 (surface-mount diodes for high brightness and efficiency).
- 886 • Color Type: White (cool white)
- 887 • Length: 1m
- 888 • Beam Angle: 120°
- 889 • Operating Temperature: -25°C to 60°C.
- 890 • Storage Temperature: -40°C to 80°C.

891 **4.3.4.6 Power Supply**

892 The bench power supply is a versatile and adjustable power source used to provide stable  
893 voltage and current for various electronic projects. It is designed for testing applications,  
894 allowing users to set specific voltage and current levels. This power supply was selected  
895 for its versatility, ease of use, and ability to provide accurate voltage and current control for  
896 the prototype.

898 **Specifications:**

- 899 • Type: SMPS (Switch-Mode Power Supply)
- 900 • Input: 110V AC, 50/60Hz (U.S. Standard)



Fig. 4.10 Bench Power Supply

- 901 • Output Range: 0-30V DC / 0-5A DC
- 902 • Voltage Precision:  $\pm 0.010\text{V}$  (10 mV) resolution
- 903 • Current Precision:  $\pm 0.001\text{A}$  (1 mA) resolution
- 904 • Power Precision:  $\pm 0.1\text{W}$  resolution
- 905 • Weight: 5 lbs (2.27 kg)
- 906 • Dimensions: 11.1" x 4.92" x 6.14" (28.2 cm x 12.5 cm x 15.6 cm)
- 907 • Maximum Power: 195W
- 908 • Power Source: AC input only



Fig. 4.11 4 Channel Relay Module

#### 4.3.4.7 4 Channel Relay Module

The 4 Channel Relay Module is a compact and versatile relay board that allows for the control of multiple devices using a single microcontroller. This module was selected for its compact size, ease of use, and ability to control multiple devices simultaneously. It is designed to be used with microcontrollers such as Arduino and Raspberry Pi, allowing for easy integration into the prototype.

#### Specifications:

- Operating Voltage: 5V DC (compatible with Arduino, Raspberry Pi, and other microcontrollers).
- Number of Relays: 4 independent channels.
- Relay Type: Electromechanical (mechanical switching).



- 921     • Max AC Load: 10A @ 250V AC (resistive).
- 922     • Max DC Load: 10A @ 30V DC (resistive).
- 923     • Contact Type: SPDT (Single Pole Double Throw) - NO (Normally Open), NC  
924                 (Normally Closed), COM (Common).
- 925     • Dimensions: 50mm x 70mm x 20mm
- 926     • Weight: 50-80 grams.
- 927     • Status LEDs: Individual LEDs for each relay (indicates ON/OFF state).
- 928     • Input Pins: 4 digital control pins (one per relay).
- 929     • Output Terminals: Screw terminals for connecting loads (NO/NC/COM).

## 930     **4.4 Software Considerations**

931     The software stack includes Python for programming PyTorch for machine learning and  
932     OpenCV for image processing. These tools are selected for their robustness, ease of use,  
933     and extensive community support, ensuring efficient system development.

### 934     **4.4.1 PyTorch**

935     PyTorch is an open-source deep-learning framework used in this project for implementing  
936     and running the convolutional neural networks responsible for classifying mango ripeness  
937     and detecting bruises. Its dynamic computational graph and GPU acceleration support  
938     made it an ideal choice for real-time image classification. Its simplicity and flexibility also



939 allowed for easy integration with the Raspberry Pi which is important as it is the main  
940 processing unit for the system.

941 **4.4.2 OpenCV**

942 Open Source Computer Vision Library or OpenCV is utilized in the system for all image  
943 processing tasks, particularly in preprocessing steps such as background subtraction, thresh-  
944 olding, edge detection, and contour analysis. These operations are essential for calculating  
945 the real-world dimensions of the mango. OpenCV was utilized primarily because of its  
946 diverse set of functions, performance optimization, and ease of use making it a core tool  
947 for enabling accurate and fast computer vision processing within the prototype.

948 **4.4.3 CustomTkinter**

949 CustomTkinter is a modern alternative to the standard Tkinter library, and is used to  
950 build the graphical user interface (GUI) of the system. It provides a more polished and  
951 customizable visual appearance while retaining the simplicity of Tkinter. With features  
952 such as styled buttons, frames, and labels, CustomTkinter allowed for the creation of  
953 a user-friendly interface that supports real-time display of classification results, priority  
954 scoring inputs, and system status updates.

955 **4.5 Security and Reliability Considerations**

956 Potential vulnerabilities, such as data corruption during image capture, are addressed  
957 through redundancy and error-checking mechanisms. Reliability is ensured by implement-  
958 ing fault-tolerant designs and rigorous testing protocols.



## 959    **4.6 Scalability and Efficiency Considerations**

960    The system is designed to handle large volumes of mangoes by optimizing the machine  
961    learning model and using parallel processing techniques. Efficiency is improved through  
962    techniques like model quantization and hardware acceleration.

## 963    **4.7 User Interface**

964    A User Interface (UI) is designed to display grading results, system status. Wireframes  
965    illustrate the layout, ensuring usability and accessibility for operators. Likewise, a Graphical  
966    User Interface (GUI) is also used to allow users to customize the system's grading priorities.

## 967    **4.8 Constraints and Limitations**

968    Challenges include variations in mango appearance due to lighting and environmental  
969    factors. Trade-offs are made between model complexity and real-time performance to  
970    balance accuracy and speed.

## 971    **4.9 Technical Standards**

972    The system adheres to industry standards for image processing and machine learning,  
973    ensuring compatibility and interoperability with other systems.



## 4.10 Prototyping and Simulation

Prototypes are developed using tools like MATLAB and Simulink to simulate the system's performance. These simulations help identify design flaws and optimize the system before deployment.,

## 4.11 Design Validation

The design is validated through testing, including unit testing of individual modules and integration testing of the entire system. Peer reviews and iterative improvements ensure the system meets the desired performance metrics.

## 4.12 Summary

This chapter outlined the key design considerations, including system architecture, hardware and software choices, and validation methods. These decisions are critical for developing a reliable and efficient mango sorting and grading system.



De La Salle University

986

## Chapter 5

987

# METHODOLOGY



TABLE 5.1 SUMMARY OF METHODS FOR REACHING THE OBJECTIVES

Objectives	Methods	Locations
GO: To develop a user-priority-based grading and sorting system for Carabao mangoes, using machine learning and computer vision techniques to assess ripeness, size, and bruises.	<ol style="list-style-type: none"> <li>1. Hardware design: Build an image acquisition system with a conveyor belt, LED lights, and Raspberry Pi Camera</li> <li>2. Software design: Coded a Raspberry Pi application to grade and sort the Carabao mangoes</li> </ol>	Sec. 5.2 on p. 55
SO1: To make an image acquisition system with a conveyor belt for automatic sorting and grading mangoes.	<ol style="list-style-type: none"> <li>1. Hardware implementation: Design and build an image acquisition system prototype</li> </ol>	Sec. 5.3 on p. 55
SO2: To get the precision, recall, F1 score, confusion matrix, and train and test accuracy metrics for classifying the ripeness and bruises with an accuracy score of at least 90%.	<ol style="list-style-type: none"> <li>1. Performance testing: Train and test the machine learning algorithm for classifying bruises and ripeness</li> <li>2. Data collection: Gather our own Carabao mango dataset together with an online dataset</li> </ol>	Sec. 5.5 on p. 57

*Continued on next page*



*Continued from previous page*

Objectives	Methods	Locations
SO3: To create a microcontroller-based system to operate the image acquisition system, control the conveyor belt, and process the mango images through machine learning.	<ol style="list-style-type: none"> <li>1. Algorithm development: To develop a code for the image acquisition system</li> <li>2. Hardware design: To design a schematic for the microcontroller based system</li> </ol>	Sec. 5.3 on p. 55
SO4: To grade mangoes based on user priorities for size, ripeness, and bruises.	<ol style="list-style-type: none"> <li>1. Formula development: Formulated an equation based on the inputted user priority and the predicted mango classification</li> </ol>	Sec. 5.7 on p. 61
SO5: To classify mango ripeness based on image data using machine learning algorithms such as kNN, k-mean, and Naïve Bayes.	<ol style="list-style-type: none"> <li>1. Performance testing: Train and test the machine learning algorithm for classifying bruises</li> </ol>	Sec. 5.6.3 on p. 60
SO6: To classify mango size based on image data by getting its length and width using OpenCV, geometry, and image processing techniques.	<ol style="list-style-type: none"> <li>1. Performance testing: Train and test the machine learning algorithm for classifying ripeness</li> </ol>	Sec. 5.6.2 on p. 60
SO7: To classify mango bruises based on image data by employing machine learning algorithms.	<ol style="list-style-type: none"> <li>1. Accuracy testing: Get the percent accuracy testing for getting the length and width of the Carabao mango</li> </ol>	Sec. 5.6.4 on p. 61



## 988      **5.1 Introduction**

989      The methodology for this research outlines the development of the Carabao Mango sorter  
990      using machine learning and computer vision. The sorting system uses a conveyor belt  
991      system which delivers the mangoes into the image acquisition system. This system captures  
992      the image of the mangoes which will then be going through the various stages of image  
993      processing and classification into grades which will depend on the priority of the user.  
994      This methodology ensures that the grading of the mangoes will be accurate while being  
995      non-destructive.

## 996      **5.2 Research Approach**

997      This study applies the experimental approach for research in order to develop and properly  
998      test the proposed system. The experimental approach of the methodology will allow the  
999      researchers to fine-tune the parameters and other factors in the classification of mangoes in  
1000     order to get optimal results with high accuracy scores while maintaining the quality of the  
1001     mangoes. This approach will also allow for real-time data processing and classification  
1002     which will improve the previous static grading systems.

## 1003     **5.3 Hardware Design**

1004     The prototype consists of hardware and software components for automated mango sorting  
1005     and grading purposes. The hardware includes the conveyor belt system used to transfer  
1006     mangoes from scanning to sorting smoothly. A camera and lighting system are able  
1007     to collect high-resolution images for analysis. The DC motors and stepper motors are



1008 responsible for driving the conveyor belt and sorting actuators. The entire system is  
1009 controlled by a microcontroller (Raspberry Pi 4b), coordinating actions of all components.  
1010 Sorting actuators then direct mangoes into selected bins based on their classification to  
1011 make sorting efficient.

## 1012 **5.4 Software Design**

1013 For the programming language used for the prototype and training and testing the CNN  
1014 model, Python was used for training and testing the CNN model and it was also used in the  
1015 microcontroller to run the application containing the UI and CNN model. PyTorch was the  
1016 main library used in using the EfficientNet model that is used in classifying the ripeness  
1017 and bruises of the mango. Likewise, tkinter is the used library when designing the UI in  
1018 Python.

1019 Furthermore, the rest of the software components are of utmost importance to mango  
1020 classification. Image processing algorithms in OpenCV and CNN models extract features  
1021 such as color, size, and bruises that are known to determine quality parameters of mangoes.  
1022 Mangoes are classified based on ripeness and defects by using machine learning algorithms,  
1023 which further enhances accuracy using deep learning techniques. A user interface (UI) is  
1024 designed for users to control and observe the system in real time. Finally, the interface  
1025 programming of the microcontroller provides the necessary synchronization between  
1026 sensors, actuators, and motors throughout the sorting operation scenario.



## 1027 **5.5 Data Collection Methods**

1028 The system acquires high-resolution images of mangoes under pre-specified lighting conditions through systematic acquisition. Apart from that, this corpus of data is based on the real-time images acquired from the camera system, where classification operations are carried out based on real-time data. Pre-processing image operations such as flipping, rotating, resizing, normalization, and Gaussian blur are also carried out in order to enhance image clarity and feature detection. Then, the feature extraction process is carried out, where the intensity of color, shape, and texture are analyzed for the detection of characteristic features in terms of the mango. All these aspects lead to the creation of a reliable dataset for the machine learning algorithm that will allow the system to classify and grade mangoes more accurately.

## 1038 **5.6 Testing and Evaluation Methods**

1039 In a bid to ensure the mango sorting and grading system is accurate and reliable, there is intensive testing conducted at different levels. Unit testing is initially conducted on each component separately, for instance, the conveyor belt, sensors, and cameras, to ensure that each of the components works as expected when operating separately. After component testing on an individual basis, integration testing is conducted to ensure communication between hardware and software is correct to ensure the image processing system, motors, and sorting actuators work in concert as required. System testing is conducted to conduct overall system performance testing in real-world conditions to ensure mangoes are accurately and efficiently sorted and graded.



## 1048 5.6.1 Classification Report

### 1049 5.6.1.1 Confusion Matrix

	Predicted Positive	Predicted Negative
Actual Positive	TP	FN
Actual Negative	FP	TN

TABLE 5.2 CONFUSION MATRIX EXAMPLE

1050 A confusion matrix is a table that visualizes the performance of a classification model.

1051 For a binary classification problem, it has four components:

- 1053 • True Positives (TP): Cases correctly predicted as positive
- 1054 • True Negatives (TN): Cases correctly predicted as negative
- 1055 • False Positives (FP): Cases incorrectly predicted as positive. (Type I error)
- 1056 • False Negatives (FN): Cases incorrectly predicted as negative (Type II error)

### 1057 5.6.1.2 Precision

$$\text{Precision} = \frac{TP}{TP + FP} \quad (5.1)$$

1058 Precision measures how many of the predicted positives are actually positive. It answers  
 1059 the question: "When the model predicts the positive class, how often is it correct?" High  
 1060 precision means low false positives.



1061     **5.6.1.3 Recall**

$$\text{Recall} = \frac{TP}{TP + FN} \quad (5.2)$$

1062     Recall, which is also called sensitivity, measures how many of the actual positives were  
 1063     correctly identified. It answers the question: "Of all the actual positive cases, how many  
 1064     did the model catch?" High recall means low false negatives.

1065     **5.6.1.4 F1 Score**

$$F_1 = 2 \times \frac{\text{Precision} \times \text{Recall}}{\text{Precision} + \text{Recall}} \quad (5.3)$$

1066     The F1 score is the harmonic mean of precision and recall. It provides a single metric  
 1067     that balances both concerns. This is particularly useful when you need to find a balance  
 1068     between precision and recall, as optimizing for one often decreases the other.

1069     **5.6.1.5 Accuracy**

$$\text{Accuracy} = \frac{TP + TN}{TP + TN + FP + FN} \quad (5.4)$$

1070     Accuracy measures the proportion of correct predictions (both true positives and true  
 1071     negatives) among the total cases. While intuitive, accuracy can be misleading with imbal-  
 1072     anced datasets.

1073     To test system performance, various measures of performance are used to evaluate.  
 1074     As seen on equation 5.4, accuracy score is used to measure the percentage of correctly  
 1075     classified mangoes to ensure the system maintains high precision levels. Precision as seen  
 1076     on equation 5.1 and recall as seen on equation 5.2 are used to measure consistency of



1077 classification to determine if the system classifies different ripeness levels and defects  
1078 correctly. Furthermore, the F1 score formula as seen on equation 5.3 is used to evaluate the  
1079 performance of the model's classification.

1080 A confusion matrix is used to measure correct and incorrect classification to ensure the  
1081 machine learning model is optimized and that minimum errors are achieved. Throughput  
1082 analysis is also used to determine the rate and efficiency of sorting to ensure that the  
1083 system maintains high capacity without bottlenecks to sort mangoes. Using these methods  
1084 of testing, the system is constantly optimized to ensure high-quality and reliable mango  
1085 classification.

### 1086 **5.6.2 Ripeness Training and Testing**

1087 For the testing of the ripeness classification, the Carabao mangoes are classified into three  
1088 ripeness stages which are Green, green yellow, and yellow. Likewise, The green would  
1089 represent the ripe mangoes while the green yellow would represent the semi ripe while the  
1090 yellow would represent the ripe mangoes. As reference, Figure 5.2 shows the different  
1091 ripeness stages for Carabao/Pico mangoes.

### 1092 **5.6.3 Bruises Training and Testing**

1093 For the testing of the bruise classification of the Carabao mangoes, it would classified into  
1094 two categories which are bruised and not bruised. To define what bruise and not bruise  
1095 mangoes looked like Figure 5.2 is used as reference to categorize which mangoes are  
1096 bruised and not bruised.



## Annex A

## Stages of ripeness of 'carabao' and 'pico' mango fruits

Stage of ripeness	Peel color	Flesh color
Green	Completely light green	Yellowish white or light yellow green
Breaker	Traces of yellow	Middle area and fruit outline yellowish; other areas, white to yellowish white
Turning	More green than yellow	More yellow than white
Semi-ripe	More yellow than green	Yellow for 'carabao'; yellow orange for 'pico'
Ripe	80-100% yellow ('carabao') or yellow orange ('pico')	Middle area yellow for 'carabao'; yellow orange for 'pico'
Overripe	Yellow for 'carabao'; yellow orange for 'pico'	100% yellow for 'carabao' and yellow orange for 'pico'

Fig. 5.1 Carabao Mango Ripeness Stages

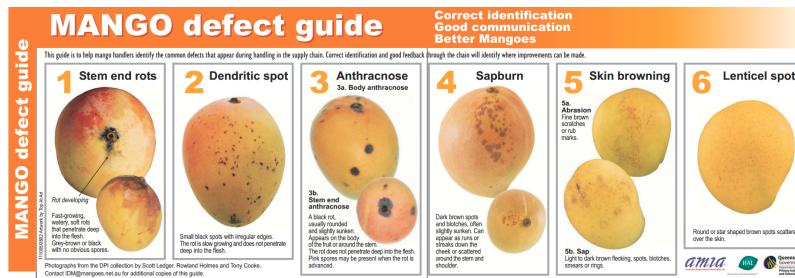


Fig. 5.2 Different Kinds of Mango Defects

1097

**5.6.4 Size Determination**

1098

**5.7 Formula for User Priority**

1099

**5.8 Ethical Considerations**

1100

Ethical considerations ensure that the system is operated safely and responsibly. Data privacy is ensured by securely storing and anonymizing extracted images and classification

1101



1102 data so that unauthorized access becomes impossible. The system is also eco-friendly  
1103 through non-destructive testing, saving mangoes while also ensuring that they are of good  
1104 quality. Safety in operations is also ensured by protecting moving parts to prevent mechan-  
1105 ical harm and incorporating fail-safes to securely stop operation in case of malfunction.  
1106 Addressing these concerns, the system is not only accurate and efficient but also secure,  
1107 eco-friendly, and safe for operators, thus a sustainable solution to automated mango sorting  
1108 and grading.

## 1109 **5.9 Summary**

1110 This chapter explained how to create an automatic Carabao mango sorter and grader using  
1111 machine learning and computer vision. The system integrates hardware and software  
1112 resources, including a conveyor belt, cameras, sensors, and actuators, to offer accurate,  
1113 real-time sorting by ripeness, size, and bruises. Various testing and evaluation processes  
1114 ensure its performance to offer reliability. Ethical issues are data privacy, environmental  
1115 sustainability, and operation safety. With enhanced efficiency, reduced human error, and  
1116 enhanced quality, this system provides an affordable, scalable, and non-destructive solution  
1117 to post-harvest mango classification in agricultural industries.



1118

## Chapter 6

1119

# RESULTS AND DISCUSSIONS



TABLE 6.1 SUMMARY OF METHODS FOR ACHIEVING THE OBJECTIVES

Objectives	Methods	Locations
GO: To develop a user-priority-based grading and sorting system for Carabao mangoes, using machine learning and computer vision techniques to assess ripeness, size, and bruises.	<p>Expected Results:</p> <ul style="list-style-type: none"> <li>1. Successfully developed a user-priority-based grading and sorting system using machine learning and computer vision which can assess the mangoes' ripeness, size and bruises.</li> </ul> <p>Actual Results:</p> <ul style="list-style-type: none"> <li>1. More work needs to be done to fine tune the software components to achieve higher accuracy such as changing hyperparameters or using a newer version of EfficientNet</li> <li>2. More work needs to be done to make the hardware component more robust such as by fixing the camera and LED lights in place</li> </ul>	Sec. 6.6 on p. 75
SO1: To make an image acquisition system with a conveyor belt for automatic sorting and grading mangoes.	<p>Expected Results:</p> <ul style="list-style-type: none"> <li>1. Successfully integrated a conveyor belt with the image acquisition in order to achieve efficient flow of automated sorting and grading of the mangoes.</li> <li>2. Successfully integrated LED strips to provide optimal lighting for image capturing of the mangoes.</li> <li>3. Successfully fixed the hardware components in place</li> </ul> <p>Actual Results:</p> <ul style="list-style-type: none"> <li>1. Successfully integrated a conveyor belt with the image acquisition in order to achieve efficient flow of automated sorting and grading of the mangoes.</li> <li>2. Successfully integrated LED strips to provide optimal lighting for image capturing of the mangoes.</li> <li>3. Need to fix the hardware components in place</li> </ul>	Sec. 6.4 on p. 71

Continued on next page

## 6. Results and Discussions



# De La Salle University

*Continued from previous page*

Objectives	Methods	Locations
<p>SO2: To get the precision, recall, F1 score, confusion matrix, and train and test accuracy metrics for classifying the ripeness and bruises with an accuracy score of at least 90%.</p>	<p>Expected Results:</p> <ul style="list-style-type: none"> <li>1. Successfully achieved at least 90 percent accuracy, precision, recall, f1 score for ripeness classification of Carabao mangoes</li> <li>2. Successfully achieved at least 90 percent accuracy, precision, recall, f1 score for bruises classification of Carabao mangoes</li> </ul> <p>Actual Results:</p> <ul style="list-style-type: none"> <li>1. Successfully achieved at least 93% accuracy for ripeness classification of Carabao mangoes</li> <li>2. Successfully achieved at least 73% accuracy for bruise classification of Carabao Mangoes</li> </ul>	<p>Sec. 6.1 on p. 68</p>
<p>SO3: To create a microcontroller-based system to operate the image acquisition system, control the conveyor belt, and process the mango images through machine learning.</p>	<p>Expected Results:</p> <ul style="list-style-type: none"> <li>1. Successfully made a conveyor belt system to move the mangoes through the image acquisition system to the sorting system</li> <li>2. Successfully mounted the image acquisition system on the prototype</li> <li>3. Successfully made the frame for the conveyor belt and image acquisition system to sit on</li> </ul> <p>Actual Results:</p> <ul style="list-style-type: none"> <li>1. Successfully made a conveyor belt system to move the mangoes through the image acquisition system to the sorting system</li> <li>2. Temporarily mounted the image acquisition system on the prototype</li> <li>3. Successfully made the frame for the conveyor belt and image acquisition system to sit on</li> </ul>	<p>Sec. 6.4 on p. 71</p>

*Continued on next page*

## 6. Results and Discussions



# De La Salle University

*Continued from previous page*

<b>Objectives</b>	<b>Methods</b>	<b>Locations</b>
SO4: To grade mangoes based on user priorities for size, ripeness, and bruises.	<p>Expected Results:</p> <ul style="list-style-type: none"> <li>1. Successfully grade mangoes based on the user priorities on the physical characteristics of the mango</li> <li>2. Successfully verified with qualified individual the results</li> <li>3. Successfully utilize the weighted equation to evaluate mango grade based on user priorities</li> </ul> <p>Actual Results:</p> <ul style="list-style-type: none"> <li>1. Successfully grade mangoes based on the user priorities on the physical characteristics of the mango</li> <li>2. Successfully utilize the weighted equation to evaluate mango grade based on user priorities</li> <li>3. Need to look for a qualified person to evaluate the graded mango for ground truth</li> </ul>	Sec. 6.3 on p. 71

*Continued on next page*

## 6. Results and Discussions



# De La Salle University

*Continued from previous page*

Objectives	Methods	Locations
<p>SO5: To classify mango ripeness based on image data using machine learning algorithms such as kNN, k-mean, and Naïve Bayes.</p>	<p>Expected Results:</p> <ul style="list-style-type: none"> <li>1. Achieve at least 90% accuracy on performance metrics</li> <li>2. Obtain performance metrics for kNN, k-mean, and Naive Bayes methods for comparison and show the superior performance of using CNN</li> <li>3. Successfully fine tuned the CNN model to achieve the highest accuracy possible, choosing the best performing among EfficientNet b0-b7, and testing other CNN hyperparameters</li> </ul> <p>Actual Results:</p> <ul style="list-style-type: none"> <li>1. Successfully trained a CNN model using EfficientNet-b0 and Adam Optimizer to detect ripeness based on color</li> <li>2. Successfully achieved at least 90 percent accuracy, precision, recall, f1 score for ripeness classification of Carabao mangoes</li> </ul>	<p>Sec. 6.1.1 on p. 68</p>
<p>SO6: To classify mango size based on image data by getting its length and width using OpenCV, geometry, and image processing techniques.</p>	<p>Expected Results:</p> <ul style="list-style-type: none"> <li>1. Successfully classified mango size using computer vision techniques</li> <li>2. Successfully tuned to have an accurate size with an 80 percent accuracy rating</li> </ul> <p>Actual Results:</p> <ul style="list-style-type: none"> <li>1. Successfully classified mango size using computer vision techniques</li> <li>2. Calculation of mango size is somewhat inaccurate and needs more fine tuning</li> </ul>	<p>Sec. 6.2 on p. 71</p>

*Continued on next page*



*Continued from previous page*

Objectives	Methods	Locations
SO7: To classify mango bruises based on image data by employing machine learning algorithms.	<p>Expected Results:</p> <ul style="list-style-type: none"> <li>1. Achieve at least 90% accuracy on performance metrics</li> <li>2. Successfully fine tuned the CNN model to achieve the highest accuracy possible, choosing the best performing among EfficientNet b0-b7, and testing other CNN hyperparameters</li> </ul> <p>Actual Results:</p> <ul style="list-style-type: none"> <li>1. Successfully trained a CNN model using EfficientNet-b0 and Adam Optimizer to bruises</li> <li>2. Successfully achieved at least 90 percent accuracy, precision, recall, f1 score for bruise classification of Carabao mangoes</li> </ul>	Sec. 6.1.2 on p. 70

## 1120 6.1 Training and Testing Results of the Model

### 1121 6.1.1 Ripeness Classification Results

1122 Add the F1-Score and etc here

EfficientNet Version	Precision	Recall	F1	Test Accuracy
b0	0.9841	0.9838	0.9838	0.98
b1	0.9876	0.9876	0.9876	0.99
b2	0.9802	0.9801	0.9801	0.98
b3	0.9709	0.968	0.9684	0.97
b4	0.9716	0.9699	0.9699	0.97
b5	0.93	0.93	0.93	0.93

TABLE 6.2 PERFORMANCE METRICS FOR DIFFERENT EFFICIENTNET VERSIONS

## 6. Results and Discussions



**De La Salle University**

	Precision	Recall	F1	Support
Green	0.95	0.94	0.95	135
Green Yellow	0.77	0.78	0.77	81
Yellow	0.70	0.71	0.71	80
Accuracy			0.83	296
Macro Avg	0.81	0.81	0.81	296
Weighted Avg	0.84	0.83	0.84	296

TABLE 6.3 RIPENESS CLASSIFICATION REPORT USING KNN

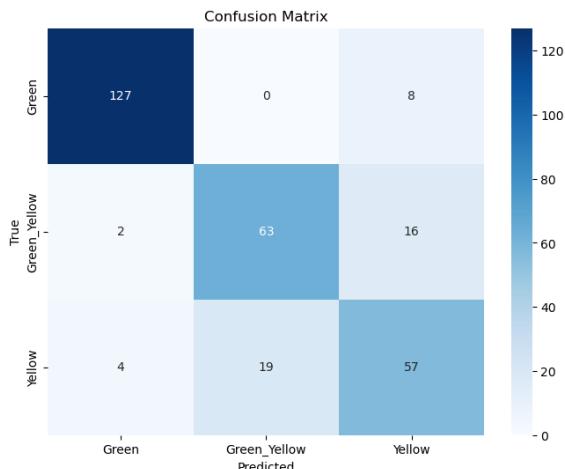


Fig. 6.1 Ripeness Confusion Matrix using kNN

	Precision	Recall	F1	Support
Green	0.96	0.76	0.85	135
Yellow Green	0.75	0.30	0.42	81
Yellow	0.45	0.88	0.59	80
Accuracy			0.67	296
Macro Avg	0.72	0.64	0.62	296
Weighted Avg	0.76	0.67	0.66	296

TABLE 6.4 RIPENESS CLASSIFICATION REPORT USING NAIVE BAYES

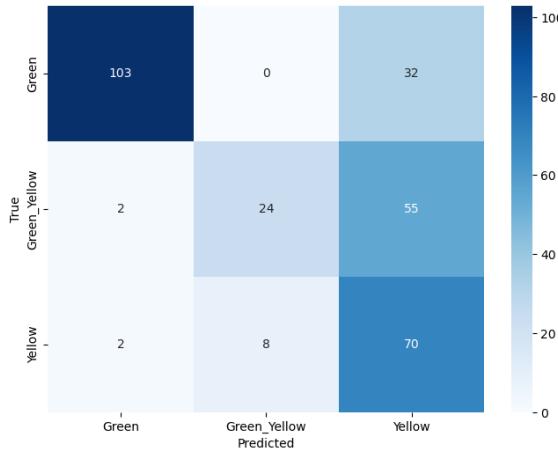


Fig. 6.2 Ripeness Confusion Matrix using Naive Bayes

1123

### 6.1.2 Bruises Classification Results

	Precision	Recall	F1	Support
Bruised	0.97	0.90	0.93	1515
Not Bruised	0.88	0.97	0.92	1146
Accuracy			0.93	2661
Macro Avg	0.93	0.93	0.93	2661
Weighted Avg	0.93	0.93	0.93	2661

TABLE 6.5 BRUISES CLASSIFICATION REPORT USING CNN

Metrics	Results
Precision	0.9318
Recall	0.9275
F1 Score	0.9278

TABLE 6.6 SUMMARIZED CLASSIFICATION REPORT USING CNN

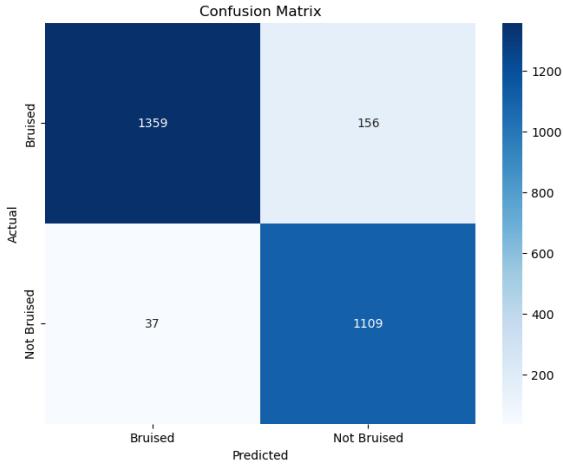


Fig. 6.3 Bruises Confusion Matrix using CNN

## 6.2 Size Determination Results

## 6.3 User Priority Formula

$B(P)$  and  $R(P)$  and  $S(P)$  are the User Priority-Based Grading for bruises, ripeness, and size of the Carabao mango. Furthermore,  $b(p)$  and  $r(p)$  and  $s(p)$  are the machine learning's predictions for bruises, ripeness, and size of the Carabao mango. The formula for the user priority is given by:

$$\text{User Priority} = b(P)B(P) + r(P)R(P) + s(P)S(P) \quad (6.1)$$

## 6.4 Physical Prototype

Add pictures of the hardware prototype here with description

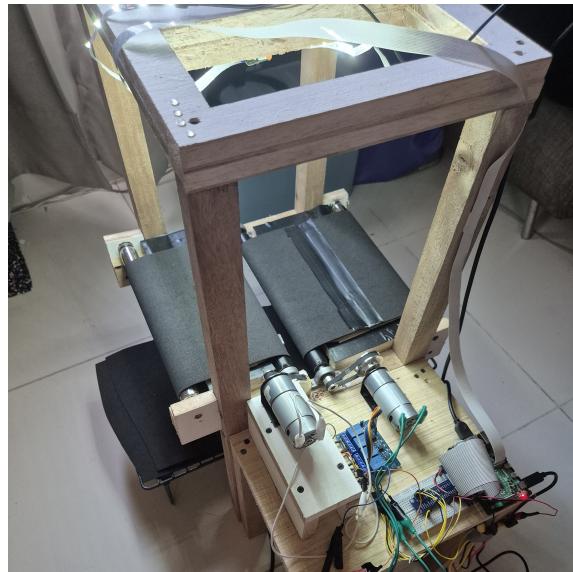


Fig. 6.4 Prototype Top View



Fig. 6.5 Entrance Conveyor Belt View



Fig. 6.6 Side Conveyor Belt View



Fig. 6.7 Prototype Main Hardware



Fig. 6.8 DC Motor and Pulley

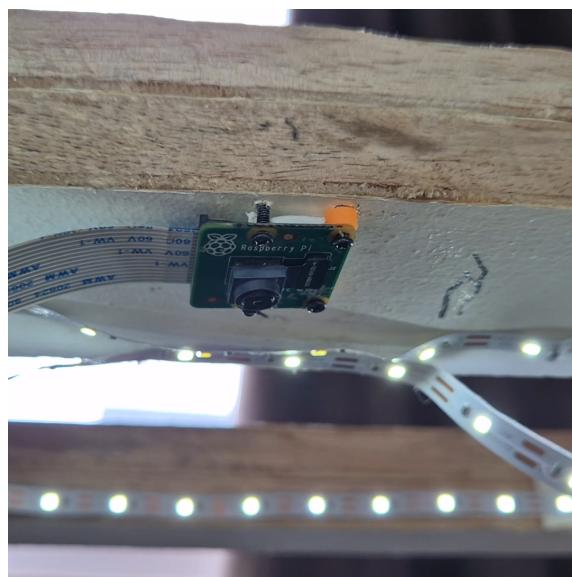


Fig. 6.9 LED Lights and Camera Module



## 1132 6.5 Software Application

1133 Show the raspberry pi app UI and demonstrate it here

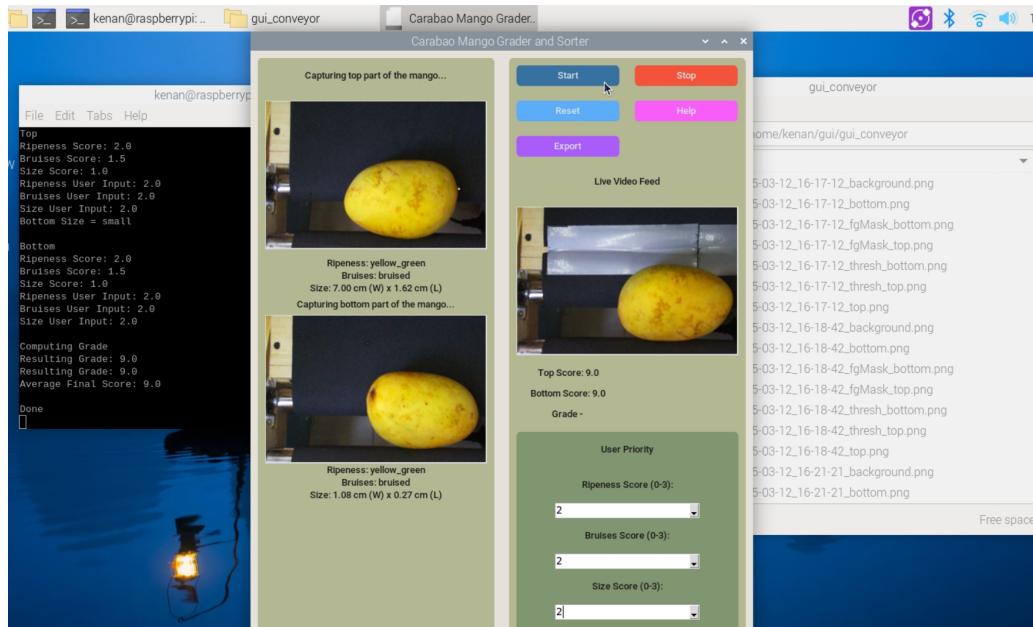


Fig. 6.10 Raspberry Pi App UI Version 1

## 1134 6.6 Summary

1135 Provide the gist of this chapter such that it reflects the contents and the message.

## 6. Results and Discussions

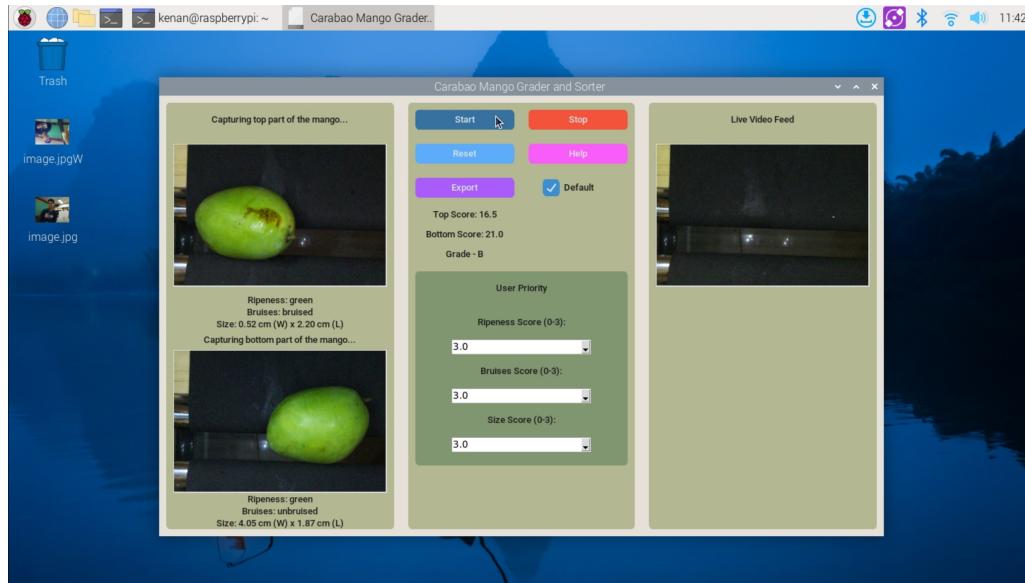


Fig. 6.11 Raspberry Pi App UI Version 2

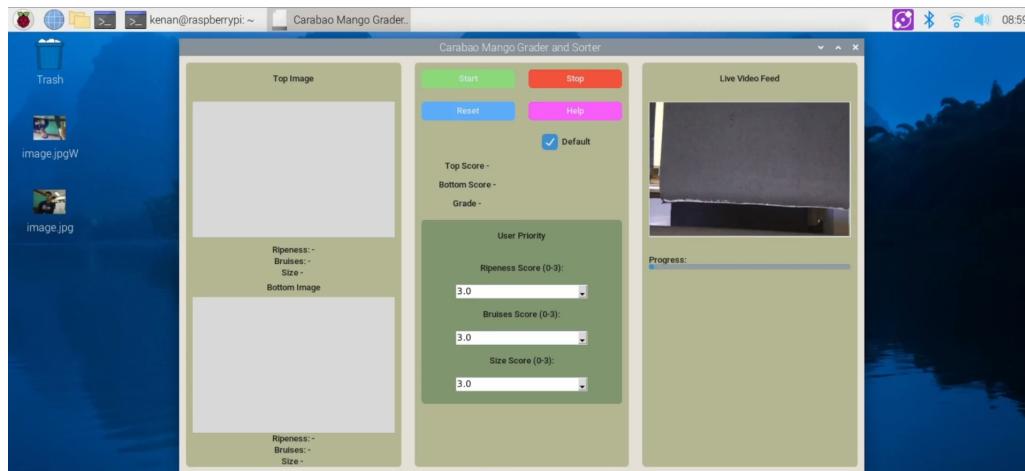


Fig. 6.12 Raspberry Pi App UI Version 3



1136 **Chapter 7**

1137 **CONCLUSIONS, RECOMMENDATIONS, AND**  
1138 **FUTURE DIRECTIVES**



## 1139    7.1 Concluding Remarks

1140    In this Thesis, the prototype is successful in grading and sorting Carabao mangoes based  
1141    on the user priority and machine learning algorithm. More specifically, the prototype  
1142    is successful in automatically classifying Carabao mangoes based on ripeness (Green,  
1143    Green Yellow, and Yellow), size (Large, Medium, Small), and bruises (bruised and not  
1144    bruised)

## 1145    7.2 Contributions

1146    The contributions of each group member are as follows:

- 1147    • BANAL Kenan A.: Scrum Master (Project manager in charge of the hardware and  
1148    software integration)
- 1149    • BAUTISTA Francis Robert Miguel F.: Front End Engineer (UI/UX Designer in  
1150    charge of software interface and hardware assistant of the Scrum Master)
- 1151    • HERMOSURA Don Humphrey L. : Back End Engineer (Software Engineer in  
1152    charge of the machine learning algorithm and software assistant of the Scrum Master)
- 1153    • SALAZAR Daniel G.: Product Engineer (Software Engineer in charge of training  
1154    and testing of the machine learning algorithm)

## 1155    7.3 Recommendations

1156    The researchers recommend that the prototype be improved in the optimization of the  
1157    machine learning algorithm and the hardware design. The researchers also recommend that



1158 the prototype be tested in the actual grading and sorting of Carabao mangoes in the market.

## 7.4 Future Prospects

1160 Future researchers may consider the following recommendations for future work:

- 1161 1. User testing of the prototype in the actual grading and sorting of Carabao mangoes  
1162 in the Philippine market.
- 1163 2. Additional of weight measurement to the prototype to improve the grading and  
1164 sorting of Carabao mangoes.
- 1165 3. Integration of a custom PCB to improve the hardware design of the prototype.



1166

## REFERENCES

- 1167 Abbas, Q., Niazi, S., Iqbal, M., and Noureen, M. (2018). Mango Classification Using Texture &  
1168 Shape Features. *IJCSNS International Journal of Computer Science and Network Security*, 18(8).
- 1169 Abu, M., Olympio, N. S., and Darko, J. O. (2021). Determination of Harvest Maturity for Mango  
1170 (&lt;i&gt;Mangifera indica&lt;/i&gt; L.) Fruit by Non-Destructive Criteria. *Agricultural Sciences*,  
1171 12(10):1103–1118.
- 1172 Adam, J. A. P., Dato, K. S., Impelido, M. C. D., Tobias, R. G., and Pilueta, N. U. (2022). Non-  
1173 destructive microcontroller-based carabao mango ripeness grader.
- 1174 Alejandro, A. B., Gonzales, J. P., Yap, J. P. C., and Linsangan, N. B. (2018). Grading and sorting of  
1175 Carabao mangoes using probabilistic neural network. page 020065, Bandung, Indonesia.
- 1176 Amna, M. W. A., Guiqiang, L., and Muhammad Zuhair AKRAM, M. F. (2023). Machine vision-  
1177 based automatic fruit quality detection and grading. *Frontiers of Agricultural Science and*  
1178 *Engineering*, 0(0):0.
- 1179 Britannica (n.d.). Mango history cultivation and facts.
- 1180 Centino, M. F., Castano, M. C. N., and Ebo, J. B. F. (2020). The Current Status of Philippine Mango  
1181 in the Global Value Chain.
- 1182 Chakraborty, S. K., Subeesh, A., Dubey, K., Jat, D., Chandel, N. S., Potdar, R., Rao, N. G., and  
1183 Kumar, D. (2023). Development of an optimally designed real time automatic citrus fruit grading-  
1184 sorting machine leveraging computer vision-based adaptive deep learning model. *Engineering*  
1185 *Applications of Artificial Intelligence*, 120:105826.
- 1186 Co., Z. F. I. (n.d.). What is fruit sorting.
- 1187 D'Adamo, G. (2018). The determinants of export quality in the euro area. *Quarterly Report on the*  
1188 *Euro Area (QREA)*, 17(1):23–31. Publisher: Directorate General Economic and Financial Affairs  
1189 (DG ECFIN), European Commission.
- 1190 DBpedia (n.d.). About: Carabao.
- 1191 Guillergan, G., Sabay, R., Madrigal, D., and Bual, J. (2024). Naive Bayes Classifier in Grading  
1192 Carabao Mangoes. *Technium: Romanian Journal of Applied Sciences and Technology*, 22:14–32.
- 1193 Guillermo, M. C. S., Naciongayo, D. S., and Galela, M. G. C. (2019). Determining ‘Carabao’  
1194 Mango Ripeness Stages Using Three Image Processing Algorithms.
- 1195 Lacap, A., Bayogan, E. R., Secretaria, L., Joyce, D., Ekman, J., and Goldwater, A. (2021). Bruise  
1196 Injury and Its Effect on ‘Carabao’ Mango Fruit Quality. *Philippine Journal of Science*, 150(6B).
- 1197 Patel, K. K., Khan, M. A., Kumar, Y., and Yadav, A. K. (2019). Novel Techniques in Post Harvest  
1198 Management of Mango- An Overview. *South Asian Journal of Food Technology and Environment*,  
1199 05(02):821–835.



# De La Salle University

- 1200 Rizwan Iqbal, H. M. and Hakim, A. (2022). Classification and Grading of Harvested Mangoes  
1201 Using Convolutional Neural Network. *International Journal of Fruit Science*, 22(1):95–109.
- 1202 Samaniego, L. A., De Jesus, L. C. M., Apostol, J. D., Betonio, D. C., Medalla, J. D. B., Peruda Jr,  
1203 S. R., Brucal, S. G. E., and Yong, E. D. (2023). Carabao mango export quality checker using  
1204 matlab image processing. *International Journal of Computing Sciences Research*, 7:2080–2094.
- 1205 Schulze, K., Nagle, M., Spreer, W., Mahayothee, B., and Müller, J. (2015). Development and  
1206 assessment of different modeling approaches for size-mass estimation of mango fruits (*Mangifera*  
1207 *indica* L., cv. ‘Nam Dokmai’). *Computers and Electronics in Agriculture*, 114:269–276.
- 1208 Supekar, A. D. and Wakode, M. (2020). Multi-Parameter Based Mango Grading Using Image  
1209 Processing and Machine Learning Techniques. *INFOCOMP Journal of Computer Science*,  
1210 19(2):175–187. Number: 2.
- 1211 Tomas, M. C., Celino, J. P. L., Escalambre, I. E., and Secreto, B. P. (2022). Detection of Overall  
1212 Fruit Maturity of Local Fruits Using Support Vector Machine through Image Processing. In *2022*  
1213 *12th International Conference on Software Technology and Engineering (ICSTE)*, pages 96–102.
- 1214 Veling, P. S. (2019). Mango Disease Detection by using Image Processing. *International Journal*  
1215 *for Research in Applied Science and Engineering Technology*, 7(4):3717–3726.
- 1216 Zheng, B. and Huang, T. (2021). Mango Grading System Based on Optimized Convolutional Neural  
1217 Network. *Mathematical Problems in Engineering*, 2021:1–11.

1218

Produced: May 7, 2025, 13:18



De La Salle University

1219

## **Appendix A STUDENT RESEARCH ETHICS CLEARANCE**

1220

A. Student Research Ethics Clearance



De La Salle University

1221

RESEARCH ETHICS CLEARANCE FORM <sup>1</sup> For Thesis Proposals	
<b>Names of Student Researcher(s):</b> BANAL, Kenan A. BAUTISTA, Francis Robert Miguel F. HERMOSURA, Don Humphrey L. SALAZAR, Daniel G	
<b>College:</b> GCOE	
<b>Department:</b> ECE	
<b>Course:</b> Computer Engineering	
<b>Expected Duration of the Project:</b> from: January 4 2025 to: January 4 2026	
<b>Ethical considerations</b>  (The <a href="#">Ethics Checklists</a> may be used as guides in determining areas for ethical concern/consideration)	
 <b>To the best of my knowledge, the ethical issues listed above have been addressed in the research.</b>   <b>Name and Signature of Adviser/Mentor:</b> <b>Date:</b> February 5, 2025	
 <b>Noted by:</b>   <b>Name and Signature of the Department Chairperson:</b> <b>Date:</b> February 6, 2025	

<sup>1</sup> The same form can be used for the reports of completed projects. The appropriate heading need only be used.



De La Salle University

1222

## **Appendix B ANSWERS TO QUESTIONS TO THIS THESIS**

1223



## 1224 **B1 How important is the problem to practice?**

1225 A possible answer to this question is the summary of your Significance of the Study, and  
 1226 that portion of the Problem Statement where you describe the ideal scenario for your  
 1227 intended audience.

1228 Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Etiam lobortis facilisis sem.  
 1229 Nullam nec mi et neque pharetra sollicitudin. Praesent imperdiet mi nec ante. Donec  
 1230 ullamcorper, felis non sodales commodo, lectus velit ultrices augue, a dignissim nibh lectus  
 1231 placerat pede. Vivamus nunc nunc, molestie ut, ultricies vel, semper in, velit. Ut porttitor.  
 1232 Praesent in sapien. Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Duis fringilla  
 1233 tristique neque. Sed interdum libero ut metus. Pellentesque placerat. Nam rutrum augue  
 1234 a leo. Morbi sed elit sit amet ante lobortis sollicitudin. Praesent blandit blandit mauris.  
 1235 Praesent lectus tellus, aliquet aliquam, luctus a, egestas a, turpis. Mauris lacinia lorem sit  
 1236 amet ipsum. Nunc quis urna dictum turpis accumsan semper.

## 1237 **B2 How will you know if the solution/s that you will 1238 achieve would be better than existing ones?**

1239 Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Etiam lobortis facilisis sem.  
 1240 Nullam nec mi et neque pharetra sollicitudin. Praesent imperdiet mi nec ante. Donec  
 1241 ullamcorper, felis non sodales commodo, lectus velit ultrices augue, a dignissim nibh lectus  
 1242 placerat pede. Vivamus nunc nunc, molestie ut, ultricies vel, semper in, velit. Ut porttitor.  
 1243 Praesent in sapien. Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Duis fringilla  
 1244 tristique neque. Sed interdum libero ut metus. Pellentesque placerat. Nam rutrum augue  
 1245 a leo. Morbi sed elit sit amet ante lobortis sollicitudin. Praesent blandit blandit mauris.  
 1246 Praesent lectus tellus, aliquet aliquam, luctus a, egestas a, turpis. Mauris lacinia lorem sit  
 1247 amet ipsum. Nunc quis urna dictum turpis accumsan semper.

### 1248 **B2.1 How will you measure the improvement/s?**

1249 Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Etiam lobortis facilisis sem.  
 1250 Nullam nec mi et neque pharetra sollicitudin. Praesent imperdiet mi nec ante. Donec  
 1251 ullamcorper, felis non sodales commodo, lectus velit ultrices augue, a dignissim nibh lectus  
 1252 placerat pede. Vivamus nunc nunc, molestie ut, ultricies vel, semper in, velit. Ut porttitor.  
 1253 Praesent in sapien. Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Duis fringilla  
 1254 tristique neque. Sed interdum libero ut metus. Pellentesque placerat. Nam rutrum augue  
 1255 a leo. Morbi sed elit sit amet ante lobortis sollicitudin. Praesent blandit blandit mauris.



1256 Praesent lectus tellus, aliquet aliquam, luctus a, egestas a, turpis. Mauris lacinia lorem sit  
 1257 amet ipsum. Nunc quis urna dictum turpis accumsan semper.

### **B2.1.1 What is/are your basis/bases for the improvement/s?**

1259 Lorem ipsum dolor sit amet, consectetur adipiscing elit. Etiam lobortis facilisis sem.  
 1260 Nullam nec mi et neque pharetra sollicitudin. Praesent imperdiet mi nec ante. Donec  
 1261 ullamcorper, felis non sodales commodo, lectus velit ultrices augue, a dignissim nibh lectus  
 1262 placerat pede. Vivamus nunc nunc, molestie ut, ultricies vel, semper in, velit. Ut porttitor.  
 1263 Praesent in sapien. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Duis fringilla  
 1264 tristique neque. Sed interdum libero ut metus. Pellentesque placerat. Nam rutrum augue  
 1265 a leo. Morbi sed elit sit amet ante lobortis sollicitudin. Praesent blandit blandit mauris.  
 1266 Praesent lectus tellus, aliquet aliquam, luctus a, egestas a, turpis. Mauris lacinia lorem sit  
 1267 amet ipsum. Nunc quis urna dictum turpis accumsan semper.

### **B2.1.2 Why did you choose that/those basis/bases?**

1269 Lorem ipsum dolor sit amet, consectetur adipiscing elit. Etiam lobortis facilisis sem.  
 1270 Nullam nec mi et neque pharetra sollicitudin. Praesent imperdiet mi nec ante. Donec  
 1271 ullamcorper, felis non sodales commodo, lectus velit ultrices augue, a dignissim nibh lectus  
 1272 placerat pede. Vivamus nunc nunc, molestie ut, ultricies vel, semper in, velit. Ut porttitor.  
 1273 Praesent in sapien. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Duis fringilla  
 1274 tristique neque. Sed interdum libero ut metus. Pellentesque placerat. Nam rutrum augue  
 1275 a leo. Morbi sed elit sit amet ante lobortis sollicitudin. Praesent blandit blandit mauris.  
 1276 Praesent lectus tellus, aliquet aliquam, luctus a, egestas a, turpis. Mauris lacinia lorem sit  
 1277 amet ipsum. Nunc quis urna dictum turpis accumsan semper.

### **B2.1.3 How significant are your measure/s of the improvement/s?**

1279 Lorem ipsum dolor sit amet, consectetur adipiscing elit. Etiam lobortis facilisis sem.  
 1280 Nullam nec mi et neque pharetra sollicitudin. Praesent imperdiet mi nec ante. Donec  
 1281 ullamcorper, felis non sodales commodo, lectus velit ultrices augue, a dignissim nibh lectus  
 1282 placerat pede. Vivamus nunc nunc, molestie ut, ultricies vel, semper in, velit. Ut porttitor.  
 1283 Praesent in sapien. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Duis fringilla  
 1284 tristique neque. Sed interdum libero ut metus. Pellentesque placerat. Nam rutrum augue  
 1285 a leo. Morbi sed elit sit amet ante lobortis sollicitudin. Praesent blandit blandit mauris.  
 1286 Praesent lectus tellus, aliquet aliquam, luctus a, egestas a, turpis. Mauris lacinia lorem sit  
 1287 amet ipsum. Nunc quis urna dictum turpis accumsan semper.



1288 **B3 What is the difference of the solution/s from ex-**

1289 **existing ones?**

1290 Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Etiam lobortis facilisis sem.

1291 Nullam nec mi et neque pharetra sollicitudin. Praesent imperdiet mi nec ante. Donec

1292 ullamcorper, felis non sodales commodo, lectus velit ultrices augue, a dignissim nibh lectus

1293 placerat pede. Vivamus nunc nunc, molestie ut, ultricies vel, semper in, velit. Ut porttitor.

1294 Praesent in sapien. Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Duis fringilla

1295 tristique neque. Sed interdum libero ut metus. Pellentesque placerat. Nam rutrum augue

1296 a leo. Morbi sed elit sit amet ante lobortis sollicitudin. Praesent blandit blandit mauris.

1297 Praesent lectus tellus, aliquet aliquam, luctus a, egestas a, turpis. Mauris lacinia lorem sit

1298 amet ipsum. Nunc quis urna dictum turpis accumsan semper.

1299 **B3.1 How is it different from previous and existing ones?**

1300 Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Etiam lobortis facilisis sem.

1301 Nullam nec mi et neque pharetra sollicitudin. Praesent imperdiet mi nec ante. Donec

1302 ullamcorper, felis non sodales commodo, lectus velit ultrices augue, a dignissim nibh lectus

1303 placerat pede. Vivamus nunc nunc, molestie ut, ultricies vel, semper in, velit. Ut porttitor.

1304 Praesent in sapien. Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Duis fringilla

1305 tristique neque. Sed interdum libero ut metus. Pellentesque placerat. Nam rutrum augue

1306 a leo. Morbi sed elit sit amet ante lobortis sollicitudin. Praesent blandit blandit mauris.

1307 Praesent lectus tellus, aliquet aliquam, luctus a, egestas a, turpis. Mauris lacinia lorem sit

1308 amet ipsum. Nunc quis urna dictum turpis accumsan semper.

1309 **B4 What are the assumptions made (that are behind**

1310 **for your proposed solution to work)?**

1311 Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Etiam lobortis facilisis sem.

1312 Nullam nec mi et neque pharetra sollicitudin. Praesent imperdiet mi nec ante. Donec

1313 ullamcorper, felis non sodales commodo, lectus velit ultrices augue, a dignissim nibh lectus

1314 placerat pede. Vivamus nunc nunc, molestie ut, ultricies vel, semper in, velit. Ut porttitor.

1315 Praesent in sapien. Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Duis fringilla

1316 tristique neque. Sed interdum libero ut metus. Pellentesque placerat. Nam rutrum augue

1317 a leo. Morbi sed elit sit amet ante lobortis sollicitudin. Praesent blandit blandit mauris.

1318 Praesent lectus tellus, aliquet aliquam, luctus a, egestas a, turpis. Mauris lacinia lorem sit

1319 amet ipsum. Nunc quis urna dictum turpis accumsan semper.



1320 **B4.1 Will your proposed solution/s be sensitive to these as-**  
 1321 **sump tions?**

1322 Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Etiam lobortis facilisis sem.  
 1323 Nullam nec mi et neque pharetra sollicitudin. Praesent imperdiet mi nec ante. Donec  
 1324 ullamcorper, felis non sodales commodo, lectus velit ultrices augue, a dignissim nibh lectus  
 1325 placerat pede. Vivamus nunc nunc, molestie ut, ultricies vel, semper in, velit. Ut porttitor.  
 1326 Praesent in sapien. Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Duis fringilla  
 1327 tristique neque. Sed interdum libero ut metus. Pellentesque placerat. Nam rutrum augue  
 1328 a leo. Morbi sed elit sit amet ante lobortis sollicitudin. Praesent blandit blandit mauris.  
 1329 Praesent lectus tellus, aliquet aliquam, luctus a, egestas a, turpis. Mauris lacinia lorem sit  
 1330 amet ipsum. Nunc quis urna dictum turpis accumsan semper.

1331 **B4.2 Can your proposed solution/s be applied to more general**  
 1332 **cases when some assumptions are eliminated? If so, how?**

1333 Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Etiam lobortis facilisis sem.  
 1334 Nullam nec mi et neque pharetra sollicitudin. Praesent imperdiet mi nec ante. Donec  
 1335 ullamcorper, felis non sodales commodo, lectus velit ultrices augue, a dignissim nibh lectus  
 1336 placerat pede. Vivamus nunc nunc, molestie ut, ultricies vel, semper in, velit. Ut porttitor.  
 1337 Praesent in sapien. Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Duis fringilla  
 1338 tristique neque. Sed interdum libero ut metus. Pellentesque placerat. Nam rutrum augue  
 1339 a leo. Morbi sed elit sit amet ante lobortis sollicitudin. Praesent blandit blandit mauris.  
 1340 Praesent lectus tellus, aliquet aliquam, luctus a, egestas a, turpis. Mauris lacinia lorem sit  
 1341 amet ipsum. Nunc quis urna dictum turpis accumsan semper.

1342 **B5 What is the necessity of your approach / pro-**  
 1343 **posed solution/s?**

1344 Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Etiam lobortis facilisis sem.  
 1345 Nullam nec mi et neque pharetra sollicitudin. Praesent imperdiet mi nec ante. Donec  
 1346 ullamcorper, felis non sodales commodo, lectus velit ultrices augue, a dignissim nibh lectus  
 1347 placerat pede. Vivamus nunc nunc, molestie ut, ultricies vel, semper in, velit. Ut porttitor.  
 1348 Praesent in sapien. Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Duis fringilla  
 1349 tristique neque. Sed interdum libero ut metus. Pellentesque placerat. Nam rutrum augue  
 1350 a leo. Morbi sed elit sit amet ante lobortis sollicitudin. Praesent blandit blandit mauris.  
 1351 Praesent lectus tellus, aliquet aliquam, luctus a, egestas a, turpis. Mauris lacinia lorem sit  
 1352 amet ipsum. Nunc quis urna dictum turpis accumsan semper.



1353 **B5.1 What will be the limits of applicability of your proposed so-**  
 1354 **lution/s?**

1355 Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Etiam lobortis facilisis sem.  
 1356 Nullam nec mi et neque pharetra sollicitudin. Praesent imperdiet mi nec ante. Donec  
 1357 ullamcorper, felis non sodales commodo, lectus velit ultrices augue, a dignissim nibh lectus  
 1358 placerat pede. Vivamus nunc nunc, molestie ut, ultricies vel, semper in, velit. Ut porttitor.  
 1359 Praesent in sapien. Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Duis fringilla  
 1360 tristique neque. Sed interdum libero ut metus. Pellentesque placerat. Nam rutrum augue  
 1361 a leo. Morbi sed elit sit amet ante lobortis sollicitudin. Praesent blandit blandit mauris.  
 1362 Praesent lectus tellus, aliquet aliquam, luctus a, egestas a, turpis. Mauris lacinia lorem sit  
 1363 amet ipsum. Nunc quis urna dictum turpis accumsan semper.

1364 **B5.2 What will be the message of the proposed solution to**  
 1365 **technical people? How about to non-technical managers and**  
 1366 **business people?**

1367 Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Etiam lobortis facilisis sem.  
 1368 Nullam nec mi et neque pharetra sollicitudin. Praesent imperdiet mi nec ante. Donec  
 1369 ullamcorper, felis non sodales commodo, lectus velit ultrices augue, a dignissim nibh lectus  
 1370 placerat pede. Vivamus nunc nunc, molestie ut, ultricies vel, semper in, velit. Ut porttitor.  
 1371 Praesent in sapien. Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Duis fringilla  
 1372 tristique neque. Sed interdum libero ut metus. Pellentesque placerat. Nam rutrum augue  
 1373 a leo. Morbi sed elit sit amet ante lobortis sollicitudin. Praesent blandit blandit mauris.  
 1374 Praesent lectus tellus, aliquet aliquam, luctus a, egestas a, turpis. Mauris lacinia lorem sit  
 1375 amet ipsum. Nunc quis urna dictum turpis accumsan semper.

1376 **B6 How will you know if your proposed solution/s**  
 1377 **is/are correct?**

1378 Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Etiam lobortis facilisis sem.  
 1379 Nullam nec mi et neque pharetra sollicitudin. Praesent imperdiet mi nec ante. Donec  
 1380 ullamcorper, felis non sodales commodo, lectus velit ultrices augue, a dignissim nibh lectus  
 1381 placerat pede. Vivamus nunc nunc, molestie ut, ultricies vel, semper in, velit. Ut porttitor.  
 1382 Praesent in sapien. Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Duis fringilla  
 1383 tristique neque. Sed interdum libero ut metus. Pellentesque placerat. Nam rutrum augue  
 1384 a leo. Morbi sed elit sit amet ante lobortis sollicitudin. Praesent blandit blandit mauris.



1385 Praesent lectus tellus, aliquet aliquam, luctus a, egestas a, turpis. Mauris lacinia lorem sit  
 1386 amet ipsum. Nunc quis urna dictum turpis accumsan semper.

**B6.1 Will your results warrant the level of mathematics used  
(i.e., will the end justify the means)?**

1389 Lorem ipsum dolor sit amet, consectetur adipiscing elit. Etiam lobortis facilisis sem.  
 1390 Nullam nec mi et neque pharetra sollicitudin. Praesent imperdier mi nec ante. Donec  
 1391 ullamcorper, felis non sodales commodo, lectus velit ultrices augue, a dignissim nibh lectus  
 1392 placerat pede. Vivamus nunc nunc, molestie ut, ultricies vel, semper in, velit. Ut porttitor.  
 1393 Praesent in sapien. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Duis fringilla  
 1394 tristique neque. Sed interdum libero ut metus. Pellentesque placerat. Nam rutrum augue  
 1395 a leo. Morbi sed elit sit amet ante lobortis sollicitudin. Praesent blandit blandit mauris.  
 1396 Praesent lectus tellus, aliquet aliquam, luctus a, egestas a, turpis. Mauris lacinia lorem sit  
 1397 amet ipsum. Nunc quis urna dictum turpis accumsan semper.

**B7 Is/are there an/\_ alternative way/s to get to the  
same solution/s?**

1400 Lorem ipsum dolor sit amet, consectetur adipiscing elit. Etiam lobortis facilisis sem.  
 1401 Nullam nec mi et neque pharetra sollicitudin. Praesent imperdier mi nec ante. Donec  
 1402 ullamcorper, felis non sodales commodo, lectus velit ultrices augue, a dignissim nibh lectus  
 1403 placerat pede. Vivamus nunc nunc, molestie ut, ultricies vel, semper in, velit. Ut porttitor.  
 1404 Praesent in sapien. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Duis fringilla  
 1405 tristique neque. Sed interdum libero ut metus. Pellentesque placerat. Nam rutrum augue  
 1406 a leo. Morbi sed elit sit amet ante lobortis sollicitudin. Praesent blandit blandit mauris.  
 1407 Praesent lectus tellus, aliquet aliquam, luctus a, egestas a, turpis. Mauris lacinia lorem sit  
 1408 amet ipsum. Nunc quis urna dictum turpis accumsan semper.

**B7.1 Can you come up with illustrating examples, or even  
better, counterexamples to your proposed solution/s?**

1411 Lorem ipsum dolor sit amet, consectetur adipiscing elit. Etiam lobortis facilisis sem.  
 1412 Nullam nec mi et neque pharetra sollicitudin. Praesent imperdier mi nec ante. Donec  
 1413 ullamcorper, felis non sodales commodo, lectus velit ultrices augue, a dignissim nibh lectus  
 1414 placerat pede. Vivamus nunc nunc, molestie ut, ultricies vel, semper in, velit. Ut porttitor.  
 1415 Praesent in sapien. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Duis fringilla  
 1416 tristique neque. Sed interdum libero ut metus. Pellentesque placerat. Nam rutrum augue



1417 a leo. Morbi sed elit sit amet ante lobortis sollicitudin. Praesent blandit blandit mauris.  
 1418 Praesent lectus tellus, aliquet aliquam, luctus a, egestas a, turpis. Mauris lacinia lorem sit  
 1419 amet ipsum. Nunc quis urna dictum turpis accumsan semper.

## **B7.2 Is there an approximation that can arrive at essentially the same proposed solution/s more easily?**

1420 Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Etiam lobortis facilisis sem.  
 1421 Nullam nec mi et neque pharetra sollicitudin. Praesent imperdiet mi nec ante. Donec  
 1422 ullamcorper, felis non sodales commodo, lectus velit ultrices augue, a dignissim nibh lectus  
 1423 placerat pede. Vivamus nunc nunc, molestie ut, ultricies vel, semper in, velit. Ut porttitor.  
 1424 Praesent in sapien. Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Duis fringilla  
 1425 tristique neque. Sed interdum libero ut metus. Pellentesque placerat. Nam rutrum augue  
 1426 a leo. Morbi sed elit sit amet ante lobortis sollicitudin. Praesent blandit blandit mauris.  
 1427 Praesent lectus tellus, aliquet aliquam, luctus a, egestas a, turpis. Mauris lacinia lorem sit  
 1428 amet ipsum. Nunc quis urna dictum turpis accumsan semper.

## **B8 If you were the examiner of your Thesis, how would you present the Thesis in another way? Give your remarks, especially for your methodology and the results and discussions.**

1431 Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Etiam lobortis facilisis sem.  
 1432 Nullam nec mi et neque pharetra sollicitudin. Praesent imperdiet mi nec ante. Donec  
 1433 ullamcorper, felis non sodales commodo, lectus velit ultrices augue, a dignissim nibh lectus  
 1434 placerat pede. Vivamus nunc nunc, molestie ut, ultricies vel, semper in, velit. Ut porttitor.  
 1435 Praesent in sapien. Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Duis fringilla  
 1436 tristique neque. Sed interdum libero ut metus. Pellentesque placerat. Nam rutrum augue  
 1437 a leo. Morbi sed elit sit amet ante lobortis sollicitudin. Praesent blandit blandit mauris.  
 1438 Praesent lectus tellus, aliquet aliquam, luctus a, egestas a, turpis. Mauris lacinia lorem sit  
 1439 amet ipsum. Nunc quis urna dictum turpis accumsan semper.

### **B8.1 What are the weaknesses of your Thesis, specifically your methodology and the results and discussions?**

1444 Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Etiam lobortis facilisis sem.  
 1445 Nullam nec mi et neque pharetra sollicitudin. Praesent imperdiet mi nec ante. Donec



# De La Salle University

- 1448 ullamcorper, felis non sodales commodo, lectus velit ultrices augue, a dignissim nibh lectus  
1449 placerat pede. Vivamus nunc nunc, molestie ut, ultricies vel, semper in, velit. Ut porttitor.  
1450 Praesent in sapien. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Duis fringilla  
1451 tristique neque. Sed interdum libero ut metus. Pellentesque placerat. Nam rutrum augue  
1452 a leo. Morbi sed elit sit amet ante lobortis sollicitudin. Praesent blandit blandit mauris.  
1453 Praesent lectus tellus, aliquet aliquam, luctus a, egestas a, turpis. Mauris lacinia lorem sit  
1454 amet ipsum. Nunc quis urna dictum turpis accumsan semper.



De La Salle University

1455

## **Appendix C REVISIONS TO THE PROPOSAL**

1456

## C. Revisions to the Proposal



**De La Salle University**

1457

### PRO1 Panel Comments and Revisions – Appendix Z

#### PRO1 Panel Comments and Revisions

Zoom Recording:

[https://zoom.us/rec/share/mrn9zBtPz3bJ5laVcy2E8-iBno8A6fBRgOCacMrhmzLPCNO0IDxXBHiK\\_xzdicEb.MzbHGzrD7rL3tVgJ?startTIme=1731326444000](https://zoom.us/rec/share/mrn9zBtPz3bJ5laVcy2E8-iBno8A6fBRgOCacMrhmzLPCNO0IDxXBHiK_xzdicEb.MzbHGzrD7rL3tVgJ?startTIme=1731326444000)

Passcode: +7qL6DZE

Panelist's Comments and Revisions	Action Taken	Page Number
Capture both two sides of the mango and not just one to remove error	The image capturing system would only capture the two sides of the mango which are the two largest surface areas of the skin.	18
How will you get large dataset with sweetness and how will you classify it?	Remove Sweetness in the SO	13
Size and weight are not the same.	Remove Weight in objectives but retained size in the SO4 and SO6	
Specify in the specific objectives that it will be automatic sorting	SO1: To make an image acquisition system with a conveyor belt for automatic sorting and grading mangoes.	13
Add what process will be used to get the size classification	SO6: To classify mango size by getting its length and width using OpenCV, geometry, and image processing techniques	13
Add what process the ripeness classification will be	SO5: To classify mango ripeness using kNN or nearest neighbors algorithm	13
Get rid of texture in the general objectives	Texture is removed in the SOs	13
Get rid of CNN in general objectives and replace with machine learning	CNN is removed and replaced with machine learning GO: To develop a user-priority-based grading and sorting system for Carabao mangoes, using machine learning to assess ripeness, size, and bruises.	13
Remove Raspberry Pi on the SO's and generalize to "to create a microcontroller based application"	SO3: To create a microcontroller application to operate and control the prototype.	13
Remove SO4. No need for user testing	Removed user test and the new SO4 is SO4: To grade mangoes based on user priorities for size, ripeness, and bruises.	13
Fix IPO to the correct input and output	Input: Two side image of the Carabao Mango and the User Priority Attributes Process: Machine Learning Algorithm, Grading Formula, and CNN model using a microcontroller Output: Size, Ripeness, and Bruises	20

C. Revisions to the Proposal



# De La Salle University

1458

## PRO1 Panel Comments and Revisions – Appendix Z

	Classification with its Overall Grade	
Define bruises	The black or brown area of the mango that is visible on the skin of the mango.	6
Dataset should use at least 10,000 images	Added to expected deliverables SO2: To use a publicly available dataset of at least 10,000 mango images for classification of ripeness, and bruises.	14
Add to specific objectives the percentage accuracy	SO2: To get the precision, recall, F1 score, confusion matrix, and train and test accuracy metrics for classifying the ripeness and bruises with an accuracy score of at least 90%.	14
Weight sensor just adds complexity	removed all mention of load sensor, load cell. removed load cell methodology	39,40,41, 42,43,44 previousl y



1459

## PRO1 Panel Comments and Revisions – Appendix Z

### PRO1 Panel Comments and Revisions

Zoom Recording:

[https://zoom.us/rec/share/mrn9zBtPz3bJ5laVcy2E8-iBno8A6fBRgOCacMrhmzLPCNO0IDxXBHiK\\_xzdicEb.MzbHGzrD7rL3tVgJ?startTim=e=1731326444000](https://zoom.us/rec/share/mrn9zBtPz3bJ5laVcy2E8-iBno8A6fBRgOCacMrhmzLPCNO0IDxXBHiK_xzdicEb.MzbHGzrD7rL3tVgJ?startTim=e=1731326444000)

Passcode: +?qL6DZE

Summary:

- Specific Objectives
- Add:
  - what process will be used to get the sweetness classification
  - what process the ripeness classification will be
  - what process will be used to get the size classification
  - Specify in the specific objectives that it will be automatic sorting
- Remove:
  - get rid of texture in the general objectives
  - get rid of cnn in general objectives and replace with machine learning
  - remove Raspberry Pi on the SO's and generalize to "to create a microcontroller based application"
  - remove SO4. No need for user testing

Comments:

\*[00-00] time stamps from recording

- [15:00] Why only the top side of the mango? Isn't the point of automation to reduce human error? Then what about the bottom side wouldn't that just introduce another error if the mango happens to have defects on the bottom?
- [16:09] What is the load cell for? Size is not the same as weight. If size is taken from the weight wouldn't size be also taken from the image. If size then adding a load cell would just introduce more complexity, if weight then load cell is fine. reminder that size is not the same as weight.
- [17:36] When computer vision, state input and output parameters. Output parameters in this case would be sweetness, ripeness, size and bruising. Input parameters would be images.
- [18:12] No mention of how the dataset would be gathered. Would you be gather your own dataset or using a publicly available dataset
- [21:38] Fix IPO based on mention input and output parameters.
- [21:50] Dataset is lacking. Usually in machine learning at least 10,000 images. can take more than one image per mango. after taking an image of mango can make more out of the image using data augmentations.
- [22:48] Add to specific Objectives the mentioned 80%
- [23:09] Consultant that would grade the mangoes as a third party to remove biases. For both the testing and the training
- [24:55] How do you detect the sweetness of mangoes? Add these to the specific objectives. What are the categories of sweetness? Add these to specific objectives. How do



1460

### PRO1 Panel Comments and Revisions – Appendix Z

you detect the correct categorization of sweetness? How to automate the classification of the sweetness.

- [33:10] Why is the dataset destructive but the testing non destructive? Clarify this further to avoid confusion.
- [35:09] What is the basis of sweetness using images? Clarify this further.
- [35:35] How would you know if the classifier is correct or not? What is your ground truth (for the sweetness)?
- [38:55] When can you say you are getting the top side of the mango? How would you know if the mango images showing the top side or the bottom side of both cheeks of the mango can be captured? If it doesn't matter then any side can be captured so why is it in the limitations that only the top side can be captured. Clarify the limitations.
- [48:10] What classifier would you use here? What features would you extract from the images?
- [52:07] Does it explain what process will be used to get the sweetness classification? Add it to the specific objectives
- [54:00] How will ripeness be classified? Will it use the same dataset as the sweetness classification did? How was ground truth obtained?
- [55:44] Why not the nearest neighbor? It is more fit in this scenario. Do not specify CNN in the objectives. The embedded systems as well, do not specify the Raspberry pi unless truly sure
- [57:30] Table is just image processing. Is there a specific objective that would describe how ripeness classification will be done? Add this to the specific objectives.
- [59:10] How is the weight obtained? Add it to the specific objectives. Remember that size is not proportional to weight. Size could be obtained from the image as the camera is from a fixed distance. Add to specific objectives how to get the size
- [1:00:00] get rid of texture in the general objectives. get rid of cnn in general objectives and replace with machine learning. as each parameter will use a different method.
- [1:04:00] remove Raspberry Pi on the SO's and generalize to "to create a microcontroller based application"
- [1:04:37] remove SO4. no more user testing
- [1:05:00] The formula used for grading the mangoes, is this used as industry standard? How do they measure the export quality of mango
- [1:07:00] Specify in the specific objectives that it will be automatic sorting

Here are my comments on my end :)

1. Ensure seamless integration between hardware (sensors, motors, etc.) and software (CNNs, Raspberry Pi). You can consider using a modular approach for easier troubleshooting.
2. How do you gather a comprehensive and diverse dataset for training your CNN. This will enhance the model's robustness and accuracy.
3. Make sure that the weight sensors are calibrated correctly to avoid measurement errors.

## C. Revisions to the Proposal



# De La Salle University

1461

### PRO1 Panel Comments and Revisions – Appendix Z

4. Implement data augmentation techniques to enhance your image dataset, which can improve model generalization and accuracy.
5. Design an intuitive user interface for the Raspberry Pi application.
6. Besides precision, recall, and F1 score, consider incorporating confusion matrices to better understand model performance and error types.
7. Conduct user testing of the application to gather feedback on usability and functionality. This can lead to improvements in design and user experience. Consider how the system can be scaled or adapted for different fruits or larger processing volumes in the future.

Noted by:

  
\_\_\_\_\_  
**Dr. Donabel de Veas Abuan**  
*Chair of Panel*

Date: November 11 2024

---

Note: Keep a copy of this Appendix. It is a requirement that has to be submitted in order to qualify for PRO3 Defense.



De La Salle University

1462

## **Appendix D REVISIONS TO THE FINAL**

1463



- 1464      Make a table with the following columns for showing the summary of revisions to the proposal based on the comments of the panel of examiners.
- 1465
- 1466      1. Examiner
- 1467      2. Comment
- 1468      3. Summary of how the comment has been addressed
- 1469      4. Locations in the document where the changes have been reflected

**TABLE D.1 SUMMARY OF REVISIONS TO THE THESIS**

Examiner	Comment	Summary of how the comment has been addressed	Locations
Dr. Reggie C. Gustilo	<p>1. First itemtext</p> <p>2. Second itemtext</p> <p>3. Last itemtext</p> <p>4. First itemtext</p> <p>5. Second itemtext</p> <p><b>First</b> itemtext</p> <p><b>Second</b> itemtext</p> <p><b>Last</b> itemtext</p> <p><b>First</b> itemtext</p> <p><b>Second</b> itemtext</p>	<p>1. First itemtext</p> <p>2. Second itemtext</p> <p>3. Last itemtext</p> <p>4. First itemtext</p> <p>5. Second itemtext</p>	<p>Sec. ??</p> <p>on p. ??,</p> <p>Sec. ??</p> <p>on p. ??,</p> <p>Fig. ?? on p. ??</p>

*Continued on next page*



# De La Salle University

*Continued from previous page*

Examiner	Comment	Summary of how the comment has been addressed	Locations
Dr. Donable de Veas Abuan	1. First itemtext 2. Second itemtext 3. Last itemtext 4. First itemtext 5. Second itemtext	1. First itemtext 2. Second itemtext 3. Last itemtext 4. First itemtext 5. Second itemtext  <b>First</b> itemtext  <b>Second</b> itemtext  <b>Last</b> itemtext  <b>First</b> itemtext  <b>Second</b> itemtext	Sec. ?? on p. ??, Sec. ?? on p. ??, Fig. ?? on p. ???
Engr. Jose Martin Maningo	1. First itemtext 2. Second itemtext 3. Last itemtext 4. First itemtext 5. Second itemtext	1. First itemtext 2. Second itemtext 3. Last itemtext 4. First itemtext 5. Second itemtext  • First itemtext • Second itemtext • Last itemtext • First itemtext • Second itemtext	Sec. ?? on p. ??, Sec. ?? on p. ??, Fig. ?? on p. ???

*Continued on next page*



# De La Salle University

*Continued from previous page*

Examiner	Comment	Summary of how the comment has been addressed	Locations
Dr. Alexander Co Abad	1. First itemtext 2. Second itemtext 3. Last itemtext 4. First itemtext 5. Second itemtext	1. First itemtext 2. Second itemtext 3. Last itemtext 4. First itemtext 5. Second itemtext	Sec. ?? on p. ??, Sec. ?? on p. ??, Fig. ?? on p. ???



De La Salle University

1470

## **Appendix E ARTICLE PAPER(S)**

1471

# Article/Forum Paper Format

## (IEEE LaTeX format)

Michael Shell, *Member, IEEE*, John Doe, *Fellow, OSA*, and Jane Doe, *Life Fellow, IEEE*

1472

**Abstract—The abstract goes here.** Lorem ipsum dolor sit amet, consectetur adipiscing elit. Etiam lobortis facilisis sem. Nullam nec mi et neque pharetra sollicitudin. Praesent imperdiet mi nec ante. Donec ullamcorper, felis non sodales commodo, lectus velit ultrices augue, a dignissim nibh lectus placerat pede. Vivamus nunc nunc, molestie ut, ultricies vel, semper in, velit. Ut porttitor. Praesent in sapien. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Duis fringilla tristique neque. Sed interdum libero ut metus. Pellentesque placerat. Nam rutrum augue a leo. Morbi sed elit sit amet ante lobortis sollicitudin. Praesent blandit blandit mauris. Praesent lectus tellus, aliquet aliquam, luctus a, egestas a, turpis. Mauris lacinia lorem sit amet ipsum. Nunc quis urna dictum turpis accumsan semper.

**Index Terms—**Computer Society, IEEE, IEEEtran, journal, L<sup>A</sup>T<sub>E</sub>X, paper, template.

### I. INTRODUCTION

THIS demo file is intended to serve as a “starter file” for IEEE article papers produced under L<sup>A</sup>T<sub>E</sub>X using IEEEtran.cls version 1.8b and later. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Etiam lobortis facilisis sem. Nullam nec mi et neque pharetra sollicitudin. Praesent imperdiet mi nec ante. Donec ullamcorper, felis non sodales commodo, lectus velit ultrices augue, a dignissim nibh lectus placerat pede. Vivamus nunc nunc, molestie ut, ultricies vel, semper in, velit. Ut porttitor. Praesent in sapien. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Duis fringilla tristique neque. Sed interdum libero ut metus. Pellentesque placerat. Nam rutrum augue a leo. Morbi sed elit sit amet ante lobortis sollicitudin. Praesent blandit blandit mauris. Praesent lectus tellus, aliquet aliquam, luctus a, egestas a, turpis. Mauris lacinia lorem sit amet ipsum. Nunc quis urna dictum turpis accumsan semper.

#### A. Subsection Heading Here

**Subsection text here.** Lorem ipsum dolor sit amet, consectetur adipiscing elit. Etiam lobortis facilisis sem. Nullam nec mi et neque pharetra sollicitudin. Praesent imperdiet mi nec ante. Donec ullamcorper, felis non sodales commodo, lectus velit ultrices augue, a dignissim nibh lectus placerat pede. Vivamus nunc nunc, molestie ut, ultricies vel, semper in, velit. Ut porttitor. Praesent in sapien. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Duis fringilla tristique neque. Sed interdum libero ut metus. Pellentesque placerat. Nam rutrum augue a leo. Morbi sed elit sit amet ante lobortis

M. Shell was with the Department of Electrical and Computer Engineering, Georgia Institute of Technology, Atlanta, GA, 30332.  
E-mail: see <http://www.michaelshell.org/contact.html>

J. Doe and J. Doe are with Anonymous University.



Fig. 1. Simulation results for the network.

TABLE I  
AN EXAMPLE OF A TABLE

One	Two
Three	Four

sollicitudin. Praesent blandit blandit mauris. Praesent lectus tellus, aliquet aliquam, luctus a, egestas a, turpis. Mauris lacinia lorem sit amet ipsum. Nunc quis urna dictum turpis accumsan semper.

#### 1) Subsubsection Heading Here: Subsubsection text here.

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Etiam lobortis facilisis sem. Nullam nec mi et neque pharetra sollicitudin. Praesent imperdiet mi nec ante. Donec ullamcorper, felis non sodales commodo, lectus velit ultrices augue, a dignissim nibh lectus placerat pede. Vivamus nunc nunc, molestie ut, ultricies vel, semper in, velit. Ut porttitor. Praesent in sapien. Lorem ipsum dolor sit amet, consectetur adipiscing elit. Duis fringilla tristique neque. Sed interdum libero ut metus. Pellentesque placerat. Nam rutrum augue a leo. Morbi sed elit sit amet ante lobortis sollicitudin. Praesent blandit blandit mauris. Praesent lectus tellus, aliquet aliquam, luctus a, egestas a, turpis. Mauris lacinia lorem sit amet ipsum. Nunc quis urna dictum turpis accumsan semper.

### II. CONCLUSION

#### The conclusion goes here.

Lorem ipsum dolor sit amet, consectetur adipiscing elit. Etiam lobortis facilisis sem. Nullam nec mi et neque pharetra

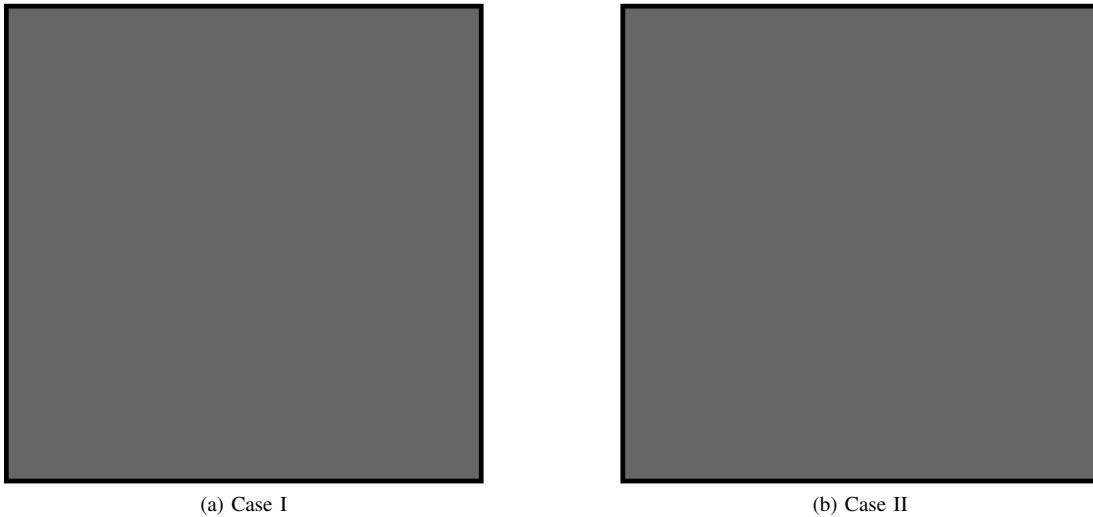


Fig. 2. Simulation results for the network.

sollicitudin. Praesent imperdiet mi nec ante. Donec ullamcorper, felis non sodales commodo, lectus velit ultrices augue, a dignissim nibh lectus placerat pede. Vivamus nunc nunc, molestie ut, ultricies vel, semper in, velit. Ut porttitor. Praesent in sapien. Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Duis fringilla tristique neque. Sed interdum libero ut metus. Pellentesque placerat. Nam rutrum augue a leo. Morbi sed elit sit amet ante lobortis sollicitudin. Praesent blandit blandit mauris. Praesent lectus tellus, aliquet aliquam, luctus a, egestas a, turpis. Mauris lacinia lorem sit amet ipsum. Nunc quis urna dictum turpis accumsan semper.

## APPENDIX A PROOF OF THE FIRST ZONKLAR EQUATION

### Appendix one text goes here.

Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Etiam lobortis facilisis sem. Nullam nec mi et neque pharetra sollicitudin. Praesent imperdiet mi nec ante. Donec ullamcorper, felis non sodales commodo, lectus velit ultrices augue, a dignissim nibh lectus placerat pede. Vivamus nunc nunc, molestie ut, ultricies vel, semper in, velit. Ut porttitor. Praesent in sapien. Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Duis fringilla tristique neque. Sed interdum libero ut metus. Pellentesque placerat. Nam rutrum augue a leo. Morbi sed elit sit amet ante lobortis sollicitudin. Praesent blandit blandit mauris. Praesent lectus tellus, aliquet aliquam, luctus a, egestas a, turpis. Mauris lacinia lorem sit amet ipsum. Nunc quis urna dictum turpis accumsan semper.

## APPENDIX B

### Appendix two text goes here. [?].

Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Etiam lobortis facilisis sem. Nullam nec mi et neque pharetra sollicitudin. Praesent imperdiet mi nec ante. Donec ullamcorper, felis non sodales commodo, lectus velit ultrices augue, a dignissim nibh lectus placerat pede. Vivamus nunc nunc, molestie ut, ultricies vel, semper in, velit. Ut porttitor. Praesent

in sapien. Lorem ipsum dolor sit amet, consectetuer adipiscing elit. Duis fringilla tristique neque. Sed interdum libero ut metus. Pellentesque placerat. Nam rutrum augue a leo. Morbi sed elit sit amet ante lobortis sollicitudin. Praesent blandit blandit mauris. Praesent lectus tellus, aliquet aliquam, luctus a, egestas a, turpis. Mauris lacinia lorem sit amet ipsum. Nunc quis urna dictum turpis accumsan semper.

## ACKNOWLEDGMENT

The authors would like to thank...