



AgentConnect®

Amending and Refunding Transactions

Version 15.12 (SP1)

2018

This AgentConnect® specification and the information contained herein is the **confidential property** of MoneyGram International, Inc. (MoneyGram), and is loaned to the recipient solely for use in integrating the MoneyGram System with the recipient's point-of-sale (POS) system as authorized by a Non-Disclosure Agreement entered between **MoneyGram** and the recipient. This document is also protected as an unpublished work under copyright law, and no part hereof may be compiled, distributed or disclosed to any third party without the prior written consent of **MoneyGram** except to persons having a legitimate need to know to integrate to the AgentConnect® System with the recipient's POS system as authorized in a POS license.

Other companies may have patents that apply to Money transfer or to the use of AgentConnect® within certain features. **MoneyGram** is not responsible for violations of any third party intellectual property rights by use of AgentConnect®.

The recipient's rights to integrate the AgentConnect® System with its POS system and/or using MoneyGram's confidential information will cease immediately upon termination of the Network Agreement or the Biller Agreement between MoneyGram and the recipient.

Table of Contents

Overview	1
Business Purpose	1
API Flows and Processes	1
APIs	2
1. detailLookup	3
detailLookupRequest	3
<i>Field Summary</i>	<i>3</i>
<i>Field Detail</i>	<i>4</i>
detailLookupResponse	6
<i>Field Summary</i>	<i>6</i>
<i>Field Detail</i>	<i>8</i>
2. amendTransaction	26
amendTransactionRequest	26
<i>Field Summary</i>	<i>26</i>
<i>Field Detail</i>	<i>27</i>
amendTransactionResponse	29
<i>Field Summary</i>	<i>29</i>
<i>Field Detail</i>	<i>30</i>
3. sendReversal	31
sendReversalRequest	32
<i>Field Summary</i>	<i>32</i>
<i>Field Detail</i>	<i>33</i>
sendReversalResponse	37
<i>Field Summary</i>	<i>37</i>
<i>Field Detail</i>	<i>38</i>
Table of Figures	40

The following diagram explains the formats used in process flows throughout this document.

For each API description, a red arrow points to the API being described.

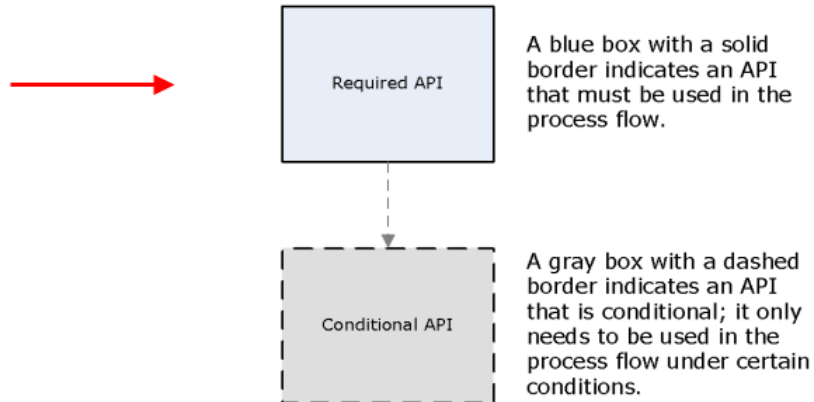


Figure 1: Explanation of Process Flow Diagrams

The following is an example of a table used to describe API request field details.

Tag	Datatype	Information and Rules	Input	Data
requestExampleField1	string Maximum length: 10	An example of a field containing a string.	GUI	required
requestExampleField2	string Length: 3 Must be a valid country code	An example of a field containing a country code	application	required
requestExampleField3	boolean	An example field whose data and visibility requirements depend on the <code>getFieldsForProduct</code> API. <i>Additional Information</i> 1. If <code>true</code> , then... 2. If <code>false</code> , then...	not allowed	not allowed

Definitions

- **Tag:** The field's XML tag; fields for which data is required are shown in bold red text
- **Datatype:** Describes the type and restrictions of the field's data
- **Information and Rules:** Provides additional information, business rules, and a description of the field if necessary
- **Input:** Indicates how the field's value is obtained
 - **Application:** The agent application must not display the field on its user interface for user input, and the value must be retrieved from another part of the agent application (e.g., a previous API response) or the agent's system
 - **GUI:** The agent application must display the field on its user interface and allow user input
 - **Conditional:** The agent application may or may not display the field on the user interface for user input depending on the conditions stated in the Information and Rules column
 - **GFFP:** Whether or not the field is shown on the user interface for user inputs depends on the information returned by the `getFieldsForProductResponse` (GFFP)
 - **N/A:** Input does not apply; for instance, if the field only contains other fields
 - **Not Allowed:** The agent application must not allow data to be entered in the field

- **Optional:** The agent may choose whether to display the field on the user interface for user input
- **Data:** Indicates whether the field must contain data; only used on API requests
 - **Required:** The field must contain data
 - **Not allowed:** The field must not contain data
 - **Optional:** The agent must display the field on the user interface, but data collection is optional
 - **Conditional:** The field may or may not contain data depending on the conditions stated in the Information and Rules column
 - **GFFP:** Whether or not the field contains data depends on the information returned by the `getFieldsForProductResponse` (GFFP)
 - **Response:** Whether or not the field contains data depends on the information returned by a message specified in the additional information for the API

The following is an example of a table used to describe API response field details.

Tag	Datatype	Information and Rules	Display
<code>responseExampleField1</code>	string Maximum length: 10	An example of a field containing a string.	required
<code>responseExampleField2</code>	string Length: 3 Must be a valid country code	An example of a field containing a country code	optional
<code>responseExampleField3</code>	boolean	An example field whose data and visibility requirements depend on the <code>getFieldsForProduct</code> API. <i>Additional Information</i> 1. If <code>true</code> , then... 2. If <code>false</code> , then...	required

Definitions

- **Tag:** The field's XML tag; fields for which data is required are shown in bold red text
- **Datatype:** Describes the type and restrictions of the field's data
- **Information and Rules:** Provides additional information, business rules, and a description of the field if necessary

- **Display:** Indicates whether the value of the field is shown on the agent application's user interface
 - **Conditional:** The value may or may not be shown on the user interface depending on the conditions stated in the Information and Rules column
 - **GFFP:** Whether or not the value is shown on the user interface depends on the information returned by the `getFieldsForProductResponse` (GFFP) o
 - **N/A:** Visibility does not apply; for instance, if the field doesn't contain displayable data
 - **Not allowed:** The value must not be shown on the user interface; for fields in API responses, the data in the field should not be edited unless otherwise stated
 - **Optional:** The agent may choose whether to show the value on the user interface
 - **Required:** The value must be shown on the user interface when data is returned in the API

Overview

Business Purpose

- This document provides technical and business information required to amend and refund pending MoneyGram send transactions in order to handle customer service issues
- All Agent applications that include sends must include functionality for amends and reversals.
- For a successful Amend or Reversal, the original send must have been performed from the same location.
- (**Amends or Refunds can only be performed by the original send location**)

API Flows and Processes

Amend MoneyGram Send Transaction Process

1. The agent application sends a [detailLookupRequest](#) containing the transaction reference number, and MoneyGram returns a [detailLookupResponse](#) indicating whether the transaction can be amended.
2. The agent confirms the consumer's identity matches the identity of the transaction's sender.
3. If the transaction is available, the agent application sends an [amendTransactionRequest](#) containing the transaction reference number and amended receiver name (first, middle, last, second last name), and MoneyGram returns a [amendTransactionResponse](#) indicating whether the amend succeeded.

Refund MoneyGram Send Transaction Process

1. The agent application sends a [detailLookupRequest](#) containing the transaction reference number, and MoneyGram returns a [detailLookupResponse](#) indicating whether the transaction can be refunded.
2. The agent confirms the consumer's identity matches the identity of the transaction's sender.
3. If the transaction is available, the agent application sends a [sendReversalRequest](#) containing details of the refund request, and MoneyGram returns a [sendReversalResponse](#) containing refund information.
4. The agent refunds the consumer's funds if reversal API is successful.

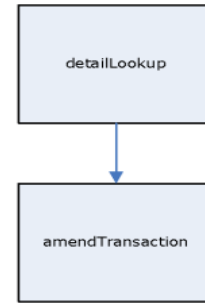


Figure 2: Amend Transaction Process Flow

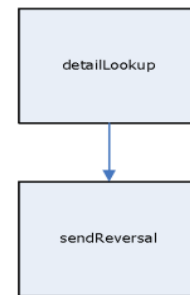


Figure 3: Refund Transaction Process Flow

APIs

Required APIs

1. detailLookup
2. amendTransaction
3. sendReversal

1. detailLookup

The agent application uses the [detailLookup](#) API to determine the status and other information for a MoneyGram money transfer send transaction before amending or refunding it.

Additional Information

1. The [detailLookupResponse](#) returns information only for transactions sent from the location making the request
2. This API can only be used by the original sending location/agent ID.
3. For agent's call center application, the original agent ID that performed the send transaction must be used for this API. Only one transaction can be looked up at a time. (see Business Purpose above)
4. The appearance of fields with conditional display is determined by the compliance regulations of the agent's country.
5. If the agent uses store hours defined by MoneyGram, the [detailLookup](#) API may not be used outside of the defined store hours
6. If this is used for the purpose of amending or refunding a transaction, the actual transaction status should be displayed for the user

Transaction Flow

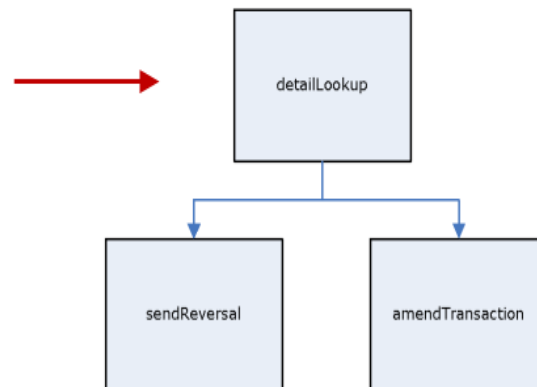


Figure 4: Location of detailLookup in Process Flows

detailLookupRequest

Field Summary

- [referenceNumber](#)
- [mgiTransactionSessionID](#)
- [includeUseData](#)
- [operatorName](#)

Field Detail

Tag	Datatype	Information and Rules	Input	Data
referenceNumber	string Maximum length: 12	None	GUI	required
mgTransactionSessionID	string Maximum length: 38	An ID number that uniquely identifies the send transaction across APIs. This field is not used for Amend or Refund processes	NA	NA
includeUseData	boolean	<i>Additional Information</i> 1. If <code>true</code>, any data sent in the <code>agentUseSendData</code> on the <code>sendValidationRequest</code> is returned in the response. 2. If <code>false</code>, any data sent in the <code>agentUseSendData</code> on the <code>sendValidationRequest</code> is not returned in the response. 3. If agent is not using the <code>agentUseSendData</code> field, this should be set to <code>false</code>.	Application	required
operatorName	string Maximum length: 7	<i>Additional Information</i> 1. Operator name or operator ID of the associate or user performing the transaction; it must be auto-populated from the agent's system and cannot be editable by the user • Agent Facing – Teller ID/User ID mapped to <code>operatorName</code> • Customer Facing/Self Service (kiosk, online, mobile) – User ID/User Login mapped to <code>operatorName</code> • ATM – unique customer ID (customer number) mapped to <code>operatorName</code>	application	optional

detailLookupResponse

Field Summary

- [mgTransactionSessionID](#)
- [transactionStatus](#)
- [dateTimeSent](#)
- [referenceNumber](#)
- [freqCustCardNumber](#)
- [receiveCountry](#)
- [deliveryOption](#)
- [senderFirstName](#)
- [senderMiddleName](#)
- [senderLastName](#)
- [senderLastName2](#)
- [senderAddress](#)
- [senderAddress2](#)
- [senderAddress3](#)
- [senderCity](#)
- [senderState](#)
- [senderZipCode](#)
- [senderCountry](#)
- [senderHomePhone](#)
- [receiverFirstName](#)
- [receiverMiddleName](#)
- [receiverLastName](#)
- [receiverLastName2](#)
- [receiverAddress](#)
- [receiverAddress2](#)
- [receiverAddress3](#)
- [receiverCity](#)
- [receiverState](#)
- [receiverZipCode](#)
- [receiverCountry](#)
- [receiverPhone](#)
- [direction1](#)
- [direction2](#)
- [direction3](#)
- [testQuestion](#)
- [testAnswer](#)
- [messageField1](#)
- [messageField2](#)
- [senderPhotoIdType](#)
- [senderPhotoIdNumber](#)
- [senderPhotoIdState](#)
- [senderPhotoIdCountry](#)
- [senderLegalIdType](#)
- [senderLegalIdNumber](#)
- [senderDOB](#)
- [senderOccupation](#)
- [thirdPartyFirstName](#)
- [thirdPartyMiddleName](#)
- [thirdPartyLastName](#)
- [thirdPartyLastName2](#)
- [thirdPartyAddress](#)
- [thirdPartyAddress2](#)
- [thirdPartyAddress3](#)
- [thirdPartyCity](#)
- [thirdPartyState](#)
- [thirdPartyCountry](#)
- [thirdPartyZipCode](#)
- [thirdPartyDOB](#)
- [thirdPartyLegalIdType](#)
- [thirdPartyLegalIdNumber](#)
- [thirdPartyOccupation](#)
- [thirdPartyOrg](#)
- [senderBirthCity](#)
- [senderBirthCountry](#)
- [senderPassportIssueDate](#)
- [senderPassportIssueCity](#)
- [senderPassportIssueCountry](#)
- [operatorName](#)

- validIndicator
- agentUseSendData
- customerReceiveNumber
- receiveAgentID
- receiveAgentName
- receiveAgentAbbreviation
- expectedDateOfDelivery
- redirectIndicator
- redirectInfo
 - originalSendAmount
 - originalSendCurrency
 - originalSendFee
 - originalExchangeRate
 - originalReceiveAmount
 - originalReceiveCurrency
 - originalReceiveCountry
 - newSendFee
 - newExchangeRate
 - newReceiveAmount
 - newReceiveCurrency
 - feeDifference
 - redirectType
- agentCheckAuthorizationNumber
- accountNickname
- promotionInfo
 - promotionCode
 - promotionDiscountId
 - promotionCategoryId
 - promotionDiscount
 - promotionDiscountAmount
 - promotionErrorCode
 - promotionErrorMessage
 - longLanguageCode
 - textTranslation
- disclosureText
 - longLanguageCode
 - textTranslation
- feeRefundRequired
- sendAmounts
 - sendAmount
 - sendCurrency
 - totalSendFees
 - totalDiscountAmount
 - totalSendTaxes
 - totalAmountToCollect
 - detailSendAmounts
 - amountType
 - amount
 - amountCurrency
- receiveAmounts
 - receiveAmount
 - receiveCurrency
 - validCurrencyIndicator
 - payoutCurrency
 - totalReceiveFees
 - totalReceiveTaxes
 - totalReceiveAmount
 - receiveFeesAreEstimated
 - receiveTaxesAreEstimated
 - detailReceiveAmounts
 - amountType
 - amount
 - amountCurrency
- exchangeRateApplied
- referenceNumberTextCode
- referenceNumberText

Field Detail

Tag	Datatype	Information and Rules	Display
mgTransactionSessionID	string Maximum length: 38	NA	NA
transactionStatus	string Valid values: AVAIL, CANCL, RECVD, REFND, AFR, PRCS	<i>Additional Information</i> 1. AVAIL is available 2. CANCL is canceled 3. RECVD is received 4. REFND is refunded 5. AFR is available for refund 6. PRCS is for processing. With this status, the transaction can be reversed or amended, but it cannot be received	required
dateTimeSent	dateTime Format: CCYY-MM-DDThh:mm:ss.sss-hh:mm	None	optional
referenceNumber	string Maximum length: 12	None	optional
freqCustCardNumber	string Maximum length: 20	The sender's MoneyGram Plus number.	optional
receiveCountry	string Length: 3	None	optional
deliveryOption	string	If displayed, use codeTableResponse.deliveryOptionInfo.deliveryOptionName to map this field to display the description of the actual delivery option name	optional

Tag	Datatype	Information and Rules	Display
senderFirstName	string Maximum length: 40	<i>Field Rules</i> 1. See <i>Data Quality Edits Addendum</i> for data quality rules	required
senderMiddleName	string Length: 40	<i>Field Rules</i> 1. See <i>Data Quality Edits Addendum</i> for data quality rules	required
senderLastName	string Maximum length: 40	<i>Field Rules</i> 1. See <i>Data Quality Edits Addendum</i> for data quality rules	required
senderLastName2	string Maximum length: 40	<i>Field Rules</i> 1. See <i>Data Quality Edits Addendum</i> for data quality rules	required
senderAddress	string Maximum length: 80	<i>Field Rules</i> 1. See <i>Data Quality Edits Addendum</i> for data quality rules	optional
senderAddress2	string Maximum length: 80	<i>Field Rules</i> 1. See <i>Data Quality Edits Addendum</i> for data quality rules	optional
senderAddress3	string Maximum length: 80	<i>Field Rules</i> 1. See <i>Data Quality Edits Addendum</i> for data quality rules	optional
senderCity	string Maximum length: 40	None	optional
senderState	string Length: 2	None	optional

Tag	Datatype	Information and Rules	Display
senderZipCode	string Minimum length: 3 Maximum length: 10		optional
senderCountry	string Length: 3	None	optional
senderHomePhone	string Maximum length: 14	None	optional
receiverFirstName	string Maximum length: 40	<i>Field Rules</i> 1. See <i>Data Quality Edits Addendum</i> for data quality rules 2. Display is required for Amend transaction process	conditional
receiverMiddleName	string Maximum length: 40	<i>Field Rules</i> 1. See <i>Data Quality Edits Addendum</i> for data quality rules 2. Display is required for Amend transaction process	conditional
receiverLastName	string Maximum length: 40	<i>Field Rules</i> 1. See <i>Data Quality Edits Addendum</i> for data quality rules 2. Display is required for Amend transaction process	conditional
receiverLastName2	string Maximum length: 40	<i>Field Rules</i> 1. See <i>Data Quality Edits Addendum</i> for data quality rules 2. Display is required for Amend transaction process	conditional
receiverAddress	string Maximum length: 80	<i>Field Rules</i> 1. See <i>Data Quality Edits Addendum</i> for data quality rules	optional

Tag	Datatype	Information and Rules	Display
receiverAddress2	string Maximum length: 80	<i>Field Rules</i> 1. See <i>Data Quality Edits Addendum</i> for data quality rules	optional
receiverAddress3	string Maximum length: 80	<i>Field Rules</i> 1. See <i>Data Quality Edits Addendum</i> for data quality rules	optional
receiverCity	string Maximum length: 40	See <i>Data Quality Edits Addendum</i> for data quality rules	optional
receiverState	string Length: 2	None	optional
receiverZipCode	string Minimum length: 3 Maximum length: 10		optional
receiverCountry	string Length: 3	None	optional
receiverPhone	string Maximum length: 14	None	optional
direction1	string Maximum length: 40	<i>Field Rules</i> 1. Only used with delivery options HDS_USD, HDS_LOCAL, and HOME_DELIVERY	optional
direction2	string Maximum length: 40	<i>Field Rules</i> 1. Only used with delivery options HDS_USD, HDS_LOCAL, and HOME_DELIVERY	optional

Tag	Datatype	Information and Rules	Display
direction3	string Maximum length: 40	<i>Field Rules</i> 1. Only used with delivery options HDS_USD, HDS_LOCAL, and HOME_DELIVERY	optional
testQuestion	string Maximum length: 30	None	optional
testAnswer	string Maximum length: 30	None	optional
messageField1	string Maximum length: 40	None	optional
messageField2	string Maximum length: 40	None	optional
senderPhotoIdType	string	None	optional
senderPhotoIdNumber	string Minimum length: 4 Maximum length: 25	<i>Field Rules</i> 1. Only alphanumeric and hyphen (-) characters allowed	optional
senderPhotoIdState	string Length: 2	None	optional
senderPhotoIdCountry	string Length: 3	None	optional
senderLegalIdType	string	None	optional

Tag	Datatype	Information and Rules	Display
senderLegalIdNumber	string Minimum length: 4 Maximum length: 14	<i>Field Rules</i> 1. Only alphanumeric and hyphen (-) characters allowed	optional
senderDOB	date Format: CCYY-MM-DD	<i>Field Rules</i> 1. Cannot be later than the current date	optional
senderOccupation	string Maximum length: 30	None	optional
thirdPartyFirstName	string Maximum length: 40	<i>Field Rules</i> 1. See <i>Data Quality Edits Addendum</i> for data quality rules	optional
thirdPartyMiddleName	string Length: 40	<i>Field Rules</i> 1. See <i>Data Quality Edits Addendum</i> for data quality rules	optional
thirdPartyLastName	string Maximum length: 40	<i>Field Rules</i> 1. See <i>Data Quality Edits Addendum</i> for data quality rules	optional
thirdPartyLastName2	string Maximum length: 40	<i>Field Rules</i> 1. See <i>Data Quality Edits Addendum</i> for data quality rules	optional
thirdPartyAddress	string Maximum length: 80	<i>Field Rules</i> 1. See <i>Data Quality Edits Addendum</i> for data quality rules	optional
thirdPartyAddress2	string Maximum length: 80	<i>Field Rules</i> 1. See <i>Data Quality Edits Addendum</i> for data quality rules	optional
thirdPartyAddress3	string Maximum length: 80	<i>Field Rules</i> 1. See <i>Data Quality Edits Addendum</i> for data quality rules	optional

Tag	Datatype	Information and Rules	Display
thirdPartyCity	string Maximum length: 40	See <i>Data Quality Edits Addendum</i> for data quality rules	optional
thirdPartyState	string Length: 2	None	optional
thirdPartyCountry	string Length: 3	None	optional
thirdPartyZipCode	string Minimum length: 3 Maximum length: 10	None	optional
thirdPartyDOB	date Format: CCYY-MM-DD	<i>Field Rules</i> 1. Cannot be later than the current date	optional
thirdPartyLegalIdType	string	None	optional
thirdPartyLegalIdNumber	string Minimum length: 4 Maximum length: 14	<i>Field Rules</i> 1. Only alphanumeric and hyphen (-) characters allowed	optional
thirdPartyOccupation	string Maximum length: 30	None	optional
thirdPartyOrg	string Maximum length: 60	None	optional
senderBirthCity	string Maximum length: 40	None	optional

Tag	Datatype	Information and Rules	Display
senderBirthCountry	string Length: 3	None	optional
senderPassportIssueDate	date Format: CCYY-MM-DD	None	optional
senderPassportIssueCity	string Maximum length: 40	None	optional
senderPassportIssueCountry	string Length: 3	None	optional
operatorName	string Maximum length: 7	None	optional
validIndicator	boolean	Additional Information 1. If <code>true</code>, <code>validReceiveAmount</code>, <code>validReceiveCurrency</code>, and <code>validExchangeRate</code> are used to calculate the final payout amount 2. If <code>false</code>, the transaction receive amount may be converted into another currency before being paid using an independent exchange rate	optional
agentUseSendData	string Maximum length: 200	None	optional
customerReceiveNumber	string Maximum length: 20	The unique customer receive number/RRN (receiver registration number) that identifies the receiver of the transaction.	not allowed
receiveAgentID	string Length: 8	None	not allowed

Tag	Datatype	Information and Rules	Display
receiveAgentName	string Maximum length: 40	None	optional
receiveAgentAbbreviation	string Maximum length: 10	The abbreviated form of the agent's name.	optional
expectedDateOfDelivery	date Format: CCYY-MM-DD	The date a send transaction is expected to be delivered.	optional
redirectIndicator	boolean	<i>Additional Information</i> 1. If <code>true</code> , the transaction is a currency redirect 2. If <code>false</code> , the transaction is not a currency redirect	not allowed
redirectInfo	complex Maximum number of occurrences: 1	None	NA
originalSendAmount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	None	NA
originalSendCurrency	string Length: 3	None	NA
originalSendFee	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	None	NA

Tag	Datatype	Information and Rules	Display
originalExchangeRate	decimal Minimum exclusive value: 0 Maximum length: 14	<i>Field Rules</i> 1. Value returned to four decimal places for USA and US territories 2. Value returned to six decimal places elsewhere	NA
originalReceiveAmount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	None	NA
originalReceiveCurrency	string Length: 3	None	NA
originalReceiveCountry	string Length: 3	None	NA
newSendFee	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	None	NA
newExchangeRate	decimal Minimum exclusive value: 0 Maximum length: 14	<i>Field Rules</i> 1. Value returned to four decimal places for USA and US territories 2. Value returned to six decimal places elsewhere	NA
newReceiveAmount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	None	NA

Tag	Datatype	Information and Rules	Display
newReceiveCurrency	string Length: 3	None	NA
feeDifference	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	None	NA
redirectType	string Valid values: CURRENCY_REDIRECT	None	NA
agentCheckAuthorizationNumber	string Maximum length: 5	None	NA
accountNickname	string Maximum length: 30	None	optional
promotionInfo	complex Maximum number of occurrences: unbounded	None	N/A
promotionCode	string Maximum length: 20	The code used to identify the promotion.	optional
promotionDiscountId	string Length: 2 Valid values: 01, 02, 03	The code used to identify the type of discount. <i>Additional Information</i> 1. 01 is flat fee 2. 02 is amount off 3. 03 is percent off	NA

Tag	Datatype	Information and Rules	Display
promotionCategoryId	string Length: 2	The code used to identify the promotion category.	NA
promotionDiscount	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	The promotion's discount value.	NA
promotionDiscountAmount	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	The discount amount applied to <code>nonDiscountedFeeExclTax</code> .	optional
promotionErrorCode	string Length: 4	The error code returned if the promotion code was invalid.	optional
promotionErrorMessage	complex Maximum number of occurrences: unbounded	None	N/A
longLanguageCode	string Length: 3	The language of the promotional message.	optional
textTranslation	string Maximum length: 2000	The translated promotional message.	optional
disclosureText	complex Maximum number of occurrences: unbounded	None	N/A

Tag	Datatype	Information and Rules	Display
longLanguageCode	string Length: 3	The language of the disclosure message.	optional
textTranslation	string Maximum length: 2000	Additional disclosure info when taxes/fees can't be determined based on included fields.	optional
feeRefundRequired	boolean	<i>Additional Information</i> 1. If <code>true</code> , the transaction fee must be refunded when reversing the transaction 2. If <code>false</code> , the transaction fee is not refunded when reversing the transaction	N/A
sendAmounts	complex Maximum number of occurrences: unbounded	None	N/A
sendAmount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	None	required
sendCurrency	string Length: 3	None	required
totalSendFees	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Sum of <code>discountedMGIFee</code> and <code>nonMGISendFee</code> . Total of all fees charged to sender by MoneyGram, agents, etc.	required

Tag	Datatype	Information and Rules	Display
totalDiscountAmount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Discount amount applied to nonDiscountedFeeExclTax.	required
totalSendTaxes	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Total taxes charged to the sender by MoneyGram, government agents, etc.	required
totalAmountToCollect	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Total of all fees, taxes, and the send amount.	required
detailSendAmounts	complex Maximum number of occurrences: unbounded	None	N/A

Tag	Datatype	Information and Rules	Display
amountType	string Valid values: mgiNonDiscountedSendFee, nonMgiSendFee, totalNonDiscountedFees, discountedMgiSendFee, mgiSendTax, nonMgiSendTax, totalMgiCollectedFeesAndTaxes, totalAmountToMgi, totalSendFeesAndTaxes, totalNonMGISendFeesAndTaxes	The type of fee or tax <i>Additional Information</i> 1. mgiNonDiscountedSendFee is the fee amount charged by MoneyGram before discounts are applied 2. nonMgiSendFee is the total of non-MoneyGram fees charged to the sender by government agents, banking channels, etc.; MoneyGram does not collect this fee 3. totalNonDiscountedFees is the sum of mgiNonDiscountedFee and nonMGISendFee 4. discountedMgiSendFee is the fee collected by MoneyGram after discounts 5. mgiSendTax is taxes collected by MoneyGram 6. nonMgiSendTax is taxes the agent collects and remits 7. totalMgiCollectedFeesAndTaxes is the total taxes and fees charged by MoneyGram 8. totalAmountToMgi is nonMGISendFee and nonMGISendTax subtracted from totalAmountToCollect; this is the amount MoneyGram collects from the sending agent at settlement 9. totalSendFeesAndTaxes is the total of all fees and taxes for the transaction 10. totalNonMGISendFeesAndTaxes is the total of all non-MoneyGram fees and taxes charged to the sender by government agents, banking channels, etc.	optional
amount	decimal	None	optional
amountCurrency	string Length: 3	None	optional

Tag	Datatype	Information and Rules	Display
receiveAmounts	complex Maximum number of occurrences: unbounded	None	N/A
receiveAmount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	None	required
receiveCurrency	string Length: 3	None	required
validCurrencyIndicator	boolean	<i>Additional Information</i> 1. If <code>true</code> , <code>validReceiveAmount</code> , <code>validReceiveCurrency</code> , and <code>validExchangeRate</code> are used to calculate the final payout amount 2. If <code>false</code> , estimated amounts may be available to calculate the final payout amount	optional
payoutCurrency	string Length: 3	None	required
totalReceiveFees	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Total fees charged to the receiver by MoneyGram, agents, government entity, etc.	required
totalReceiveTaxes	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Total taxes charged to the receiver by MoneyGram, agents, government entity, etc.	required

Tag	Datatype	Information and Rules	Display
totalReceiveAmount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Receive amount minus any receive fees/taxes.	required
receiveFeesAreEstimated	boolean	If "true" indicates whether the receive-side fees are "estimates"	optional
receiveTaxesAreEstimated	boolean	If "true" indicates whether the receive-side taxes are "estimates"	optional
detailReceiveAmounts	complex Maximum number of occurrences: unbounded	None	N/A
amountType	string Valid values: mgiReceiveFee, nonMGIReceiveFee, mgiReceiveTax, nonMgiReceiveTax	The type of fee or tax <i>Additional Information</i> 1. mgiReceiveFee is the fee amount charged by MoneyGram 2. nonMGIReceiveFee is the total of non-MoneyGram fees charged to the receiver by government agents, banking channels, etc.; MoneyGram does not collect this fee 3. mgiReceiveTax is taxes collected by MoneyGram 4. nonMgiReceiveTax is taxes the agent collects and remits	optional
amount	Decimal Minimum exclusive value: 0 Maximum length: 14	None	optional
amountCurrency	string Length: 3	None	optional

Tag	Datatype	Information and Rules	Display
exchangeRateApplied	decimal Minimum inclusive value: 0 Maximum length: 14	The exchange rate applied between <code>sendCurrency</code> and <code>receiveCurrency</code> . <i>Field Rules</i> 1. Value returned to four decimal places for USA and US territories 2. Value returned to six decimal places elsewhere	optional
referenceNumberTextCode	string maximum length: 20	This is the code used to identify the <code>referenceNumberText</code> message. Both fields will be populated when a message needs to be displayed to the sender.	optional
referenceNumberText	string Maximum length: 240	Data may be returned due to compliance rules that requires the agent to notify the customer to call MoneyGram. This must be displayed on the screen for the agent to advise the customer	required

2. amendTransaction

The agent application uses the [amendTransaction](#) API to make minor spelling changes to the receiver name (first, middle, last, and/or second last names) of money transfer send transaction. If the transaction was sent to the wrong person/receiver, the transaction must be cancelled and a new one must be created for a different receiver. MoneyGram does not allow the receiver name to be changed to a completely different person.

Business Rules to Code

1. The agent application may only amend a transaction if the [detailLookupResponse](#) returns a `transactionStatus` of AVAIL, AFR or PRCS. Not all transactions in the listed statuses can automatically be amended. If a transaction is in AVAIL, AFR or PRCS status and cannot be amended, the response will return an error.
2. The agent application may only amend transactions originally sent by the agent.
(**Amends can only be performed by the original send location**)
3. If any of the name fields are not changed, the same data that was used on the original send must be sent in this request. If any of the name fields are left blank, that name field will be erased.
4. This name change is intended to correct the spelling only. It's not intended to be used to change to an entirely different name.

Transaction Flow

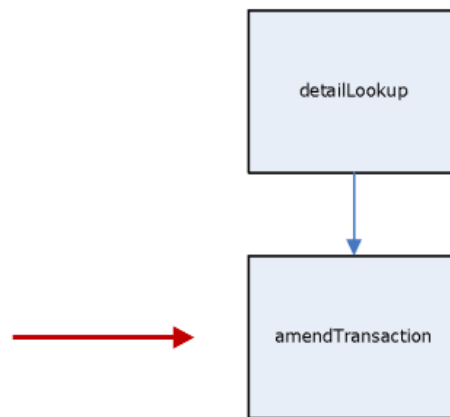


Figure 5: Location of amendTransaction in Process Flows

amendTransactionRequest

Field Summary

- [referenceNumber](#)
- [operatorName](#)
- [receiverFirstName](#)
- [receiverMiddleName](#)
- [receiverLastName](#)
- [receiverLastName2](#)
- [receiverNameSuffix](#)
- [receiverNameSuffixOther](#)
- [receiverFirstNameNotAvailable](#)

Field Detail

Tag	Datatype	Information and Rules	Input	Data
referenceNumber	string Maximum length: 12	None	GUI	required
operatorName	string Maximum length: 80	<i>Additional Information</i> 1. Operator name or operator ID of the associate or user performing the transaction; it must be auto-populated from the agent's system and cannot be editable by the user - Agent Facing – Teller ID/User ID mapped to operatorName - Customer Facing/Self Service (kiosk, online, mobile) – User ID/User Login mapped to operatorName - ATM – unique customer ID (customer number) mapped to operatorName	application	required
receiverFirstName	string Maximum length: 40	See <i>Data Quality Edits Addendum</i> for data quality rules	GUI	required
receiverMiddleName	string Maximum length: 40	<i>Additional Information</i> 1. The value of receiverMiddleName must be sent even if the Middle name has not changed in order prevent a blank value overwriting the existing second last name <i>Field Rules</i> 1. Data is required if a value was returned in the detailLookupResponse 2. See <i>Data Quality Edits Addendum</i> for data quality rules	GUI	conditional
receiverLastName	string Maximum length: 40	See <i>Data Quality Edits Addendum</i> for data quality rules	GUI	required

Tag	Datatype	Information and Rules	Input	Data
receiverLastName2	string Maximum length: 40	<i>Additional Information</i> 1. The value of <code>receiverLastName2</code> must be sent even if the second last name has not changed in order prevent a blank value overwriting the existing second last name <i>Field Rules</i> 1. Data is required if a value was returned in the detailLookupResponse 2. See <i>Data Quality Edits Addendum</i> for data quality rules	GUI	conditional
receiverNameSuffix	string maximum length: 30	For future use	NA	NA
receiverNameSuffixOther	String Maximum length: 30	For future use	NA	NA
receiverFirstNameNotAvailable	boolean	For future use	NA	NA

amendTransactionResponse

Field Summary

- transactionSucceeded

Field Detail

Tag	Datatype	Information and Rules	Display
transactionSucceeded	Boolean Valid value: true	<i>Additional Information</i> 1. If <code>true</code> , the transaction was amended 2. If transaction is not successful, an error is returned.	required

3. *sendReversal*

The agent application uses the [sendReversal](#) API to refund a MoneyGram money transfer send transaction.

Business Rules to Code

1. The agent application may only reverse a transaction if the [detailLookupResponse](#) returns a `transactionStatus` of AVAIL, AFR or PRCS. Not all transactions in the listed statuses can automatically be reversed. If a transaction is in AVAIL, AFR or PRCS status and cannot be reversed, the response will return an error.
2. The agent application must issue a refund receipt
3. For a successful Refund, the original send must have been done from the same location. (**Refund can only be performed by the original send location**)

Additional Information

1. The consumer must always show identification prior to obtaining a refund
2. The values of `refundFaceAmount` and `refundFeeAmount` appear on settlement reports
3. Refunds are available to the agent application for ninety days
4. Refunds after ninety days, or reversals of transactions that can't be processed by the agent application, can only be performed by contacting MoneyGram
5. There are no restrictions on the type of transactions eligible for reversal. Transactions may only be reversed if they have a status of AVAIL. However, a reversal attempt on a directed send transaction may not always be successful in cases where MoneyGram has sent the transaction to the account deposit partner. An error will be returned when the reversal fails. Agent must wait for a successful response before refunding the money.

Refund Receipt Specification

Refund receipts must go through MoneyGram legal approval process. The following rules must be followed when designing refund receipts:

1. The agent copy of the receipt must use one format; the consumer copy must use a second format
2. The receipt must be titled REFUND RECEIPT
3. Phrase 1 shall state, "The following transfer has been canceled."
4. Phrase 2 shall state, "Agent: Please return the total amount collected. Keep signed copy."
5. Phrase 3 shall appear near the bottom of the receipt and state, "Customer signature"
6. The following fields are required on refund receipts:
 - From the agent's profile:
 - Agent's name
 - Agent's address
 - Agent's telephone number
 - From the [detailLookupResponse](#):
 - `transactionDateTime`
 - `senderFirstName`
 - `senderMiddleName`

- senderLastName
- senderLastName2
- receiverFirstName
- receiverMiddleName
- receiverLastName
- receiverLastName2
- From information used in the [sendReversalRequest](#):
 - referenceNumber
 - sendReversalReason
- From the [sendReversalResponse](#):
 - transactionDateTime
 - refundFaceAmount
 - refundFeeAmount
 - refundTotalAmount

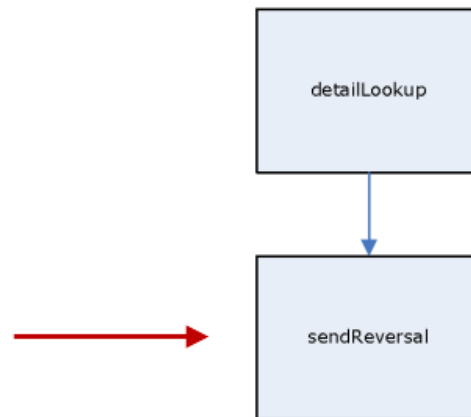


Figure 6: Location of sendReversal in Process Flows

sendReversalRequest

Field Summary

- | | |
|--------------------------------------|---|
| • sendAmount | • agentCheckNumber |
| • feeAmount | • agentCheckAmount |
| • sendCurrency | • customerCheckType |
| • referenceNumber | • customerCheckNumber |
| • operatorName | • customerCheckAmount |
| • reversalType | • communicationRetryIndicator |
| • sendReversalReason | |
| • feeRefund | |
| • agentCheckType | |

Field Detail

Tag	Datatype	Information and Rules	Input	Data
sendAmount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	<i>Additional Information</i> 1. Use value from detailLookupResponse	application	required
feeAmount	decimal Maximum length: 14 Maximum decimal digits: 3	<i>Additional Information</i> 1. Use value from detailLookupResponse	application	required
sendCurrency	string Length: 3 Must be a valid currency code	<i>Additional Information</i> 1. Use value from detailLookupResponse	application	required
referenceNumber	string Maximum length: 8	<i>Additional Information</i> 1. Use value from detailLookupRequest	application	required
operatorName	string Maximum length: 80	<i>Additional Information</i> 1. Operator name or operator ID of the associate or user performing the transaction; it must be auto-populated from the agent's system and cannot be editable by the user - Agent Facing – Teller ID/User ID mapped to operatorName - Customer Facing/Self Service (kiosk, online, mobile) – User ID/User Login mapped to operatorName - ATM – unique customer ID (customer number) mapped to operatorName	application	required

Tag	Datatype	Information and Rules	Input	Data
reversalType	string Valid values: C, R	<i>Additional Information</i> 1. C is cancel. If reversal is done same day as the transaction based on US Central time. 2. R is refund. If reversal is done day after the send transaction based on US Central time. Agent application must restrict reversalType = R for same day refunds 3. Agent application can always start with a reversalType of 'C'. If error code 605 (subErrorCode 3401, "Send reversal/cancel must be requested same day") is encountered, then application should programmatically submit the reversal request again with reversalType = R.	application	required
sendReversalReason	string Valid values: NO_RCV_LOC, WRONG_SERVICE, NO_TQ, INCORRECT_AMT, MS_NOT_USED	<i>Additional Information</i> 1. NO_RCV_LOC is no receive location 2. WRONG_SERVICE is wrong delivery option 3. NO_TQ is missing test question and answer 4. INCORRECT_AMT is incorrect Send/ Receive amount 5. MS_NOT_USED is MoneyGram Plus or a card number not used <i>Field Rules</i> 1. Data is required if reversalType is R	GUI	conditional
feeRefund	string Valid values: Y, N	<i>Additional Information</i> 1. If value is Y, the transaction fee is to be refunded to the consumer 2. If value is N, the transaction fee is not to be refunded to the consumer 3. Value must be Y if reversalType=C or also if reversalType=R i.e, a Refund attempted within 30 minutes of original Send. (Currently this rule applies to US & territories only).	optional	required

Tag	Datatype	Information and Rules	Input	Data
agentCheckType	string Valid values: MTC	<i>Additional Information</i> 1. MTC is MoneyGram checks <i>Field Rules</i> 1. Data is required if using MoneyGram checks 2. Data is not allowed if not using MoneyGram checks	not allowed	conditional
agentCheckNumber	string Maximum length: 12	<i>Field Rules</i> 1. Data and GUI input are required if using MoneyGram checks 2. Data and input are not allowed if not using MoneyGram checks	conditional	conditional
agentCheckAmount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	The amount of the transaction paid the receiver in cash. <i>Field Rules</i> 1. Data and GUI input are required if using MoneyGram checks 2. Data and input are not allowed if not using MoneyGram checks 3. If not using MoneyGram Money Transfer Checks (MTCs), must contain value of <code>receiveAmount</code> field returned by the <code>referenceNumberResponse</code> 4. If using MTCs, must contain the portion of the receive amount that was paid in cash and recorded against <code>agentCheckNumber</code> .	conditional	conditional
customerCheckType	string Valid values: MTC	The type of non-cash instrument issued to the receiver. <i>Additional Information</i> 1. MTC is MoneyGram checks	not allowed	optional

Tag	Datatype	Information and Rules	Input	Data
customerCheckNumber	string Maximum length: 12	The number of the non-cash instrument issued to the receiver. <i>Field Rules</i> 1. Data and GUI input are required if using MoneyGram checks 2. Data and input are not allowed if not using MoneyGram checks	conditional	conditional
customerCheckAmount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	The amount of the transaction paid to the receiver by money order. <i>Field Rules</i> 1. Data and GUI input are required if using MoneyGram checks 2. Data and input are not allowed if not using MoneyGram checks 3. If using MTCs, must contain the portion of the receive amount that was paid in non-cash instruments and recorded against customerCheckNumber.	conditional	Conditional
communicationRetryIndicator	Boolean	If you are sending the reversal request for the first time, send it as false. If there is a communication error and you must send the request again, send it as true after the communication error has been resolved.	application	required

sendReversalResponse

Additional Information

1. Visibility rules only apply to fields that are returned

Field Summary

- transactionDateTime
- refundTotalAmount
- refundFaceAmount
- refundFeeAmount
- totalCheckAmount
- reversalType
- agentCheckAuthorizationNumber
 - receipts

Field Detail

Tag	Datatype	Information and Rules	Display
transactionDateTime	dateTime Format: CCYY-MM-DDThh:mm:ss.sss-hh:mm	None	required
refundTotalAmount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	The amount to return to the consumer 1. Data not returned when reversal type is 'C' 2. When returned, it is the total of refundFaceAmount and RefundFeeAmount (if fee is refunded)	required
refundFaceAmount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	None Data not returned when reversal type is 'C'	required
refundFeeAmount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	The original transaction fee amount. <i>Additional Information</i> 1. Data not returned when reversal type is 'C' 2. A value is always returned for Refunds, even when the transaction fee is not to be returned. Application should use the value in the refundTotalAmount to determine total refund amount	required
totalCheckAmount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	<i>Additional Information</i> 1. Field is not currently used	required

Tag	Datatype	Information and Rules	Display
reversalType	string Valid values: C, R	<i>Additional Information</i> 1. C is cancel 2. R is refund	not allowed
agentCheckAuthorizationNumber	string Maximum length: 5	<i>Additional Information</i> 1. Field is not currently used	required
receipts		For future use	

Table of Figures

Figure 1: Explanation of Process Flow Diagrams iv

Figure 2: Amend Transaction Process Flow 1

Figure 3: Refund Transaction Process Flow 1

Figure 4: Location of detailLookup in Process Flows 3

Figure 5: Location of amendTransaction in Process Flows 26

Figure 6: Location of sendReversal in Process Flows 32



CORPORATE OFFICE 2828 N. Harwood, Floor 15
 Dallas, TX 75201
 USA

TOLL FREE 1.800.328.5678

WEB SITE **www.moneygram.com**