



# AgentConnect<sup>®</sup>

## Directory of Agents

Version 15.12 (SP1)

2018

This AgentConnect® specification and the information contained herein is the **confidential property** of MoneyGram International, Inc. (MoneyGram), and is loaned to the recipient solely for use in integrating the MoneyGram System with the recipient's point-of-sale (POS) system as authorized by a Non-Disclosure Agreement entered between **MoneyGram** and the recipient. This document is also protected as an unpublished work under copyright law, and no part hereof may be compiled, distributed or disclosed to any third party without the prior written consent of **MoneyGram** except to persons having a legitimate need to know to integrate to the AgentConnect® System with the recipient's POS system as authorized in a POS license.

Other companies may have patents that apply to Money transfer or to the use of AgentConnect® within certain features. **MoneyGram** is not responsible for violations of any third party intellectual property rights by use of AgentConnect®.

The recipient's rights to integrate the AgentConnect® System with its POS system and/or using MoneyGram's confidential information will cease immediately upon termination of the Network Agreement or the Biller Agreement between MoneyGram and the recipient.


# Table of Contents

---

|                                                   |           |
|---------------------------------------------------|-----------|
| <b>Overview .....</b>                             | <b>1</b>  |
| <b>Business Purpose .....</b>                     | <b>1</b>  |
| <b>API Flows and Processes .....</b>              | <b>1</b>  |
| <b>Alternative Processes .....</b>                | <b>1</b>  |
| <b>APIs .....</b>                                 | <b>2</b>  |
| <b>1. cityList.....</b>                           | <b>3</b>  |
| cityListRequest.....                              | 3         |
| <i>Field Summary .....</i>                        | <i>3</i>  |
| <i>Field Detail.....</i>                          | <i>4</i>  |
| cityListResponse .....                            | 5         |
| <i>Field Summary .....</i>                        | <i>5</i>  |
| <i>Field Detail.....</i>                          | <i>6</i>  |
| <b>2. directoryOfAgentsByCity .....</b>           | <b>7</b>  |
| directoryOfAgentsByCityRequest.....               | 7         |
| <i>Field Summary .....</i>                        | <i>7</i>  |
| <i>Field Detail.....</i>                          | <i>8</i>  |
| directoryOfAgentsByCityResponse .....             | 9         |
| <i>Field Summary .....</i>                        | <i>9</i>  |
| <i>Field Detail.....</i>                          | <i>10</i> |
| <b>3. directoryOfAgentsByAreaCodePrefix .....</b> | <b>12</b> |
| directoryOfAgentsByAreaCodePrefixRequest.....     | 12        |
| <i>Field Summary .....</i>                        | <i>12</i> |
| <i>Field Detail.....</i>                          | <i>13</i> |
| directoryOfAgentsByAreaCodePrefixResponse.....    | 14        |
| <i>Field Summary .....</i>                        | <i>14</i> |
| <i>Field Detail.....</i>                          | <i>15</i> |
| <b>4. directoryOfAgentsByZip.....</b>             | <b>17</b> |
| directoryOfAgentsByZipRequest.....                | 17        |
| <i>Field Summary .....</i>                        | <i>17</i> |
| <i>Field Detail.....</i>                          | <i>18</i> |
| directoryOfAgentsByZipResponse.....               | 19        |
| <i>Field Summary .....</i>                        | <i>19</i> |
| <i>Field Detail.....</i>                          | <i>20</i> |
| <b>Table of Figures .....</b>                     | <b>23</b> |

The following diagram explains the formats used in process flows throughout this document.

For each API description, a red arrow points to the API being described.

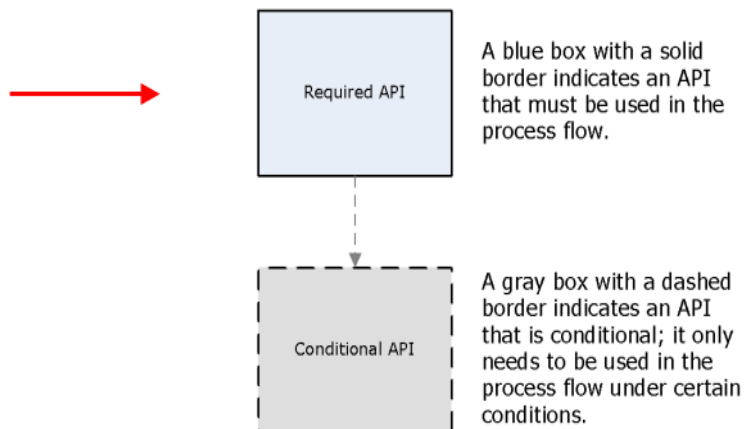

**Figure 1: Explanation of Process Flow Diagrams**

The following is an example of a table used to describe API request field details.

| Tag                  | Datatype                                            | Information and Rules                                                                                                                                                                                              | Input       | Data        |
|----------------------|-----------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-------------|
| requestExampleField1 | string<br>Maximum length: 10                        | An example of a field containing a string.                                                                                                                                                                         | GUI         | required    |
| requestExampleField2 | string<br>Length: 3<br>Must be a valid country code | An example of a field containing a country code                                                                                                                                                                    | application | required    |
| requestExampleField3 | boolean                                             | An example field whose input and data requirements depend on the <code>getFieldsForProduct</code> API.<br><i>Additional Information</i><br>1. If <code>true</code> , then...<br>2. If <code>false</code> , then... | not allowed | not allowed |

## Definitions

- **Tag:** The field's XML tag; fields for which data is required are shown in bold red text
- **Datatype:** Describes the type and restrictions of the field's data
- **Information and Rules:** Provides additional information, business rules, and a description of the field if necessary
- **Input:** Indicates how the field's value is obtained
  - **Application:** The agent application must retrieve the data from another part of the agent application or from a previous MoneyGram API response. Data can be displayed on the application screen
  - **GUI:** The agent application must visibility the field on its user interface and allow user input
  - **Conditional:** The agent application may or may not visibility the field on the user interface for user input depending on the conditions stated in the Information and Rules column
  - **GFFP or GFFR:** Whether or not the field is shown on the user interface for user inputs depends on the information returned by the `getFieldsForProductResponse` (GFFP) or `getFieldsForRewardsResponse` (GFFR)
  - **N/A:** Input does not apply; for instance, if the field only contains other fields

- **Not Allowed:** The agent application must not allow data to be entered in the field by the user. Data must not be displayed. The agent application must retrieve the data from another part of the agent application or from a previous MoneyGram API response
- **Optional:** The agent may choose whether to visibility the field on the user interface for user input
- **Data:** Indicates whether the field must contain data; only used on API requests
  - **Required:** The field must contain data
  - **Not allowed:** The field must not contain data
  - **Optional:** The agent may choose whether to show the field on the user interface
  - **Conditional:** The field may or may not contain data depending on the conditions stated in the Information and Rules column
  - **GFFP or GFFR:** Whether or not the field contains data depends on the information returned by the `getFieldsForProductResponse` (GFFP) or `getFieldsForRewardsResponse` (GFFR)
  - **Response:** Whether or not the field contains data depends on the information returned by a message specified in the additional information for the API

The following is an example of a table used to describe API response field details.

| Tag                   | Datatype                                            | Information and Rules                                                                                                                                                                                                    | Display  |
|-----------------------|-----------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| responseExampleField1 | string<br>Maximum length: 10                        | An example of a field containing a string.                                                                                                                                                                               | required |
| responseExampleField2 | string<br>Length: 3<br>Must be a valid country code | An example of a field containing a country code                                                                                                                                                                          | optional |
| responseExampleField3 | boolean                                             | An example field whose data and display requirements depend on the <code>getFieldsForProduct</code> API.<br><br><i>Additional Information</i><br>1. If <code>true</code> , then...<br>2. If <code>false</code> , then... | required |

## Definitions

- **Tag:** The field's XML tag; fields for which data is required are shown in bold red text

- **Datatype:** Describes the type and restrictions of the field's data
- **Information and Rules:** Provides additional information, business rules, and a description of the field if necessary
- **Display:** Indicates whether the value of the field is shown on the agent application's user interface
  - **Conditional:** The value may or may not be shown on the user interface depending on the conditions stated in the Information and Rules column
  - **GFFP or GFFR:** Whether or not the value is shown on the user interface depends on the information returned by the `getFieldsForProductResponse` (GFFP) or `getFieldsForRewardsResponse` (GFFR)
  - **N/A:** Display does not apply; for instance, if the field doesn't contain displayable data
  - **Not allowed:** The value must not be shown on the user interface; for fields in API responses, the data in the field should not be edited unless otherwise stated
  - **Optional:** The agent may choose whether to show the value on the user interface
  - **Required:** The value must be shown on the user interface when data is returned in the API

# Overview


## Business Purpose

- This document provides technical and business information required to design an application to search for MoneyGram agent locations. This information is most useful for senders to ensure that there are locations where their receivers can pick up their transactions. This is an alternative to the MoneyGram online agent locator.

## API Flows and Processes

### Directory of Agents by City Process

- The agent application sends a [cityListRequest](#) containing city search information, and MoneyGram returns a [cityListResponse](#) containing all available matches.
- The agent selects the city that best matches the city in which to search for an agent location.
- The agent application sends a [directoryOfAgentsByCityRequest](#) containing the selected city and country in which to search, and MoneyGram returns a [directoryOfAgentsByCityResponse](#) containing information about agents in that city.

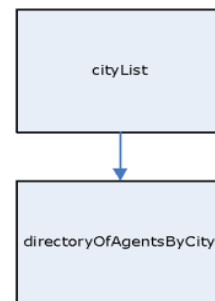

**Figure 2: Directory of Agents by City Process Flow**

### Directory of Agents by Phone Number Process


- The agent application sends a [directoryOfAgentsByAreaCodePrefixRequest](#) containing the first six numbers of a telephone number, and MoneyGram returns a [directoryOfAgentsByAreaCodePrefixResponse](#) containing information about agents that match the criteria.



**Figure 3: Directory of Agents by Phone Process Flow**

### Directory of Agents by Postal Code Process

- The agent application sends a [directoryOfAgentsByZipRequest](#) containing a postal code, and MoneyGram returns a [directoryOfAgentsByZipResponse](#) containing all available matches.



**Figure 4: Directory of Agents by Postal Code Process Flow**

## Alternative Processes

- The agent may use the online agent location finder at [www.global.moneygram.com](http://www.global.moneygram.com) to find agents

# APIs

---


## Optional APIs

1. [cityList](#)
2. [directoryOfAgentsByCity](#)
3. [directoryOfAgentsByAreaCodePrefix](#)
4. [directoryOfAgentsByZip](#)

## 1. *cityList*

The agent application must use the [cityList](#) API to determine the name of a city as it appears in MoneyGram's systems prior to using the [directoryOfAgentsByCity](#) API.

### Transaction Flow

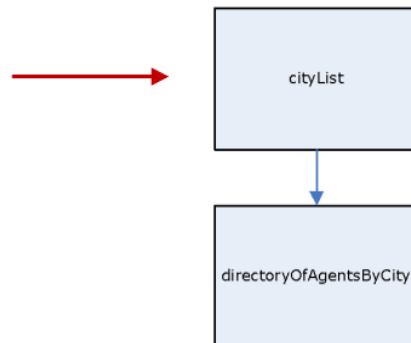

**Figure 5: Location of cityList in Process Flow**

### cityListRequest

#### Field Summary

- [country](#)
- [state](#)
- [city](#)
- [maxRowsToReturn](#)

**Field Detail**

| Tag             | Datatype                                                  | Information and Rules                                                                                                                                                                     | Input       | Data        |
|-----------------|-----------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-------------|
| country         | string<br>Length: 3<br>Must be a valid country code       | None                                                                                                                                                                                      | GUI         | required    |
| state           | string<br>Length: 2<br>Must be a valid state code         | <i>Field Rules</i><br>1. Data and GUI input are required if <code>country</code> is CAN, MEX, or USA<br>2. Data and input are not allowed if <code>country</code> is not CAN, MEX, or USA | conditional | conditional |
| city            | String<br>Maximum length: 24                              | <i>Additional Information</i><br>1. The wildcard character (*) is allowed after a letter or sequence of letters (e.g., M*)                                                                | GUI         | required    |
| maxRowsToReturn | Int<br>Maximum inclusive value: 3000<br>Default value:200 | <i>Additional Information</i><br>1. The <a href="#">cityListResponse</a> does not return more than 3000 results                                                                           | optional    | optional    |

## **cityListResponse**

### **Field Summary**

- city

**Field Detail**

| Tag  | Datatype                                                            | Information and Rules                                                                                                                                                                                                                        | Display  |
|------|---------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| city | string<br>Maximum number of occurrences: 3000<br>Maximum length: 60 | The name of a city in MoneyGram's systems that matches the criteria provided in the <a href="#">cityListRequest</a><br><br><i>Additional Information</i><br>1. A city being returned does not guarantee an agent location exists in the city | required |


## 2. *directoryOfAgentsByCity*

The agent application uses the [directoryOfAgentsByCity](#) API to locate agent locations in a specified city.

### Business Rules to Code

1. The agent application must use the [cityList](#) API to obtain the name of the city to search as it appears in MoneyGram's systems

### Transaction Flow

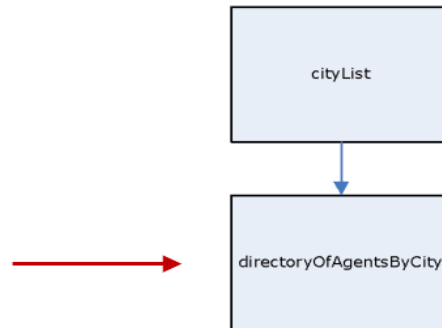

**Figure 6: Location of `directoryOfAgentsByCity` in Process Flow**

## `directoryOfAgentsByCityRequest`

### Field Summary

- [country](#)
- [state](#)
- [city](#)
- [maxRowsToReturn](#)

**Field Detail**

| Tag             | Datatype                                                   | Information and Rules                                                                                                                                                                                                                                                                                            | Input       | Data        |
|-----------------|------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|-------------|
| country         | string<br>Length: 3<br>Must be a valid country code        | <i>Additional Information</i><br>1. Use value of <code>country</code> used in <a href="#">cityListRequest</a>                                                                                                                                                                                                    | application | required    |
| state           | string<br>Length: 2<br>Must be a valid state code          | <i>Additional Information</i><br>1. Use value of <code>state</code> used in <a href="#">cityListRequest</a><br><i>Field Rules</i><br>1. Data and application input are required if <code>country</code> is CAN, MEX, or USA<br>2. Data and input are not allowed if <code>country</code> is not CAN, MEX, or USA | conditional | conditional |
| city            | string<br>Maximum length: 60                               | <i>Additional Information</i><br>1. Use value selected from <a href="#">cityListResponse</a> results                                                                                                                                                                                                             | application | required    |
| maxRowsToReturn | int<br>Maximum inclusive value: 3000<br>Default value: 200 | None                                                                                                                                                                                                                                                                                                             | optional    | optional    |

## directoryOfAgentsByCityResponse

### Field Summary

- agentInfo
  - agentName
  - address
  - city
  - state
  - receiveCapability
  - sendCapability
  - agentPhone
  - storeHours
    - dayOfWeek
    - openTime
    - closeTime
    - closed

**Field Detail**

| Tag               | Datatype                                            | Information and Rules                                                                                                                                                             | Display  |
|-------------------|-----------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| agentInfo         | complex<br>Maximum number of occurrences: unbounded | None                                                                                                                                                                              | N/A      |
| agentName         | string<br>Maximum length: 40                        | None                                                                                                                                                                              | optional |
| address           | string<br>Maximum length: 30                        | None                                                                                                                                                                              | optional |
| city              | string<br>Maximum length: 60                        | None                                                                                                                                                                              | optional |
| state             | string<br>Length: 2                                 | None                                                                                                                                                                              | optional |
| receiveCapability | boolean                                             | <i>Additional Information</i><br>1. If <code>true</code> , the agent can perform receive transactions<br>2. If <code>false</code> , the agent cannot perform receive transactions | optional |
| sendCapability    | boolean                                             | <i>Additional Information</i><br>1. If <code>true</code> , the agent can perform send transactions<br>2. If <code>false</code> , the agent cannot perform send transactions       | optional |
| agentPhone        | string<br>Maximum length: 20                        | None                                                                                                                                                                              | optional |

| Tag        | Datatype                                                                        | Information and Rules                                                                                                                                          | Display  |
|------------|---------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| storeHours | complex<br>Minimum number of occurrences: 1<br>Maximum number of occurrences: 7 | None                                                                                                                                                           | N/A      |
| dayOfWeek  | string<br>Valid values: MON, TUE, WED, THU, FRI, M-F, S-S, SAT, SUN             | None                                                                                                                                                           | optional |
| openTime   | time<br>Format: hh:mm:ss                                                        | None                                                                                                                                                           | optional |
| closeTime  | time<br>Format: hh:mm:ss                                                        | None                                                                                                                                                           | optional |
| closed     | boolean                                                                         | <i>Additional Information</i><br>1. If <code>true</code> , the location is closed for business<br>2. If <code>false</code> , the location is open for business | optional |

### ***3. directoryOfAgentsByAreaCodePrefix***

The agent application uses the `directoryOfAgentsByPhone` API locate agent locations with a specified area code and partial telephone number.

#### **directoryOfAgentsByAreaCodePrefixRequest**

##### **Field Summary**

- areaCodePrefix
- country
- maxRowsToReturn

**Field Detail**

| Tag             | Datatype                                                  | Information and Rules                                                            | Input    | Data     |
|-----------------|-----------------------------------------------------------|----------------------------------------------------------------------------------|----------|----------|
| areaCodePrefix  | string<br>Length: 6<br>Validation pattern: [0-9]{6}       | The first six numbers of a telephone number not including the phone country code | GUI      | required |
| country         | string<br>Length: 3<br>Must be a valid country code       | None                                                                             | GUI      | required |
| maxRowsToReturn | int<br>Maximum inclusive value: 3000<br>Default value:200 | None                                                                             | optional | optional |

## directoryOfAgentsByAreaCodePrefixResponse

### Field Summary

- agentInfo
  - agentName
  - address
  - city
  - state
  - receiveCapability
  - sendCapability
  - agentPhone
  - storeHours
    - dayOfWeek
    - openTime
    - closeTime
    - closed

**Field Detail**

| Tag               | Datatype                                            | Information and Rules                                                                                                                                                             | Display  |
|-------------------|-----------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| agentInfo         | complex<br>Maximum number of occurrences: unbounded | None                                                                                                                                                                              | N/A      |
| agentName         | string<br>Maximum length: 40                        | None                                                                                                                                                                              | optional |
| address           | string<br>Maximum length: 30                        | None                                                                                                                                                                              | optional |
| city              | string<br>Maximum length: 60                        | None                                                                                                                                                                              | optional |
| state             | string<br>Length: 2                                 | None                                                                                                                                                                              | optional |
| receiveCapability | boolean                                             | <i>Additional Information</i><br>1. If <code>true</code> , the agent can perform receive transactions<br>2. If <code>false</code> , the agent cannot perform receive transactions | optional |
| sendCapability    | boolean                                             | <i>Additional Information</i><br>1. If <code>true</code> , the agent can perform send transactions<br>2. If <code>false</code> , the agent cannot perform send transactions       | optional |
| agentPhone        | string<br>Maximum length: 20                        | None                                                                                                                                                                              | optional |

| Tag        | Datatype                                                                        | Information and Rules                                                                                                                                          | Display  |
|------------|---------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| storeHours | complex<br>Minimum number of occurrences: 1<br>Maximum number of occurrences: 7 | None                                                                                                                                                           | N/A      |
| dayOfWeek  | string<br>Valid values: MON, TUE, WED, THU, FRI, M-F, S-S, SAT, SUN             | None                                                                                                                                                           | optional |
| openTime   | time<br>Format: hh:mm:ss                                                        | None                                                                                                                                                           | optional |
| closeTime  | time<br>Format: hh:mm:ss                                                        | None                                                                                                                                                           | optional |
| closed     | boolean                                                                         | <i>Additional Information</i><br>1. If <code>true</code> , the location is closed for business<br>2. If <code>false</code> , the location is open for business | optional |

## **4. *directoryOfAgentsByZip***

The agent application uses the [directoryOfAgentsByZip](#) API to locate agent locations with a specified postal code.

### **directoryOfAgentsByZipRequest**

#### **Field Summary**

- [zipCode](#)
- [country](#)
- [maxRowsToReturn](#)

**Field Detail**

| Tag             | Datatype                                                  | Information and Rules | Input    | Data     |
|-----------------|-----------------------------------------------------------|-----------------------|----------|----------|
| zipCode         | string<br>Maximum length: 10                              | None                  | GUI      | required |
| country         | string<br>Length: 3<br>Must be a valid country code       | None                  | GUI      | required |
| maxRowsToReturn | int<br>Maximum inclusive value: 3000<br>Default value:200 | None                  | optional | optional |

## directoryOfAgentsByZipResponse

### Field Summary

- agentInfo
  - agentName
  - address
  - city
  - state
  - receiveCapability
  - sendCapability
  - agentPhone
  - storeHours
    - dayOfWeek
    - openTime
    - closeTime
    - closed

**Field Detail**

| Tag               | Datatype                                            | Information and Rules                                                                                                                                                             | Display  |
|-------------------|-----------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| agentInfo         | complex<br>Maximum number of occurrences: unbounded | None                                                                                                                                                                              | N/A      |
| agentName         | string<br>Maximum length: 40                        | None                                                                                                                                                                              | optional |
| address           | string<br>Maximum length: 30                        | None                                                                                                                                                                              | optional |
| city              | string<br>Maximum length: 60                        | None                                                                                                                                                                              | optional |
| state             | string<br>Length: 2                                 | None                                                                                                                                                                              | optional |
| receiveCapability | boolean                                             | <i>Additional Information</i><br>1. If <code>true</code> , the agent can perform receive transactions<br>2. If <code>false</code> , the agent cannot perform receive transactions | optional |
| sendCapability    | boolean                                             | <i>Additional Information</i><br>1. If <code>true</code> , the agent can perform send transactions<br>2. If <code>false</code> , the agent cannot perform send transactions       | optional |
| agentPhone        | string<br>Maximum length: 20                        | None                                                                                                                                                                              | optional |

| Tag        | Datatype                                                                        | Information and Rules                                                                                                                                          | Display  |
|------------|---------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|
| storeHours | complex<br>Minimum number of occurrences: 1<br>Maximum number of occurrences: 7 | None                                                                                                                                                           | N/A      |
| dayOfWeek  | string<br>Valid values: MON, TUE, WED, THU, FRI, M-F, S-S, SAT, SUN             | None                                                                                                                                                           | optional |
| openTime   | time<br>Format: hh:mm:ss                                                        | None                                                                                                                                                           | optional |
| closeTime  | time<br>Format: hh:mm:ss                                                        | None                                                                                                                                                           | optional |
| closed     | boolean                                                                         | <i>Additional Information</i><br>1. If <code>true</code> , the location is closed for business<br>2. If <code>false</code> , the location is open for business | optional |

## Table of Figures

---

|                                                                     |    |
|---------------------------------------------------------------------|----|
| Figure 1: Explanation of Process Flow Diagrams .....                | iv |
| Figure 2: Directory of Agents by City Process Flow .....            | 1  |
| Figure 3: Directory of Agents by Phone Process Flow .....           | 1  |
| Figure 4: Directory of Agents by Postal Code Process Flow .....     | 1  |
| Figure 5: Location of cityList in Process Flow .....                | 3  |
| Figure 6: Location of directoryOfAgentsByCity in Process Flow ..... | 7  |



CORPORATE OFFICE    2828 N. Harwood, Floor 15  
Dallas, TX 75201  
USA

TOLL FREE    1.800.328.5678

WEB SITE    **[www.moneygram.com](http://www.moneygram.com)**