



AgentConnect®

FormFree Completion

Version 15.12 (SP1)

2018

This AgentConnect® specification and the information contained herein is the **confidential property** of MoneyGram International, Inc. (MoneyGram), and is loaned to the recipient solely for use in integrating the MoneyGram System with the recipient's point-of-sale (POS) system as authorized by a Non-Disclosure Agreement entered between **MoneyGram** and the recipient. This document is also protected as an unpublished work under copyright law, and no part hereof may be compiled, distributed or disclosed to any third party without the prior written consent of **MoneyGram** except to persons having a legitimate need to know to integrate to the AgentConnect® System with the recipient's POS system as authorized in a POS license.

Other companies may have patents that apply to Money transfer or to the use of AgentConnect® within certain features. **MoneyGram** is not responsible for violations of any third party intellectual property rights by use of AgentConnect®.

The recipient's rights to integrate the AgentConnect® System with its POS system and/or using MoneyGram's confidential information will cease immediately upon termination of the Network Agreement or the Biller Agreement between MoneyGram and the recipient.

Table of Contents

Overview	1
Business Purpose	1
API Flows and Processes	1
APIs	9
1. formFreeTranLookupWithAmount.....	10
formFreeTranLookupWithAmountRequest	10
Field Summary	10
Field Detail.....	11
tranType.....	11
formFreeTranLookupWithAmountResponse	12
Field Summary	12
Field Detail.....	13
2. formFreeSendLookup	16
formFreeSendLookupRequest	16
Field Summary	16
Field Detail.....	17
formFreeSendLookupResponse	18
Field Summary	18
Field Detail.....	21
3. formFreeReceiveLookup.....	40
formFreeReceiveLookupRequest	40
Field Summary	40
Field Detail.....	41
formFreeReceiveLookupResponse	42
Field Summary	42
Field Detail.....	44
4. formFreeBPLookup	56
formFreeBPLookupRequest	56
Field Summary	56
Field Detail.....	57
formFreeBPLookupResponse	58
Field Summary	58
Field Detail.....	60
5. receiveValidation.....	71
receiveValidationRequest.....	73
Field Summary	73

Field Detail.....	75
receiveValidationResponse	89
Field Summary	89
Field Detail.....	90
6. feeLookup.....	91
feeLookupRequest	92
Field Summary	92
Field Detail.....	93
feeLookupResponse	97
Field Summary	97
Field Detail.....	98
7. bpValidation	107
bpValidationRequest	108
Field Summary	108
Field Detail.....	110
bpValidationResponse	123
Field Summary	123
Field Detail.....	125
8. commitTransaction	136
commitTransactionRequest	136
Field Summary	136
Field Detail.....	137
commitTransactionResponse	139
Field Summary	139
Field Detail.....	140
9. detailLookup.....	142
detailLookupRequest	142
Field Summary	142
Field Detail.....	143
detailLookupResponse	145
Field Summary	145
Field Detail.....	147
10. referenceNumber	164
referenceNumberRequest	164
Field Summary	164
Field Detail.....	165
referenceNumberResponse	166
Field Summary	166

Field Detail..... 168

Table of Figures..... 182

The following diagram explains the formats used in process flows throughout this document.

For each API description, a red arrow points to the API being described.

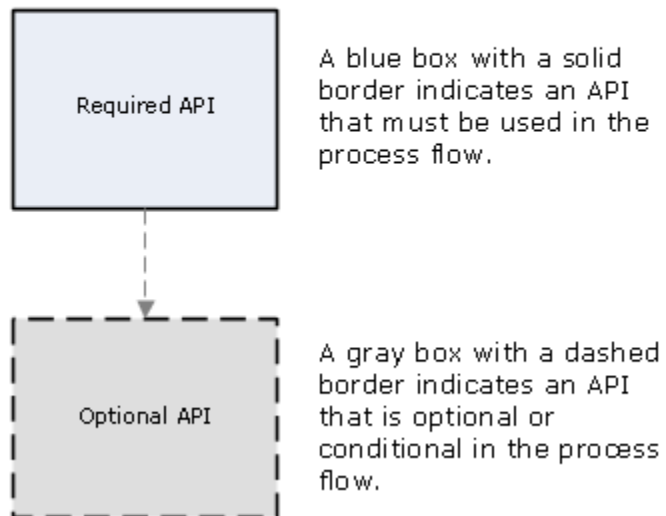


Figure 1: Explanation of Process Flow Diagrams

The following is an example of a table used to describe API request field details.

Tag	Datatype	Information and Rules	Input	Data
requestExampleField1	string Maximum length: 10	An example of a field containing a string.	GUI	required
requestExampleField2	string Length: 3 Must be a valid country code	An example of a field containing a country code	application	required
requestExampleField3	boolean	An example field whose data and visibility requirements depend on the <code>getFieldsForProduct</code> API. <i>Additional Information</i> 1. If <code>true</code> , then... 2. If <code>false</code> , then...	not allowed	not allowed

Definitions

- **Tag:** The field's XML tag; fields for which data is required are shown in bold red text
- **Datatype:** Describes the type and restrictions of the field's data
- **Information and Rules:** Provides additional information, business rules, and a description of the field if necessary
- **Input:** Indicates how the field's value is obtained
 - **Application:** The agent application must retrieve the data from another part of the agent application or from a previous MoneyGram API response. Data can be displayed on the application screen
 - **GUI:** The agent application must display the field on its user interface and allow user input
 - **Conditional:** The agent application may or may not display the field on the user interface for user input depending on the conditions stated in the Information and Rules column
 - **GFFP:** Whether or not the field is shown on the user interface for user inputs depends on the information returned by the `getFieldsForProductResponse` (GFFP)
 - **N/A:** Input does not apply; for instance, if the field only contains other fields

- **Not Allowed:** The agent application must not allow data to be entered in the field by the user. Data must not be displayed. The agent application must retrieve the data from another part of the agent application or from a previous MoneyGram API response
- **Optional:** The agent may choose whether to display the field on the user interface for user input
- **Data:** Indicates whether the field must contain data; only used on API requests
 - **Required:** The field must contain data
 - **Not allowed:** The field must not contain data
 - **Optional:** The agent must display the field on the user interface, but data collection is optional
 - **Conditional:** The field may or may not contain data depending on the conditions stated in the Information and Rules column
 - **GFFP:** Whether or not the field contains data depends on the information returned by the `getFieldsForProductResponse` (GFFP)
 - **Response:** Whether or not the field contains data depends on the information returned by a message specified in the additional information for the API

The following is an example of a table used to describe API response field details.

Tag	Datatype	Information and Rules	Display
responseExampleField1	string Maximum length: 10	An example of a field containing a string.	required
responseExampleField2	string Length: 3 Must be a valid country code	An example of a field containing a country code	optional
responseExampleField3	boolean	An example field whose data and visibility requirements depend on the <code>getFieldsForProduct</code> API. <i>Additional Information</i> 1. If <code>true</code> , then... 2. If <code>false</code> , then...	required

Definitions

- **Tag:** The field's XML tag; fields for which data is required are shown in bold red text

- **Datatype:** Describes the type and restrictions of the field's data
- **Information and Rules:** Provides additional information, business rules, and a description of the field if necessary
- **Display:** Indicates whether the value of the field is shown on the agent application's user interface
 - **Conditional:** The value may or may not be shown on the user interface depending on the conditions stated in the Information and Rules column
 - **GFFP:** Whether or not the value is shown on the user interface depends on the information returned by the `getFieldsForProductResponse` (GFFP)
 - **N/A:** Visibility does not apply; for instance, if the field doesn't contain displayable data
 - **Not allowed:** The value must not be shown on the user interface; for fields in API responses, the data in the field should not be edited unless otherwise stated
 - **Optional:** The agent may choose whether to show the value on the user interface
 - **Required:** The value must be shown on the user interface if data is returned in the API.

Overview

Business Purpose

- To develop an application that retrieves transaction data previously collected and stored in MoneyGram systems in order to process send, receive and Bill Payment transactions. Customers have initiated their transactions through other methods (e.g., via mobile phone, online form, etc.) and use the application to complete their staged transactions. A customer either pays for a send or bill payment transaction and receives a reference number, or completes a receive transaction and receives payment.
- The advantage for the agent is that logic for setting up the transaction data, and the time spent with the customer to collect all required data, has been handled in a previous process.

API Flows and Processes

Send Transaction Completion Process

- The agent begins a MoneyGram send completion transaction. Agent must develop two methods to complete a transaction: 1) search by phone number (Primary lookup). 2) search by senderFirstName and senderLastName (Secondary lookup).

- Method 1:** search by phone number (Primary lookup) - the application must start with a phone number lookup. The agent application sends a formFreeTranLookupWithAmountRequest, and MoneyGram returns a formFreeTranLookupWithAmountResponse containing a list of transactions staged to that phone number and are available for completion.

The agent selects the customer's transaction after matching the amount and other information returned in the list

Method 2: search by senderFirstName and senderLastName (Secondary lookup)– If the primary lookup does not return any data, the customer can provide the senderFirstName and senderLastName. The agent application sends a formFreeTranLookupWithAmountRequest, and MoneyGram returns a formFreeTranLookupWithAmountResponse containing a list of transactions staged to that senderFirstName and senderLastName that are available for completion.

The agent selects the customer's transaction after matching the amount and other information returned in the list

- The agent application sends a formFreeSendLookupRequest containing the customer's transaction number (confirmation number), and MoneyGram returns a formFreeSendLookupResponse containing detailed information on the transaction.
- The agent confirms the amount, delivery option, and other information is correct and the customer will accept the fee and exchange rate.

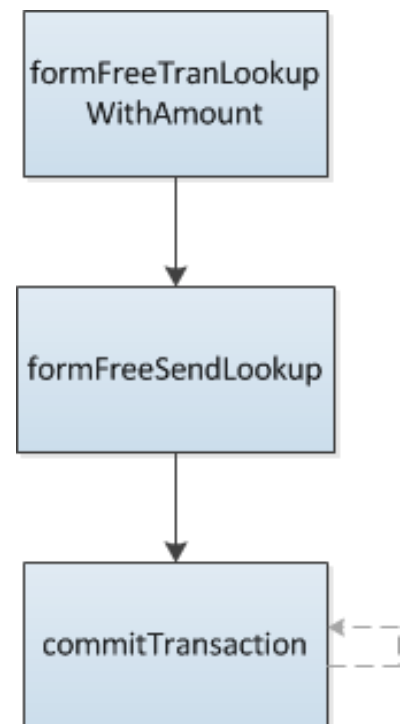


Figure 2: FormFree Send Process Flow

5. [Conditional] The agent provides the consumer with a disclosure slip showing all transaction fees, taxes, and other transaction details.
6. The agent collects funds from the consumer.
7. If the `formFreeSendLookupResponse` returns a value of `true` in the `readyForCommit` field, the agent application sends a `commitTransactionRequest`, and MoneyGram returns a `commitTransactionResponse`.
8. If the `commitTransactionResponse` is not received, the agent application must resend the `commitTransactionRequest`. This can be repeated 3 times. Agent can always check the transaction status to confirm if the transaction was successful.
10. [Optional] The agent provides the consumer with a promotional slip showing MoneyGram promotional information.
11. Have consumer sign the Agent Copy of the receipt and agent retains the receipt. The agent provides the consumer with a transaction Customer Copy receipt showing all transaction details.

Receive Transaction Completion Process

1. The agent begins a MoneyGram receive completion transaction. The reference number is provided by the consumer that is available for receive completion.
2. The agent application sends a `formFreeReceiveLookupRequest`, and MoneyGram returns a `formFreeReceiveLookupResponse` containing detailed transaction information.
3. The agent confirms the amount and other information is correct and verify the customer.
4. The agent application sends a `receiveValidationRequest` containing the fields returned in the `formFreeReceiveLookupResponse`, and MoneyGram returns a `receiveValidationResponse` indicating the transaction can continue.
5. The agent application sends a `commitTransactionRequest`, and MoneyGram returns a `commitTransactionResponse`.
6. If the `commitTransactionResponse` is not received, the agent application must resend the `commitTransactionRequest`. This can be repeated 3 times. Agent can always check the transaction status to confirm if the transaction was successful.
7. After a successful `commitTransaction`, the customer signs the Agent Copy of receipt for agent to retain, and agent provides the customer with their money and the transaction receipt.

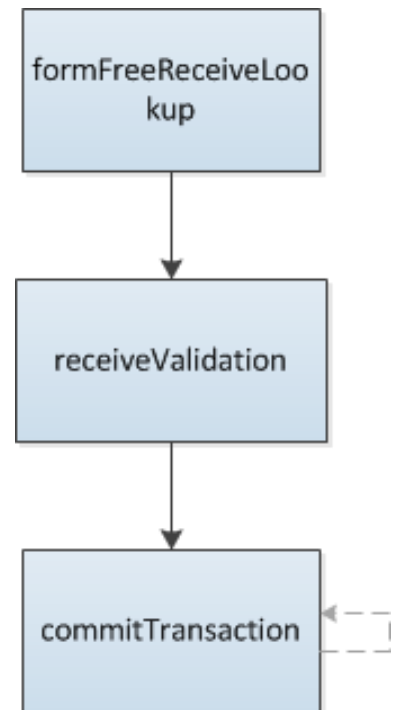


Figure 3: FormFree Receive Process Flow

Bill Payment Transaction Completion Process

1. The agent begins a bill payment completion transaction. Agent must develop two methods to complete a transaction: 1) search by phone number (Primary lookup). 2) search by senderFirstName and senderLastName (Secondary lookup).

2. **Method 1:** search by phone number (Primary lookup) - the application must start with a phone number lookup. The agent application sends a formFreeTranLookupWithAmountRequest, and MoneyGram returns a formFreeTranLookupWithAmountResponse containing a list of transactions staged to that phone number and are available for completion.

The agent selects the customer's transaction after matching the amount and other information returned in the list

Method 2: search by senderFirstName and senderLastName (Secondary lookup)- If the primary lookup does not return any data, the customer can provide the senderFirstName and senderLastName. The agent application sends a formFreeTranLookupWithAmountRequest, and MoneyGram returns a formFreeTranLookupWithAmountResponse containing a list of transactions staged to that senderFirstName and senderLastName that are available for completion.

The agent selects the customer's transaction after matching the amount and other information returned in the list

3. The agent application sends a formFreeTranLookupWithAmountRequest, and MoneyGram returns a formFreeTranLookupWithAmountResponse containing a list of transactions available for completion.
4. The agent uses the information provided with each transaction in the list to select the customer's transaction.
5. The agent application sends a formFreeBPLookupRequest containing the customer's transaction number, and MoneyGram returns a formFreeBPLookupResponse containing detailed information on the transaction.
6. The agent confirms the amount and other information is correct from the formFreeBPLookupResponse
7. The agent application sends a feeLookupRequest for the biller and transaction amount.
8. From the feeLookupResponse information the agent confirms the amount and other information is correct and the customer will accept the fee and exchange rate, if any.
9. The agent application sends a bpValidationRequest containing the fields returned in the formFreeBPLookupResponse, and MoneyGram returns a bpValidationResponse.

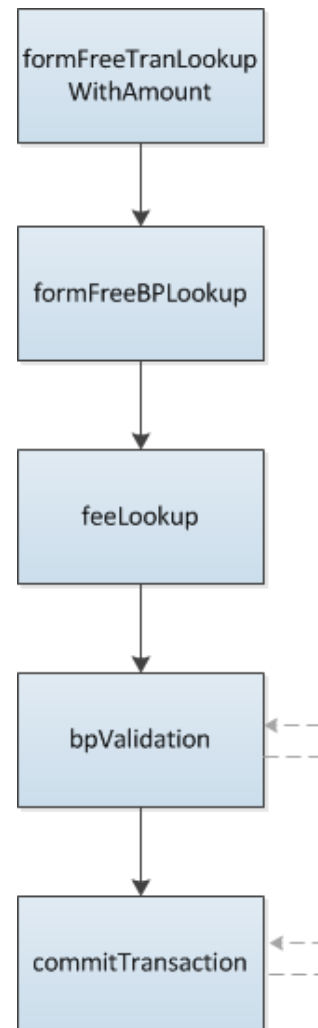


Figure 4: FormFree Bill Payment Process Flow

10. [Optional] The agent provides the consumer with a disclosure slip showing all transaction fees, taxes, and other transaction details.
11. The agent collects funds from the consumer.
12. The agent application sends a `commitTransactionRequest`, and MoneyGram returns a `commitTransactionResponse`.
13. If the `commitTransactionResponse` is not received, the agent application must resend the `commitTransactionRequest`. This can be repeated 3 times. Agent can always check the transaction status to confirm if the transaction was successful.
14. The agent provides the consumer with a transaction receipt showing all transaction details.

FormFree Transaction Completion Process using QR Code (optional)

1. Agents who have hardware to support QR Code scanning should be encouraged to adopt MoneyGram QR Code standards and support QR Code FormFree completion.
2. In the staging model via MGO and APP, staging customers will receive a mandatory email notification. Customer will have to opt-in to SMS notifications. Email and SMS notifications will include the following data:
 - a. Staging transaction summary
 - b. Agents in country have built QR code completion, a QR code will be provided
3. Agents should offer FormFree QR Code completion for:
 - a. Money Transfer Sends (including Account Deposit options)
 - b. Money Transfer Receives
 - c. Bill Payment (if applicable)
4. Agents should scan a standardized MG QR Code that will perform a FormFree Lookup and return transaction details for a money transfer end, Bill Payment or money transfer Receive transaction. If QR code is used, this must be the primary method used for completion and the agent's application can call the `formFreeSendLookup/formFreeBPLookup` and skip the `formFreeTranLookupWithAmount` for this flow. A secondary FormFree lookup must be built using phone number lookup and starting with the `formFreeTranLookupWithAmount` API.
5. Agent must adopt MoneyGram's standardized QR Code format and must be compatible with MoneyGram's Zxing (Zebra Crossing) QR Code generator:
 - a. Agents must use 2D QR Code completion
 - b. Agent's QR Code messaging content must be JSON
 - c. Standardized QR Code Text Content Attributes are as shown below. The order of these attributes are not always the same and can vary, but the field 'Tag' is the same and does not change.

QR Code Image Specifications

Tag	Datatype	Information and Rules	Input	Data
serviceID	string Maximum length: 30 Valid value: MGI	Identifies the service entity for the client POE. <i>Additional Information</i> MGI is for MoneyGram International	application	required
actionID	string Maximum length: 30 Valid values: FORM_FREE_SEND FORM_FREE_BILLPAY FORM_FREE_RECEIVE	Identifies type of staging event. <i>Additional Information</i> 1. FORM_FREE_SEND is for Send transactions 2. FORM_FREE_BILLPAY is for Bill Payment transactions 3. FORM_FREE_RECEIVE is for Receive transactions	application	required
agentID	string Length: 8	The agent's unique identification number. Each location will have a unique number assigned by MoneyGram. Populated only when staging to a specific agent location. Used by client application to ensure the completion location matches the location chosen at time of staging.	application	optional
confirmationNumber	string Length: 7	Must contain the same value of transactionNumber from the formFreeTranLookupWithAmountResponse Used by the client POE when calling FormFreeSendLookup API or FormFreeBPLookup API	application	required
referenceNumber	string Length: 12	Must contain the same value of referenceNumber from the formFreeReceiveLookup Used by the agent POS when calling formFreeReceiveLookup API	application	Conditional
amount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Amount of staged transaction (does not include fees or taxes). Can be used to match amount on FormFree transaction lookups.	application	required

QR Code Image Specifications (FORM_FREE_SEND)

Attribute	Value	Example
Content Type	Text/JSON	
Height	200 pixels	
Width	200 pixels	
EXAMPLE: Image and embedded text/JSON payload		<pre>{ "serviceID":"MGI", "actionID":"FORM_FREE_SEND", "agentID":"65208575", "confirmationNumber":"8228100", "amount":4.00 }</pre>

QR Code Image Specifications (FORM_FREE_RECEIVE)

Attribute	Value	Example
Content Type	Text/JSON	
Height	200 pixels	
Width	200 pixels	
EXAMPLE: Image and embedded text/JSON payload		<pre>{ "serviceID":"MGI", "actionID":"FORM_FREE_RECEIVE", "agentID":"87651239", "referenceNumber":"15495371", "amount":199.99 }</pre>

QR Code Image Specifications (FORM_FREE_BILLPAY)

Attribute	Value	Example
Content Type	Text/JSON	
Height	200 pixels	
Width	200 pixels	
EXAMPLE: Image and embedded text/JSON payload		<pre>{ "serviceID":"MGI", "actionID":"FORM_FREE_BILLPAY", "confirmationNumber":"1234567", "agentID":"87651239", "amount":399.99 }</pre>

APIs

Required APIs

1. formFreeTranLookupWithAmountLookup
2. formFreeSendLookup
3. formFreeReceiveLookup
4. formFreeBPLookup
5. receiveValidation
6. feeLookup
7. bpValidation
8. commitTransaction

Optional APIs

9. detailLookup
10. referenceNumber

1. *formFreeTranLookupWithAmount*

The agent application uses the formFreeTranLookupWithAmount to get a list of transactions available for completion in the MoneyGram system. Transaction data is retained for 24 hours before it is removed from MoneyGram systems. The transactions can be retrieved using the searched by sender's phone number or sender's name. The records are returned ordered by the most recently staged transaction.

formFreeTranLookupWithAmountRequest

Field Summary

- freqCustCardNumber
- senderPhoneNumber
- senderFirstName
- senderLastName
- billerAccountNumber
- tranType
- thisLocationOnly
- maxRowsToReturn

Field Detail

Tag	Datatype	Information and Rules	Input	Data
freqCustCardNumber	string Maximum length: 20	Field not currently used	not allowed	not allowed
senderPhoneNumber	string Maximum length: 14	<i>Field Rules</i> 1. Sender Phone number should not include the phone country code	required	required
senderFirstName	string Maximum length: 20	None	required	required
senderLastName	string Maximum length: 30	None	required	required
billerAccountNumber	string Maximum length: 30	Field not currently used	not allowed	not allowed
tranType	string Maximum length: 4 Valid values: SEND, XPAY	<i>Additional Information</i> 1. SEND is money transfer send transactions 2. XPAY is bill payment or ExpressPayment transactions	optional	required
thisLocationOnly	boolean	<i>Additional Information</i> 1. Value must be false	application	required
maxRowsToReturn	integer Minimum exclusive value: 0 Maximum exclusive value: 1000	Specifies the maximum number of records to return in the <u>formFreeTranLookupWithAmountResponse</u> . If this is blank, the default is 20 records	optional	optional

formFreeTranLookupWithAmountResponse

Field Summary

- senderLastName
- senderFirstName
- senderAddress
- senderCity
- senderState
- senderCountry
- senderZipCode
- senderPhone
- freqCustCardNumber
- receiverLastName
- receiverFirstName
- receiverLastName2
- receiveState
- receiveCountry
- billerName
- billerAccountNumber
- transactionNumber
- amount
- sendCurrency

Field Detail

Tag	Datatype	Information and Rules	Display
senderLastName	string Maximum length: 40	None	required
senderFirstName	string Maximum length: 40	None	required
senderAddress	string Maximum length: 80	None	optional
senderCity	string Maximum length: 40	None	optional
senderState	string Length: 2	None	optional
senderCountry	string Length: 3	None	optional
senderZipCode	string Maximum length: 10	None	optional
senderPhone	string Maximum length: 14	None	optional
freqCustCardNumber	string Maximum length: 20	The sender's MoneyGram Plus number.	optional

Tag	Datatype	Information and Rules	Display
receiverLastName	string Maximum length: 40	None	required
receiverFirstName	string Maximum length: 40	None	required
receiverLastName2	string Maximum length: 40	None	required
receiveState	string Length: 2	Data is available when transaction is sent from USA, CAN or Jamaica and receiveCountry is USA or CAN	required
receiveCountry	string Length: 3	The full name of the country must be displayed, not the ISO country code	required
billerName	string Maximum length: 64	<i>Field Rules</i> 1. Display is required for bill payment transactions	required
billerAccountNumber	string Maximum length: 30	<i>Field Rules</i> 1. Display is required for bill payment transactions 2. Agent application must display only the last four digits	required
transactionNumber	string Length: 7	MoneyGram number identifying the specified returned transaction. This is not the reference number. Must populate this value in the confirmationNumber in formFreeSendLookupRequest or bpValidationRequest	optional
amount	Decimal Maximum length: 14 Maximum decimal digits: 3		required

Tag	Datatype	Information and Rules	Display
<u>sendCurrency</u>	string Length: 3		required

2. *formFreeSendLookup*

The agent application uses the formFreeSendLookup API to request details on an available send transaction for completion.

Business Rules to Code

1. Data returned in the response must be displayed on a transaction summary screen for review and verification.
2. The agent must verify if consumer data and ID information matched the returned data. If ID information does not match, do not allow the transaction to continue.
3. [conditional] USA only: A prepayment disclosure receipt must be printed using the response from this API for all transactions sent to outside of US. Receipt format and content will be reviewed and approved by MoneyGram. Receipt guidelines can be found in the Receipts module.

formFreeSendLookupRequest

Field Summary

- confirmationNumber
- amount
- feeAmount
- primaryReceiptLanguage
- secondaryReceiptLanguage
- receiptImages

Field Detail

Tag	Datatype	Information and Rules	Input	Data
confirmationNumber	string Length: 7	<i>Additional Information</i> 1. Must contain the value of <code>transactionNumber</code> from the <u><code>formFreeTranLookupWithAmountResponse</code></u>	application	required
amount	decimalMaximum length: 14 Maximum decimal digits: 3	1. Must contain the value of amount from the <code>formFreeTranLookupWithAmountResponse</code>	application	required
feeAmount	decimalMaximum length: 14 Maximum decimal digits: 3	None	not allowed	not allowed
primaryReceiptLanguage	string Length: 3	Primary language to be used on prepayment disclosures and receipts. <i>Field Rules</i> 1. Value must be <code>ENG</code> for USA and territories	application	conditional
secondaryReceiptLanguage	string Length: 3	Secondary language to be used on prepayment disclosures and receipts. <i>Field Rules</i> 1. Data is required for US-based agents. Valid values: <code>SPA</code> (Spanish), <code>DEU</code> (German), <code>FRA</code> (French) 2. Data is optional for non-US agents	application	conditional
receiptImages	ReceiptImagesContentType	For future use	NA	NA

formFreeSendLookupResponse

Additional Information

1. The fields returned with data can vary depending on type of transaction, destination country, and other variables
2. Visibility rules only apply to fields that are returned

Field Summary

- agentTransactionId
- confirmationNumber
- mgiTransactionSessionID
- maxAmount
- mgiRewardsNumber
- agentCustomerNumber
- destinationCountry
- destinationState
- deliveryOption
- receiveAgentID
- accountNumberLastFour
- customerReceiveNumber
- accountNickname
- senderFirstName
- senderMiddleName
- senderLastName
- senderLastName2
- senderAddress
- senderAddress2
- senderAddress3
- senderCity
- senderState
- senderZipCode
- senderCountry
- senderHomePhone
- receiverFirstName
- receiverMiddleName
- receiverLastName
- receiverLastName2
- receiverAddress
- receiverAddress2
- receiverAddress3
- direction1
- direction2
- direction3
- receiverCity
- receiverState
- receiverZipCode
- receiverCountry
- receiverPhone
- receiverPhoneCountryCode
- receiverEmail
- testQuestion
- testAnswer
- messageField1
- messageField2
- senderPhotoIdType
- senderPhotoIdNumber
- senderPhotoIdState
- senderPhotoIdCountry
- senderLegalIdType
- senderLegalIdNumber
- senderDOB
- senderOccupation
- thirdPartyFirstName
- thirdPartyMiddleName
- thirdPartyLastName
- thirdPartyLastName2
- thirdPartyAddress
- thirdPartyAddress2
- thirdPartyAddress3

- thirdPartyCity
- thirdPartyState
- thirdPartyZipCode
- thirdPartyCountry
- thirdPartyLegalIdType
- thirdPartyLegalIdNumber
- thirdPartyDOB
- thirdPartyOrg
- senderBirthCity
- senderBirthCountry
- promotionInfo
- senderEmailAddress
- senderMobilePhone
- senderMobilePhoneCountryCode
- marketingOptIn
- consumerId
- fieldValues
 - keyValuePair
- promotionalMessage
 - longLanguageCode
 - textTranslation
- readyForCommit
- disclosureText
 - longLanguageCode
 - textTranslation
- receiveAgentName
- receiveAgentAddress
 - agentAddressLine
- additionalFieldsToCollect
 - xmlTag
 - visibility
 - fieldLabel
 - displayOrder
 - fieldCategory
 - dynamic
 - fieldMax
 - fieldMin
 - dataType
- enumerated
- defaultValue
- validationRegEx
- arrayName
- arrayLength
- exampleFormat
- enumeratedValues
 - enumeratedValueInfo
 - value
 - label
- sendAmounts
 - sendAmount
 - sendCurrency
 - totalSendFees
 - totalDiscountAmount
 - totalSendTaxes
 - totalAmountToCollect
 - detailSendAmounts
 - amountType
 - amount
 - amountCurrency
- receiveAmounts
 - receiveAmount
 - receiveCurrency
 - validCurrencyIndicator
 - payoutCurrency
 - totalReceiveFees
 - totalReceiveTaxes
 - totalReceiveAmount
 - detailReceiveAmounts
 - amountType
 - amount
 - amountCurrency
- exchangeRateApplied
- senderNationalityCountry
- senderNationalityAtBirthCountry
- sendPurposeOfTransaction
- sendPurposeOfTransactionOther

- sourceOfFunds
- sourceOfFundsOther
- paymentTenderedType
- relationshipToReceiver
- relationshipToReceiverOther
- proofOfFunds
- proofOfFundsOther
- senderGender
- senderOccupationOther
- senderBirthState
- senderNameSuffix
- senderNameSuffixOther
- senderCitizenshipCountry
- senderCitizenshipAtBirthCountry
- senderDualCitizenshipCountry
- senderPhotoIdIssueMonth
- senderPhotoIdIssueYear
- senderPhotoIdIssueDay
- senderPhotoIdExpirationMonth
- senderPhotoIdExpirationYear
- senderPhotoIdExpirationDay
- senderPhotoIdIssueAuthority
- senderLegalIdIssueMonth
- senderLegalIdIssueYear
- senderLegalIdIssueDay
- senderLegalIdExpirationMonth
- senderLegalIdExpirationYear
- senderLegalIdExpirationDay
- senderLegalIdIssueAuthority
- senderLegalIdState
- senderLegalIdIssueCountry
- senderTransactionSMSNotificationOptIn
- receiverTransactionSMSNotificationOptIn
- HomePhoneNotAvailable
- senderHomePhoneCountryCode
- receiverNameSuffix
- receiverNameSuffixOther
- senderFirstNameNotAvailable
- receiverFirstNameNotAvailable
- thirdPartyFirstNameNotAvailable
- thirdPartySenderBirthCity
- thirdPartySenderBirthState
- thirdPartySenderBirthCountry
- thirdPartySenderGender
- thirdPartySenderOccupation
- thirdPartySenderOccupationOther
- thirdPartySenderNameSuffix
- thirdPartySenderNameSuffixOther
- thirdPartySenderCitizenshipCountry
- thirdPartySenderCitizenshipAtBirthCountry
- thirdPartySenderDualCitizenshipCountry
- thirdPartyLegalIdIssueMonth
- thirdPartyLegalIdIssueYear
- thirdPartyLegalIdIssueDay
- thirdPartyLegalIdExpirationMonth
- thirdPartyLegalIdExpirationYear
- thirdPartyLegalIdExpirationDay
- thirdPartyLegalIdIssueAuthority
- thirdPartyLegalIdState
- thirdPartyLegalIdIssueCountry
- receipts

Field Detail

Tag	Datatype	Information and Rules	Display
agentTransactionId	string Maximum length: 20	An ID number that uniquely identifies the send transaction across APIs. <i>Additional Information</i> 1. The agent's externally generated transaction ID	optional
confirmationNumber	string Length: 7	None	optional
mgTransactionSessionID	string Maximum length: 38	An ID number that uniquely identifies the send transaction across APIs.	not allowed
maxAmount	decimal Minimum exclusive value: 0 Maximum length: 14	Do not use this field.	not allowed
mgRewardsNumber	string Maximum length: 20	The sender's MoneyGram Plus number.	optional
agentCustomerNumber	string Maximum length: 20	<i>Field Rules</i> 1. Value is stored unencrypted and must not contain PCI data	optional
destinationCountry	string Length: 3	The full name of the country must be displayed, not the ISO country code	required
destinationState	string Length: 2	None	conditional
deliveryOption	string		not allowed.

Tag	Datatype	Information and Rules	Display
receiveAgentID	string Length: 8	None	not allowed
accountNumberLastFour	string Length: 4	The last four digits of the account number for transactions requiring receiver registration.	required
customerReceiveNumber	string Maximum length: 20	The receiver's registration number for transactions that require receiver registration.	not allowed
accountNickname	string Maximum length: 30	Not currently used.	not allowed
senderFirstName	string Maximum length: 40	None	required
senderMiddleName	string Maximum length: 40	None	required
senderLastName	string Maximum length: 40	None	required
senderLastName2	string Maximum length: 40	None	required
senderAddress	string Maximum length: 80	None	Required
senderAddress2	string Maximum length: 80	None	optional

Tag	Datatype	Information and Rules	Display
senderAddress3	string Maximum length: 80	None	optional
senderCity	string Maximum length: 40	None	Required
senderState	string Length: 2	None	required
senderZipCode	string Maximum length: 10	None	required
senderCountry	string Length: 3	None	Required
senderHomePhone	string Maximum length: 14	None	required
receiverFirstName	string Maximum length: 40	None	required
receiverMiddleName	string Maximum length: 40	None	required
receiverLastName	string Maximum length: 40	None	required
receiverLastName2	string Maximum length: 40	None	required
receiverAddress	string Maximum length: 80	None	optional

Tag	Datatype	Information and Rules	Display
receiverAddress2	string Maximum length: 80	None	optional
receiverAddress3	string Maximum length: 80	None	optional
direction1	string Maximum length: 40	1. Only used with delivery options HDS_USD, HDS_LOCAL and HOME_DELIVERY.	optional
direction2	string Maximum length: 40	1. Only used with delivery options HDS_USD, HDS_LOCAL and HOME_DELIVERY	optional
direction3	string Maximum length: 40	1. Only used with delivery options HDS_USD, HDS_LOCAL and HOME_DELIVERY	optional
receiverCity	string Maximum length: 40	None	optional
receiverState	string Length: 25	None	optional
receiverZipCode	string Maximum length: 10	None	optional
receiverCountry	string Length: 3	None	optional
receiverPhone	string Maximum length: 20	None	optional
receiverPhoneCountryCode	String	None	Optional

Tag	Datatype	Information and Rules	Display
receiverEmail	String	None	Optional
testQuestion	string Maximum length: 30	None	optional
testAnswer	string Maximum length: 30	None	optional
messageField1	string Maximum length: 40	None	optional
messageField2	string Maximum length: 40	None	optional
senderPhotoIdType	string	Must be displayed on the screen for agent to verify with ID provided by the consumer.	required
senderPhotoIdNumber	string Maximum length: 25	Must be displayed on the screen for agent to verify with ID provided by the consumer.	required
senderPhotoIdState	string Length: 2	Must be displayed on the screen for agent to verify with ID provided by the consumer.	required
senderPhotoIdCountry	string Length: 3	Must be displayed on the screen for agent to verify with ID provided by the consumer.	required
senderLegalIdType	string	None	required
senderLegalIdNumber	string Maximum length: 20	Display the last 4 characters only	required

Tag	Datatype	Information and Rules	Display
senderDOB	date Format: CCYY-MM-DD	None	required
senderOccupation	string Maximum length: 30	None	optional
thirdPartyFirstName	string Maximum length: 40	None	required
thirdPartyMiddleName	string Maximum length: 40	None	required
thirdPartyLastName	string Maximum length: 40	None	required
thirdPartyLastName2	string Maximum length: 40	None	required
thirdPartyAddress	string Maximum length: 80	None	not allowed
thirdPartyAddress2	string Maximum length: 80	None	not allowed
thirdPartyAddress3	string Maximum length: 80	None	not allowed
thirdPartyCity	string Maximum length: 40	None	not allowed
thirdPartyState	string Length: 2	None	not allowed

Tag	Datatype	Information and Rules	Display
thirdPartyZipCode	string Maximum length: 10	None	not allowed
thirdPartyCountry	string Length: 3	None	not allowed
thirdPartyLegalIdType	string	None	not allowed
thirdPartyLegalIdNumber	string Maximum length: 14	None	not allowed
thirdPartyDOB	date Format: CCYY-MM-DD	None	not allowed
thirdPartyOccupation	string Maximum length: 30	None	not allowed
thirdPartyOrg	string Maximum length: 60	None	not allowed
senderBirthCity	string Maximum length: 40	None	not allowed
senderBirthCountry	string Length: 3	None	not allowed
promotionInfo	String	None	optional
promotionCode	string Maximum length: 20	The code used to identify the promotion.	required

Tag	Datatype	Information and Rules	Display
promotionDiscountId	string Length: 2 Valid values: 01, 02, 03	The code used to identify the type of discount. <i>Additional Information</i> 1. 01 is flat fee. Flat Fee is a promotion that provides the services with a specified fee. 2. 02 is amount off. Amount Off is a promotion that provides services with a specified amount off the fee. 3. 03 is percent off. Percent Off is a promotion that provides services with a percent off the fee.	required
promotionCategoryId	string Length: 2	Internal Use Only	required
promotionDiscount	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	The promotion's discount value.	required
promotionDiscountAmount	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	The discount amount applied to nonDiscountedFeeExclTax.	required
promotionErrorCode	string Length: 4	The error code returned if the promotion code was invalid.	required
promotionErrorMessage		The error message to display if the promotion code was invalid.	required
longLanguageCode	string Length: 3	The language of the promotional message.	required

Tag	Datatype	Information and Rules	Display
textTranslation	string Maximum length: 2000	The translated promotional message.	required
senderEmailAddress	string	None	optional
senderMobilePhone	string Maximum length: 20	None	optional
senderMobilePhoneCountryCode	String	None	optional
marketingOptIn	boolean	<i>Additional Information</i> 1. If <code>true</code> , the customer agrees to allow MoneyGram to send marketing materials 2. If <code>false</code> , the customer does not agree to allow MoneyGram to send marketing materials	required
consumerId	string Maximum length: 20	None	not allowed
fieldValues	string	<i>Additional Information</i> 1. Not currently used	not allowed
keyValuePair	complex Maximum number of occurrences: unbounded	None	N/A
promotionalMessage	complex Maximum number of occurrences: unbounded	None	N/A
longLanguageCode	string Length: 3	The language of the promotional message.	not allowed

Tag	Datatype	Information and Rules	Display
textTranslation	string Maximum length: 2000	The translated promotional message.	Not allowed
readyForCommit	boolean	<i>Additional Information</i> 1. If <code>true</code> , the agent application may continue the transaction	not allowed
disclosureText	complex Maximum number of occurrences: unbounded	None	N/A
longLanguageCode	string Length: 3	The language of the disclosure message.	optional
textTranslation	string Maximum length: 2000	Additional disclosure info when taxes/fees can't be determined based on included fields.	optional
receiveAgentName	string Maximum length: 40	The name of the intended receive agent.	optional
receiveAgentAddress	complex Maximum number of occurrences: unbounded	None	not allowed
agentAddressLine	string Maximum length: 80	None None	not allowed
additionalFieldsToCollect	complex Maximum number of occurrences: unbounded	For future use	Not Allowed
sendAmounts	complex	None	N/A

Tag	Datatype	Information and Rules	Display
sendAmount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	The actual send amount on the transaction.	required
sendCurrency	string Length: 3	None	required
totalSendFees	decimal Maximum length: 14 Maximum decimal digits: 3	Sum of <code>discountedMGIFee</code> and <code>nonMGISendFee</code> . Total of all fees charged to sender by MoneyGram, agents, etc.	required
totalDiscountAmount	decimal Maximum length: 14 Maximum decimal digits: 3	Discount amount applied to <code>nonDiscountedFeeExclTax</code> .	required
totalSendTaxes	decimal Maximum length: 14 Maximum decimal digits: 3	Total taxes charged to the sender by MoneyGram, government agents, etc.	required
totalAmountToCollect	decimal Maximum length: 14 Maximum decimal digits: 3	Total of all fees, taxes, and the send amount. This amount must be collected from the customer before sending the <code>commitTransaction</code> API	required
detailSendAmounts	complex	None	N/A

Tag	Datatype	Information and Rules	Display
amountType	string Valid values: mgiNonDiscountedSendFee, nonMgiSendFee, totalNonDiscountedFees, discountedMgiSendFee, mgiSendTax, nonMgiSendTax, totalMgiCollectedFeesAndTaxes, totalAmountToMgi, totalSendFeesAndTaxes, totalNonMGISendFeesAndTaxes	The type of fee or tax <i>Additional Information</i> 1. mgiNonDiscountedSendFee is the fee amount charged by MoneyGram before discounts are applied 2. nonMgiSendFee is the total of non-MoneyGram fees charged to the sender by government agents, banking channels, etc.; MoneyGram does not collect this fee 3. totalNonDiscountedFees is the sum of mgiNonDiscountedFee and nonMGISendFee 4. discountedMgiSendFee is the fee collected by MoneyGram after discounts 5. mgiSendTax is taxes collected by MoneyGram 6. nonMgiSendTax is taxes the agent collects and remits 7. totalMgiCollectedFeesAndTaxes is the total taxes and fees charged by MoneyGram 8. totalAmountToMgi is nonMGISendFee and nonMGISendTax subtracted from totalAmountToCollect; this is the amount MoneyGram collects from the sending agent at settlement 9. totalSendFeesAndTaxes is the total of all fees and taxes for the transaction 10. totalNonMGISendFeesAndTaxes is the total of all non-MoneyGram fees and taxes charged to the sender by government agents, banking channels, etc.	optional
amount	decimal	None	optional
amountCurrency	string Length: 3	None	optional
receiveAmounts	complex	None	N/A

Tag	Datatype	Information and Rules	Display
receiveAmount	decimal Maximum length: 14 Maximum decimal digits: 3	If totalReceiveFees or totalReceiveTaxes is not zero, this receive amount must be displayed	conditional
receiveCurrency	string Length: 3	None	required
validCurrencyIndicator	boolean	<i>Additional Information</i> 1. If <code>true</code> , <code>validReceiveAmount</code> , <code>validReceiveCurrency</code> , and <code>validExchangeRate</code> are used to calculate the final payout amount 2. If <code>false</code> , estimated amounts may be available to calculate the final payout amount	not allowed
payoutCurrency	string Length: 3	This must be displayed on the application screen as the payout currency regardless of the <code>validCurrencyIndicator</code>	required
totalReceiveFees	decimal Maximum length: 14 Maximum decimal digits: 3	Must be displayed if value returned is not zero. Total fees charged to the receiver by MoneyGram, agents, government entity, etc.	required
totalReceiveTaxes	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Must be displayed if value returned is not zero. Total taxes charged to the receiver by MoneyGram, agents, government entity, etc.	required
totalReceiveAmount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Must always be displayed on the application screen. Receive amount minus any receive fees/taxes.	required

Tag	Datatype	Information and Rules	Display
receiveFeesAreEstimated	boolean	Indicates whether the receive-side taxes are "estimates" The word "estimated" must appear before "other fees" and totalReceiveAmount field when true.	not allowed
receiveTaxesAreEstimated	boolean	Indicates whether the receive-side taxes are "estimates" The word "estimated" must appear before "other taxes" and totalReceiveAmount field when true.	not allowed
detailReceiveAmounts	complex Maximum number of occurrences: unbounded	None	N/A
amountType	string Valid values: mgiReceiveFee, nonMGIReceiveFee, mgiReceiveTax, nonMgiReceiveTax	The type of fee or tax <i>Additional Information</i> 1. mgiReceiveFee is the fee amount charged by MoneyGram 2. nonMGIReceiveFee is the total of non-MoneyGram fees charged to the receiver by government agents, banking channels, etc.; MoneyGram does not collect this fee 3. mgiReceiveTax is taxes collected by MoneyGram 4. nonMgiReceiveTax is taxes the agent collects and remits	optional
amount	decimal	None	optional
amountCurrency	String , Length: 3	None	optional
exchangeRateApplied	decimal Minimum inclusive value: 0 Maximum length: 14	The exchange rate applied between sendCurrency and receiveCurrency. <i>Field Rules</i> 1. Value returned to four decimal places for USA and US territories 2. Value returned to six decimal places elsewhere	required
senderNationalityCountry	String, Length: 3	None	optional

Tag	Datatype	Information and Rules	Display
senderNationalityAtBirthCountry	String, Length: 3	None	optional
sendPurposeOfTransaction	String, Length: 30	None	optional
sendPurposeOfTransactionOther	String, Length: 40	For future use	NA
sourceOfFunds	String, Length: 30	None	optional
sourceOfFundsOther	String, Length: 30	For future use	NA
paymentTenderedType	String, Length: 20	This field must be displayed on agent application. If the form of Payment does not match what is in this field, the transaction should be stopped and ask the customer to restage the transaction with the correct form of payment	required
relationshipToReceiver	String, Length: 30	None	optional
relationshipToReceiverOther	String, Length: 30	For future use	NA
proofOfFunds	String, Length: 30	None	optional
proofOfFundsOther	String, Length: 30	For future use	NA
senderGender	String, Length: 30	None	optional
senderOccupationOther	String, Length: 30	For future use	NA
senderBirthState	String, Length: 20	For future use	NA
senderNameSuffix	String, Length: 30	None	optional
senderNameSuffixOther	String, Length: 30	For future use	NA
senderCitizenshipCountry	String, Length: 3	None	optional

Tag	Datatype	Information and Rules	Display
senderCitizenshipAtBirthCountry	String, Length: 3	None	optional
senderDualCitizenshipCountry	String, Length: 3	None	optional
senderPhotoIdIssueMonth	String, Length: 2	None	required
senderPhotoIdIssueYear	String, Length: 2	None	required
senderPhotoIdIssueDay	String, Length: 2	None	required
senderPhotoIdExpirationMonth	String, Length: 2	None	required
senderPhotoIdExpirationYear	String, Length: 2	None	required
senderPhotoIdExpirationDay	String, Length: 2	None	required
senderPhotoIdIssueAuthority	String, Length: 30	For future use	NA
senderLegalIdIssueMonth	String, Length: 2	None	required
senderLegalIdIssueYear	String, Length: 2	None	required
senderLegalIdIssueDay	String, Length: 2	None	required
senderLegalIdExpirationMonth	String, Length: 2	None	required
senderLegalIdExpirationYear	String, Length: 2	None	required
senderLegalIdExpirationDay	String, Length: 2	None	required

Tag	Datatype	Information and Rules	Display
senderLegalIdIssueAuthority	String, Length: 30	For future use	NA
senderLegalIdState	String, Length: 2	For future use	NA
senderLegalIdIssueCountry	String, Length: 3	None	required
senderTransactionSMSNotificationOptIn	Boolean	None	required
receiverTransactionSMSNotificationOptIn	Boolean	None	required
HomePhoneNotAvailable	Boolean	For future use	NA
senderHomePhoneCountryCode	String	None	optional
receiverNameSuffix	String, Length: 20	None	optional
receiverNameSuffixOther	String, Length: 20	For future use	NA
senderFirstNameNotAvailable	Boolean	For future use	NA
receiverFirstNameNotAvailable	Boolean	For future use	NA
thirdPartyFirstNameNotAvailable	Boolean	For future use	NA
thirdPartySenderBirthCity	String	None	not allowed
thirdPartySenderBirthState	String, Length: 20	For future use	NA
thirdPartySenderBirthCountry	String, Length: 3	None	not allowed
thirdPartySenderGender	String, Length: 30	None	not allowed

Tag	Datatype	Information and Rules	Display
thirdPartySenderOccupation	String, Length: 30	None	not allowed
thirdPartySenderOccupation Other	String, Length: 30	For future use	NA
thirdPartySenderNameSuffix	String, Length: 30	None	not allowed
thirdPartySenderNameSuffix Other	String, Length: 30	For future use	NA
thirdPartySenderCitizenshi pCountry	String, Length: 3	None	not allowed
thirdPartySenderCitizenshi pAtBirthCountry	String, Length: 3	None	not allowed
thirdPartySenderDualCitize nshipCountry	String, Length: 3	None	not allowed
thirdPartyLegalIdIssueMont h	String, Length: 2	None	not allowed
thirdPartyLegalIdIssueYear	String, Length: 2	None	not allowed
thirdPartyLegalIdIssueDay	String, Length: 2	None	not allowed
thirdPartyLegalIdExpiratio nMonth	String, Length: 2	None	not allowed
thirdPartyLegalIdExpiratio nYear	String, Length: 2	None	not allowed
thirdPartyLegalIdExpiratio nDay	String, Length: 2	None	not allowed
thirdPartyLegalIdIssueAuth ority	String , Length: 30	None	not allowed
thirdPartyLegalIdState	String, Length: 2	For future use	NA

Tag	Datatype	Information and Rules	Display
thirdPartyLegalIdIssueCountry	String, Length: 2	None	optional
receipts	complex	For future use	NA

1. formFreeReceiveLookup

The agent application uses the formFreeReceiveLookup API to request details on a receive transaction available for completion.

Business Rules to Code:

1. Data returned in the response must be displayed on a transaction summary screen for review and verification.
2. The agent must verify if consumer data and ID information matched the returned data. If ID information does not match, do not allow the transaction to continue.

formFreeReceiveLookupRequest

Field Summary

- referenceNumber
- receiptImages

Field Detail

Tag	Datatype	Information and Rules	Input	Data
referenceNumber	string Maximum length: 12	None	required	required
receiptImages		For future use	NA	NA

formFreeReceiveLookupResponse

Additional Information

1. The fields returned with data can vary depending on type of transaction, destination country, and other variables
2. Visibility rules only apply to fields that are returned

Field Summary

- referenceNumber
- receiveAmount
- receiveCurrency
- senderFirstName
- senderMiddleName
- senderLastName
- senderLastName2
- senderHomePhone
- originatingCountry
- dateTimeSent
- receiverFirstName
- receiverMiddleName
- receiverLastName
- receiverLastName2
- receiverAddress
- receiverAddress2
- receiverAddress3
- receiverAddress4
- receiverCity
- receiverState
- receiverZipCode
- receiverCountry
- messageField1
- messageField2
- receiverPhotoIdType
- receiverPhotoIdNumber
- receiverPhotoIdState
- receiverPhotoIdCountry
- receiverLegalIdType
- receiverLegalIdNumber
- receiverDOB
- receiverOccupation
- thirdPartyFirstName
- thirdPartyMiddleName
- thirdPartyLastName
- thirdPartyLastName2
- thirdPartyAddress
- thirdPartyAddress2
- thirdPartyAddress3
- thirdPartyAddress4
- thirdPartyCity
- thirdPartyState
- thirdPartyZipCode
- thirdPartyCountry
- thirdPartyLegalIdType
- thirdPartyLegalIdNumber
- thirdPartyDOB
- thirdPartyOrg
- receiverBirthCity
- receiverBirthCountry
- consumerId
- freqCustCardNumber
- receiverPhone
- receiverPhotoIdStored
- receiverLegalIdIssueCountry
- receiverLegalIdStored
- receiverNationalityCountry
- receiverNationalityAtBirthCountry
- additionalDocumentationNeeded
- receiverEmailAddress
- receiverMobilePhone

- marketingOptIn
- fieldValues
- mgiTransactionSessionID
- receivePurposeOfTransaction
- receivePurposeOfTransactionOther
- relationshipToSender
- relationshipToSenderOther
- receiverOccupationOther
- receiverGender
- receiverBirthState
- receiverCitizenshipCountry
- receiverCitizenshipAtBirthCountry
- receiverDualCitizenshipCountry
- receiverPhotoIdIssueMonth
- receiverPhotoIdIssueYear
- receiverPhotoIdIssueDay
- receiverPhotoIdExpirationMonth
- receiverPhotoIdExpirationYear
- receiverPhotoIdExpirationDay
- receiverPhotoIdIssueAuthority
- receiverLegalIdIssueMonth
- receiverLegalIdIssueYear
- receiverLegalIdIssueDay
- receiverLegalIdExpirationMonth
- receiverLegalIdExpirationYear
- receiverLegalIdExpirationDay
- receiverLegalIdIssueAuthority
- receiverLegalIdState
- receiverPhoneNotAvailable
- receiverPhoneCountryCode
- thirdPartyFirstNameNotAvailable
- thirdPartyReceiverNameSuffix
- thirdPartyReceiverNameSuffixOther
- thirdPartyReceiverGender
- thirdPartyReceiverOccupation
- thirdPartyReceiverOccupationOther
- thirdPartyReceiverBirthCity
- thirdPartyReceiverBirthState
- thirdPartyReceiverBirthCountry
- thirdPartyReceiverCitizenshipCountry
- thirdPartyReceiverCitizenshipAtBirthCountry
- thirdPartyReceiverDualCitizenshipCountry
- thirdPartyLegalIdIssueMonth
- thirdPartyLegalIdIssueYear
- thirdPartyLegalIdIssueDay
- thirdPartyLegalIdExpirationMonth
- thirdPartyLegalIdExpirationYear
- thirdPartyLegalIdExpirationDay
- thirdPartyLegalIdIssueAuthority
- thirdPartyLegalIdState
- thirdPartyLegalIdIssueCountry
- thirdPartyLegalIdStored
- receipts

Field Detail

Tag	Datatype	Information and Rules	Display
referenceNumber	string Maximum length: 12	None	required
receiveAmount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	None	required
receiveCurrency	string Length: 3	None	required
senderFirstName	string Length: 40		required
senderMiddleName	string Length: 40		required
senderLastName	string Length: 40		required
senderLastName2	string Length: 40		required
senderHomePhone	string Length: 14	None	optional
originatingCountry	String Length: 3	None	optional

Tag	Datatype	Information and Rules	Display
dateTimeSent	dateTime Format: CCYY-MM-DDThh:mm:ss.sss-hh:mm	None	optional
receiverFirstName	string Length: 40	None	required
receiverMiddleName	string Length: 40	None	required
receiverLastName	string Length: 40	None	required
receiverLastName2	string Length: 40	None	required
receiverAddress	string Maximum length: 80	None	required
receiverAddress2	string Maximum length: 80	None	optional
receiverAddress3	string Maximum length: 80	None	optional
receiverAddress4	string Maximum length: 80	None	optional
receiverCity	string Maximum length: 40	None	required
receiverState	string Length: 25	None	required
receiverZipCode	string Maximum length: 10	None	required

Tag	Datatype	Information and Rules	Display
receiverCountry	string Length: 3	None	required
messageField1	string Maximum length: 40	None	optional
messageField2	string Maximum length: 40	None	optional
receiverPhotoIdType	String	Must be displayed on the screen for agent to verify with ID provided by the consumer.	Required
receiverPhotoIdNumber	string Maximum length: 25	Must be displayed on the screen for agent to verify with ID provided by the consumer.	required
receiverPhotoIdState	string Length: 2	Must be displayed on the screen for agent to verify with ID provided by the consumer.	required
receiverPhotoIdCountry	string Length: 3	Must be displayed on the screen for agent to verify with ID provided by the consumer.	required
receiverLegalIdType	string	None	required
receiverLegalIdNumber	string Maximum length: 20	Display the last characters only	required
receiverDOB	date Format: CCYY-MM-DD	None	required

Tag	Datatype	Information and Rules	Display
receiverOccupation	string Maximum length: 30	None	optional
thirdPartyFirstName	string Maximum length: 40	None	required
thirdPartyMiddleName	string Maximum length: 40	None	required
thirdPartyLastName	string Maximum length: 40	None	required
thirdPartyLastName2	string Maximum length: 40	None	required
thirdPartyAddress	string Maximum length: 80	None	not allowed
thirdPartyAddress2	string Maximum length: 80	None	not allowed
thirdPartyAddress3	string Maximum length: 80	None	not allowed
thirdPartyAddress4	string Maximum length: 80	None	not allowed
thirdPartyCity	string Maximum length: 40	None	not allowed
thirdPartyState	string Length: 2	None	not allowed

Tag	Datatype	Information and Rules	Display
thirdPartyZipCode	string Maximum length: 10	None	not allowed
thirdPartyCountry	string Length: 3	None	not allowed
thirdPartyLegalIdType	String	None	not allowed
thirdPartyLegalIdNumber	string Maximum length: 20	None	not allowed
thirdPartyDOB	date Format: CCYY-MM-DD	None	not allowed
thirdPartyOrg	string Maximum length: 60	None	not allowed
receiverBirthCity	string Maximum length: 40	None	optional
receiverBirthCountry	string Length: 3	None	optional
consumerId	string Maximum length: 20	None	not allowed
freqCustCardNumber	string Maximum length: 20	None	not allowed
receiverPhone	string Maximum length: 14	None	required

Tag	Datatype	Information and Rules	Display
receiverPhotoIdStored	Boolean	For future use	NA
receiverLegalIdIssueCountry	String Length: 3	None	required
receiverLegalIdStored	Boolean	For future use	NA
receiverNationalityCountry	string Length: 3	None	optional
receiverNationalityAtBirthCountry	string Length: 3	None	optional
additionalDocumentationNeeded	Boolean	For future use	NA
receiverEmailAddress	string Maximum length: 60 Validation pattern: Must contain one and only one commercial at symbol (@) Validation pattern: Otherwise restricted to alphanumeric, dot (.), dash (-), and underscore (_) characters	None	optional
receiverMobilePhone	string Maximum length: 14	None	optional
marketingOptIn	Boolean	For future use	NA

Tag	Datatype	Information and Rules	Display
fieldValues	complex Maximum number of occurrences: unbounded	For future use	NA
xmlTag	string Maximum length: 80	NA	NA
value	String	NA	NA
mgTransactionSessionID	string Maximum length: 38	Session ID identifying the session. This value must be used in subsequent APIs	not allowed
receivePurposeOfTransaction	string Length: 30	None	optional
receivePurposeOfTransactionOther	string Length: 30	For future use	NA
relationshipToSender	string Length: 30	None	optional
relationshipToSenderOther	string Length: 30	For future use	NA
receiverOccupationOther	string Length: 30	For future use	NA
receiverGender	string Length: 30	None	optional
receiverBirthState	string Length: 2	For future use	NA

Tag	Datatype	Information and Rules	Display
receiverCitizenshipCountry	string Length: 2	None	optional
receiverCitizenshipAtBirthCountry	string Length: 2	None	optional
receiverDualCitizenshipCountry	string Length: 2	None	optional
receiverPhotoIdIssueMonth	string Length: 2 Format: MM	None	required
receiverPhotoIdIssueYear	string Length: 4 Format: CCYY	None	required
receiverPhotoIdIssueDay	string Length: 2 Format: DD	None	required
receiverPhotoIdExpirationMonth	string Length: 2 Format: MM	None	required
receiverPhotoIdExpirationYear	string Length: 4 Format: CCYY	None	required

Tag	Datatype	Information and Rules	Display
receiverPhotoIdExpirationDay	string Length: 2 Format: DD	None	required
receiverPhotoIdIssueAuthority	string Length: 30	For future use	NA
receiverLegalIdIssueMonth	string Length: 2 Format: MM	None	required
receiverLegalIdIssueYear	string Length: 4 Format: CCYY	None	required
receiverLegalIdIssueDay	string Length: 2 Format: DD	None	required
receiverLegalIdExpirationMonth	string Length: 2 Format: MM	None	required
receiverLegalIdExpirationYear	string Length: 4 Format: CCYY	None	required
receiverLegalIdExpirationDay	string Length: 2 Format: DD	None	required

Tag	Datatype	Information and Rules	Display
receiverLegalIdIssueAuthority	string Length: 30	For future use	NA
receiverLegalIdState	string Length: 2	For future use	NA
receiverPhoneNotAvailable	Boolean	For future use	NA
receiverPhoneCountryCode	string Length: 3	None	optional
thirdPartyFirstNameNotAvailable	Boolean	For future use	NA
thirdPartyReceiverNameSuffix	string Length: 30	None	optional
thirdPartyReceiverNameSuffixOther	string Length: 30	For future use	NA
thirdPartyReceiverGender	string Length: 30	None	optional
thirdPartyReceiverOccupation	string Length: 30	None	optional
thirdPartyReceiverOccupationOther	string Length: 30	For future use	NA
thirdPartyReceiverBirthCity	string Maximum length: 40	None	optional

Tag	Datatype	Information and Rules	Display
thirdPartyReceiverBirthState	string Length: 20	For future use	NA
thirdPartyReceiverBirthCountry	string Length: 3	None	not allowed
thirdPartyReceiverCitizenshipCountry	string Length: 3	None	not allowed
thirdPartyReceiverCitizenshipAtBirthCountry	string Length: 3	None	not allowed
thirdPartyReceiverDualCitizenshipCountry	string Length: 3	None	not allowed
thirdPartyLegalIdIssueMonth	string Length: 2 Format: MM	None	not allowed
thirdPartyLegalIdIssueYear	string Length: 4 Format: CCYY	None	not allowed
thirdPartyLegalIdIssueDay	string Length: 2 Format: DD	None	not allowed
thirdPartyLegalIdExpirationMonth	string Length: 2 Format: MM	None	not allowed

Tag	Datatype	Information and Rules	Display
thirdPartyLegalIdExpirationYear	string Length: 4 Format: CCYY	None	not allowed
thirdPartyLegalIdExpirationDay	string Length: 2 Format: DD	None	not allowed
thirdPartyLegalIdIssueAuthority	string Length: 30	For future use	NA
thirdPartyLegalIdState	string Length: 2	For future use	NA
thirdPartyLegalIdIssueCountry	string Length: 3	None	not allowed
thirdPartyLegalIdStored	Boolean	For future use	not allowed
receipts		For future use	NA

4. *formFreeBPLookup*

The agent application uses the formFreeBPLookup API to request details for bill payment transaction available for completion.

Business Rules to Code:

1. Data returned in the response must be displayed on a transaction summary screen for review and verification.
2. Agent must verify if consumer data and ID information matched the returned data. If ID information does not match, do not allow the transaction continue.

formFreeBPLookupRequest

Field Summary

- confirmationNumber
- receiptImages

Field Detail

Tag	Datatype	Information and Rules	Input	Data
confirmationNumber	string Length: 7	<i>Additional Information</i> 1. Must contain the value of transactionNumber from the <u>formFreeTranLookupWithAmountResponse</u>	application	required
receiptImages	complex	For future use	NA	NA

formFreeBPLookupResponse

Additional Information

1. The fields returned with data can vary depending on type of transaction, destination country, and other variables
2. Visibility rules only apply to fields that are returned

Field Summary

- [maxAmount](#)
- [feeAmount](#)
- [freqCustCardNumber](#)
- [destinationCountry](#)
- [receiveCode](#)
- [receiveAgentID](#)
- [billerAccountNumber](#)
- [validateAccountNumber](#)
- [billerName](#)
- [senderFirstName](#)
- [senderMiddleName](#)
- [senderLastName](#)
- [senderLastName2](#)
- [senderAddress](#)
- [senderAddress2](#)
- [senderAddress3](#)
- [senderAddress4](#)
- [senderCity](#)
- [senderState](#)
- [senderZipCode](#)
- [senderCountry](#)
- [senderHomePhone](#)
- [receiverFirstName](#)
- [receiverMiddleName](#)
- [receiverLastName](#)
- [receiverLastName2](#)
- [messageField1](#)
- [messageField2](#)
- [senderPhotoIdType](#)
- [senderPhotoIdNumber](#)
- [senderPhotoIdState](#)
- [senderPhotoIdCountry](#)
- [senderLegalIdType](#)
- [senderLegalIdNumber](#)
- [senderDOB](#)
- [senderOccupation](#)
- [thirdPartyFirstName](#)
- [thirdPartyMiddleName](#)
- [thirdPartyLastName](#)
- [thirdPartyLastName2](#)
- [thirdPartyAddress](#)
- [thirdPartyAddress2](#)
- [thirdPartyAddress3](#)
- [thirdPartyAddress4](#)
- [thirdPartyCity](#)
- [thirdPartyState](#)
- [thirdPartyCountry](#)
- [thirdPartyZipCode](#)
- [thirdPartyLegalIdType](#)
- [thirdPartyLegalIdNumber](#)
- [thirdPartyDOB](#)
- [thirdPartyOrg](#)
- [productVariant](#)
- [serviceOfferingID](#)
- [sendCurrency](#)
- [receiveCurrency](#)
- [cardSwiped](#)
- [cardExpirationMonth](#)
- [cardExpirationYear](#)
- [sendPurposeOfTransaction](#)

- sendPurposeOfTransactionOther
- sourceOfFunds
- sourceOfFundsOther
- paymentTenderedType
- proofOfFunds
- proofOfFundsOther
- senderGender
- senderOccupationOther
- senderBirthCountry
- senderBirthState
- senderBirthCity
- senderNameSuffix
- senderNameSuffixOther
- senderCitizenshipCountry
- senderCitizenshipAtBirthCountry
- senderDualCitizenshipCountry
- senderPhotoIdIssueMonth
- senderPhotoIdIssueYear
- senderPhotoIdIssueDay
- senderPhotoIdExpirationMonth
- senderPhotoIdExpirationYear
- senderPhotoIdExpirationDay
- senderPhotoIdIssueAuthority
- senderLegalIdIssueMonth
- senderLegalIdIssueYear
- senderLegalIdIssueDay
- senderLegalIdExpirationMonth
- senderLegalIdExpirationYear
- senderLegalIdExpirationDay
- senderLegalIdIssueAuthority
- senderLegalIdState
- senderLegalIdIssueCountry
- senderHomePhoneNotAvailable
- senderHomePhoneCountryCode
- senderFirstNameNotAvailable
- receiverNameSuffix
- receiverNameSuffixOther
- receiverFirstNameNotAvailable
- thirdPartyFirstNameNotAvailable
- thirdPartySenderBirthCity
- thirdPartySenderBirthState
- thirdPartySenderBirthCountry
- thirdPartySenderGender
- thirdPartySenderOccupation
- thirdPartySenderOccupationOther
- thirdPartySenderNameSuffix
- thirdPartySenderNameSuffixOther
- thirdPartySenderCitizenshipCountry
- thirdPartySenderCitizenshipAtBirthCountry
- thirdPartySenderDualCitizenshipCountry
- thirdPartyLegalIdIssueMonth
- thirdPartyLegalIdIssueYear
- thirdPartyLegalIdIssueDay
- thirdPartyLegalIdExpirationMonth
- thirdPartyLegalIdExpirationYear
- thirdPartyLegalIdExpirationDay
- thirdPartyLegalIdIssueAuthority
- thirdPartyLegalIdState
- thirdPartyLegalIdIssueCountry
- receipts
-

Field Detail

Tag	Datatype	Information and Rules	Display
maxAmount	decimal Maximum length: 14 Maximum decimal digits: 3	The actual send amount for the transaction.	required
feeAmount	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	The actual fee charged for the transaction.	required
freqCustCardNumber	string Maximum length: 20	The sender's MoneyGram Plus number.	optional
destinationCountry	string Length: 3	None	required
receiveCode	string Maximum length: 25	None	required
receiveAgentId	string Length: 8	None	not allowed
billerAccountNumber	string Maximum length: 30	<i>Field Rules</i> 1. Agent application must display only last four characters	required
validateAccountNumber	string Maximum length: 30	None	not allowed
billerName	string Maximum length: 64	None	required

Tag	Datatype	Information and Rules	Display
senderFirstName	string Maximum length: 40	None	required
senderMiddleName	string Maximum length: 40	None	required
senderLastName	string Maximum length: 40	None	required
senderLastName2	string Maximum length: 40	None	required
senderAddress	string Maximum length: 80	None	required
senderAddress2	string Maximum length: 80	None	optional
senderAddress3	string Maximum length: 80	None	optional
senderAddress4	string Maximum length: 80	None	optional
senderCity	string Maximum length: 40	None	required
senderState	string Length: 2	None	required
senderZipCode	string Maximum length: 10	None	required

Tag	Datatype	Information and Rules	Display
senderCountry	string Length: 3	None	required
senderHomePhone	string Maximum length: 14	None	required
receiverFirstName	string Maximum length: 40		required
receiverMiddleName	string Maximum length: 40		required
receiverLastName	string Maximum length: 40		required
receiverLastName2	string Maximum length: 40		required
messageField1	string Maximum length: 40	None	optional
messageField2	string Maximum length: 33	None	optional
senderPhotoIdType	string	Must be displayed on the screen for agent to verify with ID provided by the consumer	required
senderPhotoIdNumber	string Maximum length: 25	Must be displayed on the screen for agent to verify with ID provided by the consumer	required
senderPhotoIdState	string Length: 2	Must be displayed on the screen for agent to verify with ID provided by the consumer	required

Tag	Datatype	Information and Rules	Display
senderPhotoIdCountry	string Length: 3	Must be displayed on the screen for agent to verify with ID provided by the consumer	required
senderLegalIdType	string	None	required
senderLegalIdNumber	string Maximum length: 20	Display the last 4 characters only	required
senderDOB	date Format: CCYY-MM-DD	None	required
senderOccupation	string Maximum length: 30	None	not allowed
thirdPartyFirstName	string Maximum length: 40	None	required
thirdPartyMiddleName	string Maximum length: 40	None	required
thirdPartyLastName	string Maximum length: 40	None	required
thirdPartyLastName2	string Maximum length: 40	None	required
thirdPartyAddress	string Maximum length: 80	None	not allowed
thirdPartyAddress2	string Maximum length: 80	None	not allowed

Tag	Datatype	Information and Rules	Display
thirdPartyAddress3	string Maximum length: 80	None	not allowed
thirdPartyAddress4	string Maximum length: 80	None	not allowed
thirdPartyCity	string Maximum length: 40	None	not allowed
thirdPartyState	string Length: 2	None	not allowed
thirdPartyCountry	string Length: 3	None	not allowed
thirdPartyZipCode	string Maximum length: 10	None	not allowed
thirdPartyLegalIdType	string	None	not allowed
thirdPartyLegalIdNumber	string Maximum length: 20	None	not allowed
thirdPartyDOB	date Format: CCYY-MM-DD	None	not allowed
thirdPartyOrg	string Maximum length: 60	None	not allowed
productVariant	string	<i>Additional Information</i> 1. EP is ExpressPayment	optional

Tag	Datatype	Information and Rules	Display
serviceOfferingID	string Maximum length: 21	The ID number of the type of prepaid service offered by the Biller (e.g., 100 minute phone card).	not allowed
sendCurrency	string Length: 3	None	required
receiveCurrency	string Length: 3	None	required
cardSwiped	Boolean Valid values: True, False	None	Not allowed
cardExpirationMonth	String Max Length:2 Valid format:MM	None	optional
cardExpirationYear	String Max Length:4 Valid Format:CCYY	None	optional
sendPurposeOfTransaction	String Max Length:30	None	optional
sendPurposeOfTransaction Other	String Max Length:30	For future use	NA
sourceOfFunds	String Max Length:30	None	optional
sourceOfFundsOther	String Max Length:30	For future use	NA

Tag	Datatype	Information and Rules	Display
paymentTenderedType	String Max Length:20	This field must be displayed on agent application. If the form of Payment does not match what is in this field, the agent application can allow a different form to be selected and use that form of payment in the bpValidationRequest	required
proofOfFunds	String Max Length:30	None	required
proofOfFundsOther	String Max Length:30	For future use	NA
senderGender	String Max Length:30	None	optional
senderOccupationOther	String Max Length:30	For future use	NA
senderBirthCountry	string Length: 3	None	optional
senderBirthState	String Max Length:20	For future use	NA
senderBirthCity	string Maximum length: 40	None	optional
senderNameSuffix	String Max Length:30	None	optional
senderNameSuffixOther	String Max Length:30	For future use	NA

Tag	Datatype	Information and Rules	Display
senderCitizenshipCountry	string Length: 3	None	optional
senderCitizenshipAtBirth Country	string Length: 3	None	optional
senderDualCitizenshipCou ntry	string Length: 3	None	optional
senderPhotoIdIssueMonth	String, Length: 2	none	required
senderPhotoIdIssueYear	String, Length: 2	none	required
senderPhotoIdIssueDay	String, Length: 2	none	required
senderPhotoIdExpirationM onth	String, Length: 2	none	required
senderPhotoIdExpirationY ear	String, Length: 2	none	required
senderPhotoIdExpirationD ay	String, Length: 2	none	required
senderPhotoIdIssueAuthor ity	String Max Length:30	For future use	NA
senderLegalIdIssueMonth	String, Length: 2	none	required
senderLegalIdIssueYear	String, Length: 2	None	required
senderLegalIdIssueDay	String, Length: 2	None	required
senderLegalIdExpirationM onth	String, Length: 2	None	required

Tag	Datatype	Information and Rules	Display
senderLegalIdExpirationYear	String, Length: 2	None	required
senderLegalIdExpirationDay	String, Length: 2	None	required
senderLegalIdIssueAuthority	String Max Length:30	For future use	NA
senderLegalIdState	string Length: 2	For future use	NA
senderLegalIdIssueCountry	string Length: 3	None	optional
senderHomePhoneNotAvailable	Boolean	For future use	NA
senderHomePhoneCountryCode	String, Length: 3	None	optional
senderFirstNameNotAvailable	Boolean	For future use	NA
receiverNameSuffix	String Max Length:30	None	optional
receiverNameSuffixOther	String Max Length:30	For future use	NA
receiverFirstNameNotAvailable	Boolean	For future use	NA

Tag	Datatype	Information and Rules	Display
thirdPartyFirstNameNotAvailable	Boolean	For future use	NA
thirdPartySenderBirthCity	string Maximum length: 40	None	not allowed
thirdPartySenderBirthState	String Max Length:20	For future use	NA
thirdPartySenderBirthCountry	string Length: 3	None	not allowed
thirdPartySenderGender	String Max Length:30	None	not allowed
thirdPartySenderOccupation	String Max Length:30	None	not allowed
thirdPartySenderOccupationOther	String Max Length:30	For future use	NA
thirdPartySenderNameSuffix	String Max Length:30	None	not allowed
thirdPartySenderNameSuffixOther	String Max Length:30	For future use	NA
thirdPartySenderCitizenshipCountry	string Length: 3	None	NA
thirdPartySenderCitizenshipAtBirthCountry	string Length: 3	None	not allowed

Tag	Datatype	Information and Rules	Display
thirdPartySenderDualCitizenshipCountry	string Length: 3	None	not allowed
thirdPartyLegalIdIssueMonth	string Length: 2	None	not allowed
thirdPartyLegalIdIssueYear	string Length: 2	None	not allowed
thirdPartyLegalIdIssueDay	string Length: 2	None	not allowed
thirdPartyLegalIdExpirationMonth	string Length: 2	None	not allowed
thirdPartyLegalIdExpirationYear	string Length: 2	None	not allowed
thirdPartyLegalIdExpirationDay	string Length: 2	None	not allowed
thirdPartyLegalIdIssueAuthority	String Max Length:30	For future use	NA
thirdPartyLegalIdState	String Max Length:20	For future use	NA
thirdPartyLegalIdIssueCountry	string Length: 3	None	not allowed
receipts	complex	For future use	N/A

5. receiveValidation

The agent application uses the receiveValidation API to receive a MoneyGram money transfer transaction.

Business Rules to Code

1. The receiveValidationRequest fields must be populated with the field data returned from the formFreeReceiveLookupResponse. Exceptions to this are the field timeStamp, and formFreeReceiveLookupResponse.receiveAmount needs to be mapped to receiveValidationRequest.agentCheckAmount. See xml [sample 1](#) below.
2. For FormFree transactions, the agent application must send the receiveValidationRequest until the response returns a readyForCommit value of true
3. During FormFree completion this API must have formFreeStaging field set to false.
4. Receive validation must contain the session ID carried from formFreeReceiveLookupResponse in the mgiTransactionSessionID field.

Additional Information

2. The agent application must not alter data from the formFreeReceiveLookupResponse before using it in the receiveValidationRequest unless otherwise specified.
3. Agents that only accept passports or government IDs as identification can use any valid state code of the issuing country in the senderPhotoIdState field for IDs issued by Canada, Mexico, and the United States.
4. A transaction cannot be sent and received by the same agent
5. MoneyGram may not authorize payout of transactions attempted to be received in countries, states/provinces, or via delivery options that were not originally designated by the sender at time of send.

Sample 1:

```
<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xmlns:xsd="http://www.w3.org/2001/XMLSchema">
  <soapenv:Body>
    <ac:formFreeReceiveLookupResponse xmlns:ac="http://www.moneygram.com/AgentConnect1512">
      <ac:doCheckIn>false</ac:doCheckIn>
      <ac:timeStamp>2018-02-28T01:13:50.284-06:00</ac:timeStamp>
      <ac:flags>0</ac:flags>
      <ac:referenceNumber>27510057</ac:referenceNumber>
      <ac:receiveAmount>82.00</ac:receiveAmount>
      <ac:receiveCurrency>EUR</ac:receiveCurrency>
      <ac:senderFirstName>James</ac:senderFirstName>
      <ac:senderLastName>Mathew</ac:senderLastName>
      <ac:originatingCountry>USA</ac:originatingCountry>
      <ac:dateTimeSent>2018-02-28T01:12:47.538-06:00</ac:dateTimeSent>
      <ac:receiverFirstName>Kevin</ac:receiverFirstName>
      <ac:receiverLastName>Peterson</ac:receiverLastName>
      <ac:receiverAddress>12th Avenue</ac:receiverAddress>
      <ac:receiverCity>Atlanta</ac:receiverCity>
      <ac:receiverState>GA</ac:receiverState>
      <ac:receiverZipCode>54147</ac:receiverZipCode>
      <ac:receiverCountry>USA</ac:receiverCountry>
```

```

    <ac:receiverPhotoIdType>DRV</ac:receiverPhotoIdType>
    <ac:receiverPhotoIdNumber>A54124856</ac:receiverPhotoIdNumber>
    <ac:receiverPhotoIdState>GA</ac:receiverPhotoIdState>
    <ac:receiverPhotoIdCountry>USA</ac:receiverPhotoIdCountry>
    <ac:receiverLegalIdType>INT</ac:receiverLegalIdType>
    <ac:receiverLegalIdNumber>A574789562</ac:receiverLegalIdNumber>
    <ac:receiverDOB>1985-04-11</ac:receiverDOB>
    <ac:receiverBirthCountry>USA</ac:receiverBirthCountry>
    <ac:consumerId>0</ac:consumerId>
    <ac:mgiTransactionSessionID>888218871E15198020299107405368</ac:mgiTransactionSessionID>
  </ac:formFreeReceiveLookupResponse>
</soapenv:Body>
</soapenv:Envelope>

<?xml version="1.0" encoding="UTF-8"?>
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/">
  <soapenv:Body>
    <receiveValidationRequest xmlns="http://www.moneygram.com/AgentConnect1512">
      <agentID>xxxxxxx</agentID>
      <agentSequence>1</agentSequence>
      <token>TEST</token>
      <timeStamp>2018-02-28T01:14:22.989-06:00</timeStamp>
      <apiVersion>1512</apiVersion>
      <clientSoftwareVersion>1512</clientSoftwareVersion>
      <referenceNumber>27510057</referenceNumber>
      <receiveCurrency>EUR</receiveCurrency>
      <agentCheckAmount>82.00</agentCheckAmount>
      <receiverAddress>12th Avenue</receiverAddress>
      <receiverCity>Atlanta</receiverCity>
      <receiverState>GA</receiverState>
      <receiverZipCode>54147</receiverZipCode>
      <receiverCountry>USA</receiverCountry>
      <receiverPhotoIdType>DRV</receiverPhotoIdType>
      <receiverPhotoIdNumber>A54124856</receiverPhotoIdNumber>
      <receiverPhotoIdState>GA</receiverPhotoIdState>
      <receiverPhotoIdCountry>USA</receiverPhotoIdCountry>
      <receiverLegalIdType>INT</receiverLegalIdType>
      <receiverLegalIdNumber>A574789562</receiverLegalIdNumber>
      <receiverDOB>1985-04-11</receiverDOB>
      <receiverBirthCountry>USA</receiverBirthCountry>
      <consumerId>0</consumerId>
      <mgiTransactionSessionID>888218871E15198020299107405368</mgiTransactionSessionID>
      <formFreeStaging>false</formFreeStaging>
    </receiveValidationRequest>
  </soapenv:Body>
</soapenv:Envelope>

```

receiveValidationRequest

Field Summary

- agentStagingChannel
- operatorName
- referenceNumber
- pin
- receiveCurrency
- agentCheckNumber
- agentCheckType
- agentCheckAmount
- customerCheckNumber
- customerCheckType
- customerCheckAmount
- receiverAddress
- receiverAddress2
- receiverAddress3
- receiverCity
- receiverState
- receiverZipCode
- receiverCountry
- receiverPhotoIdType
- receiverPhotoIdNumber
- receiverPhotoIdState
- receiverPhotoIdCountry
- receiverLegalIdType
- receiverLegalIdNumber
- receiverDOB
- receiverOccupation
- thirdPartyFirstName
- thirdPartyMiddleName
- thirdPartyLastName
- thirdPartyLastName2
- thirdPartyAddress
- thirdPartyAddress2
- thirdPartyAddress3
- thirdPartyCity
- thirdPartyState
- thirdPartyZipCode
- thirdPartyCountry
- thirdPartyLegalIdType
- thirdPartyLegalIdNumber
- thirdPartyDOB
- thirdPartyOrg
- receiverBirthCity
- receiverBirthCountry
- pcTerminalNumber
- agentUseReceiveData
- billerAccountNumber
- otherPayoutType
- otherPayoutAmount
- cardExpirationMonth
- cardExpirationYear
- cardSwiped
- consumerID
- receiverPhone
- agentConsumerID
- agentTransactionId
- mgjTransactionSessionID
- formFreeStaging
- timeToLive
- receivePurposeOfTransaction
- receivePurposeOfTransactionOther
- relationshipToSender
- relationshipToSenderOther
- receiverOccupationOther
- receiverGender
- receiverBirthState
- receiverCitizenshipCountry

- receiverCitizenshipAtBirthCountry
- receiverDualCitizenshipCountry
- receiverPhotoIdIssueMonth
- receiverPhotoIdIssueYear
- receiverPhotoIdIssueDay
- receiverPhotoIdExpirationMonth
- receiverPhotoIdExpirationYear
- receiverPhotoIdExpirationDay
- receiverPhotoIdIssueAuthority
- receiverLegalIdIssueMonth
- receiverLegalIdIssueYear
- receiverLegalIdIssueDay
- receiverLegalIdExpirationMonth
- receiverLegalIdExpirationYear
- receiverLegalIdExpirationDay
- receiverLegalIdIssueAuthority
- receiverLegalIdIssueCountry
- receiverPhoneNotAvailable
- receiverPhoneCountryCode
- thirdPartyFirstNameNotAvailable
- thirdPartyReceiverNameSuffix
- thirdPartyReceiverNameSuffixOther
- thirdPartyReceiverGender
- thirdPartyReceiverOccupation
- thirdPartyReceiverOccupationOther
- thirdPartyReceiverBirthCity
- thirdPartyReceiverBirthState
- thirdPartyReceiverBirthCountry
- thirdPartyReceiverCitizenshipCountry
- thirdPartyReceiverCitizenshipAtBirthCountry
- thirdPartyReceiverDualCitizenshipCountry
- thirdPartyLegalIdIssueMonth
- thirdPartyLegalIdIssueMonth
- thirdPartyLegalIdIssueDay
- thirdPartyLegalIdExpirationMonth
- thirdPartyLegalIdExpirationYear
- thirdPartyLegalIdExpirationDay
- thirdPartyLegalIdIssueAuthority
- thirdPartyLegalIdState
- thirdPartyLegalIdIssueCountry
- primaryReceiptLanguage
- secondaryReceiptLanguage
- receiptImages
- fieldValues
 - xmlTag
 - value

Field Detail

Tag	Datatype	Information and Rules	Input	Data
agentStagingChannel	string Maximum length: 128	Field does not apply to this product	application	optional
operatorName	string Maximum length: 80	<i>Additional Information</i> 1. Operator name or operator ID of the associate or user performing the transaction; it must be auto-populated from the agent's system and cannot be editable by the user - Agent Facing – Teller ID/User ID mapped to operatorName - Customer Facing/Self Service (kiosk, online, mobile) – User ID/User Login mapped to operatorName - ATM – unique customer ID (customer number) mapped to operatorName	conditional	required
referenceNumber	string Length: 12	Use the value returned in formFreeReceiveLookupResponse	application	conditional
pin	string Maximum length: 8	None	application	conditional
receiveCurrency	string Length: 3	Use the value returned in formFreeReceiveLookupResponse	application	conditional
agentCheckNumber	string Maximum length: 12	NA	NA	NA
agentCheckType	string Valid values: MTC	NA	NA	NA

Tag	Datatype	Information and Rules	Input	Data
agentCheckAmount	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	The amount of the transaction paid to the receiver <i>Field Rules</i> 1. This must have the value of <code>receiveAmount</code> returned by the <code>formFreeReceiveLookupResponse</code>	application	required
customerCheckNumber	string Maximum length: 12	NA	NA	NA
customerCheckType	string	NA	NA	NA
customerCheckAmount	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	NA	NA	NA
receiverAddress	string Maximum length: 80	Use the value returned in <code>formFreeReceiveLookupResponse</code>	application	conditional
receiverAddress2	string Maximum length: 80	Use the value returned in <code>formFreeReceiveLookupResponse</code>	application	conditional
receiverAddress3	string Maximum length: 80	Use the value returned in <code>formFreeReceiveLookupResponse</code>	application	conditional
receiverCity	string Maximum length: 40	Use the value returned in <code>formFreeReceiveLookupResponse</code>	application	conditional

Tag	Datatype	Information and Rules	Input	Data
receiverState	string Length: 2 Must be a valid state code	Use the value returned in formFreeReceiveLookupResponse	conditional	conditional
receiverZipCode	string Minimum length: 3 Maximum length: 10	<i>Use the value returned in formFreeReceiveLookupResponse</i>	application	conditional
receiverCountry	string Length: 3 Must be a valid country code	Use the value returned in formFreeReceiveLookupResponse	application	conditional
receiverPhotoIdType	string Must be a valid photo ID type	Use the value returned in formFreeReceiveLookupResponse	application	conditional
receiverPhotoIdNumber	string Minimum length: 4 Maximum length: 25	Use the value returned in formFreeReceiveLookupResponse Must be displayed on the screen for agent to verify with ID provided by the consumer.	application	conditional
receiverPhotoIdState	string Length: 2 Must be a valid state code	Use the value returned in formFreeReceiveLookupResponse	conditional	conditional
receiverPhotoIdCountry	string Length: 3 Must be a valid country code	Use the value returned in formFreeReceiveLookupResponse	application	conditional

Tag	Datatype	Information and Rules	Input	Data
receiverLegalIdType	string Must be a valid legal ID type	Use the value returned in formFreeReceiveLookupResponse	application	conditional
receiverLegalIdNumber	string Minimum length: 4 Maximum length: 20	<i>Use the value returned in formFreeReceiveLookupResponse</i>	application	conditional
receiverDOB	date Format: CCYY-MM-DD	Use the value returned in formFreeReceiveLookupResponse	application	conditional
receiverOccupation	string Maximum length: 30	Use the value returned in formFreeReceiveLookupResponse	application	conditional
thirdPartyFirstName	string Maximum length: 40	<i>Use the value returned in formFreeReceiveLookupResponse</i>	application	conditional
thirdPartyMiddleName	string Length: 40	Use the value returned in formFreeReceiveLookupResponse	application	conditional
thirdPartyLastName	string Maximum length: 40	<i>Use the value returned in formFreeReceiveLookupResponse</i>	application	conditional
thirdPartyLastName2	string Maximum length: 40	<i>Use the value returned in formFreeReceiveLookupResponse</i>	application	conditional
thirdPartyAddress	string Maximum length: 80	<i>Use the value returned in formFreeReceiveLookupResponse</i>	application	conditional
thirdPartyAddress2	string Maximum length: 80	<i>Use the value returned in formFreeReceiveLookupResponse</i>	application	conditional

Tag	Datatype	Information and Rules	Input	Data
thirdPartyAddress3	string Maximum length: 80	Use the value returned in <i>formFreeReceiveLookupResponse</i>	application	conditional
thirdPartyCity	string Maximum length: 40	Use the value returned in <i>formFreeReceiveLookupResponse</i>	application	conditional
thirdPartyState	string Length: 2 Must be a valid state code	Use the value returned in <i>formFreeReceiveLookupResponse</i>	application	conditional
thirdPartyZipCode	string Minimum length: 3 Maximum length: 10	Use the value returned in <i>formFreeReceiveLookupResponse</i>	application	conditional
thirdPartyCountry	string Length: 3 Must be a valid country code	Use the value returned in <i>formFreeReceiveLookupResponse</i>	application	conditional
thirdPartyLegalIdType	string Must be a valid legal ID type	Use the value returned in <i>formFreeReceiveLookupResponse</i>	application	conditional
thirdPartyLegalIdNumber	string Minimum length: 4 Maximum length: 20	Use the value returned in <i>formFreeReceiveLookupResponse</i>	application	conditional
thirdPartyDOB	date Format: CCYY-MM-DD	Use the value returned in <i>formFreeReceiveLookupResponse</i>	application	conditional

Tag	Datatype	Information and Rules	Input	Data
thirdPartyOrg	string Maximum length: 60	Use the value returned in formFreeReceiveLookupResponse	application	conditional
receiverBirthCity	string Maximum length: 40	Use the value returned in formFreeReceiveLookupResponse	application	conditional
receiverBirthCountry	string Length: 3 Must be a valid country code	Use the value returned in formFreeReceiveLookupResponse	application	conditional
pcTerminalNumber	string Maximum length: 10	None	optional	optional
agentUseReceiveData	string Maximum length: 200	Additional data chosen by the agent for the agent's use. Stored with the transaction by MoneyGram.	optional	optional
billerAccountNumber	string Length: 30	For future use	NA	NA
otherPayoutType	string Must be a valid payout type	For future use	NA	NA
otherPayoutAmount	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	For future use	NA	NA
cardExpirationMonth	string Length: 2 Format: MM	For future use	NA	NA

Tag	Datatype	Information and Rules	Input	Data
cardExpirationYear	string Length: 4 Format: CCYY	For future use	NA	NA
cardSwiped	boolean	For future use	NA	NA
consumerID	String Maximum length: 20	<i>Additional Information</i> 1. If data is not returned by formFreeReceiveLookupResponse, set value to 0	application	required
receiverPhone	string Maximum length: 14	Use the value returned in formFreeReceiveLookupResponse	application	conditional
agentConsumerID	string	ID for the consumer on the agent's system <i>Field Rules</i> 1. Value is stored unencrypted and must not contain PCI data	optional	optional
agentTransactionId	string Maximum length: 20	An ID number that uniquely identifies the send transaction across APIs. <i>Additional Information</i> 1. The agent's externally generated transaction ID	application	conditional
mgitransactionSessionID	string Maximum length: 38	Use the value returned in formFreeReceiveLookupResponse	application	required
formFreeStaging	Boolean Valid value: False	Value must be <code>false</code> , to complete the FormFree transaction.	application	required
timeToLive	Int Maximum 5 digits	For future use	NA	NA

Tag	Datatype	Information and Rules	Input	Data
receivePurposeOfTransaction	string Maximum length: 30	Use the value returned in formFreeReceiveLookupResponse	application	conditional
receivePurposeOfTransactionOther	string Maximum length: 30	For future use	NA	NA
relationshipToSender	string Maximum length: 30	None	application	conditional
relationshipToSenderOther	string Maximum length: 30	For future use	NA	NA
receiverOccupationOther	string Maximum length: 30	For future use	NA	NA
receiverGender	string Maximum length: 30	Use the value returned in formFreeReceiveLookupResponse	application	conditional
receiverBirthState	string Maximum length: 2	For future use	NA	NA
receiverCitizenshipCountry	string Length: 3	Use the value returned in formFreeReceiveLookupResponse	application	conditional
receiverCitizenshipAtBirthCountry	string Length: 3 Must be a valid country code	Use the value returned in formFreeReceiveLookupResponse	application	conditional

Tag	Datatype	Information and Rules	Input	Data
receiverDualCitizenshipCountry	string Length: 3 Must be a valid country code	Use the value returned in formFreeReceiveLookupResponse	application	conditional
receiverPhotoIdIssueMonth	string Length: 2 Format: MM	Use the value returned in formFreeReceiveLookupResponse	application	conditional
receiverPhotoIdIssueYear	string Length: 4 Format: CCYY	Use the value returned in formFreeReceiveLookupResponse	application	conditional
receiverPhotoIdIssueDay	string Length: 2 Format: DD	Use the value returned in formFreeReceiveLookupResponse	application	conditional
receiverPhotoIdExpirationMonth	string Length: 2 Format: MM	Use the value returned in formFreeReceiveLookupResponse	application	conditional
receiverPhotoIdExpirationYear	string Length: 4 Format: CCYY	Use the value returned in formFreeReceiveLookupResponse	application	conditional
receiverPhotoIdExpirationDay	string Length: 2 Format: DD	Use the value returned in formFreeReceiveLookupResponse	application	conditional

Tag	Datatype	Information and Rules	Input	Data
receiverPhotoIdIssueAuth ority	string Maximum length: 30	Use the value returned in formFreeReceiveLookupResponse	application	conditional
receiverLegalIdIssueMont h	string Length: 2 Format: MM	Use the value returned in formFreeReceiveLookupResponse	application	conditional
receiverLegalIdIssueYear	string Length: 4 Format: CCYY	Use the value returned in formFreeReceiveLookupResponse	application	conditional
receiverLegalIdIssueDay	string Length: 2 Format: DD	Use the value returned in formFreeReceiveLookupResponse	application	conditional
receiverLegalIdExpiratio nMonth	string Length: 2 Format: MM	Use the value returned in formFreeReceiveLookupResponse	application	conditional
receiverLegalIdExpiratio nYear	string Length: 4 Format: CCYY	Use the value returned in formFreeReceiveLookupResponse	application	conditional
receiverLegalIdExpiratio nDay	string Length: 2 Format: DD	Use the value returned in formFreeReceiveLookupResponse	application	conditional
receiverLegalIdIssueAuth ority	string Maximum length: 30	For future use	NA	NA

Tag	Datatype	Information and Rules	Input	Data
receiverLegalIdState	string Length: 2 Must be a valid state code	For future use	NA	NA
receiverLegalIdIssueCountry	string Length: 3 Must be a valid country code	Use the value returned in formFreeReceiveLookupResponse	application	conditional
receiverPhoneNotAvailable	boolean	For future use	NA	NA
receiverPhoneCountryCode	string Length: 3 Must be a valid country code	Use the value returned in formFreeReceiveLookupResponse	application	conditional
thirdPartyFirstNameNotAvailable	boolean	For future use	NA	NA
thirdPartyReceiverNameSuffix	string Maximum length: 30	Use the value returned in formFreeReceiveLookupResponse	application	conditional
thirdPartyReceiverNameSuffixOther	string Maximum length: 30	For future use	application	conditional
thirdPartyReceiverGender	string Maximum length: 30	Use the value returned in formFreeReceiveLookupResponse	application	conditional
thirdPartyReceiverOccupation	string Maximum length: 30	Use the value returned in formFreeReceiveLookupResponse	application	conditional

Tag	Datatype	Information and Rules	Input	Data
thirdPartyReceiverOccupationOther	string Maximum length: 30	For future use	NA	NA
thirdPartyReceiverBirthCity	string Maximum Length: 40	Use the value returned in formFreeReceiveLookupResponse	application	conditional
thirdPartyReceiverBirthState	receiverState string Length: 2	For future use	NA	NA
thirdPartyReceiverBirthCountry	string Length: 3 Must be a valid country code	Use the value returned in formFreeReceiveLookupResponse	application	conditional
thirdPartyReceiverCitizenshipCountry	string Length: 3 Must be a valid country code	Use the value returned in formFreeReceiveLookupResponse	application	conditional
thirdPartyReceiverCitizenshipAtBirthCountry	string Length: 3 Must be a valid country code	Use the value returned in formFreeReceiveLookupResponse	application	conditional
thirdPartyReceiverDualCitizenshipCountry	string Length: 3 Must be a valid country code	Use the value returned in formFreeReceiveLookupResponse	application	conditional
thirdPartyLegalIdIssueMonth	string Length: 2	Use the value returned in formFreeReceiveLookupResponse	application	conditional

Tag	Datatype	Information and Rules	Input	Data
thirdPartyLegalIdIssueYear	string Length: 4	Use the value returned in formFreeReceiveLookupResponse	application	conditional
thirdPartyLegalIdIssueDay	string Length: 2	Use the value returned in formFreeReceiveLookupResponse	application	conditional
thirdPartyLegalIdExpirationMonth	string Length: 2	Use the value returned in formFreeReceiveLookupResponse	application	conditional
thirdPartyLegalIdExpirationYear	string Length: 4	Use the value returned in formFreeReceiveLookupResponse	application	conditional
thirdPartyLegalIdExpirationDay	string Length: 2	Use the value returned in formFreeReceiveLookupResponse	application	conditional
thirdPartyLegalIdIssueAuthority	string Maximum length: 30	For future use	NA	NA
thirdPartyLegalIdState	string Length: 2 Must be a valid state code	For future use	NA	NA
thirdPartyLegalIdIssueCountry	string Length: 3	Use the value returned in formFreeReceiveLookupResponse	application	conditional
primaryReceiptLanguage	string Maximum length: 3	For future use	NA	NA
secondaryReceiptLanguage	string Maximum length: 3	For future use	NA	NA
receiptImages	Complex	For future use		

Tag	Datatype	Information and Rules	Input	Data
fieldValues	Complex Maximum number of occurrences: unbounded	Currently not applicable to this product	NA	NA
xmlTag	string Maximum length: 80	NA	NA	NA
value	string	NA	NA	NA

receiveValidationResponse

Additional Information

1. Visibility rules only apply to fields that are returned

Field Summary

- mgTransactionSessionID
- readyForCommit
- disclosureText
 - longLanguageCode
 - textTranslation
- additionalFieldsToCollect
 - xmlTag
 - visibility
 - fieldLabel
 - displayOrder
 - fieldCategory
 - dynamic
 - fieldMax
 - fieldMin
 - dataType
 - enumerated
 - defaultValue
 - validationRegEx
 - arrayName
 - arrayLength
 - exampleFormat
 - enumeratedValues
 - enumeratedValueInfo
 - value
 - label
- receipts

Field Detail

Tag	Datatype	Information and Rules	Display
mgitransactionSessionID	string Maximum length: 38	An ID number that uniquely identifies the send transaction across APIs. <i>Additional Information</i> 1. Value must be used in the commitTransactionRequest API	not allowed
readyForCommit	boolean	<i>Additional Information</i> 1. If <code>true</code> , the agent application may continue the transaction with commitTransactionRequest 2. If <code>false</code> , the agent application must not proceed to next step.	not allowed
disclosureText	complex Maximum number of occurrences: unbounded	None	N/A
longLanguageCode	string Length: 2	The language of the disclosure message.	required
textTranslation	string Maximum length: 2000	Additional disclosure info when taxes/fees can't be determined based on included fields.	required
additionalFieldsToCollect	complex Maximum number of occurrences: unbounded	For future use	N/A
Receipts	Complex	For future use	N/A

6. *feeLookup*

The agent application uses the `feeLookup` API to determine transaction fee information during a FormFree Bill Payment completion process. The fee is displayed to the agent and communicated to the consumer, and is one of the ways in which agents and consumers verify they have made the correct selection.

Business Rules

1. Data for some of the fields in this request should be auto-populated from previous APIs such as `formFreeTranLookupWithAmountResponse` and `formFreeBPLookupResponse`.
2. `AmountExcludingFee` should be used in this request and populate from `fromFreeTranLookupWithAmount.amount` field
3. Fees and exchange rates may change at any time between the transaction initiation and `feeLookup` API, or between the `feeLookup` and `bpValidation` APIs
4. The fees and exchange rates given to the consumer when the transaction was initiated and the values returned in the `feeLookupResponse` are provided for convenience, and are not finalized until the transaction is completed

feeLookupRequest

Field Summary

- productType
- productVariant
- operatorName
- amountIncludingFee
- amountExcludingFee
- receiveAmount
- receiveCountry
- deliveryOption
- mgjRewardsNumber
- receiveCode
- indicativeReceiveCurrency
- receiveAgentID
- receiveCurrency
- sendCurrency
- mgjCustomerReceiveNumber
- defaultInformationFee
- serviceOfferingID
- defaultMaxFee
- allOptions
- promoCodeValues
 - promoCode

Field Detail

Tag	Datatype	Information and Rules	Input	Data
productType	string Valid values: BP	<i>Additional Information</i> 1. BP is bill payment	application	required
productVariant	string Valid values: EP	<i>Additional Information</i> 1. Use value of productVariant from formFreeBPLookupResponse	application	required
operatorName	string Maximum length: 7	<i>Additional Information</i> 1. Operator name or operator ID of the associate or user performing the transaction; it must be auto-populated from the agent's system and cannot be editable by the user - Agent Facing – Teller ID/User ID mapped to operatorName - Customer Facing/Self Service (kiosk, online, mobile) – User ID/User Login mapped to operatorName - ATM – unique customer ID (customer number) mapped to operatorName	application	optional
amountIncludingFee	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Field does not apply to this product	NA	NA

Tag	Datatype	Information and Rules	Input	Data
amountExcludingFee	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Use the value from the amount field returned from fromFreeTranLookupWithAmount	application	required
receiveAmount	decimal Minimum exclusive value: 0 Maximum length: 9 Maximum decimal digits: 3	Field does not apply to this product	NA	NA
receiveCountry	string Length: 3 Must be a valid country code	Use the value from destinationCountry in formFreeBPLookupResponse	required	required
deliveryOption	string Must be a valid delivery option	Additional Information 1. Field does not apply to this product	not allowed	not allowed
mg RewardsNumber	string Maximum length: 20	The sender's MoneyGram Plus number.	optional	optional
receiveCode	string Maximum length: 25	None	application	required
indicativeReceiveCurrency	string Length: 3	Field Rules 1. Field is not currently used for this product	NA	NA

Tag	Datatype	Information and Rules	Input	Data
receiveAgentID	string Length: 8	Use the value from receiveAgentID in formFreeBPLookupResponse	application	required
receiveCurrency	string Length: 3 Must be a valid currency code	Use the value from receiveCurrency in formFreeBPLookupResponse	application	required
sendCurrency	string Length: 3 Must be a valid currency code	Use the value from sendCurrency in formFreeBPLookupResponse	application	required
mgCustomerReceiveNumber	string Maximum length: 20	Field does not apply to this product	NA	NA
defaultInformationalFee	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Field does not apply to this product	NA	NA
serviceOfferingID	string Maximum length: 21	<i>Field Rules</i> 1. Field is not currently used	NA	NA
defaultMaxFee	boolean	<i>Field does not apply to this product</i>	NA	NA
allOptions	boolean Valid values: false		application	required

Tag	Datatype	Information and Rules	Input	Data
promoCodeValues	complex	Contains promotional code values <i>Field Rules</i> 1. Field does not apply to this product	N/A	N/A
promoCode	string Maximum number of occurrences: unbounded Maximum length: 20	Field does not apply to this product	NA	NA

feeLookupResponse

Additional Information

1. The fields returned with data can vary depending on type of transaction, biller information, and other variables
2. Visibility rules only apply to fields that are returned

Field Summary

- feeInfo
 - validReceiveAmount
 - validReceiveCurrency
 - validExchangeRate
 - estimatedReceiveAmount
 - estimatedReceiveCurrency
 - estimatedExchangeRate
 - totalAmount
 - receiveCountry
 - deliveryOption
 - receiveAmountAltered
 - speedOfDeliveryText
 - saLimitAvailable
 - revisedInformationFee
 - deliveryOptId
 - deliveryOptDisplayName
 - regAuthText
 - receiveAgentID
 - receiveAgentName
 - receiveAgentAbbreviation
 - mgManaged
 - disclosureText
 - mgiTransactionSessionID
 - sendAmountAltered
 - additionalInfoText
 - promotionInfo
 - promotionCode
 - promotionDiscountId
 - promotionCategoryId
 - promotionDiscount
- promotionDiscountAmount
- promotionErrorCode
- promotionErrorMessage
- sendAmounts
 - sendAmount
 - sendCurrency
 - totalSendFees
 - totalDiscountAmount
 - totalSendTaxes
 - totalAmountToCollect
 - detailSendAmounts
 - amountType
 - amount
 - amountCurrency
- receiveAmounts
 - receiveAmount
 - receiveCurrency
 - validCurrencyIndicator
 - payoutCurrency
 - totalReceiveFees
 - totalReceiveTaxes
 - totalReceiveAmount
 - receiveFeesAreEstimated
 - receiveTaxesAreEstimated
 - detailEstimatedReceiveAmounts
 - amountType
 - amount
 - amountCurrency

Field Detail

Tag	Datatype	Information and Rules	Display
feeInfo	complex Maximum number of occurrences: unbounded	None	N/A
validReceiveAmount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Use the totalReceiveAmount field	not allowed
validReceiveCurrency	string Length: 3	Use the payoutCurrency field	not allowed
validExchangeRate	decimal Minimum inclusive value: 0 Maximum length: 14	NA	NA
estimatedReceiveAmount	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	None	NA
estimatedReceiveCurrency	string Length: 3	None	NA
estimatedExchangeRate	decimal Minimum inclusive value: 0 Maximum length: 14	<i>Field Rules</i> 1. Value returned to four decimal places for USA and US territories 2. Value returned to six decimal places elsewhere	NA

Tag	Datatype	Information and Rules	Display
totalAmount	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Use the totalAmountToCollect field for display	not allowed
receiveCountry	string Length: 3	None	optional
deliveryOption	string	NA	NA
receiveAmountAltered	boolean	Field does not apply to this product	NA
speedOfDeliveryText	string Validation pattern: Maximum length in English: 40 Validation pattern: Maximum length in translation language: 2000	NA	NA
saLimitAvailable	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Internal Use Only.	NA
revisedInformationalFee	boolean	Field does not apply to this product	NA
deliveryOptId	string	Field does not apply to this product	NA
deliveryOptDisplayName	string	<i>Field does not apply to this product</i>	NA

Tag	Datatype	Information and Rules	Display
regAuthText	string	<i>Additional Information</i> 1. Field is not currently used 2. Field is not returned	NA
receiveAgentID	string Length: 8	None	not allowed
receiveAgentName	string Maximum length: 40	Name of the biller being used for the bill payment transaction	optional
receiveAgentAbbreviation	string Maximum length: 10	NA	NA
mgManaged	string Maximum length: 20 Valid values: Not Allowed, Required	<i>Field does not apply to this product</i>	NA
disclosureText	string Maximum length: 2000	Field does not apply to this product	NA
mgTransactionSessionID	string Maximum length: 20	An ID number that uniquely identifies the send transaction across APIs. <i>Additional Information</i> 1. Value must be saved and used in the <u>bpValidationRequest</u> and <u>commitTransactionRequest</u> APIs	not allowed
sendAmountAltered	Boolean	NA	NA
additionalInfoText	Maximum length: 400	Field is not currently used	NA

Tag	Datatype	Information and Rules	Display
promotionInfo	complex Maximum number of occurrences: unbounded	For future use	N/A
promotionCode	string Maximum length: 20	For future use	NA
promotionDiscountId	string Length: 2 Valid values: 01, 02, 03	For future use	NA
promotionCategoryId	string Length: 2	For future use	NA
promotionDiscount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	For future use	NA
promotionDiscountAmount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	For future use	NA
promotionErrorCode	string Length: 4	For future use	NA
promotionErrorMessage	string Maximum length: 40	For future use	NA

Tag	Datatype	Information and Rules	Display
sendAmounts	complex Maximum number of occurrences: unbounded	None	N/A
sendAmount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	The send amount of the transaction. This value must be used to populate the 'amount' field in bpValidationRequest	required
sendCurrency	string Length: 3	None	required
totalSendFees	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Sum of discountedMGIFee and nonMGISendFee. Total of all fees charged to sender by MoneyGram, agents, etc.	required
totalDiscountAmount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	NA	NA
totalSendTaxes	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Total taxes charged to the sender by MoneyGram, government agents, etc.	required

Tag	Datatype	Information and Rules	Display
totalAmountToCollect	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Total of all fees, taxes, and the send amount.	required
detailSendAmounts	complex Maximum number of occurrences: unbounded	None	N/A

Tag	Datatype	Information and Rules	Display
amountType	string Valid values: mgiNonDiscountedSendFee, nonMgiSendFee, totalNonDiscountedFees, discountedMgiSendFee, mgiSendTax, nonMgiSendTax, totalMgiCollectedFeesAnd Taxes, totalAmountToMgi, totalSendFeesAndTaxes, totalNonMGISendFeesAndTa xes	The type of fee or tax <i>Additional Information</i> 1. mgiNonDiscountedSendFee is the fee amount charged by MoneyGram before discounts are applied 2. nonMgiSendFee is the total of non-MoneyGram fees charged to the sender by government agents, banking channels, etc.; MoneyGram does not collect this fee 3. totalNonDiscountedFees is the sum of mgiNonDiscountedFee and nonMGISendFee 4. discountedMgiSendFee is the fee collected by MoneyGram after discounts 5. mgiSendTax is taxes collected by MoneyGram 6. nonMgiSendTax is taxes the agent collects and remits 7. totalMgiCollectedFeesAndTaxes is the total taxes and fees charged by MoneyGram 8. totalAmountToMgi is nonMGISendFee and nonMGISendTax subtracted from totalAmountToCollect; this is the amount MoneyGram collects from the sending agent at settlement 9. totalSendFeesAndTaxes is the total of all fees and taxes for the transaction 10. totalNonMGISendFeesAndTaxes is the total of all non-MoneyGram fees and taxes charged to the sender by government agents, banking channels, etc.	optional
amount	decimal	None	optional
amountCurrency	string Length: 3	None	optional

Tag	Datatype	Information and Rules	Display
receiveAmounts	complex Maximum number of occurrences: unbounded	None	N/A
receiveAmount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	None	N/A
receiveCurrency	string Length: 3	None	N/A
validCurrencyIndicator	boolean	NA	Not allowed
payoutCurrency	string Length: 3	The currency associated with the receive amount	required
totalReceiveFees	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Total fees charged to the receiver by MoneyGram, agents, government entity, etc.	N/A
totalReceiveTaxes	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Total taxes charged to the receiver by MoneyGram, agents, government entity, etc.	optional

Tag	Datatype	Information and Rules	Display
totalReceiveAmount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Receive amount minus any receive fees/taxes.	optional
receiveFeesAreEstimated	boolean	Indicates whether the receive-side fees are "estimates". Currently does not apply to this product	N/A
receiveTaxesAreEstimated	Boolean	Indicates whether the receive-side taxes are "estimates". Currently does not apply to this product	N/A
detailEstimatedReceiveAmounts	complex Maximum number of occurrences: unbounded	None	N/A
amountType	string Valid values: mgiReceiveFee, nonMGIReceiveFee, mgiReceiveTax, nonMgiReceiveTax	The type of fee or tax <i>Additional Information</i> 1. mgiReceiveFee is the fee amount charged by MoneyGram 2. nonMGIReceiveFee is the total of non-MoneyGram fees charged to the receiver by government agents, banking channels, etc.; MoneyGram does not collect this fee 3. mgiReceiveTax is taxes collected by MoneyGram 4. nonMgiReceiveTax is taxes the agent collects and remits	optional
amount	decimal	None	optional
amountCurrency	string Length: 3	None	optional

7. *bpValidation*

The agent application uses the `bpValidation` API to confirm bill payment information before finalizing the transaction.

Business Rules to Code

1. The `bpValidationRequest` fields must be populated with the field data returned from the `formFreeBPLookupResponse`. Exceptions to this are the field `timeStamp` and `formFreeBPLookupResponse`.
2. For FormFree transactions, the agent application must send the `bpValidationRequest` until the response returns a `readyForCommit` value of `true`
3. During FormFree completion this API must have `formFreeStaging` field set to `false`.
4. `bpValidationRequest` must contain the session ID carried from `feeLookupResponse` in the `mgjTransactionSessionID` field.

bpValidationRequest

Field Summary

- agentStagingChannel
- operatorName
- productVariant
- serviceOfferingID
- amount
- mg RewardsNumber
- destinationCountry
- receiveCode
- receiveAgentID
- billerAccountNumber
- validateAccountNumber
- senderFirstName
- senderMiddleName
- senderLastName
- senderLastName2
- senderAddress
- senderAddress2
- senderAddress3
- senderCity
- senderState
- senderZipCode
- senderCountry
- senderHomePhone
- receiverFirstName
- receiverMiddleName
- receiverLastName
- receiverLastName2
- feeAmount
- messageField1
- messageField2
- senderPhotoIdType
- senderPhotoIdNumber
- senderPhotoIdState
- senderPhotoIdCountry
- senderLegalIdType
- senderLegalIdNumber
- senderDOB
- senderOccupation
- thirdPartyFirstName
- thirdPartyMiddleName
- thirdPartyLastName
- thirdPartyLastName2
- thirdPartyAddress
- thirdPartyAddress2
- thirdPartyAddress3
- thirdPartyCity
- thirdPartyState
- thirdPartyZipCode
- thirdPartyCountry
- thirdPartyLegalIdType
- thirdPartyLegalIdNumber
- thirdPartyDOB
- thirdPartyOccupation
- thirdPartyOrg
- accountNumberRetryCount
- agentUseSendData
- sendCurrency
- receiveCurrency
- pcTerminalNumber
- cardSwiped
- cardExpirationMonth
- cardExpirationYear
- purposeOfFund
- confirmationNumber
- agentConsumerID
- agentTransactionId
- mg TransactionSessionID
- formFreeStaging

- timeToLive
- primaryReceiptLanguage
- secondaryReceiptLanguage
- receiptImages
- sendPurposeOfTransaction
- sendPurposeOfTransactionOther
- sourceOfFunds
- sourceOfFundsOther
- paymentTenderedType
- proofOfFunds
- proofOfFundsOther
- senderGender
- senderOccupationOther
- senderBirthCountry
- senderBirthState
- senderBirthCity
- senderNameSuffix
- senderNameSuffixOther
- senderCitizenshipCountry
- senderCitizenshipAtBirthCountry
- senderDualCitizenshipCountry
- senderPhotoIdIssueMonth
- senderPhotoIdIssueYear
- senderPhotoIdIssueDay
- senderPhotoIdExpirationMonth
- senderPhotoIdExpirationYear
- senderPhotoIdExpirationDay
- senderPhotoIdIssueAuthority
- senderLegalIdIssueMonth
- senderLegalIdIssueYear
- senderLegalIdIssueDay
- senderLegalIdExpirationMonth
- senderLegalIdExpirationYear
- senderLegalIdExpirationDay
- senderLegalIdIssueAuthority
- senderLegalIdState
- senderLegalIdIssueCountry
- senderHomePhoneNotAvailable
- senderHomePhoneCountryCode
- receiverNameSuffix
- receiverNameSuffixOther
- thirdPartySenderBirthCity
- thirdPartySenderBirthState
- thirdPartySenderBirthCountry
- thirdPartySenderGender
- thirdPartySenderOccupation
- thirdPartySenderOccupationOther
- thirdPartySenderNameSuffix
- thirdPartySenderNameSuffixOther
- thirdPartySenderCitizenshipCountry
- thirdPartySenderCitizenshipAtBirthCountry
- thirdPartySenderDualCitizenshipCountry
- thirdPartyLegalIdIssueMonth
- thirdPartyLegalIdIssueYear
- thirdPartyLegalIdIssueDay
- thirdPartyLegalIdExpirationMonth
- thirdPartyLegalIdExpirationYear
- thirdPartyLegalIdExpirationDay
- thirdPartyLegalIdIssueAuthority
- thirdPartyLegalIdState
- thirdPartyLegalIdIssueCountry
- promoCodeValues
 - promoCode
- fieldValues
 - xmlTag
 - value

Field Detail

Tag	Datatype	Information and Rules	Input	Data
agentStagingChannel	string Maximum length: 128	<i>Field does not apply to this product</i>	application	optional
operatorName	string Maximum length: 80	<i>Additional Information</i> - Operator name or operator ID of the associate or user performing the transaction; it must be auto-populated from the agent's system and cannot be editable by the user - Agent Facing – Teller ID/User ID mapped to operatorName - Customer Facing/Self Service (kiosk, online, mobile) – User ID/User Login mapped to operatorName - ATM – unique customer ID (customer number) mapped to operatorName	application	required
productVariant	string Valid values: EP, UBP	<i>Additional Information</i> Use EP for ExpressPayment	application	conditional
serviceOfferingID	string Maximum length: 21	The ID number of the type of prepaid service offered by the Biller (e.g., 100 minute phone card). <i>Additional Information</i> Field is not currently used	NA	NA
amount	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Use the amount in formFreeTranLookupWithAmountResponse	application	conditional

Tag	Datatype	Information and Rules	Input	Data
mg RewardsNumber	string Maximum length: 20	The sender's MoneyGram Plus number. Use the freqCustCardNumber value returned in formFreeBPLookupResponse	application	conditional
destinationCountry	string Length: 3 Must be a valid country code	Use the value returned in formFreeBPLookupResponse	application	conditional
receiveCode	string Maximum length: 25	Use the value returned in formFreeBPLookupResponse	application	conditional
receiveAgentID	string Length: 8	Use the value returned in formFreeBPLookupResponse	application	conditional
billerAccountNumber	string Maximum length: 30	<i>Additional Information</i> 1. All but the last four characters of the account number must be masked when displayed 2. Use the value returned in formFreeBPLookupResponse	application	conditional
validateAccountNumber	string Maximum length: 30	<i>Additional Information</i> 1. All but the last four characters of the account number must be masked when displayed	application	conditional
senderFirstName	string Maximum length: 40	Use the value returned in formFreeBPLookupResponse	application	conditional
senderMiddleName	string Maximum length: 40	Use the value returned in formFreeBPLookupResponse	application	conditional
senderLastName	string Maximum length: 40	Use the value returned in formFreeBPLookupResponse	application	conditional

Tag	Datatype	Information and Rules	Input	Data
senderLastName2	string Maximum length: 40	Use the value returned in formFreeBPLookupResponse	application	conditional
senderAddress	string Maximum length: 80	Use the value returned in formFreeBPLookupResponse	application	conditional
senderAddress2	string Maximum length: 80	Use the value returned in formFreeBPLookupResponse	application	conditional
senderAddress3	string Maximum length: 80	Use the value returned in formFreeBPLookupResponse	application	conditional
senderCity	string Maximum length: 40	Use the value returned in formFreeBPLookupResponse	conditional	conditional
senderState	string Length: 2 Must be a valid state code	<i>Use the value returned in formFreeBPLookupResponse</i>	application	conditional
senderZipCode	string Maximum length: 10	<i>Use the value returned in formFreeBPLookupResponse</i>	application	conditional
senderCountry	string Length: 3 Must be a valid country code	Use the value returned in formFreeBPLookupResponse	application	conditional
senderHomePhone	string Maximum length: 14	Use the value returned in formFreeBPLookupResponse	application	conditional

Tag	Datatype	Information and Rules	Input	Data
receiverFirstName	string Maximum length: 40	Use the value returned in formFreeBPLookupResponse	application	conditional
receiverMiddleName	string Maximum length: 40	Use the value returned in formFreeBPLookupResponse	application	conditional
receiverLastName	string Maximum length: 40	Use the value returned in formFreeBPLookupResponse	application	conditional
receiverLastName2	string Maximum length: 40	Use the value returned in formFreeBPLookupResponse	application	conditional
feeAmount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	<i>Additional Information</i> 1. The value of the fee amount is validated by MoneyGram 2. An error is returned if the value in this field and the value calculated by MoneyGram are different	application	conditional
messageField1	string Maximum length: 40	Use the value returned in formFreeBPLookupResponse	application	conditional
messageField2	string Maximum length: 33	Use the value returned in formFreeBPLookupResponse	application	conditional
senderPhotoIdType	string Must be a valid photo ID type	Use the value returned in formFreeBPLookupResponse	application	conditional
senderPhotoIdNumber	string Maximum length: 25	Use the value returned in formFreeBPLookupResponse	application	conditional

Tag	Datatype	Information and Rules	Input	Data
senderPhotoIdState	string Length: 2 Must be a valid state code	Use the value returned in formFreeBPLookupResponse	application	conditional
senderPhotoIdCountry	string Length: 3 Must be a valid country code	Use the value returned in formFreeBPLookupResponse	application	conditional
senderLegalIdType	string Must be a valid legal ID type Valid values: SSN, INT, TAX, ALN	Use the value returned in formFreeBPLookupResponse	application	conditional
senderLegalIdNumber	string Maximum length: 20	Use the value returned in formFreeBPLookupResponse	application	conditional
senderDOB	date Format: CCYY-MM-DD	Use the value returned in formFreeBPLookupResponse	application	conditional
senderOccupation	string Maximum length: 30	Use the value returned in formFreeBPLookupResponse	application	conditional
thirdPartyFirstName	string Maximum length: 40	Use the value returned in formFreeBPLookupResponse	application	conditional
thirdPartyMiddleName	string Maximum length: 40	Use the value returned in formFreeBPLookupResponse	application	conditional

Tag	Datatype	Information and Rules	Input	Data
thirdPartyLastName	string Maximum length: 40	Use the value returned in formFreeBPLookupResponse	application	conditional
thirdPartyLastName2	string Maximum length: 40	Use the value returned in formFreeBPLookupResponse	application	conditional
thirdPartyAddress	string Maximum length: 80	Use the value returned in formFreeBPLookupResponse	application	conditional
thirdPartyAddress2	string Maximum length: 80	Use the value returned in formFreeBPLookupResponse	application	conditional
thirdPartyAddress3	string Maximum length: 80	Use the value returned in formFreeBPLookupResponse	application	conditional
thirdPartyCity	string Maximum length: 40	Use the value returned in formFreeBPLookupResponse	application	conditional
thirdPartyState	string Length: 2 Must be a valid state code	Use the value returned in formFreeBPLookupResponse	application	conditional
thirdPartyZipCode	string Maximum length: 10	Use the value returned in formFreeBPLookupResponse	application	conditional
thirdPartyCountry	string Length: 3 Must be a valid country code	Use the value returned in formFreeBPLookupResponse	application	conditional

Tag	Datatype	Information and Rules	Input	Data
thirdPartyLegalIdType	string Must be a valid legal ID type	Use the value returned in formFreeBPLookupResponse	application	conditional
thirdPartyLegalIdNumber	string Maximum length: 20	Use the value returned in formFreeBPLookupResponse	application	conditional
thirdPartyDOB	date Format: CCYY-MM-DD	Use the value returned in formFreeBPLookupResponse	application	conditional
thirdPartyOrg	string Maximum length: 60	Use the value returned in formFreeBPLookupResponse	application	conditional
accountNumberRetryCount	string Minimum exclusive value: 0 Maximum exclusive value: 10	<i>Additional Information</i> 1. Must have an initial value of 1 2. If an account number validation error message is received, the agent should increment the value, verify the transaction information, and resend the transaction 3. The maximum number of attempts is 3	not allowed	required
agentUseSendData	string Maximum length: 14	None	optional	optional
sendCurrency	string Length: 3 Must be a valid country code	Use the value returned in formFreeBPLookupResponse	application	conditional

Tag	Datatype	Information and Rules	Input	Data
receiveCurrency	string Length: 3 Must be a valid currency code	Use the value returned in formFreeBPLookupResponse	application	conditional
pcTerminalNumber	string length: 10	The terminal number of the agent location	not allowed	optional
cardSwiped	boolean	Must always be false for FormFree completion	application	conditional
cardExpirationMonth	string Length: 2 Format: MM	Use the value returned in formFreeBPLookupResponse	application	conditional
cardExpirationYear	string Length: 4 Format: CCYY	Use the value returned in formFreeBPLookupResponse	application	conditional
purposeOfFund	string Maximum length: 6	<i>Use the value returned in formFreeBPLookupResponse</i>	application	conditional
confirmationNumber	string Length: 7	Use the value returned in formFreeBPLookupRequest	not allowed	required
agentConsumerID	String Length: 20	An ID number that uniquely identifies Agent.	N/A	N/A
agentTransactionId	string Maximum length: 20	An ID number that uniquely identifies the BP transaction across APIs. <i>Additional Information</i> 1. The agent's externally generated transaction ID	not allowed	conditional

Tag	Datatype	Information and Rules	Input	Data
mgTransactionSessionID	string Maximum length: 38	An ID number that uniquely identifies the send transaction across APIs. <i>Additional Information</i> 1. Value must be that returned in the feeLookupResponse	not allowed	required
formFreeStaging	Boolean Valid value: false	Valid value is false, to complete the FormFree transaction.	not allowed	required
timeToLive	Int Maximum length: 5	For future use	NA	NA
primaryReceiptLanguage	string Length: 3	Primary language to be used on prepayment disclosures and receipts.	application	optional
secondaryReceiptLanguage	string Length: 3	Secondary language to be used on prepayment disclosures and receipts.	GUI	conditional
receiptImages	complex	For future use	NA	NA
sendPurposeOfTransaction	String, length: 30	Use the value returned in formFreeBPLookupResponse	application	conditional
sendPurposeOfTransaction Other	String, length: 30	For future use	NA	NA
sourceOfFunds	String, length: 30	Use the value returned in formFreeBPLookupResponse	application	conditional
sourceOfFundsOther	String, length: 30	For future use	NA	NA
paymentTenderedType	String, length: 20	Use the value returned in formFreeBPLookupResponse or the new value set by the application	application	conditional
proofOfFunds	String, length: 30	Use the value returned in formFreeBPLookupResponse	application	conditional

Tag	Datatype	Information and Rules	Input	Data
proofOfFundsOther	String, length: 30	For future use	NA	NA
senderGender	String, length: 30	Use the value returned in formFreeBPLookupResponse	application	conditional
senderOccupationOther	String, length: 30	For future use	NA	NA
senderBirthCountry	String, length: 3	Use the value returned in formFreeBPLookupResponse	application	conditional
senderBirthState	String, length: 20	For future use	NA	NA
senderBirthCity	String, length: 40	Use the value returned in formFreeBPLookupResponse	application	conditional
senderNameSuffix	String, length: 30	Use the value returned in formFreeBPLookupResponse	application	conditional
senderNameSuffixOther	String, length: 30	For future use	NA	NA
senderCitizenshipCountry	String, length: 3	Use the value returned in formFreeBPLookupResponse	application	conditional
senderCitizenshipAtBirthCountry	String, length: 3	Use the value returned in formFreeBPLookupResponse	application	conditional
senderDualCitizenshipCountry	String, length: 3	Use the value returned in formFreeBPLookupResponse	application	conditional
senderPhotoIdIssueMonth	String, length: 2	Use the value returned in formFreeBPLookupResponse	application	conditional
senderPhotoIdIssueYear	String, length: 2	Use the value returned in formFreeBPLookupResponse	application	conditional
senderPhotoIdIssueDay	String, length: 2	Use the value returned in formFreeBPLookupResponse	application	conditional
senderPhotoIdExpirationMonth	String, length: 2	Use the value returned in formFreeBPLookupResponse	application	conditional
senderPhotoIdExpirationYear	String, length: 2	Use the value returned in formFreeBPLookupResponse	application	conditional
senderPhotoIdExpirationDay	String, length: 2	Use the value returned in formFreeBPLookupResponse	application	conditional

Tag	Datatype	Information and Rules	Input	Data
senderPhotoIdIssueAuthority	String, length: 30	For future use	NA	NA
senderLegalIdIssueMonth	String, length: 2	Use the value returned in formFreeBPLookupResponse	application	conditional
senderLegalIdIssueYear	String, length: 2	Use the value returned in formFreeBPLookupResponse	application	conditional
senderLegalIdIssueDay	String, length: 2	Use the value returned in formFreeBPLookupResponse	application	conditional
senderLegalIdExpirationMonth	String, length: 2	Use the value returned in formFreeBPLookupResponse	application	conditional
senderLegalIdExpirationYear	String, length: 2	Use the value returned in formFreeBPLookupResponse	application	conditional
senderLegalIdExpirationDay	String, length: 2	Use the value returned in formFreeBPLookupResponse	application	conditional
senderLegalIdIssueAuthority	String, length: 30	For future use	NA	NA
senderLegalIdState	String, length: 2	For future use	NA	NA
senderLegalIdIssueCountry	String, length: 3	Use the value returned in formFreeBPLookupResponse	application	conditional
senderHomePhoneNotAvailable	boolean	For future use	NA	NA
senderHomePhoneCountryCode	String, length: 3	Use the value returned in formFreeBPLookupResponse	application	conditional
receiverNameSuffix	String, length: 30	Use the value returned in formFreeBPLookupResponse	application	conditional
receiverNameSuffixOther	String, length: 30	For future use	NA	NA
thirdPartySenderBirthCity	String, length: 40	Use the value returned in formFreeBPLookupResponse	application	conditional

Tag	Datatype	Information and Rules	Input	Data
thirdPartySenderBirthState	String, length: 20	For future use	NA	NA
thirdPartySenderBirthCountry	String, length: 3	Use the value returned in formFreeBPLookupResponse	application	conditional
thirdPartySenderGender	String, length: 30	Use the value returned in formFreeBPLookupResponse	application	conditional
thirdPartySenderOccupation	String, length: 30	Use the value returned in formFreeBPLookupResponse	application	conditional
thirdPartySenderOccupationOther	String, length: 30	For future use	NA	NA
thirdPartySenderNameSuffix	String, length: 30	Use the value returned in formFreeBPLookupResponse	application	conditional
thirdPartySenderNameSuffixOther	String, length: 30	For future use	NA	NA
thirdPartySenderCitizenshipCountry	String, length: 3	Use the value returned in formFreeBPLookupResponse	application	conditional
thirdPartySenderCitizenshipAtBirthCountry	String, length: 3	Use the value returned in formFreeBPLookupResponse	application	conditional
thirdPartySenderDualCitizenshipCountry	String, length: 3	Use the value returned in formFreeBPLookupResponse	application	conditional
thirdPartyLegalIdIssueMonth	String, length: 2	Use the value returned in formFreeBPLookupResponse	application	conditional
thirdPartyLegalIdIssueYear	String, length: 2	Use the value returned in formFreeBPLookupResponse	application	conditional
thirdPartyLegalIdIssueDay	String, length: 2	Use the value returned in formFreeBPLookupResponse	application	conditional

Tag	Datatype	Information and Rules	Input	Data
thirdPartyLegalIdExpirationMonth	String, length: 2	Use the value returned in formFreeBPLookupResponse	application	conditional
thirdPartyLegalIdExpirationYear	String, length: 2	Use the value returned in formFreeBPLookupResponse	application	conditional
thirdPartyLegalIdExpirationDay	String, length: 2	Use the value returned in formFreeBPLookupResponse	application	conditional
thirdPartyLegalIdIssueAuthority	String, length: 30	For future use	NA	NA
thirdPartyLegalIdState	String, length: 2	For future use	NA	NA
thirdPartyLegalIdIssueCountry	String, length: 3	Use the value returned in formFreeBPLookupResponse	application	conditional
promoCodeValues	complex	None	GUI	optional
promoCode	string Maximum number of occurrences: unbounded Maximum length: 20	Use the value returned in formFreeBPLookupResponse	application	conditional
fieldValues	complex Maximum number of occurrences: unbounded	For future use	NA	NA
xmlTag	string Maximum length: 80	NA	NA	NA
value	string	NA	NA	NA

bpValidationResponse

Additional Information

1. Visibility rules only apply to fields that are returned

Field Summary

- mgitransactionSessionID
- totalSendAmount
- mgirewardsNumber
- productVariant
- serviceOfferingID
- billerWebsite
- billerPhone
- expectedPostingTimeFrame
 - longLanguageCode
 - textTranslation
- billerCutoffTime
- billerNotes
 - longLanguageCode
 - textTranslation
- serviceOfferingDescription
 - longLanguageCode
 - textTranslation
- customerTips
 - longLanguageCode
 - textTranslation
- billerAddress
- billerAddress2
- billerAddress3
- billerCity
- billerState
- billerZip
- printMGICustomerServiceNumber
- agentTransactionId
- promotionInfo
 - promotionCode
 - promotionDiscountId
 - promotionCategoryId
- promotionDiscount
- promotionDiscountAmount
- promotionErrorCode
- promotionErrorMessage
- promotionalMessage
 - language
 - textTranslation
- readyForCommit
- disclosureText
 - language
 - textTranslation
- additionalFieldsToCollect
 -
- processingFee
- infoFeeIndicator
- sendAmounts
 - sendAmount
 - sendCurrency
 - totalSendFees
 - totalDiscountAmount
 - totalSendTaxes
 - totalAmountToCollect
 - detailSendAmounts
 - amountType
 - amount
 - amountCurrency
- receiveAmounts
 - receiveAmount
 - receiveCurrency
 - validCurrencyIndicator
 - payoutCurrency
 - totalReceiveFees

- totalReceiveTaxes
- totalReceiveAmount
- detailEstimatedReceiveAmounts
 - amountType
 - amount
 - amountCurrency
- exchangeRateApplied
- confirmationNumber
- receipts

Field Detail

Tag	Datatype	Information and Rules	Display
mgitransactionSessionID	string Maximum length: 38	An ID number that uniquely identifies the send transaction across APIs. <i>Additional Information</i> 1. Value must be used in the <u>commitTransactionRequest</u> API	not allowed
totalSendAmount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	None	required
mgirewardsNumber	string Maximum length: 20	None	optional
productVariant	string Valid values: EP, UBP	<i>Additional Information</i> 1. EP is ExpressPayment 2. UBP is utility bill payment	optional
serviceOfferingID	string Maximum length: 21	The ID number of the type of prepaid service offered by the Biller (e.g., 100 minute phone card).	required
billerWebsite	string Maximum length: 40	None	required
billerPhone	string Maximum length: 14	None	required

Tag	Datatype	Information and Rules	Display
expectedPostingTimeFrame	complex Maximum number of occurrences: unbounded	None	N/A
longLanguageCode	String Length: 3	The language of the expected posting timeframe message.	required
textTranslation	string Maximum length: 2000	The translated expected posting timeframe message.	required
billerCutoffTime	string Maximum length: 12	None	required
billerNotes	complex Maximum number of occurrences: unbounded	None	N/A
longLanguageCode	string	The language of the biller notes.	required
textTranslation	string Maximum length: 2000	The translated biller notes.	required
serviceOfferingDescription	complex Maximum number of occurrences: unbounded	The type of prepaid service offered by the Biller (e.g., 100 minute phone card).	N/A
longLanguageCode	string	The language of service offering description.	required
textTranslation	string Maximum length: 2000	The translated service offering description.	required

Tag	Datatype	Information and Rules	Display
customerTips	complex Maximum number of occurrences: unbounded	None	N/A
longLanguageCode	string	The language of the customer tips.	required
textTranslation	string Maximum length: 2000	The translated customer tips.	required
billerAddress	string Maximum length: 30	None	Not allowed
billerAddress2	string Maximum length: 30	None	Not allowed
billerAddress3	string Maximum length: 30	None	Not allowed
billerCity	string Maximum length: 40	None	Not allowed
billerState	string Length: 2	None	not allowed
billerZip	string Maximum length: 10	None	Not allowed
printMGICustomerServiceNumber	boolean	<i>Additional Information</i> 1. If <code>true</code>, the MoneyGram consumer support number must be included on the consumer's receipt 2. If <code>false</code>, the MoneyGram consumer support number is not necessary on the consumer's receipt	required

Tag	Datatype	Information and Rules	Display
agentTransactionId	String Length: 20	None	Not allowed
promotionInfo	complex Maximum number of occurrences: unbounded	None	N/A
promotionCode	string Maximum length: 20	The code used to identify the promotion.	required
promotionDiscountId	string Length: 2 Valid values: 01, 02, 03	The code used to identify the type of discount. <i>Additional Information</i> 1. 01 is flat fee 2. 02 is amount off 3. 03 is percent off	required
promotionCategoryId	string Length: 2	The code used to identify the promotion category.	required
promotionDiscount	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	The promotion's discount value.	required
promotionDiscountAmount	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	The discount amount applied to nonDiscountedFeeExclTax.	required

Tag	Datatype	Information and Rules	Display
promotionErrorCode	string Length: 4	The error code returned if the promotion code was invalid.	required
promotionErrorMessage	string Maximum length: 40	The error message to display if the promotion code was invalid.	required
promotionalMessage	complex Maximum number of occurrences: unbounded	None	N/A
language	string Length: 2	The language of the promotional message.	required
textTranslation	string Maximum length: 2000	The translated promotional message.	required
readyForCommit	boolean	<i>Additional Information</i> 1. If <code>true</code> , the agent application may continue the transaction and send <code>commitTransactionRequest</code> as 2. If <code>false</code> , the agent application must stop the transaction at this point.	not allowed
disclosureText	complex Maximum number of occurrences: unbounded	None	N/A
language	string Length: 2	The language of the disclosure message.	required
textTranslation	string Maximum length: 2000	Additional disclosure info when taxes/fees can't be determined based on included fields.	required

Tag	Datatype	Information and Rules	Display
additionalFieldsToCollect	complex Maximum number of occurrences: unbounded	None	N/A
processingFee	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	The processing fee charged by the biller.	required
infoFeeIndicator	boolean	<i>Additional Information</i> 1. If <code>true</code> , the fee is an informational fee 2. If <code>false</code> , the fee is not an informational fee	optional
sendAmounts	complex Maximum number of occurrences: unbounded	None	N/A
sendAmount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	None	required
sendCurrency	string Length: 3	None	required

Tag	Datatype	Information and Rules	Display
totalSendFees	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Sum of discountedMGIFee and nonMGISendFee. Total of all fees charged to sender by MoneyGram, agents, etc.	required
totalDiscountAmount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Discount amount applied to nonDiscountedFeeExclTax.	required
totalSendTaxes	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Total taxes charged to the sender by MoneyGram, government agents, etc.	required
totalAmountToCollect	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Total of all fees, taxes, and the send amount.	required
detailSendAmounts	complex Maximum number of occurrences: unbounded	None	N/A

Tag	Datatype	Information and Rules	Display
amountType	string Valid values: mgiNonDiscountedSendFee, nonMgiSendFee, totalNonDiscountedFees, discountedMgiSendFee, mgiSendTax, nonMgiSendTax, totalMgiCollectedFeesAndTaxes, totalAmountToMgi, totalSendFeesAndTaxes, totalNonMGISendFeesAndTaxes	The type of fee or tax <i>Additional Information</i> 1. mgiNonDiscountedSendFee is the fee amount charged by MoneyGram before discounts are applied 2. nonMgiSendFee is the total of non-MoneyGram fees charged to the sender by government agents, banking channels, etc.; MoneyGram does not collect this fee 3. totalNonDiscountedFees is the sum of mgiNonDiscountedFee and nonMGISendFee 4. discountedMgiSendFee is the fee collected by MoneyGram after discounts 5. mgiSendTax is taxes collected by MoneyGram 6. nonMgiSendTax is taxes the agent collects and remits 7. totalMgiCollectedFeesAndTaxes is the total taxes and fees charged by MoneyGram 8. totalAmountToMgi is nonMGISendFee and nonMGISendTax subtracted from totalAmountToCollect; this is the amount MoneyGram collects from the sending agent at settlement 9. totalSendFeesAndTaxes is the total of all fees and taxes for the transaction 10. totalNonMGISendFeesAndTaxes is the total of all non-MoneyGram fees and taxes charged to the sender by government agents, banking channels, etc.	required
amount	decimal	None	required
amountCurrency	string Length: 3	None	required

Tag	Datatype	Information and Rules	Display
receiveAmounts	complex Maximum number of occurrences: unbounded	None	N/A
receiveAmount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	None	required
receiveCurrency	string Length: 3	None	required
validCurrencyIndicator	boolean	<i>Additional Information</i> 1. If <code>true</code> , <code>validReceiveAmount</code> , <code>validReceiveCurrency</code> , and <code>validExchangeRate</code> are used to calculate the final payout amount 2. If <code>false</code> , estimated amounts may be available to calculate the final payout amount	optional
payoutCurrency	string Length: 3	None	required
totalReceiveFees	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Total fees charged to the receiver by MoneyGram, agents, government entity, etc.	required

Tag	Datatype	Information and Rules	Display
totalReceiveTaxes	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Total taxes charged to the receiver by MoneyGram, agents, government entity, etc.	required
totalReceiveAmount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Receive amount minus any receive fees/taxes.	required
detailEstimatedReceiveAmounts	complex Maximum number of occurrences: unbounded	None	N/A
amountType	string Valid values: mgiReceiveFee, nonMGIReceiveFee, mgiReceiveTax, nonMgiReceiveTax	The type of fee or tax <i>Additional Information</i> 1. mgiReceiveFee is the fee amount charged by MoneyGram 2. nonMGIReceiveFee is the total of non-MoneyGram fees charged to the receiver by government agents, banking channels, etc.; MoneyGram does not collect this fee 3. mgiReceiveTax is taxes collected by MoneyGram 4. nonMgiReceiveTax is taxes the agent collects and remits	required
amount	decimal	None	required
amountCurrency	string Length: 3	None	required

Tag	Datatype	Information and Rules	Display
exchangeRateApplied	decimal Minimum inclusive value: 0 Maximum length: 14	The exchange rate applied between <code>sendCurrency</code> and <code>receiveCurrency</code> . <i>Field Rules</i> 1. Value returned to four decimal places for USA and US territories 2. Value returned to six decimal places elsewhere	required
confirmationNumber	string Length: 7	The FormFree transaction confirmation number. <i>Additional Information</i> 1. Only applies to FormFree transactions	required
receipts	complex Maximum number of occurrences: unbounded	For future use. Receipt data when receipts are managed by MoneyGram	N/A

8. *commitTransaction*

In FormFree the agent application uses the `commitTransaction` API to:

- Complete a FormFree Send transaction
- Complete a FormFree Bill Payment transaction
- Complete a FormFree Receive transaction

Business Rules to Code

1. The `commitTransactionRequest` may only be used when the `readyForCommit` field of the last `formFreeSendLookupResponse`, `receiveValidationResponse` or `bpValidationResponse` was true.
2. The commit request must be sent within 30 minutes of the `formFreeSendLookupRequest` and `bpValidationRequest`. And 60 seconds for the `receiveValidationRequest`.
3. If agent's application does not receive a `commitTransactionResponse` within 10-40 seconds, application must send the `commitTransactionRequest` again. This must be retried up to 3 times. If the retry attempt fails, check transaction status to confirm if the transaction was successful.
4. If error code in the 935 is returned on commit, it must be handled the same way as if the commit response is not received (see rule above).
5. Other errors may be returned on a commit thereby stopping the transaction. The application must handle scenarios where the transaction fails (an error code is returned) on commit for Send, Bill Payment and Receive transactions.
6. Refer to AC1512 Receipts module for detailed information and requirements for receipts

`commitTransactionRequest`

Field Summary

- `mgTransactionSessionID`
- `productType`
- `fieldValues`
 - `xmlTag`
 - `fieldValue`
- `stateRegulatorVersion`

Field Detail

Tag	Datatype	Information and Rules	Input	Data
mgitransactionSessionID	string Maximum length: 38	An ID number that uniquely identifies the send transaction across APIs. <i>Additional Information</i> 1. Value must be that returned in the feeLookupResponse for FormFree Bill Payment Completion 2. Value must be that returned in the formFreeSendLookupResponse for FormFree Send completion 3. Value must be that returned in the formFreeReceiveLookupResponse	application	required
productType	string Valid values: BP, SEND, RCV	None	application	required
fieldValues	complex Maximum number of occurrences: unbounded	field not currently used.	application	Not allowed
xmlTag	string Maximum length: 80		conditional	
fieldValue	string		conditional	

Tag	Datatype	Information and Rules	Input	Data
stateRegulatorVersion	string Maximum length: 20	Version of the state regulator information used on the transaction receipt <i>Field Rules</i> 1. Data is optional for US agents 2. Data is not allowed for non-US agents 3. Currently data is required MoneyGram Send completion only.	application	conditional

commitTransactionResponse

Additional Information

1. Display rules only apply to fields that are returned

Field Summary

- referenceNumber
- partnerConfirmationNumber
- partnerName
- freePhoneCallPIN
- tollFreePhoneNumber
- expectedDateOfDelivery
- transactionDateTime
- receiptTextInfo
 - longLanguageCode
 - textTranslation
- receipts
- referenceNumberAgentText
- referenceNumberConsumerText

Field Detail

Tag	Datatype	Information and Rules	Display
referenceNumber	string Length: 12	None	required
partnerConfirmationNumber	string Maximum length: 11	None	required
partnerName	string	None	required
freePhoneCallPIN	string Maximum length: 14	PIN used to call using the telephone number in tollFreePhoneNumber	optional
tollFreePhoneNumber	string Maximum length: 14	<i>Additional Information</i> 1. Toll-free telephone number used by consumer with freePhoneCallPIN to make free phone call	required
expectedDateOfDelivery	date Format: CCYY-MM-DD	The date a send transaction is expected to be delivered or deposited.	required
transactionDateTime	dateTime Format: CCYY-MM-DDThh:mm:ss.sss-hh:mm The time zone offset is required	None	required
receiptTextInfo	complex Maximum number of occurrences: unbounded	None	N/A
Language	string Length: 3	The language of the receipt message.	required

Tag	Datatype	Information and Rules	Display
textTranslation	string Maximum length: 2000	Additional information to print on the receipt.	Required
Receipts	complex Maximum number of occurrences: unbounded	for future use	N/A
referenceNumberAgentText	string Maximum length: 240	Data is required to be printed on the Agent Copy of the receipt	required
referenceNumberConsumerText	string Maximum length: 240	Data is required to be printed on the Customer Copy of the receipt.	required

9. *detailLookup*

The agent application uses the `detailLookup` API to check the status of a transaction sent from that particular location.

Additional Information

1. This API should be used for the FormFree Send and Bill Payment completion process.
2. Agent application can look up a transaction by `mgTransactionSessionID`. The session ID can be used to look up the transaction for up to 24 hours to check the transaction status
3. This API can only be used by the original sending location/agent ID.
4. This is an Optional API to code and not required in the actual Send transaction flow.
5. If no response is received after several attempts, the agent should call the MoneyGram call center to verify that transaction's status.

detailLookupRequest

Field Summary

- referenceNumber
- mgTransactionSessionID
- includeUseData
- operatorName

Field Detail

Tag	Datatype	Information and Rules	Input	Data
referenceNumber	string Maximum length: 12	None	application	required
mgTransactionSessionID	string Maximum length: 38	An ID number that uniquely identifies the send transaction across APIs. <i>Additional Information</i> 1. Value must be that returned in the <code>feeLookupResponse</code> or <code>formFreeSendLookupResponse</code>	application	required
includeUseData	boolean	<i>Additional Information</i> 1. If <code>true</code> , any agent use data included on the original transaction is returned in the response. 2. If <code>false</code> , any agent use data included on the original transaction is not returned in the response.	application	required
operatorName	string Maximum length: 7	<i>Additional Information</i> 1. Operator name or operator ID of the associate or user performing the transaction; it must be auto-populated from the agent's system and cannot be editable by the user - Agent Facing – Teller ID/User ID mapped to operatorName - Customer Facing/Self Service (kiosk, online, mobile) – User ID/User Login mapped to operatorName - ATM – unique customer ID (customer number) mapped to operatorName	application	optional

detailLookupResponse

Field Summary

- mgTransactionSessionID
- transactionStatus
- dateTimeSent
- referenceNumber
- freqCustCardNumber
- receiveCountry
- deliveryOption
- senderFirstName
- senderMiddleName
- senderLastName
- senderLastName2
- senderAddress
- senderAddress2
- senderAddress3
- senderCity
- senderState
- senderZipCode
- senderCountry
- senderHomePhone
- receiverFirstName
- receiverMiddleName
- receiverLastName
- receiverLastName2
- receiverAddress
- receiverAddress2
- receiverAddress3
- receiverCity
- receiverState
- receiverZipCode
- receiverCountry
- receiverPhone
- direction1
- direction2
- direction3
- testQuestion
- testAnswer
- messageField1
- messageField2
- senderPhotoIdType
- senderPhotoIdNumber
- senderPhotoIdState
- senderPhotoIdCountry
- senderLegalIdType
- senderLegalIdNumber
- senderDOB
- senderOccupation
- thirdPartyFirstName
- thirdPartyMiddleName
- thirdPartyLastName
- thirdPartyLastName2
- thirdPartyAddress
- thirdPartyAddress2
- thirdPartyAddress3
- thirdPartyCity
- thirdPartyState
- thirdPartyCountry
- thirdPartyZipCode
- thirdPartyDOB
- thirdPartyLegalIdType
- thirdPartyLegalIdNumber
- thirdPartyOccupation
- thirdPartyOrg
- senderBirthCity
- senderBirthCountry
- senderPassportIssueDate
- senderPassportIssueCity
- senderPassportIssueCountry
- operatorName

- validIndicator
- agentUseSendData
- customerReceiveNumber
- receiveAgentID
- receiveAgentName
- receiveAgentAbbreviation
- expectedDateOfDelivery
- redirectIndicator
- redirectInfo
 - originalSendAmount
 - originalSendCurrency
 - originalSendFee
 - originalExchangeRate
 - originalReceiveAmount
 - originalReceiveCurrency
 - originalReceiveCountry
 - newSendFee
 - newExchangeRate
 - newReceiveAmount
 - newReceiveCurrency
 - feeDifference
 - redirectType
- agentCheckAuthorizationNumber
- accountNickname
- promotionInfo
 - promotionCode
 - promotionDiscountId
 - promotionCategoryId
 - promotionDiscount
 - promotionDiscountAmount
 - promotionErrorCode
 - promotionErrorMessage
- promotionalMessage
 - longLanguageCode
 - textTranslation
- disclosureText
 - longLanguageCode
 - textTranslation
- feeRefundRequired
- sendAmounts
 - sendAmount
 - sendCurrency
 - totalSendFees
 - totalDiscountAmount
 - totalSendTaxes
 - totalAmountToCollect
 - detailSendAmounts
 - amountType
 - amount
 - amountCurrency
- receiveAmounts
 - receiveAmount
 - receiveCurrency
 - validCurrencyIndicator
 - payoutCurrency
 - totalReceiveFees
 - totalReceiveTaxes
 - totalReceiveAmount
 - detailEstimatedReceiveAmounts
 - amountType
 - amount
 - amountCurrency
- exchangeRateApplied

Field Detail

Tag	Datatype	Information and Rules	Display
mgTransactionSessionID	string Maximum length: 38	An ID number that uniquely identifies the send transaction across APIs.	not allowed
transactionStatus	string Valid values: AVAIL, CANCL, RECVD, REFND, AFR, UNCOMMITTED, PRCSS	<i>Additional Information</i> 1. AVAIL is available 2. CANCL is canceled 3. RECVD is received 4. REFND is refunded 5. AFR is available for refund 6. UNCOMMITTED is pending commit 7. PRCSS is processing	optional
dateTimeSent	dateTime Format: CCYY-MM-DDThh:mm:ss.sss-hh:mm	None	optional
referenceNumber	string Maximum length: 12	None	optional
freqCustCardNumber	string Maximum length: 20	The sender's MoneyGram Plus number.	optional
receiveCountry	string Length: 3	None	optional
deliveryOption	string	None	optional

Tag	Datatype	Information and Rules	Display
senderFirstName	string Maximum length: 40	None	optional
senderMiddleName	string Length: 40	None	optional
senderLastName	string Maximum length: 40	None	optional
senderLastName2	string Maximum length: 40	None	optional
senderAddress	string Maximum length: 80	None	optional
senderAddress2	string Maximum length: 80	None	optional
senderAddress3	string Maximum length: 80	None	optional
senderCity	string Maximum length: 40	None	optional
senderState	string Length: 2	None	optional
senderZipCode	string Minimum length: 3 Maximum length: 10	None	optional

Tag	Datatype	Information and Rules	Display
senderCountry	string Length: 3	None	optional
senderHomePhone	string Maximum length: 14	None	optional
receiverFirstName	string Maximum length: 40	None	optional
receiverMiddleName	string Maximum length: 40	None	optional
receiverLastName	string Maximum length: 40	None	optional
receiverLastName2	string Maximum length: 40	None	optional
receiverAddress	string Maximum length: 80	None	optional
receiverAddress2	string Maximum length: 80	None	optional
receiverAddress3	string Maximum length: 80	None	optional
receiverCity	string Maximum length: 40	None	optional

Tag	Datatype	Information and Rules	Display
receiverState	string Length: 2	None	optional
receiverZipCode	string Minimum length: 3 Maximum length: 10	None	optional
receiverCountry	string Length: 3	None	optional
receiverPhone	string Maximum length: 14	None	optional
direction1	string Maximum length: 40	<i>Field Rules</i> 1. Only used with delivery options HDS_USD, HDS_LOCAL, and HOME_DELIVERY	optional
direction2	string Maximum length: 40	<i>Field Rules</i> 1. Only used with delivery options HDS_USD, HDS_LOCAL, and HOME_DELIVERY	optional
direction3	string Maximum length: 40	<i>Field Rules</i> 1. Only used with delivery options HDS_USD, HDS_LOCAL, and HOME_DELIVERY	optional
testQuestion	string Maximum length: 30	None	optional
testAnswer	string Maximum length: 30	None	optional

Tag	Datatype	Information and Rules	Display
messageField1	string Maximum length: 40	None	optional
messageField2	string Maximum length: 40	None	optional
senderPhotoIdType	string	None	optional
senderPhotoIdNumber	string Minimum length: 4 Maximum length: 25	None	optional
senderPhotoIdState	string Length: 2	None	optional
senderPhotoIdCountry	string Length: 3	None	optional
senderLegalIdType	string	None	optional
senderLegalIdNumber	string Minimum length: 4 Maximum length: 14	None	optional
senderDOB	date Format: CCYY-MM-DD	None	optional
senderOccupation	string Maximum length: 30	None	optional
thirdPartyFirstName	string Maximum length: 40	None	optional

Tag	Datatype	Information and Rules	Display
thirdPartyMiddleName	string Length: 40	None	optional
thirdPartyLastName	string Maximum length: 40	None	optional
thirdPartyLastName2	string Maximum length: 40	None	optional
thirdPartyAddress	string Maximum length: 80	None	optional
thirdPartyAddress2	string Maximum length: 80	None	optional
thirdPartyAddress3	string Maximum length: 80	None	optional
thirdPartyCity	string Maximum length: 40	None	optional
thirdPartyState	string Length: 2	None	optional
thirdPartyCountry	string Length: 3	None	optional
thirdPartyZipCode	string Minimum length: 3 Maximum length: 10	None	optional

Tag	Datatype	Information and Rules	Display
thirdPartyDOB	date Format: CCYY-MM-DD	None	optional
thirdPartyLegalIdType	string	None	optional
thirdPartyLegalIdNumber	string Minimum length: 4 Maximum length: 14	None	optional
thirdPartyOccupation	string Maximum length: 30	None	optional
thirdPartyOrg	string Maximum length: 60	None	optional
senderBirthCity	string Maximum length: 40	None	optional
senderBirthCountry	string Length: 3	None	optional
senderPassportIssueDate	date Format: CCYY-MM-DD	None	optional
senderPassportIssueCity	string Maximum length: 40	None	optional
senderPassportIssueCountry	string Length: 3	None	optional
operatorName	string Maximum length: 7	None	optional

Tag	Datatype	Information and Rules	Display
validIndicator	boolean	<i>Additional Information</i> - If <code>true</code>, <code>validReceiveAmount</code>, <code>validReceiveCurrency</code>, and <code>validExchangeRate</code> are used to calculate the final payout amount - If <code>false</code>, the transaction receive amount may be converted into another currency before being paid using an independent exchange rate	optional
agentUseSendData	string Maximum length: 200	None	optional
customerReceiveNumber	string Maximum length: 20 Validation pattern: MG123456789	The unique MoneyGram-managed RRN (receiver registration number) that identifies the receiver of the transaction.	optional
receiveAgentID	string Length: 8	None	not allowed
receiveAgentName	string Maximum length: 40	None	optional
receiveAgentAbbreviation	string Maximum length: 10	The abbreviated form of the agent's name	optional
expectedDateOfDelivery	date Format: CCYY-MM-DD	The date a send transaction is expected to be delivered.	optional
redirectIndicator	boolean	<i>Additional Information</i> - If <code>true</code>, the transaction is a currency redirect - If <code>false</code>, the transaction is not a currency redirect	not allowed

Tag	Datatype	Information and Rules	Display
redirectInfo	complex Maximum number of occurrences: 1	None	N/A
originalSendAmount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	None	optional
originalSendCurrency	string Length: 3	None	optional
originalSendFee	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	None	optional
originalExchangeRate	decimal Minimum exclusive value: 0 Maximum length: 14	<i>Field Rules</i> 1. Value returned to four decimal places for USA and US territories 2. Value returned to six decimal places elsewhere	optional
originalReceiveAmount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	None	optional
originalReceiveCurrency	string Length: 3	None	optional

Tag	Datatype	Information and Rules	Display
originalReceiveCountry	string Length: 3	None	optional
newSendFee	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	None	optional
newExchangeRate	decimal Minimum exclusive value: 0 Maximum length: 14	<i>Field Rules</i> 1. Value returned to four decimal places for USA and US territories 2. Value returned to six decimal places elsewhere	optional
newReceiveAmount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	None	optional
newReceiveCurrency	string Length: 3	None	optional
feeDifference	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	None	optional
redirectType	string Valid values: CURRENCY_REDIRECT, COUNTRY_REDIRECT, COUNTRY_CURRENCY_REDIRECT	None	optional

Tag	Datatype	Information and Rules	Display
agentCheckAuthorizationNumber	string Maximum length: 5	None	optional
accountNickname	string Maximum length: 30	None	required
promotionInfo	complex Maximum number of occurrences: unbounded	None	N/A
promotionCode	string Maximum length: 20	The code used to identify the promotion.	required
promotionDiscountId	string Length: 2 Valid values: 01, 02, 03	The code used to identify the type of discount. <i>Additional Information</i> 1. 01 is flat fee. Flat Fee is a promotion that provides the services with a specified fee. 2. 02 is amount off. Amount Off is a promotion that provides services with a specified amount off the fee. 3. 03 is percent off. Percent Off is a promotion that provides services with a percent off the fee.	required
promotionCategoryId	string Length: 2	The code used to identify the promotion category.	required
promotionDiscount	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	The promotion's discount value as setup in MoneyGram system based on the promotionDiscountId	required

Tag	Datatype	Information and Rules	Display
promotionDiscountAmount	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	The discount amount applied to nonDiscountedFeeExclTax.	required
promotionErrorCode	string Length: 4	The error code returned if the promotion code was invalid.	required
promotionErrorMessage	string Maximum length: 40	The error message to display if the promotion code was invalid.	required
promotionalMessage	complex Maximum number of occurrences: unbounded	None	N/A
longLanguageCode	string Length: 3	The language of the promotional message.	required
textTranslation	string Maximum length: 2000	The translated promotional message.	required
disclosureText	complex Maximum number of occurrences: unbounded	None	N/A
longLanguageCode	string Length: 3	The language of the disclosure message.	required
textTranslation	string Maximum length: 2000	Additional disclosure info when taxes/fees can't be determined based on included fields.	required

Tag	Datatype	Information and Rules	Display
feeRefundRequired	boolean	<i>Additional Information</i> 1. If <code>true</code> , the transaction fee must be refunded when reversing the transaction 2. If <code>false</code> , the transaction fee is not refunded when reversing the transaction	N/A
sendAmounts	complex Maximum number of occurrences: unbounded	None	N/A
sendAmount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	None	required
sendCurrency	string Length: 3	None	required
totalSendFees	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Sum of <code>discountedMGIFee</code> and <code>nonMGISendFee</code> . Total of all fees charged to sender by MoneyGram, agents, etc.	required
totalDiscountAmount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Discount amount applied to <code>nonDiscountedFeeExclTax</code> .	required

Tag	Datatype	Information and Rules	Display
totalSendTaxes	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Total taxes charged to the sender by MoneyGram, government agents, etc.	required
totalAmountToCollect	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Total of all fees, taxes, and the send amount.	required
detailSendAmounts	complex Maximum number of occurrences: unbounded	None	N/A

Tag	Datatype	Information and Rules	Display
amountType	string Valid values: mgiNonDiscountedSendFee, nonMgiSendFee, totalNonDiscountedFees, discountedMgiSendFee, mgiSendTax, nonMgiSendTax, totalMgiCollectedFeesAndTaxes, totalAmountToMgi, totalSendFeesAndTaxes, totalNonMGISendFeesAndTaxes	The type of fee or tax <i>Additional Information</i> 1. mgiNonDiscountedSendFee is the fee amount charged by MoneyGram before discounts are applied 2. nonMgiSendFee is the total of non-MoneyGram fees charged to the sender by government agents, banking channels, etc.; MoneyGram does not collect this fee 3. totalNonDiscountedFees is the sum of mgiNonDiscountedFee and nonMGISendFee 4. discountedMgiSendFee is the fee collected by MoneyGram after discounts 5. mgiSendTax is taxes collected by MoneyGram 6. nonMgiSendTax is taxes the agent collects and remits 7. totalMgiCollectedFeesAndTaxes is the total taxes and fees charged by MoneyGram 8. totalAmountToMgi is nonMGISendFee and nonMGISendTax subtracted from totalAmountToCollect; this is the amount MoneyGram collects from the sending agent at settlement 9. totalSendFeesAndTaxes is the total of all fees and taxes for the transaction 10. totalNonMGISendFeesAndTaxes is the total of all non-MoneyGram fees and taxes charged to the sender by government agents, banking channels, etc.	optional
amount	decimal	None	optional
amountCurrency	string Length: 3	None	optional

Tag	Datatype	Information and Rules	Display
receiveAmounts	complex Maximum number of occurrences: unbounded	None	N/A
receiveAmount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	None	required
receiveCurrency	string Length: 3	None	required
validCurrencyIndicator	boolean	<i>Additional Information</i> 1. If <code>true</code> , <code>validReceiveAmount</code> , <code>validReceiveCurrency</code> , and <code>validExchangeRate</code> are used to calculate the final payout amount 2. If <code>false</code> , estimated amounts may be available to calculate the final payout amount	optional
payoutCurrency	string Length: 3	None	required
totalReceiveFees	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Total fees charged to the receiver by MoneyGram, agents, government entity, etc.	required
totalReceiveTaxes	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Total taxes charged to the receiver by MoneyGram, agents, government entity, etc.	required

Tag	Datatype	Information and Rules	Display
totalReceiveAmount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Receive amount minus any receive fees/taxes.	required
detailEstimatedReceiveAmounts	complex Maximum number of occurrences: unbounded	None	N/A
amountType	string Valid values: mgiReceiveFee, nonMGIReceiveFee, mgiReceiveTax, nonMgiReceiveTax	The type of fee or tax Additional Information 1. mgiReceiveFee is the fee amount charged by MoneyGram 2. nonMGIReceiveFee is the total of non-MoneyGram fees charged to the receiver by government agents, banking channels, etc.; MoneyGram does not collect this fee 3. mgiReceiveTax is taxes collected by MoneyGram 4. nonMgiReceiveTax is taxes the agent collects and remits	optional
amount	decimal	None	optional
amountCurrency	string Length: 3	None	optional
exchangeRateApplied	decimal Minimum inclusive value: 0 Maximum length: 14	The exchange rate applied between sendCurrency and receiveCurrency. Field Rules 1. Value returned to four decimal places for USA and US territories 2. Value returned to six decimal places elsewhere	required

10. *referenceNumber*

The agent application uses the `referenceNumber` API to check the status obtain details about a specific MoneyGram money transfer transaction.

Additional Information

1. MoneyGram may not authorize payout of transactions attempted to be received in countries, states/provinces, or via delivery options that were not originally designated by the sender at time of send.
2. The agent application may use the `referenceNumber` API to verify the success of the `commitTransaction` when completing a receive transaction; if the response returns a `transactionStatus` other than `RECVD`, the application may retry the transaction.

referenceNumberRequest

Field Summary

- **referenceNumber**
- pin
- operatorName

Field Detail

Tag	Datatype	Information and Rules	Input	Data
referenceNumber	string Maximum length: 12	<i>Field Rules</i> 1. If using receive PINs, the transaction reference number must be entered by the consumer 2. If using receive PINs, the value must be masked on screen	GUI	required
pin	string Maximum length: 8	<i>Field Rules</i> 1. If using receive PINs, data and GUI input are required 2. If using receive PINs, the value must be entered by the consumer 3. If using receive PINs, the value must be masked on screen 4. If not using receive PINs, data and input are not allowed	conditional	optional
operatorName	string Maximum length: 7	<i>Additional Information</i> 1. Operator name or operator ID of the associate or user performing the transaction; it must be auto-populated from the agent's system and cannot be editable by the user - Agent Facing – Teller ID/User ID mapped to operatorName - Customer Facing/Self Service (kiosk, online, mobile) – User ID/User Login mapped to operatorName - ATM – unique customer ID (customer number) mapped to operatorName	application	optional

referenceNumberResponse

Field Summary

- [mgTransactionSessionID](#)
- [senderFirstName](#)
- [senderMiddleName](#)
- [senderLastName](#)
- [senderLastName2](#)
- [senderHomePhone](#)
- [senderAddress](#)
- [senderAddress2](#)
- [senderAddress3](#)
- [senderAddress4](#)
- [senderCity](#)
- [senderState](#)
- [senderZipCode](#)
- [senderCountry](#)
- [receiverFirstName](#)
- [receiverMiddleName](#)
- [receiverLastName](#)
- [receiverLastName2](#)
- [receiverAddress](#)
- [receiverAddress2](#)
- [receiverAddress3](#)
- [receiverAddress4](#)
- [direction1](#)
- [direction2](#)
- [direction3](#)
- [receiverCity](#)
- [receiverState](#)
- [receiverZipCode](#)
- [receiverCountry](#)
- [receiverPhone](#)
- [testQuestion](#)
- [testAnswer](#)
- [messageField1](#)
- [messageField2](#)
- [agentCheckNumber](#)
- [agentCheckAmount](#)
- [agentCheckAuthorizationNumber](#)
- [customerCheckNumber](#)
- [customerCheckAmount](#)
- [okForAgent](#)
- [deliveryOption](#)
- [transactionStatus](#)
- [dateTimeSent](#)
- [receiveCurrency](#)
- [receiveAmount](#)
- [referenceNumber](#)
- [originatingCountry](#)
- [validIndicator](#)
- [indicativeReceiveAmount](#)
- [indicativeReceiveCurrency](#)
- [indicativeExchangeRate](#)
- [mgCustomerReceiveNumber](#)
- [partnerCustomerReceiveNumber](#)
- [receiveAgentID](#)
- [receiveAgentName](#)
- [receiveAgentAbbreviation](#)
- [expectedDateOfDelivery](#)
- [originalSendAmount](#)
- [originalSendCurrency](#)
- [originalSendFee](#)
- [originalExchangeRate](#)
- [redirectIndicator](#)
- [redirectInfo](#)
 - [originalSendAmount](#)
 - [originalSendCurrency](#)
 - [originalSendFee](#)
 - [originalExchangeRate](#)
 - [originalReceiveAmount](#)

- originalReceiveCurrency
- originalReceiveCountry
- newSendFee
- newExchangeRate
- newReceiveAmount
- newReceiveCurrency
- feeDifference
- redirectType
- okForPickup
- notOkForPickupReasonCode
- notOkForPickupReasonDescription
- minutesUntilOkForPickup
- sendPurposeOfTransaction
- sendPurposeOfTransactionOther
- receiverNameSuffix
- receiverNameSuffixOther

Field Detail

Tag	Datatype	Information and Rules	Display
mgitransactionSessionID	string Maximum length: 38	An ID number that uniquely identifies the send transaction across APIs. <i>Additional Information</i> 1. Value must be saved and used in the <u>receiveValidationRequest</u> and <u>commitTransactionRequest</u> APIs	not allowed
senderFirstName	string Maximum length: 40	<i>Field Rules</i> 1. See <i>Data Quality Edits Addendum</i> for data quality rules	required
senderMiddleName	string Length: 40	<i>Field Rules</i> 1. See <i>Data Quality Edits Addendum</i> for data quality rules	required
senderLastName	string Maximum length: 40	<i>Field Rules</i> 1. See <i>Data Quality Edits Addendum</i> for data quality rules	required
senderLastName2	string Maximum length: 40	<i>Field Rules</i> 1. See <i>Data Quality Edits Addendum</i> for data quality rules	required
senderHomePhone	string Maximum length: 14	<i>Field Rules</i> 1. Display is required if required by country compliance regulations 2. Display is not allowed otherwise	conditional
senderAddress	string Maximum length: 80	None	conditional
senderAddress2	string Maximum length: 80	None	conditional

Tag	Datatype	Information and Rules	Display
senderAddress3	string Maximum length: 80	None	conditional
senderAddress4	string Maximum length: 80	None	conditional
senderCity	string Maximum length: 40	<i>Field Rules</i> 1. Display is required if required by country compliance regulations 2. Display is not allowed otherwise	conditional
senderState	string Length: 2	<i>Field Rules</i> 1. Display is required if required by country compliance regulations 2. Display is not allowed otherwise	conditional
senderZipCode	string Minimum length: 3 Maximum length: 10	<i>Field Rules</i> 1. Display is required if required by country compliance regulations 2. Display is not allowed otherwise	conditional
senderCountry	string Length: 3	<i>Field Rules</i> 1. Display is required if required by country compliance regulations 2. Display is not allowed otherwise	conditional
receiverFirstName	string Maximum length: 40	<i>Field Rules</i> 1. See <i>Data Quality Edits Addendum</i> for data quality rules	required
receiverMiddleName	string Maximum length: 40	<i>Field Rules</i> 1. See <i>Data Quality Edits Addendum</i> for data quality rules	required

Tag	Datatype	Information and Rules	Display
receiverLastName	string Maximum length: 40	<i>Field Rules</i> 1. See <i>Data Quality Edits Addendum</i> for data quality rules	required
receiverLastName2	string Maximum length: 40	<i>Field Rules</i> 1. See <i>Data Quality Edits Addendum</i> for data quality rules	required
receiverAddress	string Maximum length: 80	None	required
receiverAddress2	string Maximum length: 80	None	required
receiverAddress3	string Maximum length: 80	None	required
receiverAddress4	string Maximum length: 80	None	required
direction1	string Maximum length: 40	None	required
direction2	string Maximum length: 40	None	required
direction3	string Maximum length: 40	None	required
receiverCity	string Maximum length: 40	None	required
receiverState	string Length: 2	None	required

Tag	Datatype	Information and Rules	Display
receiverZipCode	string Minimum length: 3 Maximum length: 10	None	required
receiverCountry	string Length: 3	None	required
receiverPhone	string Maximum length: 14	None	optional
testQuestion	string Maximum length: 30	<i>Additional Information</i> 1. Agent may use the test question and answer to authorize payout in lieu of or in addition to photo ID <i>Field Rules</i> 1. Display is required if the agent uses test questions and answers 2. Display is not required if agent does not use test questions and answers	conditional
testAnswer	string Maximum length: 30	<i>Additional Information</i> 1. Agent may use the test question and answer to authorize payout in lieu of or in addition to photo ID <i>Field Rules</i> 1. Display is required if the agent uses test questions and answers 2. Display is not required if agent does not use test questions and answers	conditional
messageField1	string Maximum length: 40	<i>Additional Information</i> 1. Value must be printed on consumer receipt	required

Tag	Datatype	Information and Rules	Display
messageField2	string Maximum length: 40	<i>Additional Information</i> 1. Value must be printed on consumer receipt	required
agentCheckNumber	string Maximum length: 12	<i>Additional Information</i> 1. Field not currently used	not allowed
agentCheckAmount	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	<i>Additional Information</i> 1. Field not currently used	not allowed
agentCheckAuthorizationNumber	string Maximum length: 5	<i>Additional Information</i> 1. Field not currently used	not allowed
customerCheckNumber	string Maximum length: 12	<i>Additional Information</i> 1. Field not currently used	not allowed
customerCheckAmount	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	<i>Additional Information</i> 1. Field not currently used	not allowed
okForAgent	boolean	<i>Additional Information</i> 1. If value is <code>true</code> , the agent can receive the specified transaction option 2. If value is <code>false</code> , the agent cannot receive the specified transaction option 3. The agent application must check the <code>okForPickup</code> field to determine whether the transaction can be received at this time	optional

Tag	Datatype	Information and Rules	Display
deliveryOption	string	<i>Additional Information</i> 1. Field not currently used	NA
transactionStatus	string Valid values: AVAIL, CANCL, RECVD, REFND, AFR, PRCS	<i>Additional Information</i> 1. AVAIL is available 2. CANCL is canceled 3. RECVD is received 4. REFND is refunded 5. AFR is available for refund 6. PRCS is processing 7. Only transactions with a value of AVAIL can be received; if a transaction cannot be received, the agent application should display a message to indicate why	required
dateTimeSent	dateTime Format: CCYY-MM-DDThh:mm:ss.sss-hh:mm	None	required
receiveCurrency	string Length: 3	<i>Additional Information</i> 1. If validIndicator is false, the agent must pay the receiver using this currency 2. If validIndicator is true, the agent must pay the receiver using the currency in the indicativeReceiveCurrency field 3. The agent application must use the value of this field in all subsequent APIs	required

Tag	Datatype	Information and Rules	Display
receiveAmount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	The amount to be paid to the receiver. <i>Additional Information</i> 1. If <code>validIndicator</code> is <code>false</code> , the agent must pay this amount to the receiver 2. If <code>validIndicator</code> is <code>true</code> , the agent must pay the amount in the <code>indicativeReceiveAmount</code> field to the receiver 3. The agent application must use the value of this field in all subsequent APIs	required
referenceNumber	string Maximum length: 12	None	required
originatingCountry	string Length: 3	None	required
validIndicator	boolean	Whether or not the receive amount was guaranteed at the time of the send transaction. <i>Additional Information</i> 1. If <code>true</code> , the receive amount was guaranteed at the time of the send and the agent must pay the consumer the amount in the <code>indicativeReceiveAmount</code> field 2. If <code>false</code> , the receive amount was estimated at the time of the send and the agent must pay the consumer the amount in the <code>receiveAmount</code> field	Not allowed
indicativeReceiveAmount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	The amount to pay the consumer if the receive amount was guaranteed at the time of the send transaction. <i>Additional Information</i> 1. This amount must be paid in the currency returned in the <code>indicativeReceiveCurrency</code> field 2. This amount must not be used in subsequent APIs	required

Tag	Datatype	Information and Rules	Display
indicativeReceiveCurrency	string Length: 3	The currency in which to pay the consumer if the receive amount was guaranteed at the time of the send transaction. <i>Additional Information</i> 1. This currency must not be used in subsequent APIs	required
indicativeExchangeRate	decimal Minimum inclusive value: 0 Maximum length: 14	The exchange rate between the currencies returned in the <code>receiveCurrency</code> and <code>indicativeReceiveCurrency</code> fields <i>Field Rules</i> 1. Value returned to four decimal places for USA and US territories 2. Value returned to six decimal places elsewhere	required
mgCustomerReceiveNumber	string Maximum length: 20	<i>Additional Information</i> 1. Field does not apply to this product	not allowed
partnerCustomerReceiveNumber	string Maximum length: 20	<i>Additional Information</i> 1. Field does not apply to this product	not allowed
receiveAgentID	string Length: 8	<i>Additional Information</i> 1. Field does not apply to this product	not allowed
receiveAgentName	string Maximum length: 40	None	required
receiveAgentAbbreviation	string Maximum length: 10	The abbreviated form of the agent's name to use if there isn't enough space to use <code>receiveAgentName</code> .	conditional
expectedDateOfDelivery	date Format: CCYY-MM-DD	The date a send transaction is expected to be delivered. <i>Additional Information</i> 1. Field does not apply to this product	not allowed

Tag	Datatype	Information and Rules	Display
originalSendAmount	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	None	required
originalSendCurrency	string Length: 3	None	required
originalSendFee	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	None	required
originalExchangeRate	decimal Minimum inclusive value: 0 Maximum length: 14	<i>Field Rules</i> 1. Value returned to four decimal places for USA and US territories 2. Value returned to six decimal places elsewhere	required
redirectIndicator	boolean	<i>Additional Information</i> 1. If <code>true</code> , the transaction is a currency redirect and the application must display a message to tell the receiver the <code>newReceiveAmount</code> and <code>newReceiveCurrency</code> ; the receiver must accept the changes before continuing 2. If <code>false</code> , the transaction is not a currency redirect	not allowed
redirectInfo	complex Maximum number of occurrences: 1	None	N/A

Tag	Datatype	Information and Rules	Display
originalSendAmount	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	None	required
originalSendCurrency	string Length: 3	None	required
originalSendFee	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	None	required
originalExchangeRate	decimal Minimum inclusive value: 0 Maximum length: 14	<i>Field Rules</i> 1. Value returned to four decimal places for USA and US territories 2. Value returned to six decimal places elsewhere	required
originalReceiveAmount	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	None	required
originalReceiveCurrency	string Length: 3	None	required
originalReceiveCountry	string Length: 3	<i>Additional Information</i> 1. Field not currently used	NA

Tag	Datatype	Information and Rules	Display
newSendFee	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	<i>Additional Information</i> 1. Field does not apply to this product	not allowed
newExchangeRate	decimal Minimum inclusive value: 0 Maximum length: 14	<i>Field Rules</i> 1. Value returned to four decimal places for USA and US territories 2. Value returned to six decimal places elsewhere	required
newReceiveAmount	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	<i>Additional Information</i> 1. Must be told to receiver if <code>redirectIndicator</code> is <code>true</code> ; the receiver must accept the new value to continue	required
newReceiveCurrency	string Length: 3	<i>Additional Information</i> 1. Must be told to receiver if <code>redirectIndicator</code> is <code>true</code> ; the receiver must accept the new value to continue	required
feeDifference	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	<i>Additional Information</i> 1. Field does not apply to this product	not allowed
redirectType	string Valid values: CURRENCY_REDIRECT	<i>Additional Information</i> 1. CURRENCY_REDIRECT is currency redirect	not allowed

Tag	Datatype	Information and Rules	Display
okForPickup	boolean	Whether or not the transaction can be received at this time. <i>Additional Information</i> 1. If <code>true</code> , the transaction can be received at this time 2. If <code>false</code> , the transaction cannot be received at this time 3. If <code>false</code> , the reason the transaction cannot be received is returned in the <code>notOkForPickupReasonCode</code> field	required
notOkForPickupReasonCode	integer	<i>Additional Information</i> 1. If value is <code>688</code> , the transaction cannot be picked up before 7:00 AM in the receive country's local time 2. If value is <code>690</code> , the transaction cannot be picked up at this time because it was sent using 24 or 48 hour service, and the specified time has not elapsed 3. If value is <code>690</code> , the number of minutes remaining until the transaction can be received is returned in the <code>minutesUntilOkForPickup</code> field	not allowed
notOkForPickupReasonDescription	string	The description of why the transaction cannot be received at this time to display on the agent application GUI	optional
minutesUntilOkForPickup	int Maximum inclusive value: 99999	The number of minutes remaining until the transaction can be received. <i>Additional Information</i> 1. Value is returned only if <code>notOkForPickupReasonCode</code> is <code>690</code>	optional
sendPurposeOfTransaction	String Length: 30	The purpose for sending the transaction	optional
sendPurposeOfTransactionOther	string Length: 40	The purpose for sending the transaction	optional

Tag	Datatype	Information and Rules	Display
receiverNameSuffix	String Length: 20	The suffix of the receiver name	optional
receiverNameSuffixOther	String Length: 20	For future use	NA

Table of Figures

Figure 1: Explanation of Process Flow Diagrams vi

Figure 2: FormFree Send Process Flow1

Figure 3: FormFree Receive Process Flow 2

Figure 4: FormFree Bill Payment Process Flow3



CORPORATE OFFICE 2828 N. Harwood, Floor 15
 Dallas, TX 75201
 USA

TOLL FREE 1.800.328.5678

WEB SITE **www.moneygram.com**