



AgentConnect®

MoneyGram Receive Transactions

Version 15.12 (SP1)

2018

This AgentConnect® specification and the information contained herein is the **confidential property** of MoneyGram International, Inc. (MoneyGram), and is loaned to the recipient solely for use in integrating the MoneyGram System with the recipient's point-of-sale (POS) system as authorized by a Non-Disclosure Agreement entered between **MoneyGram** and the recipient. This document is also protected as an unpublished work under copyright law, and no part hereof may be compiled, distributed or disclosed to any third party without the prior written consent of **MoneyGram** except to persons having a legitimate need to know to integrate to the AgentConnect® System with the recipient's POS system as authorized in a POS license.

Other companies may have patents that apply to Money transfer or to the use of AgentConnect® within certain features. **MoneyGram** is not responsible for violations of any third party intellectual property rights by use of AgentConnect®.

The recipient's rights to integrate the AgentConnect® System with its POS system and/or using MoneyGram's confidential information will cease immediately upon termination of the Network Agreement or the Biller Agreement between MoneyGram and the recipient. This document must be returned upon the request of MoneyGram or upon termination of the Network Agreement or the Biller Agreement between MoneyGram and the recipient.

Table of Contents

Overview	9
Business Purpose	9
API Flows and Processes	9
FormFree Process	9
MoneyGram Receive Transaction Receipt Specification	10
APIs	11
1. referenceNumber	13
referenceNumberRequest	15
<i>Field Summary</i>	<i>15</i>
<i>Field Detail.....</i>	<i>16</i>
referenceNumberResponse	17
<i>Field Summary</i>	<i>17</i>
<i>Field Detail.....</i>	<i>19</i>
2. getFieldsForProduct	33
getFieldsForProductRequest	35
<i>Field Summary</i>	<i>35</i>
<i>Field Detail.....</i>	<i>36</i>
getFieldsForProductResponse	38
<i>Field Summary</i>	<i>38</i>
<i>Field Detail.....</i>	<i>39</i>
3. receiveValidation	45
receiveValidationRequest	47
<i>Field Summary</i>	<i>47</i>
<i>Field Detail.....</i>	<i>49</i>
receiveValidationResponse	68
<i>Field Summary</i>	<i>68</i>
<i>Field Detail.....</i>	<i>69</i>
4. commitTransaction	70
commitTransactionRequest	71
<i>Field Summary</i>	<i>71</i>
<i>Field Detail.....</i>	<i>72</i>
commitTransactionResponse	73
<i>Field Summary</i>	<i>73</i>
<i>Field Detail.....</i>	<i>74</i>
5. receiveReversal	77
receiveReversalRequest	78

Field Summary 78

Field Detail..... 79

receiveReversalResponse..... 80

Field Summary 80

Field Detail..... 80

Table of Figures 82

The following diagram explains the formats used in process flows throughout this document.

For each API description, a red arrow points to the API being described.

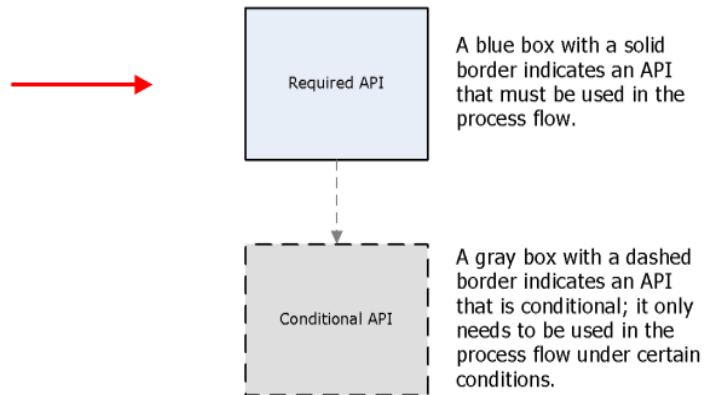


Figure 1: Explanation of Process Flow Diagram

The following is an example of a table used to describe API request field details.

Tag	Datatype	Information and Rules	Input	Data
requestExampleField1	string Maximum length: 10	An example of a field containing a string.	GUI	required
requestExampleField2	string Length: 3 Must be a valid country code	An example of a field containing a country code	application	required
requestExampleField3	boolean	An example field whose data and visibility requirements depend on the getFieldsForProduct API. <i>Additional Information</i> 1. If <code>true</code> , then... 2. If <code>false</code> , then...	not allowed	not allowed

Definitions

- **Tag:** The field's XML tag; fields for which data is required are shown in bold red text
- **Datatype:** Describes the type and restrictions of the field's data
- **Information and Rules:** Provides additional information, business rules, and a description of the field if necessary
- **Input:** Indicates how the field's value is obtained
 - **Application:** The agent application must retrieve the data from another part of the agent application or from a previous MoneyGram API response. Data can be displayed on the application screen
 - **GUI:** The agent application must display the field on its user interface and allow user input
 - **Conditional:** The agent application may or may not display the field on the user interface for user input depending on the conditions stated in the Information and Rules column
 - **GFFP:** Whether or not the field is shown on the user interface for user inputs depends on the information returned by the [getFieldsForProductResponse](#) (GFFP)
 - **N/A:** Input does not apply; for instance, if the field only contains other fields

- **Not Allowed:** The agent application must not allow data to be entered in the field by the user. Data must not be displayed. The agent application must retrieve the data from another part of the agent application or from a previous MoneyGram API response
- **Optional:** The agent may choose whether to display the field on the user interface for user input
- **Data:** Indicates whether the field must contain data; only used on API requests
 - **Required:** The field must contain data
 - **Not allowed:** The field must not contain data
 - **Optional:** The agent must display the field on the user interface, but data collection is optional
 - **Conditional:** The field may or may not contain data depending on the conditions stated in the Information and Rules column
 - **GFFP:** Whether or not the field contains data depends on the information returned by the [getFieldsForProductResponse](#) (GFFP)
 - **Response:** Whether or not the field contains data depends on the information returned by a message specified in the additional information for the API

The following is an example of a table used to describe API response field details.

Tag	Datatype	Information and Rules	Display
responseExampleField1	string Maximum length: 10	An example of a field containing a string.	required
responseExampleField2	string Length: 3 Must be a valid country code	An example of a field containing a country code	optional
responseExampleField3	boolean	An example field whose data and visibility requirements depend on the getFieldsForProduct API. <i>Additional Information</i> 1. If <code>true</code> , then... 2. If <code>false</code> , then...	required

Definitions

- **Tag:** The field's XML tag; fields for which data is required are shown in bold red text

- **Datatype:** Describes the type and restrictions of the field's data
- **Information and Rules:** Provides additional information, business rules, and a description of the field if necessary
- **Display:** Indicates whether the value of the field is shown on the agent application's user interface
 - **Conditional:** The value may or may not be shown on the user interface depending on the conditions stated in the Information and Rules column
 - **GFFP:** Whether or not the value is shown on the user interface depends on the information returned by the [getFieldsForProductResponse](#) (GFFP)
 - **N/A:** Visibility does not apply; for instance, if the field doesn't contain displayable data
 - **Not allowed:** The value must not be shown on the user interface; for fields in API responses, the data in the field should not be edited unless otherwise stated
 - **Optional:** The agent may choose whether to show the value on the user interface
 - **Required:** The value must be shown on the user interface if data is returned in the API

Overview

Business Purpose

- This document provides technical and business information required to design an application to perform MoneyGram money transfer receive transactions.

API Flows and Processes

Receive Transaction Process

- The agent application sends a [referenceNumberRequest](#) containing the transaction reference number, and MoneyGram returns a [referenceNumberResponse](#) containing transaction status and other transaction details.
- [Conditional] Choose one of the following.
 - The agent application sends a [referenceNumberRequest](#) containing the transaction reference number and receive PIN used to verify the receiver, and MoneyGram returns a [referenceNumberResponse](#) confirming the transaction may continue.
 - The agent application validates the PIN locally based on the data returned on the [referenceNumberResponse](#).
- [Conditional] If the transaction is a currency redirect transaction, the agent must tell the consumer the new exchange rate and receive amount, and receive approval before continuing.
- The agent verifies the receiver's name on ID against transaction details.
- The agent application sends a [getFieldsForProductRequest](#), and MoneyGram returns a [getFieldsForProductResponse](#) containing field requirements and screen content information for the transaction.
- A summary screen may be displayed with data collected to be confirmed by the agent or the customer. The agent application sends a [receiveValidationRequest](#) containing information collected from the customer, and MoneyGram returns a [receiveValidationResponse](#) indicating the transaction can continue, or an error indicating the issue with the receive transaction request.
- The agent application sends a [commitTransactionRequest](#) within 60 seconds of the [receiveValidationRequest](#), and MoneyGram returns a [commitTransactionResponse](#).
- If the [commitTransactionResponse](#) is not received due to communication error, the agent application must resend the [commitTransactionRequest](#).
- After a successful [commitTransaction](#), the agent provides the consumer with their money and the transaction receipt.

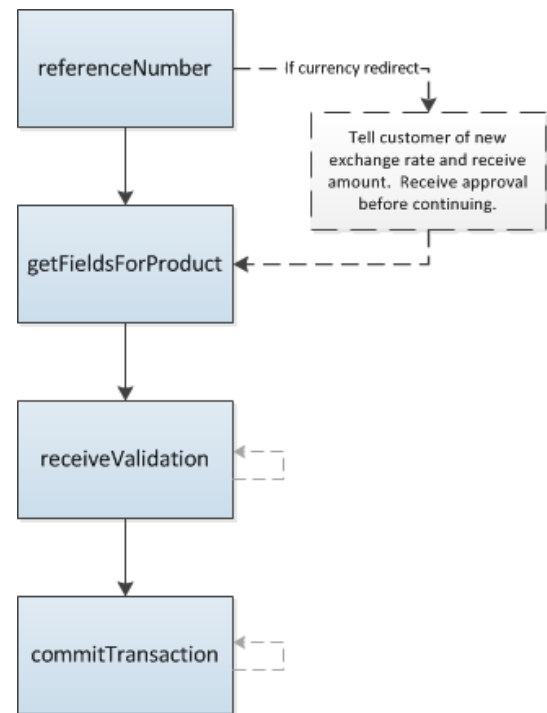


Figure 2: Receive Process Flow

FormFree Transaction Staging Process

Agents using FormFree staging develop an application used to collect receive transaction data via mobile phone, online form, or other method. The consumer completes the transaction at a later time at an agent location. At that time, the consumer provides a reference number, and photo ID if

applicable, and receives funds. The advantage of transaction staging for the agent is that logic for setting up the transaction data, and the time spent with the consumer to collect all required data, is handled in a separate process from the payout process. The FormFree completion process is described in the FormFree Completion module.

1. The agent follows the transaction staging process above for receive transactions
 - a. The application must set the `formFreeStaging` field in the [receiveValidationRequest](#) to `true`
 - b. The application does not send the [commitTransactionRequest](#); the transaction is committed at a later time
2. The agent can build its own database to store transaction data until ready to receive. Current privacy agreements for handling customer and transaction data between MoneyGram and the partner apply.

MoneyGram Receive Transaction Receipt Specification

For detail API mapping, compliance requirements and other receipts contents, please refer to AC1512 Receipts Module. The following guidelines should be followed when designing receive transaction receipts:

1. The agent copy of the receipt must use one format; the consumer copy must use a second format
2. The MoneyGram logo must appear on receipts
3. The MoneyGram privacy statement must appear on the consumer copy of the receipt; the applicable text will be provided during development
4. The information on the receipts must not be shared with any third parties without prior approval from MoneyGram
5. The following fields are required on transactions receipts if they are returned in the [referenceNumberResponse](#)
 - `senderFirstName`, `senderMiddleName`, `senderLastName`, `senderLastName2`
 - `receiverFirstName`, `receiverMiddleName`, `receiverLastName`, `receiverLastName2`
 - `receiveAmount` and `receiveCurrency`
 - `referenceNumber`
 - `transactionDateTime`
 - `OriginationCountry`
 - `Messagefield1`
 - `Messagefield2`
6. The receipt must include the agent's name from the agent profile
7. The agent copy of the receipt must include a signature line for the consumer's signature
8. The agent copy of the receipt must include instructions to the agent to retain the signed copy
9. The receipt must include additional local regulations as required

Functionality: Redirect Functionality

10. When a receive is done in a currency not available at the location (*but is available in the country*), the receiver needs to be given an option to do a redirect to an available (base) currency.

Verbiage is as follows:

- a. This transaction is set for disbursement in a currency not currently offered by you in the MoneyGram system. You may disburse this transaction in a different currency only if directed to do so by the intended receiver. Please inform the receiver of this issue and their choice to either have this transaction disbursed in the original currency at an alternative agent location in the country or to have it disbursed in an alternative currency at this location. If the receiver desires to proceed, the transaction may be disbursed by you in the amount and form of currency described below.
 - b. El desembolso de esta transacción ha sido establecido en una moneda que actualmente usted no ofrece en el sistema de MoneyGram. Puede desembolsar esta transacción en una moneda diferente únicamente si así se lo indica el destinatario previsto. Infórmele este problema al destinatario y comuníquelo que puede elegir recibir el desembolso de esta transacción ya sea en la moneda original en una localidad de agente alternativa dentro del país, o en una moneda alternativa en esta ubicación. Si el destinatario desea continuar, usted puede desembolsar la transacción en la cantidad y el tipo de moneda que se describe a continuación.
11. Agent application should also provide the original receive amount/currency, Fx rate and new receive amount in final currency.
12. If redirect is accepted, the Redirect Acknowledgement needs to be printed on the receive receipt
- Verbiage is as follows:
- c. New receiver acknowledgement to replace current "terms and conditions" ("This transaction is subject to MoneyGram Terms and Conditions on the MoneyGram receipt holder.") line above the signature line – Agent copy only
 - i. I acknowledge that I have directed MoneyGram and [insert agent name] to disburse this transaction in a currency different than originally requested by the sender. As explained to me by [insert agent name] prior to disbursement, I understand that I had the option and ability to have this transaction disbursed in the original currency at another MoneyGram agent location within this county but have instead chosen to have this transaction disbursed in the currency available at this MoneyGram agent location
 - ii. Reconozco haberle indicado a MoneyGram y a [insertar nombre del agente] que el desembolso de esta transacción se realice en una moneda diferente de la solicitada inicialmente por el remitente. Tal como me lo explicó [insertar nombre del agente] antes del desembolso, comprendo que tuve la opción y la capacidad de que el desembolso de esta transacción se realizara en la moneda original en otra localidad de agente de MoneyGram de este país; sin embargo, decidí que el desembolso de esta transacción se realice en la moneda disponible en esta localidad de agente de MoneyGram
13. Receipt also needs to include the original receive amount/currency, Fx rate and new receive amount in final currency.
14. Receivers should sign the agent copy of the receipt and agent should retain copy with signature.
15. For re-direct scenario to get the receipt verbiage in another language Agent receipt must use the information returned by **variable receipt info** API.

APIs

Required APIs

1. referenceNumber
2. getFieldsForProduct
3. receiveValidation
4. commitTransaction

Optional APIs

5. receiveReversal

1. referenceNumber

The agent application uses the [referenceNumber](#) API to obtain details about a specific MoneyGram money transfer transaction.

Business Rules to Code

1. Agent application must validate some of the fields in the response before allowing the receive transaction to continue. Fields that must be validated are:
 - a. `okForAgent` must be `true`
 - b. `transactionStatus` must be `AVAIL`
 - c. `okForPickup` must be `true`
2. The agent application must include functionality to manage transactions for which the receive currency is different than the receive currency originally intended which is referred to as currency redirect transactions.
3. For currency redirect transactions, the agent application must display the following legal text, the new amount, new currency, exchange rate, and ask whether to continue.

Tell the consumer that the original currency is not available - Receive amount may have changed.
4. The following rules apply to agents in indicative countries - receive countries where the agent, rather than MoneyGram, manages the exchange rate from USD to local currency
 - a. The agent application can check the value of `indicativeRateAvailable` in the `countryCurrencyInfo` section of the `codeTableResponse`; indicative countries have the value set to `true`
 - The developer may also confirm with the MoneyGram whether they are in an indicative country
 - Receive applications in Brazil are not subject to this business rule
 - b. Due to regulations in California, USA, and the country of Spain, MoneyGram must guarantee the receive amount in local currency at the time of the send transaction for all transactions originating in those locations
 - At the time of the receive transaction, if the [referenceNumberResponse](#) returns `true` in the `validIndicator` field, the agent employee must pay the customer the amount and currency listed in the `indicativeReceiveAmount` and `indicativeReceiveCurrency` fields
 - The agent application must process the `receiveValidationRequest` using the rules documented in the API
 - c. If the transaction did not originate in California, USA, or Spain, `validIndicator` is `false` and the agent application must process the `receiveValidationRequest` using the `receiveAmount` and `receiveCurrency` according to the rules documented in the API
 - d. The receive transaction appears as if received in USD in any subsequent APIs, regardless of the value of `validIndicator`
5. Receive PINs are an additional method of receive transaction security; if using receive PINs, the agent application must use a PIN input device for the consumer to input a PIN and reference number in order to receive a transaction. The agent must not input the information. The input device must meet the following minimum requirements:
 - Input must be masked
 - Must allow entry of numeric characters

6. A receive PIN is the first four letters of the sender's last name; special characters should be skipped (e.g., "O'Hare" would result in a PIN of "OHar"); if the sender's last name is fewer than four letters the remaining letters should be zeros
7. If using receive PINs, the [referenceNumber](#) API may be used twice as follows:
 - a. The [referenceNumberRequest](#) is sent without the receive PIN, and MoneyGram returns the [referenceNumberResponse](#) indicating the status of the transaction and whether it is available to be received
 - b. If the transaction is available to be received, the [referenceNumberRequest](#) is sent with the receive PIN, and MoneyGram returns the [referenceNumberResponse](#) to confirm the transaction may continue
8. The alphabetic characters of the receive PIN must be converted to numeric characters according to the pin pad's character mapping specification below

Additional Information

1. MoneyGram may not authorize payout of transactions attempted to be received in countries, states/provinces, or via delivery options that were not originally designated by the sender at time of send.
2. The agent application may use the [referenceNumber](#) to verify the success of the `commitTransactionRequest` when completing a receive transaction; if the response returns a `transactionStatus` other than `RECVD`, the application may retry the transaction.

PIN Pad Character Mapping

MoneyGram supports the following mapping for PIN pad devices.

Letters	Corresponding PIN Pad Number
Q, Z	1
A, B, C	2
D, E, F	3
G, H, I	4
J, K, L	5
M, N, O	6
P, R, S	7
T, U, V	8
W, X, Y	9
(space)	0

Table 1: Character Mapping

Transaction Flow

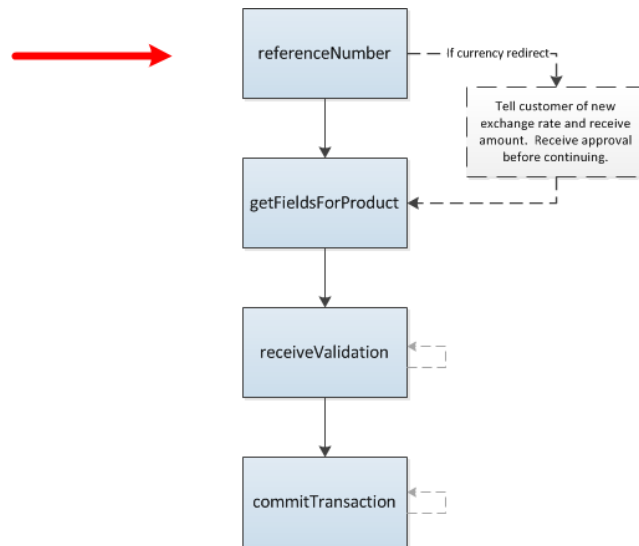


Figure 3: Location of referenceNumber in Process Flow

referenceNumberRequest

Field Summary

- **referenceNumber**
- pin
- operatorName

Field Detail

Tag	Datatype	Information and Rules	Input	Data
referenceNumber	string Maximum length: 12	<i>Field Rules</i> 1. If using receive PINs, the transaction reference number must be entered by the consumer 2. If using receive PINs, the value must be masked on screen	GUI	required
pin	string Maximum length: 8	<i>Field Rules</i> 1. If using receive PINs, data and GUI input are required 2. If using receive PINs, the value must be entered by the consumer 3. If using receive PINs, the value must be masked on screen 4. If not using receive PINs, data and input are not allowed	GUI/conditional	optional
operatorName	string Maximum length: 7	<i>Additional Information</i> 1. Operator name or operator ID of the associate or user performing the transaction; it must be auto-populated from the agent's system and cannot be editable by the user • Agent Facing – Teller ID/User ID mapped to operatorName • Customer Facing/Self Service (kiosk, online, mobile) – User ID/User Login mapped to operatorName • ATM – unique customer ID (customer number) mapped to operatorName	application/conditional	optional

referenceNumberResponse

Field Summary

- [mgTransactionSessionID](#)
- [senderFirstName](#)
- [senderMiddleName](#)
- [senderLastName](#)
- [senderLastName2](#)
- [senderHomePhone](#)
- [senderAddress](#)
- [senderAddress2](#)
- [senderAddress3](#)
- [senderAddress4](#)
- [senderCity](#)
- [senderState](#)
- [senderZipCode](#)
- [senderCountry](#)
- [receiverFirstName](#)
- [receiverMiddleName](#)
- [receiverLastName](#)
- [receiverLastName2](#)
- [receiverAddress](#)
- [receiverAddress2](#)
- [receiverAddress3](#)
- [receiverAddress4](#)
- [direction1](#)
- [direction2](#)
- [direction3](#)
- [receiverCity](#)
- [receiverState](#)
- [receiverZipCode](#)
- [receiverCountry](#)
- [receiverPhone](#)
- [testQuestion](#)
- [testAnswer](#)
- [messageField1](#)
- [messageField2](#)
- [agentCheckNumber](#)
- [agentCheckAmount](#)
- [agentCheckAuthorizationNumber](#)
- [customerCheckNumber](#)
- [customerCheckAmount](#)
- [okForAgent](#)
- [deliveryOption](#)
- [transactionStatus](#)
- [dateTimeSent](#)
- [receiveCurrency](#)
- [receiveAmount](#)
- [referenceNumber](#)
- [originatingCountry](#)
- [validIndicator](#)
- [indicativeReceiveAmount](#)
- [indicativeReceiveCurrency](#)
- [indicativeExchangeRate](#)
- [mgCustomerReceiveNumber](#)
- [partnerCustomerReceiveNumber](#)
- [receiveAgentID](#)
- [receiveAgentName](#)
- [receiveAgentAbbreviation](#)
- [expectedDateOfDelivery](#)
- [originalSendAmount](#)
- [originalSendCurrency](#)
- [originalSendFee](#)
- [originalExchangeRate](#)
- [redirectIndicator](#)
- [redirectInfo](#)
 - [originalSendAmount](#)
 - [originalSendCurrency](#)
 - [originalSendFee](#)
 - [originalExchangeRate](#)
 - [originalReceiveAmount](#)

- originalReceiveCurrency
- originalReceiveCountry
- newSendFee
- newExchangeRate
- newReceiveAmount
- newReceiveCurrency
- feeDifference
- redirectType
- okForPickup
- notOkForPickupReasonCode
- notOkForPickupReasonDescription
- minutesUntilOkForPickup
- sendPurposeOfTransaction
- sendPurposeOfTransactionOther
- receiverNameSuffix
- receiverNameSuffixOther

Field Detail

Tag	Datatype	Information and Rules	Display
mgitransactionSessionID	string Maximum length: 38	An ID number that uniquely identifies the Receive transaction across APIs. <i>Additional Information</i> 1. Value must be saved and used in the receiveValidationRequest and commitTransactionRequest APIs	not allowed
senderFirstName	string Maximum length: 40	<i>Field Rules</i> 1. See <i>Data Quality Edits Addendum</i> for data quality rules	required
senderMiddleName	string Maximum Length: 40	<i>Field Rules</i> 1. See <i>Data Quality Edits Addendum</i> for data quality rules	required
senderLastName	string Maximum length: 40	<i>Field Rules</i> 1. See <i>Data Quality Edits Addendum</i> for data quality rules	required
senderLastName2	string Maximum length: 40	<i>Field Rules</i> 1. See <i>Data Quality Edits Addendum</i> for data quality rules	required
senderHomePhone	String Maximum length: 14	<i>Field Rules</i> 1. Display is required if required by country compliance regulations 2. Display is not allowed otherwise	conditional
senderAddress	String Maximum length: 80	<i>Field Rules</i> 1. Display is required if required by country compliance regulations 2. Only returned when required by government regulations in select countries.	conditional

Tag	Datatype	Information and Rules	Display
senderAddress2	string Maximum length: 80	NA	NA
senderAddress3	string Maximum length: 80	NA	NA
senderAddress4	string Maximum length: 80	NA	NA
senderCity	string Maximum length: 40	<i>Field Rules</i> 1. Display is required if required by country compliance regulations 2. Only returned when required by government regulations in select countries.	conditional
senderState	string Length: 2 Must be a valid state code	<i>Field Rules</i> 1. Display is required if required by country compliance regulations 2. Only returned when required by government regulations in select countries.	conditional
senderZipCode	string Minimum length: 3 Maximum length: 10	<i>Field Rules</i> 1. If <code>senderCountry</code> is <code>CAN</code> , the minimum length is 6 2. If <code>senderCountry</code> is <code>USA</code> , the minimum length is 5 3. Display is required if required by country compliance regulations 4. Only returned when required by government regulations in select countries.	conditional

Tag	Datatype	Information and Rules	Display
senderCountry	string Length: 3	<i>Field Rules</i> 1. Display is required if required by country compliance regulations 2. Only returned when required by government regulations in select countries.	conditional
receiverFirstName	string Maximum length: 40	<i>Field Rules</i> 1. See <i>Data Quality Edits Addendum</i> for data quality rules	required
receiverMiddleName	string Maximum length: 40	<i>Field Rules</i> 1. See <i>Data Quality Edits Addendum</i> for data quality rules	required
receiverLastName	string Maximum length: 40	<i>Field Rules</i> 1. See <i>Data Quality Edits Addendum</i> for data quality rules	required
receiverLastName2	string Maximum length: 40	<i>Field Rules</i> 1. See <i>Data Quality Edits Addendum</i> for data quality rules	required
receiverAddress	string Maximum length: 80	NA	not allowed
receiverAddress2	string Maximum length: 80	NA	not allowed
receiverAddress3	string Maximum length: 80	NA	not allowed
receiverAddress4	string Maximum length: 80	NA	not allowed
direction1	string Maximum length: 40	None	conditional

Tag	Datatype	Information and Rules	Display
direction2	string Maximum length: 40	None	conditional
direction3	string Maximum length: 40	None	conditional
receiverCity	string Maximum length: 40	NA	not allowed
receiverState	string Length: 2	NA	not allowed
receiverZipCode	string Minimum length: 3 Maximum length: 10	NA	not allowed
receiverCountry	string Length: 3	NA	not allowed
receiverPhone	string Maximum length: 14	NA	Not allowed
testQuestion	string Maximum length: 30	<i>Additional Information</i> 1. Agent may use the test question and answer to authorize payout in lieu of or in addition to photo ID <i>Field Rules</i> 1. Display is required if the agent uses test questions and answers 2. Display is not required if agent does not use test questions and answers	not allowed

Tag	Datatype	Information and Rules	Display
testAnswer	string Maximum length: 30	<i>Additional Information</i> 1. Agent may use the test question and answer to authorize payout in lieu of or in addition to photo ID <i>Field Rules</i> 1. Display is required if the agent uses test questions and answers 2. Display is not required if agent does not use test questions and answers	not allowed
messageField1	string Maximum length: 40	<i>Additional Information</i> 1. Value must be printed on consumer receipt	optional
messageField2	string Maximum length: 40	<i>Additional Information</i> 1. Value must be printed on consumer receipt	optional
agentCheckNumber	string Maximum length: 12	<i>Additional Information</i> 1. Field not currently used	not allowed
agentCheckAmount	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	<i>Additional Information</i> 1. Field not currently used	not allowed
agentCheckAuthorizationNumber	string Maximum length: 5	<i>Additional Information</i> 1. Field not currently used	not allowed
customerCheckNumber	string Maximum length: 12	<i>Additional Information</i> 1. Field not currently used	not allowed

Tag	Datatype	Information and Rules	Display
customerCheckAmount	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	<i>Additional Information</i> 1. Field not currently used	not allowed
okForAgent	boolean	<i>Additional Information</i> 1. If value is <code>true</code> , the agent can receive the specified transaction option 2. If value is <code>false</code> , the agent cannot receive the specified transaction option. Agent application must display a message to the user that this transaction cannot be picked up at this location. 3. The agent application must check the <code>okForPickup</code> field to determine whether the transaction can be received at this time	optional
deliveryOption	string	None	optional
transactionStatus	string Valid values: AVAIL, CANCL, RECVD, REFND, AFR and PRCSS	<i>Additional Information</i> 1. AVAIL is available 2. CANCL is canceled 3. RECVD is received 4. REFND is refunded 5. AFR is available for refund 6. PRCSS is processing 7. Only transactions with a value of AVAIL can be received; if a transaction cannot be received, the agent application should display a message to indicate the transaction status and that the transaction cannot be received. Do not allow user to proceed to receive the transaction.	required

Tag	Datatype	Information and Rules	Display
dateTimeSent	dateTime Format: CCYY-MM-DDThh:mm:ss.sss-hh:mm The time zone offset is required	None	optional
receiveCurrency	string Length: 3	<i>Additional Information</i> 1. If <code>validIndicator</code> is <code>false</code> , the agent must pay the receiver using this currency 2. If <code>validIndicator</code> is <code>true</code> , the agent must pay the receiver using the currency in the <code>indicativeReceiveCurrency</code> field 3. The agent application must use the value of this field in all subsequent APIs	required
receiveAmount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	The amount to be paid to the receiver. <i>Additional Information</i> 1. If <code>validIndicator</code> is <code>false</code> , the agent must pay this amount to the receiver 2. If <code>validIndicator</code> is <code>true</code> , the agent must pay the amount in the <code>indicativeReceiveAmount</code> field to the receiver 3. The agent application must use the value of this field in all subsequent APIs	required
referenceNumber	string Maximum length: 12	None	optional
originatingCountry	string Length: 3	None	optional

Tag	Datatype	Information and Rules	Display
validIndicator	boolean	Whether or not the receive amount was guaranteed at the time of the send transaction. <i>Additional Information for receiving in indicative country only</i> 1. If <code>true</code> , the receive amount was guaranteed at the time of the send and the agent must pay the consumer the amount in the <code>indicativeReceiveAmount</code> field 2. If <code>false</code> , the receive amount was estimated at the time of the send and the agent must pay the consumer the amount in the <code>receiveAmount</code> field	optional
indicativeReceiveAmount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	The amount to pay the consumer if the receive amount was guaranteed at the time of the send transaction. <i>Additional Information for receiving in indicative country only</i> 1. This amount must be paid in the currency returned in the <code>indicativeReceiveCurrency</code> field 2. This amount must not be used in subsequent APIs	conditional
indicativeReceiveCurrency	string Length: 3	The currency in which to pay the consumer if the receive amount was guaranteed at the time of the send transaction. <i>Additional Information for receiving in indicative country only</i> 1. This currency must not be used in subsequent APIs	conditional
indicativeExchangeRate	decimal Minimum inclusive value: 0 Maximum length: 14	The exchange rate between the currencies returned in the <code>receiveCurrency</code> and <code>indicativeReceiveCurrency</code> fields <i>Field Rules for receiving in indicative country only</i> 1. Value returned to four decimal places for USA and US territories 2. Value returned to six decimal places elsewhere	conditional
mgCustomerReceiveNumber	string Maximum length: 20	<i>Additional Information</i> 1. Field does not apply to this product	not allowed

Tag	Datatype	Information and Rules	Display
partnerCustomerReceiveNumber	string Maximum length: 20	<i>Additional Information</i> 1. Field does not apply to this product	not allowed
receiveAgentID	string Length: 8	<i>Additional Information</i> 1. Field does not apply to this product	not allowed
receiveAgentName	string Maximum length: 40	None	optional
receiveAgentAbbreviation	string Maximum length: 10	The abbreviated form of the agent's name	optional
expectedDateOfDelivery	date Format: CCYY-MM-DD	The date a send transaction is expected to be delivered.	not allowed
originalSendAmount	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	None	optional
originalSendCurrency	string Length: 3	None	optional
originalSendFee	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	None	optional

Tag	Datatype	Information and Rules	Display
originalExchangeRate	decimal Minimum inclusive value: 0 Maximum length: 14	<i>Field Rules</i> 1. Value returned to four decimal places for USA and US territories 2. Value returned to six decimal places elsewhere	optional
redirectIndicator	boolean	<i>Additional Information</i> 1. If <code>true</code> , the transaction is a currency redirect and the application must display a message to tell the receiver the <code>newReceiveAmount</code> , <code>newReceiveCurrency</code> and <code>newExchangeRate</code> ; the receiver must accept the changes before continuing 2. If <code>false</code> , the transaction is not a currency redirect	not allowed
redirectInfo	complex Maximum number of occurrences: 1	None	N/A
originalSendAmount	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	None	required
originalSendCurrency	string Length: 3	None	required
originalSendFee	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	None	required

Tag	Datatype	Information and Rules	Display
originalExchangeRate	decimal Minimum inclusive value: 0 Maximum length: 14	<i>Field Rules</i> 1. Value returned to four decimal places for USA and US territories 2. Value returned to six decimal places elsewhere	required
originalReceiveAmount	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	None	required
originalReceiveCurrency	string Length: 3	None	required
originalReceiveCountry	string Length: 3	None	not allowed
newSendFee	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	<i>Additional Information</i> 1. Field does not apply to this product	not allowed
newExchangeRate	decimal Minimum inclusive value: 0 Maximum length: 14	<i>Field Rules</i> 1. Value returned to four decimal places for USA and US territories 2. Value returned to six decimal places elsewhere	required

Tag	Datatype	Information and Rules	Display
newReceiveAmount	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	<i>Additional Information</i> 1. Must be told to receiver if <code>redirectIndicator</code> is <code>true</code> ; the receiver must accept the new value to continue	required
newReceiveCurrency	string Length: 3 Must be a valid currency code	<i>Additional Information</i> 1. Must be told to receiver if <code>redirectIndicator</code> is <code>true</code> ; the receiver must accept the new value to continue	required
feeDifference	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	<i>Additional Information</i> 1. Field does not apply to this product	not allowed
redirectType	string Valid values: <code>CURRENCY_REDIRECT</code>	<i>Additional Information</i> 1. <code>CURRENCY_REDIRECT</code> is currency redirect	not allowed
okForPickup	boolean	Whether or not the transaction can be received at this time. <i>Additional Information</i> 1. If <code>true</code> , the transaction can be received at this time 2. If <code>false</code> , the transaction cannot be received at this time 3. If <code>false</code> , the reason the transaction cannot be received is returned in the <code>notOkForPickupReasonDescription</code> and reason code is returned in the <code>notOkForPickupReasonCode</code> fields	optional

Tag	Datatype	Information and Rules	Display
notOkForPickupReasonCode	integer	<i>Additional Information – some examples are</i> 1. If value is 688, the transaction cannot be picked up before 7:00 AM in the receive country's local time 2. If value is 690, the transaction cannot be picked up at this time because it was sent using 24 or 48 hour service, and the specified time has not elapsed 3. If value is 690, the number of minutes remaining until the transaction can be received is returned in the minutesUntilOkForPickup field	optional
notOkForPickupReasonDescription	string	The description of why the transaction cannot be received at this time to display on the agent application GUI. Refer to Error Messages document for more information	required
minutesUntilOkForPickup	int Maximum inclusive value: 99999	The number of minutes remaining until the transaction can be received. <i>Additional Information</i> 1. Value is returned only if notOkForPickupReasonCode is 690. Agent application can use this information to display the local time or x hours, x minutes until transaction can be picked up. For example, transaction will be available at 3:15 pm, or in 1 hour and 15 minutes.	optional
sendPurposeOfTransaction	String Length: 30	The purpose for sending the transaction	conditional
sendPurposeOfTransactionOther	string Length: 40	The purpose for sending the transaction	NA
receiverNameSuffix	String Length: 20	The suffix of the receiver name	required

Tag	Datatype	Information and Rules	Display
receiverNameSuffixOther	String Length: 20	For future use	NA

2. *getFieldsForProduct*

The agent application uses the [getFieldsForProduct](#) (GFFP) API to determine field requirements for the `receiveValidationRequest`. The information returned in the response is also used to build screen content.

Business Rules to Code

1. This is a required backend API before doing a `receiveValidation`. The response will let the application know what data fields are needed for each transaction, *and* what fields must always be displayed on the screen during the transaction.

2. **The data attributes returned in GFFP can change from transaction to transaction:** visibility, fieldMax, fieldMin, and enumeratedValues. The agent's application must respond to these changes in the GFFP response. The number of required fields may change depending on the country where agent is located.

Examples of scenarios where GFFP attributes values will change.

- a. **Visibility** - The following values are returned in the visibility field to indicate whether a field must be included in the [receiveValidationRequest](#). The value indicates if data is required to complete the transaction. The value also indicates whether the agent must allow an input mechanism to populate the field.

REQ: If the value is 'REQ', then data must be provided; omission of data will result in errors. The fields required for a transaction will vary depending on business and compliance rules applied to the specific transaction. A few examples of when the visibility can change depends on agent's country, amount, etc.

OPT: If the value is 'OPT' then the field must be available on the application screen for data entry, but data is not needed to complete the transaction. Data may be included in the request for business reasons. If the agent is collecting the data, data must be sent in the transaction; omission of data will not result in technical errors. For example, when receiver citizenship is required, dual citizenship is required to be displayed on the screen in case the consumer has dual citizenship. If the customer does not have this, then this data is not required to complete the transaction.

NOT_ALL: Data must not be included in the request, MoneyGram does not require the field to be displayed for the specified transaction. If the agent is collecting the data, data must not be sent on the transaction ; including data will be ignored or result in errors.

SUP_OPT: Data is optional on the request, and the field may optionally appear on the application screen; MoneyGram does not require data to complete the transaction. However, if the agent is collecting the data, data must be sent in on the transaction. Some examples of SUP_OPT fields are: ID expiration, nationality, citizenship, etc.

- b. **fieldMax, fieldMin** – the application must be coded to the fieldMax and fieldMin that are returned in GFFP. These values can change from one transaction to another. The maximum/minimum lengths in schema/WSDL should be used for database design and screen layout, and the agent must follow GFFP minimum and maximum lengths during a transaction submission. These lengths will always be within the boundary of the schema/WSDL. Some maximum lengths are shorter in GFFP than the schema/WSDL because MoneyGram has plans to eventually expand these fields per the lengths defined in the WSDL.
- c. **fieldLabel** – Agent may use the suggested fieldLabels returned by GFFP on the application screen. The fieldLabels are also translated into some additional languages including Spanish, German, French, Chinese, Italian etc. Translated labels are returned when language field in

the GFFP message header is specified for a particular language as described in the Introduction to AgentConnect module

- d. **enumeratedValue** – returns list of values for enumerated fields. This list of values depends on the agent's country and can change at any time. Application must be able to use the updated list without requiring any code changes. Examples of some the fields that are enumerated are: ID type, occupation, relationship to sender, etc.

Transaction Flow

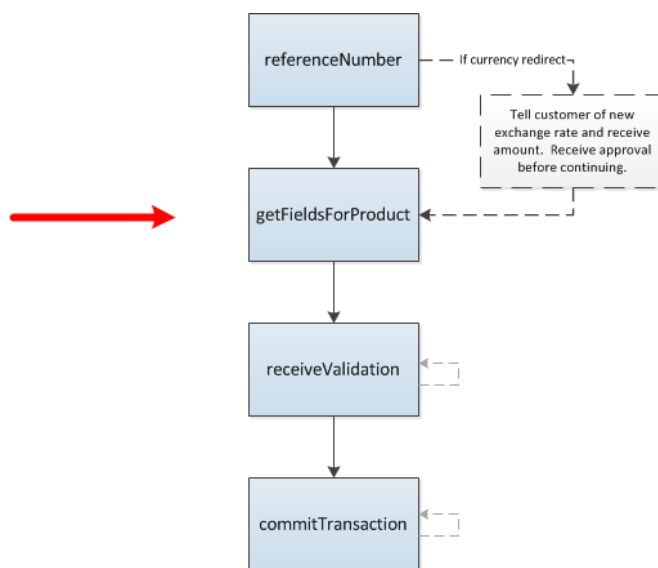


Figure 4: Location of getFieldsForProduct in Process Flow

getFieldsForProductRequest

Field Summary

- **receiveCountry**
- deliveryOption
- **thirdPartyType**
- receiveAgentID
- customerReceiveNumber
- billerAccountNumber
- cardSwiped
- otherPayoutType
- **receiveCurrency**
- **amount**
- sendCurrency
- **productType**
- productVariant
- serviceOfferingID
- **consumerId**
- **formFreeStaging**

Field Detail

Tag	Datatype	Information and Rules	Input	Data
receiveCountry	string Length: 3 Must be a valid country code	Country code of the receiving agent location.	application	required
deliveryOption	string	NA	NA	NA
thirdPartyType	string Valid values: NONE, ORG, PERSON	None	conditional	required
receiveAgentID	string Length: 8	NA	NA	NA
customerReceiveNumber	string Maximum length: 20	NA	NA	NA
billerAccountNumber	string Maximum length: 30	NA	NA	NA
cardSwiped	boolean	<i>Field does not apply to this product</i>	NA	NA
otherPayoutType	string	NA	NA	NA
receiveCurrency	string Length: 3 Must be a valid currency code	<i>Additional Information</i> 1. Use value of receiveCurrency from referenceNumberResponse	application	required

Tag	Datatype	Information and Rules	Input	Data
amount	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	<i>Additional Information</i> 1. Use value of <code>receiveAmount</code> from referenceNumberResponse	application	required
sendCurrency	string Length: 3	NA	NA	NA
productType	string Valid values: RCV	<i>Additional Information</i> 1. RCV is receive	application	required
productVariant	string	NA	NA	NA
serviceOfferingID	string Maximum length: 21	NA	NA	NA
consumerId	string Maximum length: 20 Valid values: 0	<i>Additional Information</i> 1. when data is not known, default value is 0	application	required
formFreeStaging	boolean	Whether or not the transaction is a FormFree transaction. <i>Additional Information</i> 1. If <i>true</i> , the transaction is staged and prepared for FormFree completion which will be committed at a later time. 2. If <i>false</i> , the transaction is not a FormFree type	application	required

getFieldsForProductResponse

Field Summary

- fqdoInfo
 - receiveCountry
 - deliveryOption
 - receiveAgentID
 - receiveCurrency
 - receiveAgentName
 - receiveAgentAbbreviation
 - deliveryOptionDisplayName
 - registrationAuthorizationText
 - speedOfDeliveryText
- productFieldInfo
 - xmlTag
 - visibility
 - fieldLabel
 - displayOrder
 - fieldCategory
 - fieldCategoryLabel
 - dynamic
 - fieldMax
 - fieldMin
 - dataType
 - enumerated
 - defaultValue
 - validationRegEx
 - arrayName
 - arrayLength
 - exampleFormat
 - enumeratedValues
 - enumeratedValueInfo
 - value
 - label
- dynamicFieldInfo
 - xmlTag
 - visibility
- fieldMax
- fieldMin
- scale
- dataType
- fieldLabel
- displayOrder
- enumerated
- defaultValue
- validationRegEx
- exampleFormat
- enumeratedValues
 - enumeratedValueInfo
 - value
 - label

Field Detail

Tag	Datatype	Information and Rules	Display
fqdoInfo	complex	None	N/A
receiveCountry	string Length: 3	None	N/A
deliveryOption	string	None	N/A
receiveAgentID	string Length: 8	Additional information: This is not returned for 10 minute service Receive transactions	not allowed
receiveCurrency	string Length: 3	Additional information: The receiving agent's currency	N/A
receiveAgentName	string Maximum length: 40	Additional information: This is not returned for 10 minute service Receive transactions	N/A
receiveAgentAbbreviation	string Maximum length: 10	Additional information: This is not returned for 10 minute service Receive transactions	N/A
deliveryOptionDisplayNam e	string Maximum length: 50	Additional information: This is not returned for 10 minute service Receive transactions	N/A

Tag	Datatype	Information and Rules	Display
registrationAuthorizationText	string Maximum length: 40	NA	N/A
speedOfDeliveryText	string Maximum length: 40	NA	N/A
productFieldInfo	complex Maximum number of occurrences: unbounded	None	N/A
xmlTag	string Maximum length: 80	This is the key identifying a particular field and must be mapped to receiveValidationRequest	N/A
visibility	string	See business rule above on this API <i>Additional Information</i> 1. OPT – data is optional; but if collected data must be sent to MoneyGram 2. NOT_ALL – data is not allowed 3. REQ - data is required 4. SUP_OPT – data is not required; but if collected data must be sent to MoneyGram	N/A
fieldLabel	string Maximum length: 80	The field's suggested label. Translation is returned based on the language indicated in the request header	N/A
displayOrder	integer	The order in which the field must appear on screen relative to other fields.	N/A
fieldCategory	String	Identifier used to group the fields in a category. Fields where fieldCategory = 'receiveOperationalInformationSet' must not be displayed on the application screen	N/A
fieldCategoryLabel	String	The category's suggested label	N/A

Tag	Datatype	Information and Rules	Display
dynamic	boolean	1. For future use for this product	N/A
fieldMax	long	Use the value provided for each field. In some cases such as consumer name and address, the maximum length may be less than the length indicated in the WSDL.	N/A
fieldMin	long	None	N/A
dataType	string Valid values: boolean, string, int, decimal, date, datetime, time, text, cntrycode, enum, stringbool (Y or N).	None	N/A
enumerated	boolean	<i>Additional Information</i> 1. If value is <code>true</code> , the field is restricted to a list of values 2. If value is <code>false</code> , the field is not restricted to a list of values	N/A
defaultValue	string Maximum length: 255	None	N/A
validationRegEx	string Maximum length: 255	A regular expression used to validate the field's value.	N/A
arrayName	string Maximum length: 255	NA	N/A
arrayLength	int	NA	N/A
exampleFormat	string Maximum length: 255	None	N/A

Tag	Datatype	Information and Rules	Display
enumeratedValues	complex Maximum number of occurrences: 1	Contains information on the field's list of possible values. <i>Additional Information</i> 1. The information in this list must be used if <code>enumerated</code> is <code>true</code>	N/A
enumeratedValueInfo	complex Maximum number of occurrences: unbounded	Contents define an individual enumerated value.	N/A
value	string Maximum length: 255	None	N/A
label	string Maximum length: 255	None	N/A
dynamicFieldInfo	complex Maximum number of occurrences: unbounded	For future use for this product	N/A
xmlTag	string Maximum length: 80	None	N/A
visibility	string	None	N/A
fieldMax	long	None	N/A
fieldMin	long	None	N/A
scale	integer	The number of places allowed after the decimal point. <i>Additional Information</i> 1. Only applies if <code>dataType</code> is <code>decimal</code>	N/A

Tag	Datatype	Information and Rules	Display
dataType	string Valid values: boolean, cntrycode, date, datetime, decimal, enum, int, string, stringbool, text, time	None	N/A
fieldLabel	string Maximum length: 80	None	N/A
displayOrder	integer	The order in which the field must appear on screen relative to other fields.	N/A
enumerated	boolean	<i>Additional Information</i> 1. If value is <code>true</code> , the field is restricted to a list of values 2. If value is <code>false</code> , the field is not restricted to a list of values	N/A
defaultValue	string Maximum length: 255	None	N/A
validationRegEx	string Maximum length: 255	A regular expression used to validate the field's value.	N/A
exampleFormat	string Maximum length: 255	None	N/A
enumeratedValues	complex Maximum number of occurrences: 1	Contains information on the field's list of possible values. <i>Additional Information</i> 1. The information in this list must be used if <code>enumerated</code> is <code>true</code>	N/A

Tag	Datatype	Information and Rules	Display
enumeratedValueInfo	complex Maximum number of occurrences: unbounded	Contents define an individual enumerated value.	N/A
value	string Maximum length: 255	None	N/A
label	string Maximum length: 255	None	N/A

3. receiveValidation

The agent application uses the [receiveValidation](#) API to receive a MoneyGram money transfer transaction.

1. The agent application must use the field lengths returned in the fieldMax field of [getFieldsForProductResponse](#)
2. A summary screen may be displayed with data collected to be confirmed by the agent or the customer. The agent application sends a [receiveValidationRequest](#) containing information collected from the customer, and MoneyGram returns a [receiveValidationResponse](#) indicating the transaction can continue, or an error indicating the issue with the receive transaction request
3. If the `readyForCommit` field in the [receiveValidationResponse](#) is `true`, the agent application may proceed to commit the transaction.
4. For FormFree transactions, the agent application must send the [receiveValidationRequest](#) with `formFreeStaging` field set to `true` until the response returns a `readyForCommit` value of `true`.
5. MoneyGram will recycle the reference numbers after the transactions have been closed/received for 6 months. If you are storing reference numbers in your database, you should also store the transaction date. The combination of the reference number and transaction date will be the unique key for a transaction.
6. For all Enumerated Fields, some examples are below, agent application must use the valid enumerations returned from `getFieldsForProduct` (GFFP) response and allow only valid values to be selected.

Enumerated Field
receiverOccupation
relationshipToSender
receivePurposeOfTransaction
thirdPartyReceiverNameSuffix
thirdPartyOccupation

7. If phone number is provided corresponding phone country code field is required, and vice versa.

Phone Field	Phone Country Code Field
receiverPhone	receiverPhoneCountryCode

8. State fields will always be returned as Optional by the `getFieldsForProduct` (GFFP) API. If a country is selected from the list that has states available in the `codeTable` API response, then a state is required. Agent application should change the list of states available depending on the country selected. If the country selected does not have any state list in the `codeTable` API, then the field should be disabled so data is not collected. The fields impacted are: `receiverState`, `receiverPhotoIDState`, `thirdPartyState`
9. When the `receiveValidation` API is submitted, MoneyGram performs validations on the transaction and returns any and all errors that are found. The validation involves screenings for compliance, aggregation, etc. and based on the consumer details submitted, MoneyGram may require additional information that was not marked required in the GFFP response.

The application must be able to handle multiple error messages and allow the user to correct all errors, by entering the additional field(s) before resubmitting the transaction (`receiveValidationRequest`) to MoneyGram. For example, during screening, if the consumer has done "x" number of transactions, we may now require Purpose of Transaction, Citizenship Country, etc. in order to complete the transaction. In this case, MoneyGram returns an array of error

messages indicating which additional fields need to be sent in the receiveValidation API. One or more of the following fields may come back as REQ after screening.

XML Tag	Display Visibility	Build & Display
RECEIVE GFFP		
receiverCitizenshipCountry	OPT>REQ	Build & Display
relationshipToSender	OPT>REQ	Build & Display
receivePurposeOfTransaction	OPT>REQ	Build & Display
receiverIntendedUseOfMGIServices	OPT>REQ	Build & Display

Note: OPT>REQ indicates that GFFP may return the field as 'OPT'ional, but during receiveValidate, the field may become required and an error object will be returned indicating the required field(s).

Additional Information

1. The agent application may only receive transactions for which the `transactionStatus` field of the [referenceNumberResponse](#) is AVAIL, `okForAgent` is true and `okForPickup` is true.
2. A transaction cannot be sent and received by the same agent location.
3. A transaction cannot be sent and received by locations within the same postal code.
4. MoneyGram may not authorize payout of transactions attempted to be received in countries, states/provinces, or via delivery options that were not originally designated by the sender at time of send.

Transaction Flow

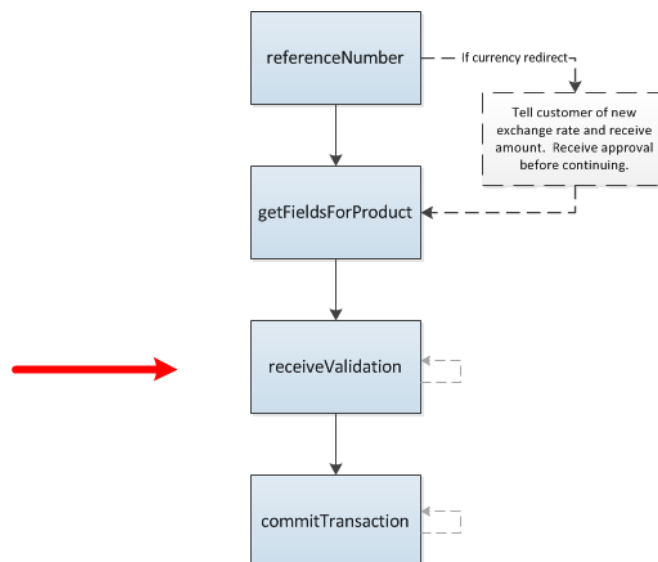


Figure 5: Location of receiveValidation in Process Flow

receiveValidationRequest

Field Summary

- agentStagingChannel
- operatorName
- **referenceNumber**
- pin
- **receiveCurrency**
- agentCheckNumber
- agentCheckType
- agentCheckAmount
- customerCheckNumber
- customerCheckType
- customerCheckAmount
- receiverAddress
- receiverAddress2
- receiverAddress3
- receiverCity
- receiverState
- receiverZipCode
- receiverCountry
- receiverMailingAddress
- receiverMailingAddress2
- receiverMailingAddress3
- receiverMailingCity
- receiverMailingState
- receiverMailingZipCode
- receiverMailingCountry
- receiverPhotoIdType
- receiverPhotoIdNumber
- receiverPhotoIdState
- receiverPhotoIdCountry
- receiverLegalIdType
- receiverLegalIdNumber
- receiverDOB
- receiverOccupation
- thirdPartyFirstName
- thirdPartyMiddleName
- thirdPartyLastName
- thirdPartyLastName2
- thirdPartyAddress
- thirdPartyAddress2
- thirdPartyAddress3
- thirdPartyCity
- thirdPartyState
- thirdPartyZipCode
- thirdPartyCountry
- thirdPartyLegalIdType
- thirdPartyLegalIdNumber
- thirdPartyDOB
- thirdPartyOccupation
- thirdPartyOrg
- receiverBirthCity
- receiverBirthCountry
- pcTerminalNumber
- agentUseReceiveData
- billerAccountNumber
- otherPayoutType
- otherPayoutAmount
- cardExpirationMonth
- cardExpirationYear
- cardSwiped
- **ConsumerID**
- receiverPhone
- agentConsumerID
- agentTransactionId
- **mgTransactionSessionID**
- **formFreeStaging**
- timeToLive
- receivePurposeOfTransaction
- receivePurposeOfTransactionOther
- relationshipToSender
- relationshipToSenderOther

- receiverOccupationOther
- receiverGender
- receiverBirthState
- receiverCitizenshipCountry
- receiverCitizenshipAtBirthCountry
- receiverDualCitizenshipCountry
- receiverPhotoIdIssueMonth
- receiverPhotoIdIssueYear
- receiverPhotoIdIssueDay
- receiverPhotoIdExpirationMonth
- receiverPhotoIdExpirationYear
- receiverPhotoIdExpirationDay
- receiverPhotoIdIssueAuthority
- receiverLegalIdIssueMonth
- receiverLegalIdIssueYear
- receiverLegalIdIssueDay
- receiverLegalIdExpirationMonth
- receiverLegalIdExpirationYear
- receiverLegalIdExpirationDay
- receiverLegalIdIssueAuthority
- receiverLegalIdState
- receiverLegalIdIssueCountry
- receiverPhoneNotAvailable
- receiverPhoneCountryCode
- thirdPartyFirstNameNotAvailable
- thirdPartyReceiverNameSuffix
- thirdPartyReceiverNameSuffixOther
- thirdPartyReceiverGender
- thirdPartyReceiverOccupation
- thirdPartyReceiverOccupationOther
- thirdPartyReceiverBirthCity
- thirdPartyReceiverBirthState
- thirdPartyReceiverBirthCountry
- thirdPartyReceiverCitizenshipCountry
- thirdPartyLegalIdIssueMonth
- thirdPartyLegalIdIssueMonth
- thirdPartyLegalIdIssueDay
- thirdPartyLegalIdExpirationMonth
- thirdPartyLegalIdExpirationYear
- thirdPartyLegalIdExpirationDay
- thirdPartyLegalIdIssueAuthority
- thirdPartyLegalIdState
- thirdPartyLegalIdIssueCountry
- primaryReceiptLanguage
- secondaryReceiptLanguage
- receiverIntendedUseOfMGIServices
- receiptImages
- fieldValues
 - xmlTag
 - value
- thirdPartyReceiverCitizenshipAtBirthCountry
- thirdPartyReceiverDualCitizenshipCountry

Field Detail

Tag	Datatype	Information and Rules	Input	Data						
agentStagingChannel	string Maximum length: 128	The AgentStagingChannel field is required when Agents <i>do not</i> use MoneyGram’s FormFree staging and completion process and still want to do a two part transaction. The first part is the transaction <i>staging/initiation</i> portion and the second part is the <i>completion</i> portion. This is used for agent applications where the receive transaction is completed in 2 parts: 1) transaction staging/initiation and 2) transaction completion. 1) During transaction staging/initiation, the customer provides all transaction information at a kiosk, mobile application or online. All transaction information collected is saved in the agent’s database. 2) During transaction completion, the customer goes to the agent location and provides the reference number to retrieve the transaction information from the agent’s system. All data is verified by the agent including photo ID. This field identifies the type of channel for the POS application where part 1 of the transaction was staged/initiated. Valid channel type codes are listed below: <table><tr><th>Channel Type Code</th><th>Description</th></tr><tr><td>ATM</td><td>Transaction is done using ATM that has MoneyGram products enabled.</td></tr><tr><td>KIOSK</td><td>Transaction is done with either a MoneyGram or agent owned kiosk.</td></tr></table>	Channel Type Code	Description	ATM	Transaction is done using ATM that has MoneyGram products enabled.	KIOSK	Transaction is done with either a MoneyGram or agent owned kiosk.	application	optional
Channel Type Code	Description									
ATM	Transaction is done using ATM that has MoneyGram products enabled.									
KIOSK	Transaction is done with either a MoneyGram or agent owned kiosk.									

Tag	Datatype	Information and Rules		Input	Data
		LOCATION	Transaction is done at a physical location (Brick & Mortar)		
		MOBILE	Transaction is done using either a MoneyGram owned or agent owned web interface via a mobile device		
		SYSTEM	Transaction is done using backend processes or rules.		
		WEB	Transaction is done using either a MoneyGram owned or agent owned web interface. Does not include transactions through a mobile device.		
		TABLET	Transaction staged using Tablet device either a MoneyGram owned or agent owned web interface. Does not include transactions through a Kiosk or Mobile device.		
		OTHER	Other staging initiation and completion Channel		
operatorName	string Maximum length: 80	<i>Additional Information</i> 1. Operator name or operator ID of the associate or user performing the transaction; it must be auto-populated from the agent's system and cannot be editable by the user Agent Facing – Teller ID/User ID mapped to operatorName		Application/conditional	required

Tag	Datatype	Information and Rules	Input	Data
		- Customer Facing/Self Service (kiosk, online, mobile) – User ID/User Login mapped to operatorName - ATM – unique customer ID (customer number) mapped to operatorName		
referenceNumber	string Length: 12	Data should be populated from reference number response.	application	required
Pin	string Maximum length: 8	None	application	GFFP
receiveCurrency	string Length: 3 Must be a valid currency code	Data should be populated from reference number response.	application	required
agentCheckNumber	string Maximum length: 12	NA	NA	NA
agentCheckType	string	NA	NA	NA
agentCheckAmount	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	The amount of the transaction paid to the receiver <i>Field Rules</i> 1. Must contain value of <code>receiveAmount</code> field returned by the referenceNumberResponse	application	required
customerCheckNumber	string Maximum length: 12	NA	NA	NA
customerCheckType	string	NA	NA	NA
customerCheckAmount	decimal	NA	NA	NA

Tag	Datatype	Information and Rules	Input	Data
	Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3			
receiverAddress	string Maximum length: 80	The receiver's permanent street address. <i>Field Rules</i> 1. See <i>Data Quality Edits Addendum</i> for data quality rules	GUI	required
receiverAddress2	string Maximum length: 80	The receiver's permanent street address. <i>Field Rules</i> 1. See <i>Data Quality Edits Addendum</i> for data quality rules	GUI	GFFP
receiverAddress3	string Maximum length: 80	The receiver's permanent street address. <i>Field Rules</i> 1. See <i>Data Quality Edits Addendum</i> for data quality rules	GUI	GFFP
receiverCity	string Maximum length: 40	The receiver's permanent address city.	GUI	required
receiverState	string Length: 2 Must be a valid state code	The receiver's permanent address state. <i>Field Rules</i> 1. Data and GUI input are required if <code>receiverCountry</code> is CAN, MEX, or USA 2. Data and input are not allowed otherwise	GUI/ conditional	conditional
receiverZipCode	String Length: 10	Application should not code to a specific country postal code format. Postal code should remain a free form text field adhering to the maximum length.	GUI	GFFP

Tag	Datatype	Information and Rules	Input	Data
receiverCountry	string Length: 3 Must be a valid country code	Country of receiver's permanent residence. Allow for all possible countries to be entered, not just the country where agent is located.	GUI	required
receiverMailingAddressS	string maximum length: 80	Mailing address for the receiver. Currently only applies to agents in Puerto Rico See Data Quality Edits Addendum for data quality rules	GUI/application	GFFP
receiverMailingAddress2	string maximum length: 80	Mailing address for the receiver. Currently only applies to agents in Puerto Rico See Data Quality Edits Addendum for data quality rules	GUI/application	GFFP
receiverMailingAddress3	string maximum length: 80	Mailing address for the receiver. Currently only applies to agents in Puerto Rico See Data Quality Edits Addendum for data quality rules	GUI/application	GFFP
receiverMailingCity	string maximum length: 40	Mailing city for the receiver. Currently only applies to agents in Puerto Rico See Data Quality Edits Addendum for data quality rules	GUI/application	GFFP
receiverMailingState	string maximum length: 2	Mailing state for the receiver. Currently only applies to agents in Puerto Rico See Data Quality Edits Addendum for data quality rules	GUI/application	GFFP
receiverMailingZipCode	string maximum length: 10	Mailing zip code for the receiver. Currently only applies to agents in Puerto Rico	GUI/application	GFFP

Tag	Datatype	Information and Rules	Input	Data
		See Data Quality Edits Addendum for data quality rules		
receiverMailingCountry	string length: 3	Mailing country for the receiver. Currently only applies to agents in Puerto Rico See Data Quality Edits Addendum for data quality rules	GUI/application	GFFP
receiverPhotoIdType	string	<u>Enumerated value - agent application must use the valid enumerations returned from getFieldsForProduct (GFFP) response and allow only valid values to be selected.</u> The list returned can be different based on the agent's country	GUI	required
receiverPhotoIdNumber	string Minimum length: 4 Maximum length: 25	<i>Field Rules</i> 1. Only alphanumeric and hyphen (-) characters allowed	GUI	required
receiverPhotoIdState	string Length: 2 Must be a valid state code	<i>Field Rules</i> 1. Data and GUI input are required if receiverPhotoIdCountry is CAN, MEX, or USA 2. Data and input are not allowed if senderPhotoIdCountry is not CAN, MEX, or USA	GUI/conditional	conditional
receiverPhotoIdCountry	string Length: 3 Must be a valid country code	Country where receiver photo ID was issued. Allow for countries other than the agent's country.	GUI	required
receiverLegalIdType	string	<u>Enumerated value - agent application must use the valid enumerations returned from getFieldsForProduct (GFFP) response and allow only valid values to be selected.</u> The list returned can be different based on the agent's country	GUI	GFFP

Tag	Datatype	Information and Rules	Input	Data
receiverLegalIdNumber	string Minimum length: 4 Maximum length: 20	<i>Field Rules</i> 1. Only alphanumeric and hyphen (-) characters allowed	GUI	GFFP
receiverDOB	date Format: CCYY-MM-DD	<i>Field Rules</i> 1. Cannot be later than the current date 2. Some countries have minimum age requirements which will be validated based on the country where the transaction is received	GUI	required
receiverOccupation	string Maximum length: 30	Must use valid values returned in GFFP. The list returned can be different based on the agent's country	GUI	GFFP
thirdPartyFirstName	string Maximum length: 40	<i>Field Rules</i> 1. See <i>Data Quality Edits Addendum</i> for data quality rules	GUI	GFFP
thirdPartyMiddleName	string Length: 40	<i>Field Rules</i> 1. See <i>Data Quality Edits Addendum</i> for data quality rules	GUI	GFFP
thirdPartyLastName	string Maximum length: 40	<i>Field Rules</i> 1. See <i>Data Quality Edits Addendum</i> for data quality rules	GUI	GFFP
thirdPartyLastName2	string Maximum length: 40	<i>Field Rules</i> 1. See <i>Data Quality Edits Addendum</i> for data quality rules	GUI	GFFP
thirdPartyAddress	string Maximum length: 80	<i>Field Rules</i> 1. See <i>Data Quality Edits Addendum</i> for data quality rules	GUI	GFFP

Tag	Datatype	Information and Rules	Input	Data
thirdPartyAddress2	string Maximum length: 80	<i>Field Rules</i> 1. See <i>Data Quality Edits Addendum</i> for data quality rules	GUI	GFFP
thirdPartyAddress3	string Maximum length: 80	<i>Field Rules</i> 1. See <i>Data Quality Edits Addendum</i> for data quality rules	GUI	GFFP
thirdPartyCity	string Maximum length: 40	None	GUI	GFFP
thirdPartyState	string Length: 2 Must be a valid state code	<i>Field Rules</i> 1. Data and GUI input are required if thirdPartyCountry is CAN, MEX, or USA 2. Data and GUI input are not allowed if thirdPartyCountry is not CAN, MEX, or USA	GUI/conditional	GFFP
thirdPartyZipCode	string Minimum length: 3 Maximum length: 10		GUI	GFFP
thirdPartyCountry	string Length: 3 Must be a valid country code	None	GUI	GFFP
thirdPartyLegalIdType	string	<u>Enumerated value - agent application must use the valid enumerations returned from getFieldsForProduct (GFFP) response and allow only valid values to be selected.</u> The list returned can be different based on the agent's country	GUI	GFFP
thirdPartyLegalIdNumber	string	<i>Field Rules</i>	GUI	GFFP

Tag	Datatype	Information and Rules	Input	Data
	Minimum length: 4 Maximum length: 20	1. Only alphanumeric and hyphen (-) characters allowed		
thirdPartyDOB	date Format: CCYY-MM-DD	<i>Field Rules</i> 1. Cannot be later than the current date 2. Some countries have minimum age requirements which will be validated based on the country where the transaction is received	GUI	GFFP
thirdPartyOrg	string Maximum length: 60	The name of the third party organization	GUI	GFFP
receiverBirthCity	string Maximum length: 40	None	GUI	GFFP
receiverBirthCountry	string Length: 3 Must be a valid country code	None	GUI	GFFP
receiverNationalityCountry	string length: 3 must be a valid country code	Current nationality. Legal status of the country where the customer is registered	GUI	GFFP
receiverNationalityAtBirthCountry	string length: 3 Must be a valid country code	Nationality at the time the customer was born	GUI	GFFP
pcTerminalNumber	string Maximum length: 10	The agent-assigned ID number of the point-of-sale.	application	optional

Tag	Datatype	Information and Rules	Input	Data
agentUseReceiveData	string Maximum length: 200	Additional data chosen by the agent for the agent's use. Stored with the transaction by MoneyGram.	GUI/application	optional
billerAccountNumber	string Length: 30	NA.	NA	NA
otherPayoutType	string	NA	NA	NA
otherPayoutAmount	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	NA	NA	NA
cardExpirationMonth	string Length: 2 Format: MM	NA	NA	NA
cardExpirationYear	string Length: 4 Format: CCYY	NA	NA	NA
cardSwiped	boolean	NA	NA	NA
consumerId	String Maximum length: 20	<i>Additional Information</i> 1. Value must be same as in GFFP 2. If data is not known, default value is 0	not allowed	required
receiverPhone	string Maximum length: 14	1. Numeric only, do not include plus(+) or dash(-) signs or parenthesis.	GUI	GFFP

Tag	Datatype	Information and Rules	Input	Data
		2. If data is provided in this field, receiverPhoneCountryCode field must also be collected and sent. 3. See <i>Data Quality Edits Addendum</i> for data quality rules		
agentConsumerID	String	The agent's number used to uniquely identify a customer <i>Field Rules</i> 1. Value is stored unencrypted and must not contain PCI data	Not Allowed	GFFP
agentTransactionId	String Maximum length: 20	An ID number that uniquely identifies the receive transaction across APIs. <i>Additional Information</i> 1. The agent's externally generated transaction ID	Not allowed	GFFP
mgTransactionSessionID	String Maximum length: 38	An ID number that uniquely identifies the receive transaction across APIs. <i>Additional Information</i> 1. Value must be that returned in the referenceNumberResponse	Not allowed	required
formFreeStaging	Boolean	Whether or not the transaction is a FormFree transaction. <i>Additional Information</i> Data should be carried from getFieldsForProductRequest	Not allowed	required
timeToLive	Int Maximum 5 digits	For future use	NA	NA
receivePurposeOfTransaction	string	<u>Enumerated value - agent application must use the valid enumerations returned from getFieldsForProduct</u>	GUI/Application	GFFP

Tag	Datatype	Information and Rules	Input	Data
	Maximum length: 30	(GFFP) response and allow only valid values to be selected. The list returned can be different based on the agent's country Please refer to Business Rule #9 for additional field visibility requirements		
receivePurposeOfTransactionOther	string Maximum length: 30	<u>For future use</u>	NA	NA
relationshipToSender	string Maximum length: 30	<u>Enumerated value - agent application must use the valid enumerations returned from getFieldsForProduct (GFFP) response and allow only valid values to be selected.</u> The list returned can be different based on the agent's country Please refer to Business Rule #9 for additional field visibility requirements	GUI/Application	GFFP
relationshipToSenderOther	string Maximum length: 30	<u>For future use</u>	NA	NA
receiverOccupationOther	string Maximum length: 30	<u>For future use</u>	NA	NA
receiverGender	string Maximum length: 30	<u>Enumerated value - agent application must use the valid enumerations returned from getFieldsForProduct (GFFP) response and allow only valid values to be selected.</u> The list returned can be different based on the agent's country	GUI/Application	GFFP
receiverBirthState	string Maximum length: 2	For future use	NA	NA
receiverCitizenshipCountry	string Length: 3	Current citizenship. Legal status of the country where the customer is registered	GUI/Application	GFFP

Tag	Datatype	Information and Rules	Input	Data
	Must be a valid country code	Please refer to Business Rule #9 for additional field visibility requirements		
receiverCitizenshipAtBirthCountry	string Length: 3 Must be a valid country code	Citizenship at the time the customer was born	GUI/Application	GFFP
receiverDualCitizenshipCountry	String Length: 3 Must be a valid country code	For future use If receiverCitizenshipCountry is required, dual citizenship will be optional and data must be provided if customer has dual citizenship	NA	NA
receiverPhotoIdIssueMonth	string Length: 2 Format: MM	If information is available, issue month must be collected, then issue year must also be collected	GUI/Application	GFFP
receiverPhotoIdIssueYear	string Length: 4 Format: CCYY	If information is available, issue year must be collected	GUI/Application	GFFP
receiverPhotoIdIssueDay	string Length: 2 Format: DD	If information is available, issue day must be collected in addition to issue month and issue year	GUI/Application	GFFP
receiverPhotoIdExpirationMonth	string Length: 2 Format: MM	If information is available, expiration month must be collected, then expiration year must also be collected	GUI/Application	GFFP
receiverPhotoIdExpirationYear	string Length: 4	If information is available, expiration year must be collected	GUI/Application	GFFP

Tag	Datatype	Information and Rules	Input	Data
	Format: CCYY			
receiverPhotoIdExpirationDay	string Length: 2 Format: DD	If information is available, expiration day must be collected in addition to expiration month and expiration year	GUI/Application	GFFP
receiverPhotoIdIssueAuthority	string Maximum length: 30	For future use.	NA	NA
receiverLegalIdIssueMonth	string Length: 2 Format: MM	If information is available, issue month must be collected, then issue year must also be collected	GUI/Application	GFFP
receiverLegalIdIssueYear	string Length: 4 Format: CCYY	If information is available, issue year must be collected	GUI/Application	GFFP
receiverLegalIdIssueDay	string Length: 2 Format: DD	If information is available, issue day must be collected in addition to issue month and issue year	GUI/Application	GFFP
receiverLegalIdExpirationMonth	string Length: 2 Format: MM	If information is available, expiration month must be collected, then expiration year must also be collected	GUI/Application	GFFP
receiverLegalIdExpirationYear	string Length: 4 Format: CCYY	If information is available, expiration year must be collected	GUI/Application	GFFP

Tag	Datatype	Information and Rules	Input	Data
receiverLegalIdExpirationDay	string Length: 2 Format: DD	If information is available, expiration day must be collected in addition to expiration month and expiration year	GUI/Application	GFFP
receiverLegalIdIssueAuthority	string Maximum length: 30	For future use	NA	NA
receiverLegalIdState	string Length: 2 Must be a valid state	For future use	NA	NA
receiverLegalIdIssueCountry	string Length: 3 Must be a valid country code		GUI/Application	GFFP
receiverPhoneNotAvailable	boolean	For future use	NA	NA
receiverPhoneCountryCode	string Length: 3	1. Country dial in code (ISD). Numeric only, do not include plus(+) or dash(-) signs or parenthesis. 2. If data is provided in this field, receiverPhone field must also be collected and sent.	GUI/Application	required
thirdPartyFirstNameNotAvailable	boolean	For future use	NA	NA
thirdPartyReceiverNameSuffix	string Maximum length: 30	<u>Enumerated value - agent application must use the valid enumerations returned from getFieldsForProduct (GFFP) response and allow only valid values to be selected.</u> The list returned can be different based on the agent's country	GUI/Application	GFFP

Tag	Datatype	Information and Rules	Input	Data
thirdPartyReceiverNameSuffixOther	string Maximum length: 30	<u>For future use</u>	NA	NA
thirdPartyReceiverGender	string Maximum length: 30	<u>Enumerated value - agent application must use the valid enumerations returned from getFieldsForProduct (GFFP) response and allow only valid values to be selected.</u> The list returned can be different based on the agent's country	GUI/Application	GFFP
thirdPartyReceiverOccupation	string Maximum length: 30	<u>Enumerated value - agent application must use the valid enumerations returned from getFieldsForProduct (GFFP) response and allow only valid values to be selected.</u> The list returned can be different based on the agent's country	GUI/Application	GFFP
thirdPartyReceiverOccupationOther	string Maximum length: 30	<u>For future use</u>	NA	NA
thirdPartyReceiverBirthCity	string Maximum Length: 40	City where customer was born	GUI/Application	GFFP
thirdPartyReceiverBirthState	receiverState string Length: 2 Must be a valid state code	For future use	NA	NA
thirdPartyReceiverBirthCountry	string Length: 3 Must be a valid country code		GUI/Application	GFFP
thirdPartyReceiverCitizenshipCountry	string Length: 3	Current citizenship. Legal status of the country where the customer is registered	GUI/Application	GFFP

Tag	Datatype	Information and Rules	Input	Data
	Must be a valid country code			
thirdPartyReceiverCitizenshipAtBirthCountry	string Length: 3 Must be a valid country code	Citizenship at the time the customer was born	GUI/Application	GFFP
thirdPartyReceiverDualCitizenshipCountry	string Length: 3 Must be a valid country code	For future use If thirdPartyReceiverCitizenshipCountry is required, dual citizenship will be optional and data must be provided if customer has dual citizenship	NA	NA
thirdPartyLegalIdIssueMonth	string Length: 2 Format: MM	If information is available, issue month must be collected, then issue year must also be collected	GUI/Application	GFFP
thirdPartyLegalIdIssueYear	string Length: 4 Format: CCYY	If information is available, issue year must be collected	GUI/Application	GFFP
thirdPartyLegalIdIssueDay	string Length: 2 Format: DD	If information is available, issue day must be collected in addition to issue month and issue year	GUI/Application	GFFP
thirdPartyLegalIdExpirationMonth	string Length: 2 Format: MM	If information is available, expiration month must be collected, then expiration year must also be collected	GUI/Application	GFFP
thirdPartyLegalIdExpirationYear	string Length: 4	If information is available, expiration year must be collected	GUI/Application	GFFP

Tag	Datatype	Information and Rules	Input	Data
	Format: CCYY			
thirdPartyLegalIdExpirationDay	string Length: 2 Format: DD	If information is available, expiration day must be collected in addition to expiration month and expiration year	GUI/Application	GFFP
thirdPartyLegalIdIssueAuthority	string Maximum length: 30	For future use	NA	NA
thirdPartyLegalIdState	string Length: 2 Must be a valid state code	For future use	NA	NA
thirdPartyLegalIdIssueCountry	string Length: 3 Must be a valid country code		GUI/Application	GFFP
primaryReceiptLanguage	string Maximum length: 3	For future use	NA	NA
secondaryReceiptLanguage	string Maximum length: 3	For future use	NA	NA
receiverIntendedUseOfMGIServices	string length: 30	Enumerated value – agent application must use the valid enumerations returned from getFieldsForProduct (GFFP) response and allow only valid values to be selected. The list returned can be different based on the agent's country Field can be labeled as: How do you plan to use MoneyGram?	GUI	GFFP

Tag	Datatype	Information and Rules	Input	Data
		The purpose of this question is to identify, in general why the consumer plans to use MoneyGram products/services. Please refer to Business Rule #9 for additional field visibility requirements		
receiptImages	Complex	Reserved for future use	NA	NA
fieldValues	Complex Maximum number of occurrences: unbounded	For future use	NA	NA
xmlTag	String Maximum length: 80	For future use	NA	NA
value	String	For future use	NA	NA

receiveValidationResponse

Additional Information

1. Visibility rules only apply to fields that are returned

Field Summary

- mgTransactionSessionID
- readyForCommit
- disclosureText
 - longLanguageCode
 - textTranslation
- additionalFieldsToCollect
 - xmlTag
 - visibility
 - fieldLabel
 - displayOrder
 - fieldCategory
 - dynamic
 - fieldMax
 - fieldMin
 - dataType
 - enumerated
 - defaultValue
 - validationRegEx
 - arrayName
 - arrayLength
 - exampleFormat
 - enumeratedValues
 - enumeratedValueInfo
 - value
 - label
- receipts

Field Detail

Tag	Datatype	Information and Rules	Display
mgTransactionSessionID	string Maximum length: 38	An ID number that uniquely identifies the receive transaction across APIs.	not allowed
readyForCommit	boolean	<i>Additional Information</i> 1. When <code>true</code> , the agent application may continue the transaction.	not allowed
disclosureText	complex Maximum number of occurrences: unbounded	None	N/A
longLanguageCode	string Length: 3	The language of the disclosure message.	required
textTranslation	string Maximum length: 2000	Additional disclosure info when taxes/fees can't be determined based on included fields.	required
additionalFieldsToCollect	complex Maximum number of occurrences: unbounded	For future use.	N/A
receipts	Complex	Reserved for future use	N/A

4. *commitTransaction*

The agent application uses the [commitTransaction](#) API to commit a MoneyGram money transfer receive transaction.

Business Rules to Code

1. The [commitTransactionRequest](#) may only be used when the readyForCommit field of the last [receiveValidationResponse](#) was true.
2. At this time, the commitTransactionRequest must be sent within 60 seconds of the receiveValidationRequest. If the commitTransactionRequest is not received by MoneyGram within 60 seconds, the transaction will not be marked as RECEIVED in MoneyGram's system.
3. If agent's application does not receive a commitTransactionResponse within 10-40 seconds, application must send the commitTransactionRequest again using the same mgiTransactionSessionID . This must be retried up to 3 times. If the retry attempt fails, check transaction status using referenceNumber API to confirm if the transaction was successful.
4. If error code 935 is returned on commit, it must be handled the same way as if the commit response is not received (see rule above).
5. Other errors may be returned on a commit thereby stopping the transaction. The application must handle scenarios where the transaction fails (an error code is returned) on commit
6. After the commit is successful, agent may proceed to print receipts and payout the transaction. Refer to AC 1512 (SP1) Receipts module for detailed information and requirements for receipts

Transaction Flow

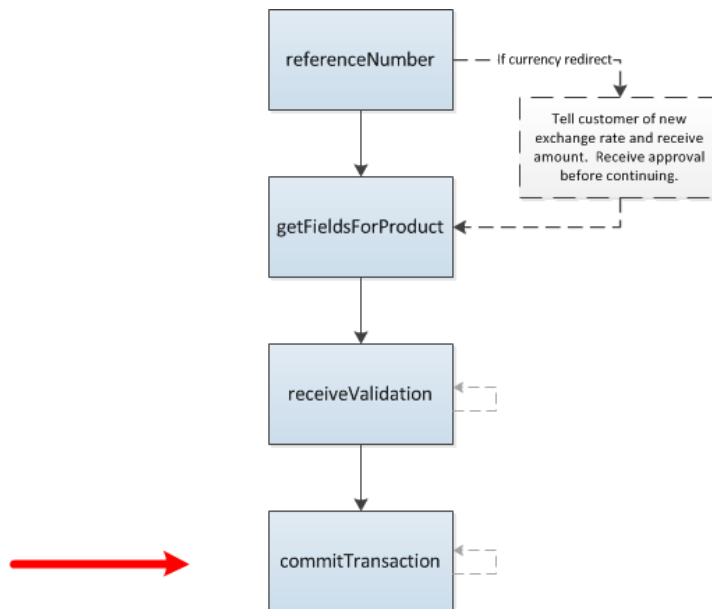


Figure 6: Location of commitTransaction in Process Flow

commitTransactionRequest

Field Summary

- **mgTransactionSessionID**
- **productType**
- fieldValues
 - xmlTag
 - fieldValue
- stateRegulatorVersion

Field Detail

Tag	Datatype	Information and Rules	Input	Data
mgTransactionSessionID	string Maximum length: 38	An ID number that uniquely identifies the Receive transaction across APIs. <i>Additional Information</i> 1. Value must be that returned in the referenceNumberResponse	application	required
productType	string Valid values: RCV	None	application	required
fieldValues	complex Maximum number of occurrences: unbounded	Not currently in use	N/A	N/A
xmlTag	string Maximum length: 80	NA	NA	NA
fieldValues	string	NA	NA	NA
stateRegulatorVersion	string Maximum length: 20	Currently not used for this product.	N/A	NA

commitTransactionResponse

Additional Information

1. Display rules only apply to fields that are returned

Field Summary

- referenceNumber
- partnerConfirmationNumber
- partnerName
- freePhoneCallPIN
- tollFreePhoneNumber
- expectedDateOfDelivery
- transactionDateTime
- receiptTextInfo
 - longLanguageCode
 - textTranslation
- receipts
- referenceNumberTextCode
- referenceNumberText
- referenceNumberConsumerText

Field Detail

Tag	Datatype	Information and Rules	Display
referenceNumber	string Length: 12	None	required
partnerConfirmationNumber	string Maximum length: 11	None	NA
partnerName	string	Not applicable for this product.	NA
freePhoneCallPIN	string Maximum length: 14	Not applicable for this product.	NA
tollFreePhoneNumber	string Maximum length: 14	Not applicable for this product.	NA
expectedDateOfDelivery	date Format: CCYY-MM-DD	Not applicable for this product	NA
transactionDateTime	dateTime Format: CCYY-MM-DDThh:mm:ss.sss-hh:mm The time zone offset is required	Additional Information 1. Value indicates the date and the time at which a particular transaction is successfully completed. 2. Data is always returned	required
receiptTextInfo	complex Maximum number of occurrences: unbounded	None	N/A
longLanguageCode	string Length: 3	The language of the receipt message.	required

Tag	Datatype	Information and Rules	Display
textTranslation	string Maximum length: 2000	Additional information to print on the receipt.	required
receipts	complex Maximum number of occurrences: unbounded	For future use. Receipt data when receipts are managed by MoneyGram	N/A
referencenumberTextCode	string maximum length: 20	Field does not apply to this product	NA
referenceNumberText	string Maximum length: 240	Field does not apply to this product	NA
referenceNumberConsumerText	string Maximum length: 240	Field does not apply to this product	NA

5. *receiveReversal*

The agent application uses the [receiveReversal](#) API if the transaction was received in error, or if a failure in some other part of the agent's system requires the rollback of a transaction (e.g., a printer jammed during processing).

This API may also be used to reverse a receive transaction due to network communication issues occurring at the time of committing a Receive transaction. The Agent application can send a receive reversal and then retry the receive request again and then commit.

Business Rules to Code

1. Reversals must be completed before 23:59:59 US Central Time the same day the original transaction was received.
2. Reversals can only be performed by the same agent that performed the original transaction.
3. Reference number lookup should be performed to check the status of the transaction before performing a receive reversal. The status must be in RECVD before a receive reversal can be done.
4. A reversal reason is required.

Additional Information

1. For manual reversal, the agent application may use the [referenceNumber](#) API to verify the status of a transaction as RECVD before using a [receiveReversal](#) API. However for reversals due to communication issues there is no need to reverse the transaction if transaction is in RECVD status. To avoid fraudulent transactions, agents should restrict manual receive reversal for call center or requiring manager's approval.
2. Receive reversal will revert the transaction status back to AVAIL making the transaction available for receive again.

receiveReversalRequest

Field Summary

- receiveAmount
- referenceNumber
- operatorName
- communicationRetryIndicator
- receiveReversalReason

Field Detail

Tag	Datatype	Information and Rules	Input	Data
receiveAmount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	None	Application	Required
referenceNumber	string Maximum length: 12	None	GUI/ Application	Required
operatorName	string Maximum length: 7	1. Operator name or operator ID of the associate or user performing the transaction; it must be auto-populated from the agent's system and cannot be editable by the user • Agent Facing – Teller ID/User ID mapped to operatorName • Customer Facing/Self Service (kiosk, online, mobile) – User ID/User Login mapped to operatorName • ATM – unique customer ID (customer number) mapped to operatorName	Application	Optional
communicationRetryIndicator	Boolean	Default value= false. If agent application has sent a receiveReversalRequest and did not receive a response, the application can retry the receiveReversalRequest again and set this indicator to true.	not allowed	Optional

receiveReversalReason	String	<i>Valid values:</i> WANTS_CASH [CUSTOMER WANTS CASH/NOT CHECK] WRONG_TX [Wrong Transaction] OUT_OF_CHECKS [Agent is out of checks] ID_PROBLEM [No ID/Wrong ID/Etc.]	GUI/ Application	Required
-----------------------	--------	--	---------------------	----------

receiveReversalResponse

Additional Information

- 1. Visibility rules only apply to fields that are returned

Field Summary

- transactionDateTime

Field Detail

Tag	Datatype	Information and Rules	Display
transactionDateTime	dateTime Format: CCYY-MM-DDThh:mm:ss.sss-hh:mm	None	not allowed

Table of Figures

Figure 2: Receive Process Flow9

Table 1: Character Mapping..... 14

Figure 3: Location of referenceNumber in Process Flow 15

Figure 4: Location of getFieldsForProduct in Process Flow 34

Figure 5: Location of receiveValidation in Process Flow 46

Figure 6: Location of commitTransaction in Process Flow 70



CORPORATE OFFICE 2828 N. Harwood, Floor 15
 Dallas, TX 75201
 USA

TOLL FREE 1.800.328.5678

WEB SITE **www.moneygram.com**