



AgentConnect®

MoneyGram Send Transactions

Version 15.12 (SP1)

2018

This AgentConnect® specification and the information contained herein is the **confidential property** of MoneyGram International, Inc. (MoneyGram), and is loaned to the recipient solely for use in integrating the MoneyGram System with the recipient's point-of-sale (POS) system as authorized by a Non-Disclosure Agreement entered between **MoneyGram** and the recipient. This document is also protected as an unpublished work under copyright law, and no part hereof may be compiled, distributed or disclosed to any third party without the prior written consent of **MoneyGram** except to persons having a legitimate need to know to integrate to the AgentConnect® System with the recipient's POS system as authorized in a POS license.

Other companies may have patents that apply to Money transfer or to the use of AgentConnect® within certain features. **MoneyGram** is not responsible for violations of any third party intellectual property rights by use of AgentConnect®.

The recipient's rights to integrate the AgentConnect® System with its POS system and/or using MoneyGram's confidential information will cease immediately upon termination of the Network Agreement or the Biller Agreement between MoneyGram and the recipient.

Table of Contents

Overview	1
Business Purpose	1
API Flows and Processes.....	1
FormFree Transaction Staging Process.....	1
Pre-Payment Disclosure Specification	3
Optional Promotional Slip Specification	3
MoneyGram Send Transaction Agent Receipt Specification	4
MoneyGram Send Transaction Customer Receipt Specification.....	4
APIs	6
1. moneyGramConsumerLookup	7
moneyGramConsumerLookupRequest	8
Field Summary	8
Field Detail.....	9
moneyGramConsumerLookupResponse	10
Field Summary	10
Field Detail.....	12
2. feeLookup.....	20
feeLookupRequest	25
Field Summary	25
Field Detail.....	26
feeLookupResponse	30
Field Summary	30
Field Detail.....	31
3. getFieldsForProduct	41
getFieldsForProductRequest	43
Field Summary	43
Field Detail.....	44
getFieldsForProductResponse	48
Field Summary	48
Field Detail.....	49
4. sendValidation.....	55
sendValidationRequest	57
Field Summary	57
Field Detail.....	61
sendValidationResponse	88
Field Summary	88

Field Detail.....	89
5. commitTransaction	99
commitTransactionRequest	101
Field Summary	101
Field Detail.....	102
commitTransactionResponse	103
Field Summary	103
Field Detail.....	104
6. detailLookup.....	107
detailLookupRequest	108
Field Summary	108
Field Detail.....	109
detailLookupResponse	110
Field Summary	110
Field Detail.....	112
Table of Figures	129

The following diagram explains the formats used in process flows throughout this document.

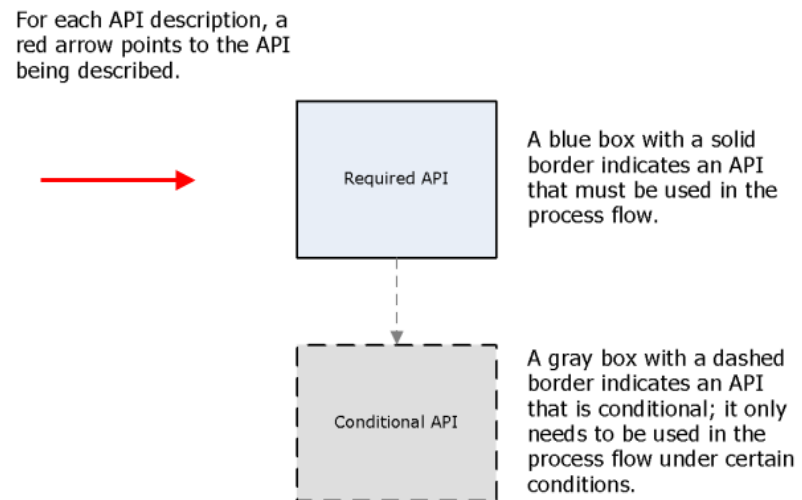


Figure 1: Explanation of Process Flow Diagrams

The following is an example of a table used to describe API request field details.

Tag	Datatype	Information and Rules	Input	Data
requestExampleField1	string Maximum length: 10	An example of a field containing a string.	GUI	required
requestExampleField2	string Length: 3 Must be a valid country code	An example of a field containing a country code	application	required
requestExampleField3	boolean	An example field whose data and visibility requirements depend on the getFieldsForProduct API. <i>Additional Information</i> 1. If <code>true</code> , then... 2. If <code>false</code> , then...	not allowed	not allowed

Definitions

- **Tag:** The field's XML tag; fields for which data is required are shown in bold red text
- **Datatype:** Describes the type and restrictions of the field's data
- **Information and Rules:** Provides additional information, business rules, and a description of the field if necessary
- **Input:** Indicates how the field's value is obtained
 - **Application:** The agent application must retrieve the data from another part of the agent application or from a previous MoneyGram API response. Data can be displayed on the application screen
 - **GUI:** The agent application must display the field on its user interface and allow user input
 - **Conditional:** The agent application may or may not display the field on the user interface for user input depending on the conditions stated in the Information and Rules column
 - **GFFP:** Whether or not the field is shown on the user interface for user inputs depends on the information returned by the [getFieldsForProductResponse](#) (GFFP)
 - **N/A:** Input does not apply; for instance, if the field only contains other fields

- **Not Allowed:** The agent application must not allow data to be entered by the user. Data must not be displayed. The agent application must retrieve the data from another part of the agent application or from a previous MoneyGram API response
- **Optional:** The agent may choose whether to display the field on the user interface for user input
- **Data:** Indicates whether the field must contain data; only used on API requests
 - **Required:** The field must contain data
 - **Not allowed:** The field must not contain data
 - **Optional:** The agent must display the field on the user interface, but data collection is optional
 - **Conditional:** The field may or may not contain data depending on the conditions stated in the Information and Rules column
 - **GFFP:** Whether or not the field contains data depends on the information returned by the [getFieldsForProductResponse](#) (GFFP)
 - **Response:** Whether or not the field contains data depends on the information returned by a message specified in the additional information for the API

The following is an example of a table used to describe API response field details.

Tag	Datatype	Information and Rules	Display
responseExampleField1	string Maximum length: 10	An example of a field containing a string.	required
responseExampleField2	string Length: 3 Must be a valid country code	An example of a field containing a country code	optional
responseExampleField3	boolean	An example field whose data and visibility requirements depend on the getFieldsForProduct API. <i>Additional Information</i> 1. If <code>true</code> , then... 2. If <code>false</code> , then...	required

Definitions

- **Tag:** The field's XML tag; fields for which data is required are shown in bold red text

- **Datatype:** Describes the type and restrictions of the field's data
- **Information and Rules:** Provides additional information, business rules, and a description of the field if necessary
- **Display:** Indicates whether the value of the field is shown on the agent application's user interface
 - **Conditional:** The value may or may not be shown on the user interface depending on the conditions stated in the Information and Rules column
 - **GFFP:** Whether or not the value is shown on the user interface depends on the information returned by the [getFieldsForProductResponse](#) (GFFP)
 - **N/A:** Visibility does not apply; for instance, if the field doesn't contain displayable data
 - **Not allowed:** The value must not be shown on the user interface; for fields in API responses, the data in the field should not be edited unless otherwise stated
 - **Optional:** The agent may choose whether to show the value on the user interface
 - **Required:** The value must be shown on the user interface if data is returned in the API

Overview

Business Purpose

- This document provides technical and business information required to design an application to perform MoneyGram money transfer send transactions.

API Flows and Processes

Send Transaction Process

- The agent application sends a [moneyGramConsumerLookupRequest](#), and MoneyGram returns a [moneyGramConsumerLookupResponse](#) containing customer information to use in the transaction, if it exists.
- The agent application sends a [feeLookupRequest](#), and MoneyGram returns a [feeLookupResponse](#) containing fee, exchange rate, available delivery options, unique session ID, and other information.
- The agent application sends a [getFieldsForProductRequest](#), and MoneyGram returns a [getFieldsForProductResponse](#) containing field requirements and screen content information for the transaction.
- The agent application sends a [sendValidationRequest](#) containing information collected from the consumer, and MoneyGram returns a [sendValidationResponse](#) indicating the transaction can continue or an error indicating an issue with the send transaction request.
- The agent confirms the amount, delivery option, and other information is correct and the consumer then accepts the fee and exchange rate.
- [Conditional] The agent provides the consumer with a Pre-Payment Disclosure showing all transaction fees, taxes, and other transaction details.
- The agent collects funds from the consumer.
- The agent application sends a [commitTransactionRequest](#), and MoneyGram returns a [commitTransactionResponse](#).
- If the [commitTransactionResponse](#) is not received due to communication error, the agent application must resend the [commitTransactionRequest](#).
- [Optional] The agent provides the consumer with a promotional slip showing promotional information.
- The agent provides the consumer with a transaction receipt showing all transaction details.

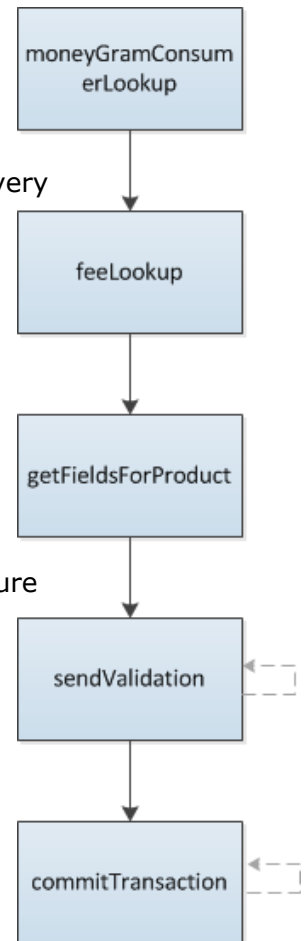


Figure 2: Send Process Flow

FormFree Transaction Staging Process

Agents using FormFree staging develop an application used to collect send transaction data via mobile phone, online form, or other method. The consumer completes the transaction at a later time at an agent location. At that time, the consumer pays for the transaction and receives a reference number. The advantage of transaction staging for the agent is that logic for setting up the transaction data, and the time spent with the consumer to collect all required data is handled in a separate process from the payment process.

- The agent follows the staging process above for send transactions.
 - The application must set the `formFreeStaging` field in the [getFieldsForProductRequest](#) and [sendValidationRequest](#) to `true`

- b. The application does not send the [commitTransactionRequest](#); the transaction is committed at a later time
- 2. The agent can build their own database to store transaction data until ready to send. Current privacy agreements for handling consumer and transaction data between MoneyGram and the partner apply.

Pre-Payment Disclosure Specification

The Pre-Payment Disclosure is required for US agents. It is required for transactions from US and US territories to outside of US only. It is not required for US to US transactions. For legal reasons, the following example should be followed when creating the slip. Use the fields found in the [sendValidationRequest](#) and [sendValidationResponse](#) APIs. Refer to AC1512 Receipts Module for detail information for all receipts.

The Pre-Payment disclosure *must* be printed in both the primary and secondary languages.

THIS IS NOT A RECEIPT For verification purposes only Please verify	
MONEYGRAM® SEND	
Date: <timeStamp> (date portion only)	Time: <timeStamp> (time portion only)
Recipient Name: <receiverFirstName> <receiverMiddleName> <receiverLastName> <receiverLastName2>	
Destination: <destinationState>, <receiveCountry>	
Service Type: <deliveryOptDisplayName>	
Transfer Amount:	<sendAmount> <sendCurrency>
Transfer Fees:	<totalSendFees> <sendCurrency>
Transfer Taxes:	<totalSendTaxes> <sendCurrency>
Total:	<totalAmountToCollect> <sendCurrency>
Exchange Rate: <exchangeRateApplied>	
Transfer Amount:	<receiveAmount> <receiveCurrency>
*Other Fees:	<totalReceiveFees> <receiveCurrency>
*Other Taxes:	<totalReceiveTaxes> <receiveCurrency>
Total to Recipient:	<totalReceiveAmount> <receiveCurrency>
*<disclosureText>	
In addition to applicable fees, MoneyGram also makes money when it changes your dollars to foreign currency.	

Figure 3: Pre-Payment Disclosure

Optional Promotional Slip Specification

The promotional slip is optional. The following guidelines should be followed when designing promotional slips:

1. The slip is intended to be given to the consumer
2. The slip's header shall state the following:
 - MONEYGRAM®
 - THIS IS NOT A RECEIPT
3. The following fields if they are returned in the [sendValidationResponse](#)
 - Each `promotionCode` and `promotionDiscountAmount`
 - `promotionalMessage`

- A message stating "Total discount not to exceed fee amount"
- The slip's footer shall state the following: *In addition to the consumer fee, MoneyGram also makes money when it exchanges currencies.

MoneyGram Send Transaction Agent Receipt Specification

For legal reasons, the agent's copy of the send transaction receipt must contain the fields and text found in the following example. Use the fields found in the [sendValidationRequest](#), [sendValidationResponse](#), and `commitResponse` APIs

Some jurisdictions may require additional information to be printed on the receipt. Please check all relevant laws.

The agent receipt *must* be printed in both the primary and secondary languages, for USA agents only.

AGENT COPY MONEYGRAM 1550 Ulca Ave. S Minneapolis, MN 55416 1-800-MONEYGRAM www.moneygram.com MONEYGRAM® SEND THIS TRANSACTION IS SUBJECT TO MONEYGRAM TERMS AND CONDITIONS <agent name> <store number> Date: <transactionDateTime> (date portion only) Time: <transactionDateTime> (time portion only) Destination: <destinationState>, <receiveCountry> Service Type: <deliveryOpDisplayName> Sender Information: <senderFirstName> <senderMiddleName> <senderLastName> <senderAddress> <senderAddress2> <senderAddress3> <senderCity>, <senderState> <senderZipCode> <senderCountry> Phone: <senderHomePhone> Identification: <senderPhotoIDType> <senderPhotoIDNumber> (or <senderLegalIDType> <senderLegalIDNumber>) Date of Birth: <senderDOB> Occupation: <senderOccupation> Third Party Information: <thirdPartyFirstName> <thirdPartyMiddleName> <thirdPartyLastName> <thirdPartyAddress> <thirdPartyAddress2> <thirdPartyAddress3> <thirdPartyCity>, <thirdPartyState> <thirdPartyZipCode> <thirdPartyCountry> Identification: <thirdPartyPhotoIDType> <thirdPartyPhotoIDNumber> (or <thirdPartyLegalIDType> <thirdPartyLegalIDNumber>) Date of Birth: <thirdPartyDOB> Occupation: <thirdPartyOccupation> Recipient Information: <receiverFirstName> <receiverMiddleName> <receiverLastName> <receiverAddress> <receiverAddress2> <receiverAddress3> <receiverCity>, <receiverState> <receiverZipCode> <receiverCountry> Phone: <receiverPhone>	Pickup Location: <receiveAgentName> <agentAddressLine> (for each) Phone: <senderHomePhone> Reference #: <referenceNumber> Date available in receive country: <expectedDateOfDelivery> *May be available sooner Transfer Amount: <sendAmount> <sendCurrency> Transfer Fees: <totalSendFees> <sendCurrency> Rewards Discount: <totalDiscountAmount> <sendCurrency> Transfer Taxes: <totalSendTaxes> <sendCurrency> Total: <totalAmountToCollect> <sendCurrency> Total discount not to exceed fee amount. Collect: <totalAmountToCollect> <sendCurrency> Exchange Rate: <exchangeRateApplied> (rounded to four decimal places) Transfer Amount: <receiveAmount> <receiveCurrency> *Other Fees: <totalReceiveFees> <receiveCurrency> *Other Taxes: <totalReceiveTaxes> <receiveCurrency> Total to Recipient: <totalReceiveAmount> <receiveCurrency> You have a right to dispute errors in your transaction. If you think there is an error, contact us within 180 days at 1-800-MONEYGRAM or www.moneygram.com. You can also contact us for a written explanation of your rights. You can cancel for a full refund within 30 minutes of payment, unless the funds have been picked up or deposited. For questions or complaints about MoneyGram contact: <stateRegulatorName> <stateRegulatorPhone> <stateRegulatorURL> Consumer Financial Protection Bureau 1-855-411-2372 1-855-729-2372 (TTY/TTD) www.consumerfinance.gov *<disclosureText> CURRENCY EXCHANGE: In addition to applicable Fees, MoneyGram also makes money when it changes your dollars to foreign currency. Currency is converted at an exchange rate set by MoneyGram or its Agents. Please see the terms and conditions or call MoneyGram at 1-800-MONEYGRAM for more information regarding currency exchange. Signature: _____
---	--

Figure 4: Agent Receipt Example

MoneyGram Send Transaction Customer Receipt Specification

For legal reasons, the customer copy of the send transaction receipt must contain the fields and text found in the following example. Use the fields found in the [sendValidationRequest](#), [sendValidationResponse](#), and `commitResponse` APIs. Refer to the Receipts Module for more details.

Some jurisdictions may require additional information to be printed on the receipt. Please check all relevant laws.

For US agents only, the customer receipt *must* be printed in both the primary and secondary languages.

CUSTOMER COPY MONEYGRAM 1550 Utica Ave. S Minneapolis, MN 55416 1-800-MONEYGRAM www.moneygram.com MONEYGRAM® SEND THIS TRANSACTION IS SUBJECT TO MONEYGRAM TERMS AND CONDITIONS <agent name> <store number> Date: <transactionDateTime> (date portion only) Time: <transactionDateTime> (time portion only) Destination: <destinationState>, <receiveCountry> Service Type: <deliveryOpDisplayName> Sender Information: <senderFirstName> <senderMiddleName> <senderLastName> Phone: <senderHomePhone> Recipient Information: <receiverFirstName> <receiverMiddleName> <receiverLastName> <receiverPhone> Pickup Location: <receiveAgentName> <agentAddressLine> (for each) Phone: <senderHomePhone> Message to Recipient: <message1> <message2> Complimentary Phone Call Dial <tollFreePhoneNumber> PIN: <freePhoneCallPIN> See receipt holder for instructions. Test Question <testQuestion> Answer <testAnswer> Reference #: <referenceNumber> Order #: Date available in receive country: <expectedDateOfDelivery> *May be available sooner		Transfer Amount: <sendAmount> <sendCurrency> Transfer Fees: <totalSendFees> <sendCurrency> <promotionCode> (for each) <promotionDiscountAmount> <sendCurrency> Transfer Taxes: <totalSendTaxes> <sendCurrency> Total: <totalAmountToCollect> <sendCurrency> Total discount not to exceed fee amount. Collect: <totalAmountToCollect> <sendCurrency> Exchange Rate: <exchangeRateApplied> (rounded to four decimal places) Transfer Amount: <receiveAmount> <receiveCurrency> *Other Fees: <totalReceiveFees> <receiveCurrency> *Other Taxes: <totalReceiveTaxes> <receiveCurrency> Total to Recipient: <totalReceiveAmount> <receiveCurrency> You have a right to dispute errors in your transaction. If you think there is an error, contact us within 180 days at 1-800-MONEYGRAM or www.moneygram.com. You can also contact us for a written explanation of your rights. You can cancel for a full refund within 30 minutes of payment, unless the funds have been picked up or deposited. For questions or complaints about MoneyGram contact: <stateRegulatorName> <stateRegulatorPhone> <stateRegulatorURL> Consumer Financial Protection Bureau 1-855-411-2372 1-855-729-2372 (TTY/TDD) www.consumerfinance.gov *<disclosureText> CURRENCY EXCHANGE: In addition to applicable Fees, MoneyGram also makes money when it changes your dollars to foreign currency. Currency is converted at an exchange rate set by MoneyGram or its Agents. Please see the terms and conditions or call MoneyGram at 1-800-MONEYGRAM for more information regarding currency exchange.
--	--	---

Figure 5: Customer Receipt Example

APIs

Required APIs

1. [moneyGramConsumerLookup](#)
2. [feeLookup](#)
3. [getFieldsForProduct](#)
4. [sendValidation](#)
5. [commitTransaction](#)

Conditional APIs

6. [detailLookup](#)

1. moneyGramConsumerLookup

The agent application uses the `moneyGramConsumerLookup` and a customer's MoneyGram Plus Rewards or telephone number to obtain information about the customer and the customer's recent transactions. This information is used in subsequent transaction APIs. The lookup by phone will return customer/sender information even if the customer has only done a Receive transaction at MoneyGram. This lookup will return the customer profile information (name, address, date of birth) as long as they transacted at MoneyGram and provide a phone number during the transaction.

Transaction records returned are ordered by most recent first. For Receiver Info, if there were multiple transactions made with the same destination country, receiver, and delivery option, they will be combined into a single record with the amount from the most recent transaction.

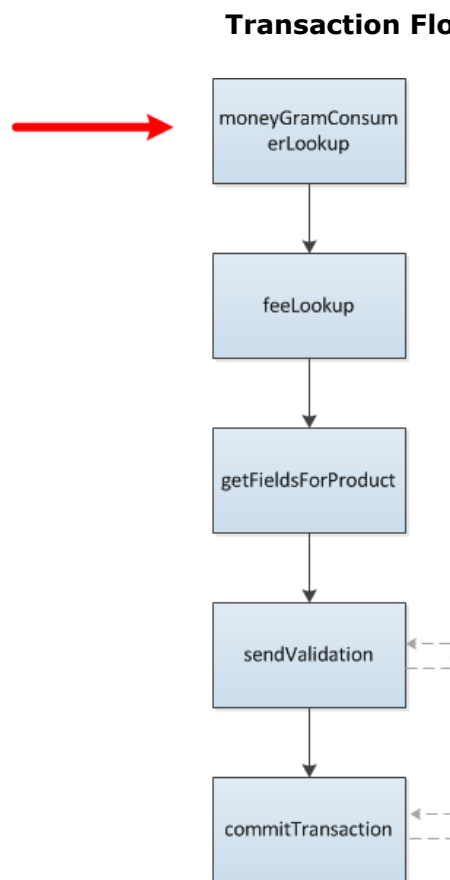


Figure 6: Location of moneyGramConsumerLookup in Process Flow

moneyGramConsumerLookupRequest

Field Summary

- customerPhone
- freqCustCardNumber
- agentFrequentCustomerNumber
- **maxSendersToReturn**
- **maxReceiversToReturn**

Field Detail

Tag	Datatype	Information and Rules	Input	Data
customerPhone	string Maximum length: 14	<i>Field Rules</i> 1. A value must be provided for one and only one of <code>customerPhone</code> or <code>freqCustCardNumber</code> 2. numbers only, no dashes 3. this is the primary phone number that was used in previous send transactions 4. Phone number should not include the phone country code	GUI	conditional
freqCustCardNumber	string Maximum length: 20	<i>Field Rules</i> 1. A value must be provided for one and only one of <code>customerPhone</code> or <code>freqCustCardNumber</code> 2. MoneyGram Plus Rewards card number that was used in previous send transactions	GUI	conditional
agentFrequentCustomerNumber	string Maximum length: 25	For future use. Agent customer number that was used in previous send transactions	not allowed	not allowed
maxSendersToReturn	int Maximum inclusive value: 10	None	optional	required
maxReceiversToReturn	int Maximum inclusive value: 10	None	optional	required

moneyGramConsumerLookupResponse

Additional Information

1. Display rules only apply to fields that are returned

Field Summary

- senderInfo
 - senderFirstName
 - senderMiddleName
 - senderLastName
 - senderLastName2
 - senderAddress
 - senderAddress2
 - senderAddress3
 - senderAddress4
 - senderCity
 - senderState
 - senderZipCode
 - senderCountry
 - senderHomePhone
 - freqCustCardNumber
 - agentFrequentCustomerNumber
 - consumerId
 - senderBirthCountry
 - senderDOB
 - senderHomePhoneCountrycode
 - senderTransactionEmailNotificationOptIn
 - senderTransactionSMSNotificationOptIn
 - senderMarketingEmailNotificationOptIn
 - senderMarketingSMSNotificationOptIn
 - senderEmailAddress
 - senderMobilePhone
 - receiverInfo
 - receiveCountry
 - receiverFirstName
 - receiverMiddleName
 - receiverLastName
 - receiverLastName2

- receiverAddress
- receiverAddress2
- receiverAddress3
- receiverAddress4
- receiverCity
- receiverState
- receiverZipCode
- receiverCountry
- receiverPhone
- sendAmount
- deliveryOption
- sendCurrency
- direction1
- direction2
- direction3
- customerReceiveNumber
- accountNickname
- displayAccountID
- receiveAgentID
- receiveAgentName
- receiveAgentAbbreviation
- receiveCurrency
- payoutCurrency
- receiverPhoneCountryCode
- billerInfo
 - receiveCode
 - receiveAgentID
 - billerAccountNumber
 - billerName
 - billerAddress
 - billerAddress2
 - billerCity
 - billerState
 - productVariant
 - receiverFirstName
 - receiverMiddleName
 - receiverLastName
 - receiverLastName2

Field Detail

Tag	Datatype	Information and Rules	Display
senderInfo	complex Maximum number of occurrences: unbounded	Additional Information Multiple records of sender info may be returned when more than one sender transaction history is found for the same search criteria used. For example, searching the same phone number may return more than one sender information	N/A
senderFirstName	string Maximum length: 40	See Data Quality Edits Addendum for data quality rules	required
senderMiddleName	string Maximum length: 40	See Data Quality Edits Addendum for data quality rules	optional
senderLastName	string Maximum length: 40	See Data Quality Edits Addendum for data quality rules	required
senderLastName2	string Maximum length: 40	See Data Quality Edits Addendum for data quality rules	required
senderAddress	string Maximum length: 80	See Data Quality Edits Addendum for data quality rules	optional
senderAddress2	string Maximum length: 80	See Data Quality Edits Addendum for data quality rules	optional
senderAddress3	string Maximum length: 80	See Data Quality Edits Addendum for data quality rules	optional
senderAddress4	string Maximum length: 80	See Data Quality Edits Addendum for data quality rules	optional

Tag	Datatype	Information and Rules	Display
senderCity	string Maximum length: 40	None	optional
senderState	string Length: 2	None	optional
senderZipCode	string length: 10		optional
senderCountry	string Length: 3	None	optional
senderHomePhone	string Maximum length: 14	This is the primary phone number the sender provided during the transaction(s).	optional
freqCustCardNumber	string Maximum length: 20	The sender's MoneyGram Plus Rewards number.	required
agentFrequentCustomerNumber	string Maximum length: 25	For future use.	not allowed
consumerId	string Maximum length: 20	<i>Additional Information</i> 1. If returned, the agent application must use the value in subsequent APIs in the transaction flow 2. If not returned, the agent application must use a value of 0 in subsequent APIs in the transaction flow 3. Numbers only.	not allowed

Tag	Datatype	Information and Rules	Display
senderBirthCountry	string Length: 3	Data is returned if it was provided in past transactions	Optional
senderDOB	date Format: CCYY-MM-DD	Data is returned if it was provided in past transactions	Optional
senderHomePhoneCountryCode	string	Additional Information 1. The international country (ISD) code for the corresponding phone number provided in the senderHomePhone 2. Historical data may be returned when provided in the original transactions.	Optional
senderTransactionEmailNotificationOptIn	boolean	Indicates sender profile for transaction opt-in for email Must use this value in sendValidationRequest. senderTransactionEmailNotificationOptIn	optional
senderTransactionSMSNotificationOptIn	boolean	Indicates sender profile for transaction opt-in for SMS/text message Must use this value in sendValidationRequest. senderTransactionSMSNotificationOptIn	optional
senderMarketingEmailNotificationOptIn	boolean	Indicates sender profile for marketing opt-in for email Must use this value in sendValidationRequest. senderMarketingEmailNotificationOptIn	optional
senderMarketingSMSNotificationOptIn	boolean	Indicates sender profile for marketing opt-in for SMS/Text notification Must use this value in sendValidationRequest. senderMarketingSMSNotificationOptIn	Optional.

Tag	Datatype	Information and Rules	Display
senderEmailAddress	String Length: 60	The sender Email Address that was used for transaction and/or marketing opt-in	optional
senderMobilePhone	String Length: 14	The sender mobile phone number that was used for transaction and/or marketing opt-in	optional
receiverInfo	complex Maximum number of occurrences: unbounded	<i>Additional Information</i> 1. Multiple records of receiver info may be returned when the same sender has sent to more than one receiver	N/A
receiveCountry	string Length: 3	None	required
receiverFirstName	string Maximum length: 40	See Data Quality Edits Addendum for data quality rules	optional
receiverMiddleName	string Maximum length: 40	See Data Quality Edits Addendum for data quality rules	optional
receiverLastName	string Maximum length: 40	See Data Quality Edits Addendum for data quality rules	optional
receiverLastName2	string Maximum length: 40	See Data Quality Edits Addendum for data quality rules	optional
receiverAddress	string Maximum length: 80	See Data Quality Edits Addendum for data quality rules	not allowed
receiverAddress2	string Maximum length: 80	See Data Quality Edits Addendum for data quality rules	not allowed

Tag	Datatype	Information and Rules	Display
receiverAddress3	string Maximum length: 80	See Data Quality Edits Addendum for data quality rules	not allowed
receiverAddress4	string Maximum length: 80	See Data Quality Edits Addendum for data quality rules	not allowed
receiverCity	string Maximum length: 30	None	not allowed
receiverState	string Length: 2	None	not allowed
receiverZipCode	string Minimum length: 3 Maximum length: 10		not allowed
receiverCountry	string Length: 3	None	optional
receiverPhone	string Maximum length: 14	None	not allowed
sendAmount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Amount used on the most recent transaction. If there are multiple transactions using the same product and for the same receiver, then the most recent transaction amount is returned	optional
deliveryOption	string	None	optional

Tag	Datatype	Information and Rules	Display
sendCurrency	string Length: 3	None	optional
direction1	string Maximum length: 40	None	optional
direction2	string Maximum length: 40	None	optional
direction3	string Maximum length: 40	None	optional
customerReceiveNumber	string Maximum length: 20	The unique MoneyGram-managed RRN (receiver registration number) that identifies the receiver of the transaction.	not allowed
accountNickname	string Maximum length: 30	None	not allowed
displayAccountID	string Maximum length: 255	None	
receiveAgentID	string Length: 8	None	not allowed
receiveAgentName	string Maximum length: 40	None	optional
receiveAgentAbbreviation	string Maximum length: 40	The abbreviated form of the agent's name to use if there isn't enough space to use <code>receiveAgentName</code> .	optional

Tag	Datatype	Information and Rules	Display
receiveCurrency	string Length: 3	None	optional
payoutCurrency	string Length: 3	None	optional
receiverPhoneCountryCode		The International country dialing code for the receiver phone	Not allowed
billerInfo	complex Maximum number of occurrences: unbounded	Not applicable for Send. Applies to Bill Payment only.	N/A
receiveCode	string Maximum length: 25		N/A
receiveAgentID	string Length: 8		N/A
billerAccountNumber	string Maximum length: 30		N/A
billerName	string Maximum length: 64		N/A
billerAddress	string Maximum length: 40		N/A
billerAddress2	string Maximum length: 40		N/A

Tag	Datatype	Information and Rules	Display
billercity	string Maximum length: 40		N/A
billersstate	string Length: 2		N/A
productvariant	string		N/A
receiverfirstname	string Maximum length: 40		N/A
receivermiddlename	string Maximum length: 40		N/A
receiverlastname	string Maximum length: 40		N/A
receiverlastname2	string Maximum length: 40		N/A

2. feeLookup

The agent application uses the [feeLookup](#) API to determine delivery options and pricing available from a particular location to any destination in MoneyGram's network. The response includes information to use in subsequent APIs to support the transaction flow for the option selected by the consumer.

Business Rules to Code

1. For the `receiveCountry` field, the agent application must check code tables API and only display countries for which `receiveActive` in the `countryInfo` section is `true`
2. The `validAmount`, `validCurrency`, and `validExchangeRate` fields are returned with data regardless of the value of the `validCurrencyIndicator` field in order to ensure MoneyGram and agents exchange the correct information
3. Depending on the regulatory and market environment, MoneyGram may provide foreign exchange rates for cross-currency transactions that will be guaranteed at the time of send, or rates that are only estimated at the time of sending. The following rules determine how to use `validAmount`, `validCurrency`, and `validExchangeRate` to advise the consumer on the expected payout amount and currency for the receiver:
 - If `validCurrencyIndicator` is `false`, the values are used only by the agent; the agent must present `estimatedReceiveAmount`, `estimatedReceiveCurrency`, and `estimatedExchangeRate` to the consumer
 - If `validCurrencyIndicator` is `false` and estimated amounts are presented to the consumer, the agent application must display the following disclaimer:
 Not all currencies available at all locations.

 The above exchange rate is only an approximation. The actual exchange rate will be the rate that is in effect at the time the transfer is received.
 - If `validCurrencyIndicator` is `true`, the values are valid to both the agent and the consumer; the agent should present them to the consumer
4. If amounts are given to the consumer in writing prior to the [sendValidationResponse](#), the agent application must display a disclaimer stating the amounts are not guaranteed until the [sendValidationResponse](#) is returned
5. The amounts returned in the [feeLookupResponse](#) must not be used to print the Pre-Payment Disclosure.
6. Every fee lookup call would generate a session ID for each delivery option/receive currency. Each `feeInfo` may have a different session ID and application must use the session ID for the selected `feeInfo`. The same session ID must be used in the subsequent APIs during the particular transaction.
7. All information returned by `feeLookup` is for information only, the actual fee and exchange rates can change. The final transaction amounts will be returned on `sendValidation` based on the send amount.
8. For US agents only. The following notice must occur prior to the start of the MoneyGram transaction flow, before providing the amount and destination country for `feeLookup`, or before the MoneyGram Consumer Lookup API.

Please display the exact content below.

MONEYGRAM ALERT!

Sellers and telemarketers can't take money transfer payments from people in the US for something they're selling through telemarketing.

Are you sending money for something a telemarketer sold you?

If you select “YES” your transaction will be canceled.

- No
- Yes

Yes/No option must be presented to the user and they must select one.

Additional Information

1. MoneyGram supports three different quote variations
 - **Quote by send amount :** The agent provides the amount the customer wants to send (in the `amountExcludingFee` field), and MoneyGram returns the fee for that amount
 - **Quote by send amount including fee:** The agent provides the customer's total cost (in the `amountIncludingFee` field) to perform the transaction, and MoneyGram returns the fee and amount the customer can send in order to match the total cost
 - **Quote by receive amount:** The agent provides the amount the customer wants the receiver to receive (in the `receiveAmount` field), and MoneyGram returns the fee and send amount necessary for the receiver to receive the required amount
2. Fees and exchange rates may change at any time between the [feeLookup](#) and [sendValidation](#) APIs; the amounts provided here are for convenience
3. Quote by receive amount is not allowed to indicative countries
4. The agent application can also determine delivery options by checking the `countryCurrencyInfo` section of the `codeTableResponse`

Display of Delivery Options

The graphics below are an example of what fields should appear when displaying delivery options, and how the screen might appear.

The agent chooses how to display the fee and tax details. The example below is only one method.

AgentConnect Application

Delivery Option	Receive Agent	Send Amt.	Send Fees	Send Taxes	FX Rate	Receive Fees	Receive Taxes	Receive Amt
<deliveryOptDisplay>	<receiveAgentAbbreviation>	<sendAmount> <sendCurrency>	<totalSendFees> <sendCurrency>	<totalSendTaxes> <sendCurrency>	<exchangeRateApplied>	<totalReceiveFees> <payoutCurrency>	<totalReceiveTaxes> <payoutCurrency>	<totalReceiveAmount> <payoutCurrency>

Send Fee and Tax Details (from <sendAmounts>)

Total Fees and Taxes	<totalSendFeesAndTaxes>
Total Fees and Taxes Collected by MoneyGram	<totalMGICollectedFeesAndTaxes>
Total MoneyGram Fee	<discountedMGISendFee>
Non-discounted MoneyGram Fee	nonDiscountedMGISendFee
Discounts	<totalDiscountAmount>
<promoCode> (for each)	<promotionDiscountAmount>
Taxes Collected by MoneyGram	<MGISendTax>
Total Fees and Taxes Collected by Agent	<totalNonMGIFeesAndTaxes>
Agent Fee	<nonMGISendFee>
Taxes Collected by Agent	<nonMGISendTax>

Receive Fee and Tax Details (from <receiveAmounts>)

Total Fees and Taxes	<totalReceiveFeesAndTaxes>
Total Fees and Taxes Collected by MoneyGram	<mgiReceiveFee> + <mgiReceiveTax>
MoneyGram Fee	<mgiReceiveFee>
Taxes Collected by MoneyGram	<mgiReceiveTax>
Total Fees and Taxes Collected by Agent	<nonMgiReceiveFee> + <nonMgiReceiveTax>
Agent Fee	<nonMgiReceiveFee>
Taxes Collected by Agent	<nonMgiReceiveTax>

Figure 7: Delivery Options Field Layout Example

AgentConnect Application

Delivery Option	Receive Agent	Send Amt.	Send Fees	Send Taxes	FX Rate	Receive Fees	Receive Taxes	Receive Amt
10 Minute Service		300.00 USD	1.00 USD	19.50 USD	1.1342	0.00 EUR	5.00 EUR	335.26 EUR
Receive at...	First Bank	300.00 USD	9.99 USD	29.49 USD	1.1342	0.00 EUR	5.00 EUR	335.26 EUR
Receive at...	Second Bank	300.00 USD	4.99 USD	24.49 USD	1.1342	1.00 EUR	6.00 EUR	334.26 EUR


Send Fee and Tax Details

Total Fees and Taxes	20.50 USD
Total Fees and Taxes Collected by MoneyGram	9.75 USD
Total MoneyGram Fee	0.00 USD
Non-discounted MoneyGram Fee	9.99 USD
Discounts	-9.99 USD
Rewards Discount	-5.00 USD
PROMOCODE Discount	-4.99 USD
Taxes Collected by MoneyGram	9.75 USD
Total Fees and Taxes Collected by Agent	10.75 USD
Agent Fee	1.00 USD
Taxes Collected by Agent	9.75 USD

Receive Fee and Tax Details

Total Fees and Taxes	5.00 EUR
Total Fees and Taxes Collected by MoneyGram	0.00 EUR
MoneyGram Fee	0.00 EUR
Taxes Collected by MoneyGram	0.00 EUR
Total Fees and Taxes Collected by Agent	5.00 EUR
Agent Fee	0.00 EUR
Taxes Collected by Agent	5.00 EUR

Figure 8: Delivery Options Screen Example

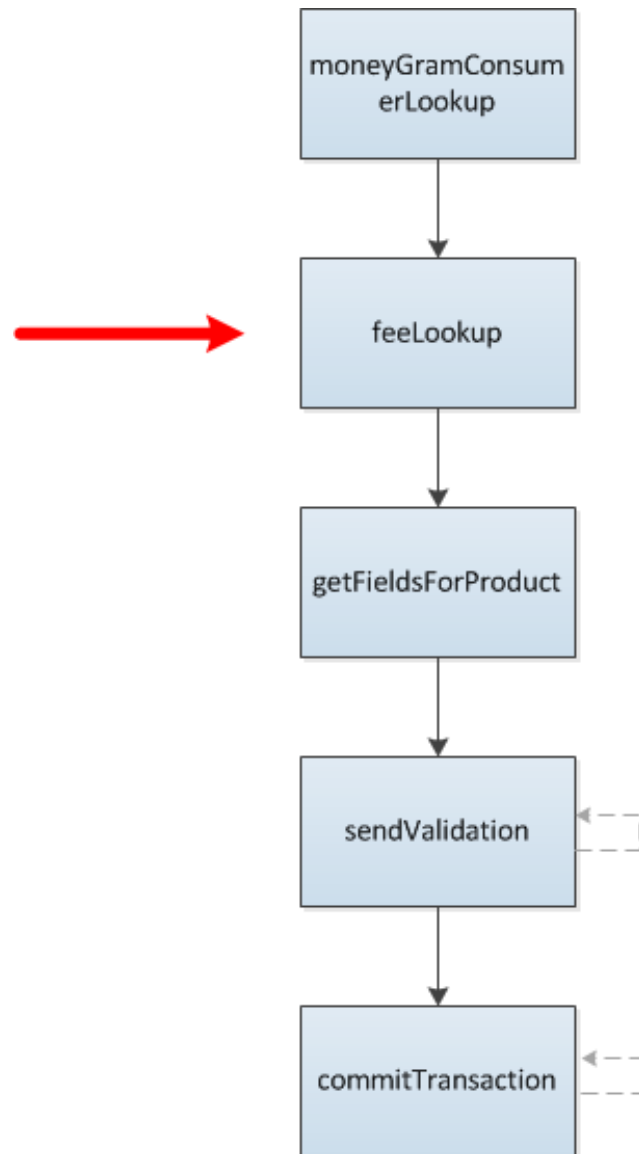Transaction Flow**Figure 9: Location of feeLookup in Process Flow**

feeLookupRequest

Field Summary

- **productType**
- productVariant
- operatorName
- amountIncludingFee
- amountExcludingFee
- receiveAmount
- **receiveCountry**
- deliveryOption
- mgRewardsNumber
- receiveCode
- indicativeReceiveCurrency
- receiveAgentID
- receiveCurrency
- sendCurrency
- mgCustomerReceiveNumber
- defaultInformationalFee
- serviceOfferingID
- defaultMaxFee
- **allOptions**
- promoCodeValues
 - promoCode

Field Detail

Tag	Datatype	Information and Rules	Input	Data
productType	string Valid values: SEND	Use 'SEND' for send transaction	not allowed	required
productVariant	string	<i>Additional Information</i> 1. Field does not apply to this product	not allowed	not allowed
operatorName	string Maximum length: 7	<i>Additional Information</i> 1. Operator name or operator ID of the associate or user performing the transaction; it must be auto-populated from the agent's system and cannot be editable by the user - Agent Facing – Teller ID/User ID mapped to operatorName - Customer Facing/Self Service (kiosk, online, mobile) – User ID/User Login mapped to operatorName - ATM – unique customer ID (customer number) mapped to operatorName	application	optional
amountIncludingFee	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	<i>Field Rules</i> 1. Data is required in one and only one of the following: amountIncludingFee, amountExcludingFee, receiveAmount 2. The GUI must provide input for at least one of the following: amountIncludingFee, amountExcludingFee, receiveAmount	conditional	conditional

Tag	Datatype	Information and Rules	Input	Data
amountExcludingFee	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	<i>Field Rules</i> 1. Data is required in one and only one of the following: amountIncludingFee, amountExcludingFee, receiveAmount 2. The GUI must provide input for at least one of the following: amountIncludingFee, amountExcludingFee, receiveAmount	conditional	conditional
receiveAmount	decimal Maximum length: 9 Maximum decimal digits: 3	<i>Field Rules</i> 1. Data is required in one and only one of the following: amountIncludingFee, amountExcludingFee, receiveAmount 2. The GUI must provide input for at least one of the following: amountIncludingFee, amountExcludingFee, receiveAmount 3. Field cannot be used to determine fees to countries with indicative rates	conditional	conditional
receiveCountry	string Length: 3 Must be a valid country code	The country in which the transaction is to be received. Application must only display the list of countries from codeTableResponse where countryInfo.receiveActive = true	GUI or application	required
deliveryOption	string Must be a valid delivery option	<i>Additional Information</i> If no value is provided and allOptions is false, the value defaults to WILL_CALL	GUI/application	optional
mg RewardsNumber	string Maximum length: 20	The sender's MoneyGram Plus Rewards number.	optional	optional
receiveCode	string Maximum length: 25	<i>Additional Information</i> 1. Field does not apply to this product	not allowed	not allowed

Tag	Datatype	Information and Rules	Input	Data
indicativeReceiveCurrency	string Length: 3	<i>Field Rules</i> 1. Field is not currently used	not allowed	not allowed
receiveAgentID	string Length: 8	If allOptions = false, receiveAgentID must be provided if it's available, from moneyGramConsumerLookup	application	conditional
receiveCurrency	string Length: 3 Must be a valid currency code	<i>Additional Information</i> 1. If allOptions is true and deliveryOption is provided, the value of receiveCurrency is ignored 2. If allOptions is false, the feeLookupResponse returns a result for the specified delivery option (or WILL_CALL if none is specified) and receive currency	GUI/application	optional
sendCurrency	string Length: 3 Must be a valid currency code	<i>Additional Information</i> 1. If a value is provided, the feeLookupResponse returns only delivery options using the specified send currency	optional	optional
mgCustomerReceiveNumber	string Maximum length: 20	The unique MoneyGram-managed RRN (receiver registration number) that identifies the receiver of the transaction. Use the value returned from moneyGramConsumerLookupResponse <i>Additional Information</i> 1. If a value is provided, the feeLookupResponse returns only the delivery option for the specified RRN	application	optional
defaultInformationalFee	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	<i>Additional Information</i> 1. Field does not apply to this product	not allowed	not allowed

Tag	Datatype	Information and Rules	Input	Data
serviceOfferingID	string Maximum length: 21	<i>Additional Information</i> 1. Field does not apply to this product	not allowed	not allowed
defaultMaxFee	boolean	<i>Additional Information</i> 1. Field does not apply to this product	not allowed	not allowed
allOptions	boolean Valid values: true	<i>Additional Information</i> 1. If true, the feeLookupResponse returns results for all delivery options and receive currencies available to the agent. This is the recommended flow 2. If false, the feeLookupResponse returns a single result for the specified <code>deliveryOption</code> and <code>receiveCurrency</code>	not allowed	required
promoCodeValues	complex	None		
promoCode	string Maximum number of occurrences: 5 Maximum length: 20	The promotional code to apply to the transaction. <i>Additional Information</i> 1. Value is provided by consumer	GUI	optional

feeLookupResponse

Additional Information

1. The fields returned with data can vary depending on type of transaction, destination country, and other variables
2. Display rules only apply to fields that are returned

Field Summary

- feeInfo
 - validReceiveAmount
 - validReceiveCurrency
 - validExchangeRate
 - estimatedReceiveAmount
 - estimatedReceiveCurrency
 - estimatedExchangeRate
 - totalAmount
 - receiveCountry
 - deliveryOption
 - receiveAmountAltered
 - speedOfDeliveryText
 - saLimitAvailable
 - revisedInformationalFee
 - deliveryOptId
 - deliveryOptDisplayName
 - regAuthText
 - receiveAgentID
 - receiveAgentName
 - receiveAgentAbbreviation
 - mgManaged
 - disclosureText
 - mgTransactionSessionID
 - sendAmountAltered
 - additionalInfoText
 - promotionInfo
 - promotionCode
 - promotionDiscountId
 - promotionCategoryId
 - promotionDiscount
- promotionDiscountAmount
- promotionErrorCode
- promotionErrorMessage
 - o longLanguageCode
 - o textTranslation
- sendAmounts
 - sendAmount
 - sendCurrency
 - totalSendFees
 - totalDiscountAmount
 - totalSendTaxes
 - totalAmountToCollect
 - detailSendAmounts
 - amountType
 - amount
 - amountCurrency
- receiveAmounts
 - receiveAmount
 - receiveCurrency
 - validCurrencyIndicator
 - payoutCurrency
 - totalReceiveFees
 - totalReceiveTaxes
 - totalReceiveAmount
 - receiveFeesAreEstimated
 - receiveTaxesAreEstimated
 - detailEstimatedReceiveAmounts
 - amountType
 - amount
 - amountCurrency

Field Detail

Tag	Datatype	Information and Rules	Display
feeInfo	complex Maximum number of occurrences: unbounded	None	N/A
validReceiveAmount	decimal Maximum length: 14 Maximum decimal digits: 3	Use the totalReceiveAmount field	not allowed
validReceiveCurrency	string Length: 3	Use the payoutCurrency field	not allowed
validExchangeRate	decimal Minimum inclusive value: 0 Maximum length: 14	<i>Additional Information</i> - If validCurrencyIndicator is true, the value is valid for the customer and must be displayed - If validCurrencyIndicator is false, use the value in estimatedExchangeRate for display <i>Field Rules</i> - Value returned to four decimal places for USA and US territories - Value returned to six decimal places elsewhere	conditional
estimatedReceiveAmount	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Always use the totalReceiveAmount for display.	not allowed
estimatedReceiveCurrency	string Length: 3	Always use the payoutCurrency for display	not allowed

Tag	Datatype	Information and Rules	Display
estimatedExchangeRate	decimal Minimum inclusive value: 0 Maximum length: 14	<i>Field Rules</i> 1. if validCurrencyIndicator = false, this must be displayed instead of the validExchangeRate. And the following text must be displayed on the application screen: Not all currencies available at all locations. The above exchange rate is only an approximation. The actual exchange rate will be the rate that is in effect at the time the transfer is received. 2. Value returned to four decimal places for USA and US territories 3. Value returned to six decimal places elsewhere	conditional
totalAmount	decimal Minimum inclusive value: 0 Maximum length: 14	Use the totalAmountToCollect field for display.	not allowed
receiveCountry	string Length: 3	None	optional
deliveryOption	string	<i>Additional Information</i> 1. Value of field is used in subsequent APIs and is not displayed on screen	not allowed

Tag	Datatype	Information and Rules	Display
receiveAmountAltered	boolean	In some circumstances it may not be possible to convert a receive amount in one currency into the exact amount in another currency. For example, 400 of one currency might be 7998 of another currency, but 401 might be 8003; therefore, no amount can match a receive amount of 8000. In such cases MoneyGram may alter the receive amount to the closest approximation. <i>Additional Information</i> 1. Field is only returned for quotes by receive amount 2. If <code>true</code>, the original receive amount was altered 3. If <code>true</code>, the agent application must display a message that the receive amount was altered 4. If <code>false</code>, the original receive amount was not altered	optional
speedOfDeliveryText	string Validation pattern: Maximum length in English: 40 Validation pattern: Maximum length in translation language: 2000	None	optional
saLimitAvailable	decimal Maximum length: 14 Maximum decimal digits: 3	Internal Use Only	Not allowed
revisedInformationalFee	Boolean	Field does not apply to this product	
deliveryOptId	string	None	not allowed

Tag	Datatype	Information and Rules	Display
deliveryOptDisplayName	string Validation pattern: Maximum length in English: 50 Validation pattern: Maximum length in translation language: 2000	<i>Additional Information</i> 1. Used with <code>receiveAgentAbbreviation</code> and <code>receiveCurrency</code> to provide a description of the delivery option for the end user	required
regAuthText	string	<i>Additional Information</i> 1. Field is not currently used 2. Field is not returned	not allowed
receiveAgentID	string Length: 8	When value is returned, it must be used in the subsequent APIs for this transaction Unique ID identifying the Receiving partner and receive currency for Account Deposit, Card Deposit and Home Delivery transactions. This is different than the agent ID provided in the request header Not applicable for WILL_CALL (10 minute service) transactions	not allowed
receiveAgentName	string Maximum length: 40		not allowed
receiveAgentAbbreviation	string Maximum length: 10	<i>Additional Information</i> 1. Used with <code>deliveryOptDisplayName</code> to provide a description of the delivery option for the end user	required
mgManaged	string Maximum length: 20 Valid values: Optional, Not Allowed, Required	<i>Additional Information</i> 1. If <code>optional</code> , the RRN is optional for the delivery option 2. If <code>required</code> , the transaction can be completed as a directed send intra-transaction 3. If <code>not allowed</code> , the delivery option does not use an RRN	not allowed

Tag	Datatype	Information and Rules	Display
disclosureText	string Maximum length: 2000	Field is not currently used and is not returned	not allowed
mgTransactionSessionID	string Maximum length: 38	A unique ID identifying the specific feeInfo. This value must be saved (for the session) and used in the subsequent APIs such as sendValidationRequest and commitTransactionRequest APIs	not allowed
sendAmountAltered	Boolean	Indicates whether the send amount was modified from the original quote	optional
additionalInfoText	string Maximum length: 400	Field is not currently used	not allowed
promotionInfo	complex Maximum number of occurrences: unbounded	None	N/A
promotionCode	string Maximum length: 20	The code used to identify the promotion.	required
promotionDiscountId	string Length: 2 Valid values: 01, 02, 03	The code used to identify the type of discount. <i>Additional Information</i> 1. 01 is flat fee. Flat Fee is a promotion that provides the services with a specified fee. 2. 02 is amount off. Amount Off is a promotion that provides services with a specified amount off the fee. 3. 03 is percent off. Percent Off is a promotion that provides services with a percent off the fee.	not allowed
promotionCategoryId	string Length: 2	Internal Use Only	not allowed

Tag	Datatype	Information and Rules	Display
promotionDiscount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	The promotion's discount value as setup in MoneyGram system based on the promotionDiscountId	not allowed
promotionDiscountAmount	decimalMaximum length: 14 Maximum decimal digits: 3	The actual discount amount applied to nonDiscountedFeeExclTax.	required
promotionErrorCode	string Length: 4	The error code returned if the promotion code was invalid.	required
promotionErrorMessage	string Maximum length: 40	NA	NA
longLanguageCode	string Length: 3	The language of the error message.	optional
textTranslation	string Maximum length: 2000	The translated error message.	required
sendAmounts	complex Maximum number of occurrences: unbounded	None	N/A
sendAmount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	The send amount of the transaction. This value must be used to populate the 'amount' field in GFFP request	required
sendCurrency	string Length: 3	None	required

Tag	Datatype	Information and Rules	Display
totalSendFees	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Sum of <code>discountedMGIFee</code> and <code>nonMGISendFee</code> . Total of all fees charged to sender by MoneyGram, agents, etc.	required
totalDiscountAmount	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Discount amount applied to <code>nonDiscountedFeeExclTax</code> .	required
totalSendTaxes	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Total taxes charged to the sender by MoneyGram, government agents, etc.	required
totalAmountToCollect	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Total of all fees, taxes, and the send amount.	required
detailSendAmounts	complex Maximum number of occurrences: unbounded	None	N/A

Tag	Datatype	Information and Rules	Display
amountType	string Valid values: mgiNonDiscountedSendFee, nonMgiSendFee, totalNonDiscountedFees, discountedMgiSendFee, mgiSendTax, nonMgiSendTax, totalMgiCollectedFeesAndTaxes, totalAmountToMgi, totalSendFeesAndTaxes, totalNonMGISendFeesAndTaxes	The type of fee or tax Additional Information 1. mgiNonDiscountedSendFee is the fee amount charged by MoneyGram before discounts are applied 2. nonMgiSendFee is the total of non-MoneyGram fees charged to the sender by government agents, banking channels, etc.; MoneyGram does not collect this fee 3. totalNonDiscountedFees is the sum of mgiNonDiscountedFee and nonMGISendFee 4. discountedMgiSendFee is the fee collected by MoneyGram after discounts 5. mgiSendTax is taxes collected by MoneyGram 6. nonMgiSendTax is taxes the agent collects and remits 7. totalMgiCollectedFeesAndTaxes is the total taxes and fees charged by MoneyGram 8. totalAmountToMgi is nonMGISendFee and nonMGISendTax subtracted from totalAmountToCollect; this is the amount MoneyGram collects from the sending agent at settlement 9. totalSendFeesAndTaxes is the total of all fees and taxes for the transaction 10. totalNonMGISendFeesAndTaxes is the total of all non-MoneyGram fees and taxes charged to the sender by government agents, banking channels, etc.	optional
amount	Decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	None	optional
amountCurrency	string Length: 3	None	optional

Tag	Datatype	Information and Rules	Display
receiveAmounts	complex Maximum number of occurrences: unbounded	None	N/A
receiveAmount	decimal Maximum length: 14 Maximum decimal digits: 3	If totalReceiveFees or totalReceiveTaxes is not zero, this receive amount must be displayed	conditional
receiveCurrency	string Length: 3	None	required
validCurrencyIndicator	boolean	<i>Additional Information</i> 1. If <code>true</code> , <code>validReceiveAmount</code> , <code>validReceiveCurrency</code> , and <code>validExchangeRate</code> are used to calculate the final payout amount 2. If <code>false</code> , estimated amounts may be available to calculate the final payout amount	not allowed
payoutCurrency	string Length: 3	This must be displayed on the application screen as the payout currency regardless of the <code>validCurrencyIndicator</code> .	required
totalReceiveFees	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Must be displayed if value returned is not zero. Total fees charged to the receiver by MoneyGram, agents, government entity, etc.	required
totalReceiveTaxes	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Must be displayed if value returned is not zero. Total taxes charged to the receiver by MoneyGram, agents, government entity, etc.	required

Tag	Datatype	Information and Rules	Display
totalReceiveAmount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Must always be displayed on the application screen. Receive amount minus any receive fees/taxes.	required
receiveFeesAreEstimated	boolean	Indicates whether the receive-side taxes are "estimates" The word "estimated" must appear before "other fees" only when true.	
receiveTaxesAreEstimated	boolean	Indicates whether the receive-side taxes are "estimates" The word "estimated" must appear before "other taxes" only when true.	
detailEstimatedReceiveAmounts	complex Maximum number of occurrences: unbounded	None	N/A
amountType	string Valid values: mgiReceiveFee, nonMGIReceiveFee, mgiReceiveTax, nonMgiReceiveTax	The type of fee or tax <i>Additional Information</i> 1. mgiReceiveFee is the fee amount charged by MoneyGram 2. nonMGIReceiveFee is the total of non-MoneyGram fees charged to the receiver by government agents, banking channels, etc.; MoneyGram does not collect this fee 3. mgiReceiveTax is taxes collected by MoneyGram 4. nonMgiReceiveTax is taxes the agent collects and remits	optional
amount	decimal	None	optional
amountCurrency	string Length: 3	None	optional

3. *getFieldsForProduct*

The agent application uses the [getFieldsForProduct \(GFFP\)](#) API to determine field requirements for the [sendValidationRequest](#). The information returned in the response is also used to build screen content.

Business Rules to Code

1. This is a required backend API before doing a sendValidation. The response will let the application know what data fields are needed for each transaction and what fields must always be displayed on the screen during the transaction or during pre-registration.
2. For the fields with productFieldInfo coming back as dynamic=true, an Agent's application must be able to provide any additional data using fields as keyValuePair. For example, an Account Deposit to India may require IFSC code for the receiver's bank account
3. **The data attributes returned in GFFP can change from transaction to transaction:** visibility, fieldLabel, displayOrder, fieldMax, fieldMin, defaultValue, exampleFormat, enumeratedValues, and regular expression. The agent's application must respond to these changes in the GFFP response. The number of required fields may change depending on the country where agent is located

Examples of scenarios where GFFP attributes values will change.

- a. **Visibility** - The following values are returned in the `visibility` field to indicate whether a field must be included in the [sendValidationRequest](#). The value indicates if data is required to complete the transaction. The value also indicates whether the agent must allow an input mechanism to populate the field.
 - REQ:** If the value is 'REQ', then data must be provided; omission of data will result in errors. The fields required for a transaction will vary depending on business and compliance rules applied to the specific transaction. A few examples of when the visibility can change depends on agent's country, amount, destination country, delivery options, etc.
 - OPT:** If the value is 'OPT' then the field must be available on the application screen for data entry, but data is not needed to complete the transaction. Data may be included in the request for business reasons. If the agent is collecting the data, data must be sent in the transaction; omission of data will not result in technical errors. For example, middle name and second last name fields are required to be displayed on the screen in case the consumer has a middle or second last name. If the customer does not have these, then this data is not required to complete the transaction.
 - NOT_ALL:** Data must not be included in the request, MoneyGram does not require the field to be displayed for the specified transaction. If the agent is collecting the data, data must not be sent on the transaction; including data will be ignored or result in errors.
 - SUP_OPT:** Data is optional on the request, and the field may optionally appear on the application screen; MoneyGram does not require data to complete the transaction. However, if the agent is collecting the data, data must be sent in on the transaction. Some examples of SUP_OPT fields are: ID expiration, nationality, citizenship, etc.
- b. **fieldMax, fieldMin** - the application must be coded to the fieldMax and fieldMin that are returned in GFFP. These values can change from one transaction to another. The maximum/minimum lengths in schema/WSDL should be used for database design and screen layout, and the agent must follow GFFP minimum and maximum lengths during a transaction submission. These lengths will always be within the boundary of the schema/WSDL. Some maximum lengths are shorter in GFFP than the schema/WSDL because MoneyGram has plans to eventually expand these fields per the lengths defined in the WSDL.
- c. **fieldLabel** - For the accountNumber field, the application must use the fieldLabel returned in GFFP. This label can change depending on which partner the transaction is being sent.

For example, some transactions can have the label as Account Number (18 digits), Account Number (11 digits), Mobile Number or Customer's Email Address.

For the remaining field labels, agent may use the suggested fieldLabels returned by GFFP on the application screen. The fieldLabels are also translated into some additional languages including Spanish, German, French, Chinese, Italian etc. Translated labels are returned when language field in the GFFP message header is specified for a particular language as described in the Introduction to AgentConnect module.

- d. **enumeratedValue** – returns list of values for enumerated fields. This list of values depends on the agent's country and can change at any time. Application must be able to use the updated list without requiring any code changes. Examples of some the fields that are enumerated are: ID type, occupation, purpose of transaction, relationship to receiver, etc.
- e. **dynamic** – application must code to all fields where dynamic = 'true', which is returned where deliveryOption = BANK_DEPOSIT, CARD_DEPOSIT or HOME_DELIVERY. The list of fields returned as true can vary depending on the destination country. When dynamic=true, the field should be sent in the keyValuePair of the sendValidationRequest.

Example:

```
<fieldValues>
  <keyValuePair>
    <xmlTag>RECEIVERPURPOSEOFFUNDS</xmlTag>
    <fieldValue>P130101</fieldValue>
  </keyValuePair>
</fieldValues>
</sendValidationRequest>
```

Transaction Flow

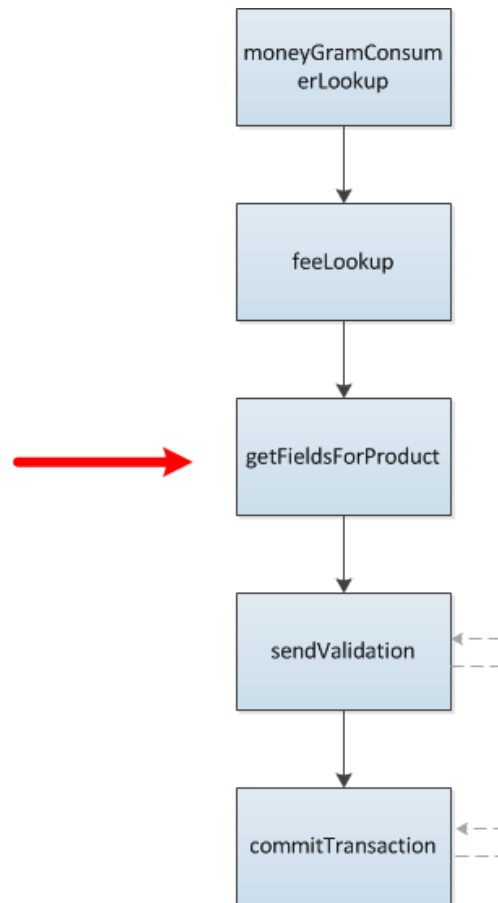


Figure 10: Location of getFieldsForProduct in Process Flow

getFieldsForProductRequest

Field Summary

- **receiveCountry**
- **deliveryOption**
- **thirdPartyType**
- receiveAgentID
- customerReceiveNumber
- billerAccountNumber
- cardSwiped
- otherPayoutType
- **receiveCurrency**
- **amount**
- **sendCurrency**
- **productType**
- productVariant
- serviceOfferingID
- **consumerId**
- **formFreeStaging**

Field Detail

Tag	Datatype	Information and Rules	Input	Data
receiveCountry	string Length: 3 Must be a valid country code	<i>Additional Information</i> 1. Use value of <code>receiveCountry</code> returned by feeLookupResponse for selected delivery option	application	required
deliveryOption	string Must be a valid delivery option	<i>Additional Information</i> 1. Use value of <code>deliveryOption</code> returned by feeLookupResponse for selected delivery option	application	required

Tag	Datatype	Information and Rules	Input	Data
thirdPartyType	string Valid values: NONE, ORG, PERSON	If the transaction is being sent on behalf of someone other than the sender, whether it is being sent for a person or an organization. <i>Additional Information</i> 1. If the <code>amount</code> is above the agent's third party profile limit and the agent application allows third-party transactions, the agent must ask whether the transaction is on behalf of a third party <i>Field Rules</i> 1. If the agent application allows third-party transactions, a field to select the type of third-party transaction must be provided on the GUI when the send amount is above the third party limit. This third party limit is returned in the <code>profileResponse</code> API documented in the Introduction to AgentConnect module. 2. For US agents only – If agent does not allow third party transactions, agent application must still ask customer if this is a third party transaction if the send amount is above the profile third party limit. If transaction is a third party and agent does not allow third party, do not allow the transaction to be completed 3. If the agent application does not allow third-party transactions, the agent must communicate this to an account representative	conditional	required
receiveAgentID	string Length: 8	<i>Additional Information</i> 1. Use value of <code>receiveAgentID</code> returned by feeLookupResponse for selected delivery option <i>Field Rules</i> 1. Data is required if <code>receiveAgentID</code> is returned in the <code>feeInformation</code> section of the feeLookupResponse for the selected delivery option	application	conditional

Tag	Datatype	Information and Rules	Input	Data
customerReceiveNumber	string Maximum length: 20	<i>Additional Information</i> 1. If moneyGramConsumerLookup API was used to find transaction history, use the customerReceiveNumber returned in moneyGramConsumerLookupResponse. 2. This data can also be populated from the customer's profile in the agent's database.	GUI/application	conditional
billerAccountNumber	string Maximum length: 30	The receiver's card number for payout via card. <i>Additional Information</i> 1. Field does not apply to this product	not allowed	not allowed
cardSwiped	boolean	<i>Additional Information</i> 1. Field does not apply to this product	not allowed	not allowed
otherPayoutType	string	The type of payment instrument used to payout the transaction, other than cash or money order. <i>Additional Information</i> 1. Field does not apply to this product	not allowed	not allowed
receiveCurrency	string Length: 3 Must be a valid currency code	<i>Additional Information</i> 1. Use value of validReceiveCurrency returned by feeLookupResponse for selected delivery option	application	required
amount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	<i>Additional Information</i> 1. Use value of sendAmount from feeLookupResponse	application	required

Tag	Datatype	Information and Rules	Input	Data
sendCurrency	string Length: 3 Must be a valid currency code	<i>Additional Information</i> 1. Use value returned in feeLookupResponse for the selected delivery option	Application	required
productType	string Valid values: SEND	Must be SEND.	Application	required
productVariant	string	<i>Additional Information</i> 1. Field does not apply for this product	not allowed	not allowed
serviceOfferingID	string Maximum length: 21	<i>Additional Information</i> 1. Field does not apply for this product	not allowed	not allowed
consumerId	string Maximum length: 20	<i>Additional Information</i> 1. Use value returned by the moneyGramConsumerLookupResponse 2. If the moneyGramConsumerLookup API was not used, or no value was returned, value must be 0	not allowed	required
formFreeStaging	boolean	Whether or not the transaction is a FormFree transaction. <i>Additional Information</i> 1. If <code>true</code> , the transaction is staged and prepared for FormFree completion which will be committed at a later time 2. If <code>false</code> , the transaction is not a FormFree type	not allowed	required

getFieldsForProductResponse

Field Summary

- fqdoInfo
 - receiveCountry
 - deliveryOption
 - receiveAgentID
 - receiveCurrency
 - receiveAgentName
 - receiveAgentAbbreviation
 - deliveryOptionDisplayName
 - registrationAuthorizationText
 - speedOfDeliveryText
- productFieldInfo
 - xmlTag
 - visibility
 - fieldLabel
 - displayOrder
 - fieldCategory
 - fieldCategoryLabel
 - dynamic
 - fieldMax
 - fieldMin
 - dataType
 - enumerated
 - defaultValue
 - validationRegEx
 - arrayName
 - arrayLength
 - exampleFormat
 - enumeratedValues
 - enumeratedValueInfo
 - value
 - label
- dynamicFieldInfo
 - xmlTag
 - visibility

Field Detail

Tag	Datatype	Information and Rules	Display
fqdoInfo	complex Maximum number of occurrences: unbounded	None	N/A
receiveCountry	string Length: 3 Must be a valid country code	None	N/A
deliveryOption	string Must be a valid delivery option	None	N/A
receiveAgentID	string Length: 8	None	not allowed
receiveCurrency	string Length: 3 Must be a valid currency code	None	N/A
receiveAgentName	string Maximum length: 40	None	N/A
receiveAgentAbbreviation	string Maximum length: 10	None	N/A
deliveryOptionDisplayNam e	string Maximum length: 50	None	N/A

Tag	Datatype	Information and Rules	Display
registrationAuthorizationText	string Maximum length: 40	Field is not currently in use. The field <code>registrationAuthorizationText</code> may contain information about additional data required to complete DS registration by a Directed Sends Partner before activating a registration number.	N/A
speedOfDeliveryText	string Maximum length: 40	None	N/A
productFieldInfo	complex Maximum number of occurrences: unbounded	None	N/A
xmlTag	string Maximum length: 80	This is the key identifying a particular field and must be mapped to <code>sendValidationRequest</code>	N/A
visibility	string Valid values: <code>OPT</code> , <code>NOT_ALL</code> , <code>REQ</code> , <code>SUP_OPT</code>	See Business Rules to Code section above regarding this API <i>Additional Information</i> 1. <code>OPT</code> – data is optional; but if collected data must be sent to MoneyGram 2. <code>NOT_ALL</code> – data is not allowed 3. <code>REQ</code> – data is required 4. <code>SUP_OPT</code> – data is not required; but if collected data must be sent to MoneyGram	N/A
fieldLabel	string Maximum length: 80	The field's suggested label. Translation is returned based on the language indicated in the request header.	N/A
displayOrder	integer	The order in which the field appears on screen relative to other fields in the same category	N/A
fieldCategory	string	Identifier used to group the fields in a category	N/A

Tag	Datatype	Information and Rules	Display
fieldCategoryLabel	String	The category's suggested label	N/A
dynamic	boolean	<i>Additional Information</i> 1. If <code>true</code> , the field is dynamic and not included in the XML schema for the sendValidationRequest , and its name and value must be provided as a <code>keyValuePair</code> 2. If <code>false</code> , the field is not dynamic	N/A
fieldMax	long	Use the value provided for each field. In some cases such as consumer name and address, the maximum length may be less than the length indicated in the WSDL.	N/A
fieldMin	long	None	N/A
dataType	string Valid values: <code>boolean</code> , <code>cntrycode</code> , <code>date</code> , <code>datetime</code> , <code>decimal</code> , <code>enum</code> , <code>int</code> , <code>string</code> , <code>stringbool</code> , <code>text</code> , <code>time</code>	None	N/A
enumerated	boolean	<i>Additional Information</i> 1. If value is <code>true</code> , the field is restricted to a list of values 2. If value is <code>false</code> , the field is not restricted to a list of values	N/A
defaultValue	string Maximum length: 255	None	N/A
validationRegEx	string Maximum length: 255	A regular expression used to validate the field's value.	N/A
arrayName	string Maximum length: 255	The xml tag of the array.	N/A

Tag	Datatype	Information and Rules	Display
arrayLength	int	The length of the array <code>arrayName</code> <i>Additional Information</i> 1. -1 means the field is not an array and must only contain a value 2. A value of 0 or larger indicates the number of values in the array	N/A
exampleFormat	string Maximum length: 255	None	N/A
enumeratedValues	complex Maximum number of occurrences: 1	Contains information on the field's list of possible values. <i>Additional Information</i> 1. The information in this list must be used if <code>enumerated</code> is <code>true</code>	N/A
enumeratedValueInfo	complex Maximum number of occurrences: unbounded	Contents define an individual enumerated value.	N/A
value	string Maximum length: 255	None	N/A
label	string Maximum length: 255	None	N/A
dynamicFieldInfo	complex Maximum number of occurrences: unbounded	For future use	N/A
xmlTag	string Maximum length: 80	None	N/A
visibility	string	None	N/A

Tag	Datatype	Information and Rules	Display
fieldMax	long	None	N/A
fieldMin	long	None	N/A
scale	integer	The number of places allowed after the decimal point. <i>Additional Information</i> 1. Only applies if <code>dataType</code> is <code>decimal</code>	N/A
dataType	string Valid values: <code>boolean</code> , <code>cntrycode</code> , <code>date</code> , <code>datetime</code> , <code>decimal</code> , <code>enum</code> , <code>int</code> , <code>string</code> , <code>stringbool</code> , <code>text</code> , <code>time</code>	None	N/A
fieldLabel	string Maximum length: 80	The field's suggested label	N/A
displayOrder	integer	The order in which the field must appear on screen relative to other fields.	N/A
enumerated	boolean	<i>Additional Information</i> 1. If value is <code>true</code> , the field is restricted to a list of values 2. If value is <code>false</code> , the field is not restricted to a list of values	N/A
defaultValue	string Maximum length: 255	None	N/A
validationRegEx	string Maximum length: 255	A regular expression used to validate the field's value.	N/A
exampleFormat	string Maximum length: 255	None	N/A

Tag	Datatype	Information and Rules	Display
enumeratedValues	complex Maximum number of occurrences: 1	Contains information on the field's list of possible values. <i>Additional Information</i> 1. The information in this list must be used if <code>enumerated</code> is <code>true</code>	N/A
enumeratedValueInfo	complex Maximum number of occurrences: unbounded	Contents define an individual enumerated value.	N/A
value	string Maximum length: 255	None	N/A
label	string Maximum length: 255	None	N/A

4. sendValidation

The agent application uses the [sendValidation](#) API to send a MoneyGram money transfer transaction.

Business Rules to Code

1. The agent application must use the field lengths returned in the [getFieldsForProductResponse](#). The maximum length for the consumer name and address fields may be shorter than the length defined in the AgentConnect WSDL since the AgentConnect WSDL reflects the target lengths of our future further expansion of the consumer name and address fields. While the agent application must use the field lengths returned in the [getFieldsForProductResponse](#), it must also be developed to accommodate the future field lengths as indicated in the AgentConnect WSDL.
2. When the `readyForCommit` field in the [sendValidationResponse](#) is `true`, the agent application may continue the transaction. If there is an error or a problem with the transaction, an error message will be returned. Please refer to the Error Message document for list of errors.
3. For FormFree transactions, the agent application must send the [sendValidationRequest](#) until the response returns a `readyForCommit` value of `true`
4. After the [sendValidationResponse](#) is received, if there are any changes needed for customer data, agent application should allow the customer data to be updated and resend the [sendValidationRequest](#) using the same `mgTransactionSessionID`.
5. MoneyGram will recycle the reference numbers after the transactions have been closed/received for 6 months. If you are storing reference numbers in your database, you should also store the transaction date. The combination of the reference number and transaction date will be the unique key for a transaction.
6. For all Enumerated Fields (some examples below), agent application must use the valid enumerations returned from [getFieldsForProduct](#) (GFFP) response and allow only valid values to be selected.

Enumerated Field
SenderOccupation
sourceOfFunds
relationshipToReceiver
proofOfFunds
senderNameSuffix
receiverNameSuffix
sendPurposeOfTransaction
thirdPartySenderNameSuffix
thirdPartySenderOccupation

7. If phone number is provided corresponding phone country code field is required, and vice versa.

Phone Field	Phone Country Code Field
senderHomePhone	senderHomePhoneCountryCode
receiverPhone	receiverPhoneCountryCode

8. State fields will always be returned as Optional by the getFieldsForProduct (GFFP) API. If a country is selected from the list that has states available in the codeTable API response, then a state is required. Agent application should change the list of states available depending on the country selected. If the country selected does not have any state list in the codeTable API, then the field should be disabled so data is not collected.

The fields impacted are: senderState, receiverState, senderPhotoIDState, thirdPartyState

9. When the sendValidation API is submitted, MoneyGram performs validations on the transaction and returns any and all errors that are found. The validation involves screenings for compliance, aggregation, etc. and based on the consumer details submitted, MoneyGram may require additional information that was not marked as required in the GFFP response.

The application must be able to handle multiple error messages and allow the user to correct all errors, by entering the additional fields(s) before resubmitting the transaction (sendValidationRequest) to MoneyGram. For example, during screening, if the consumer has done "x" number of transactions, we may now require Purpose of Transaction, Citizenship Country, etc. in order to complete the transaction. In this case, MoneyGram returns an array of error messages indicating which additional fields need to be sent in the sendValidation API. One or more of the following fields may come back as REQ after screening.

XML Tag	Display Visibility	Build & Display
SEND GFFP		
senderCitizenshipCountry	OPT>REQ	Build & Display
relationshipToReceiver	OPT>REQ	Build & Display
proofOfFunds	OPT>REQ	Build & Display
sourceOfFunds	OPT>REQ	Build & Display
sendPurposeOfTransaction	OPT>REQ	Build & Display
senderIntendedUseOfMGIServices	OPT>REQ	Build & Display

Note: OPT>REQ indicates that GFFP may return the field as 'OPT'ional, but during sendValidate, the field may become required and an error object will be returned indicating the required field(s).

10. Directed Send Intra-transaction

A directed send transaction can be completed in a single step the first time the transaction is done for a non-registered receiver or a registered receiver. The registration data, if required, is captured within the flow of the send transaction; this will be handled by GFFP. In the transaction flow, after the feeLookup is displayed on the screen, if the user selects a directed send delivery option there are 2 options.

Option 1) Receiver is already registered.

The application should obtain the CRN (customer receive number) from the (moneyGramConsumerLookup) API. If CRN is provided, that should be populated in the GFFP request.

Option 2) Receiver has not been registered.

If a CRN is not available, additional information is required for the registration. GFFP response will return information in productFieldInfo with dynamic=true. This information

should be sent on the sendValidationRequest in the key value pairs. The key value pair can be in any order if there is more than one dynamic field.

Additional Information

1. A transaction cannot be sent and received by the same agent
2. A transaction cannot be sent and received by locations within the same postal code.
3. Transactions sent from the United States to the United States or Canada can only be received in the state/province specified at the time the transaction was sent
4. Transactions sent from Jamaica to the United States can only be received in the state/province specified at the time the transaction was sent

Transaction Flow

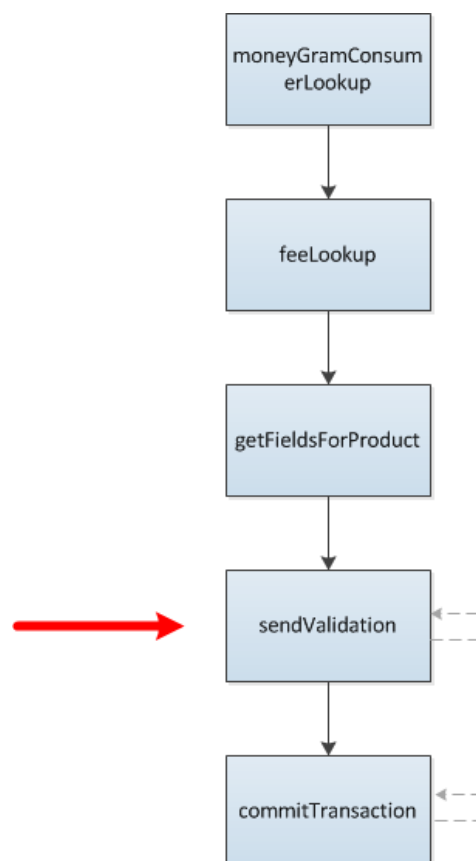


Figure 11: Location of sendValidation in Process Flow

sendValidationRequest

Field Summary

- agentStagingChannel
- operatorName
- amount
- feeAmount

- mg RewardsNumber
- agentCustomerNumber
- destinationCountry
- destinationState
- deliveryOption
- receiveCurrency
- receiveAgentID
- accountNumber
- customerReceiveNumber
- senderFirstName
- senderMiddleName
- senderLastName
- senderLastName2
- senderAddress
- senderAddress2
- senderAddress3
- senderCity
- senderState
- senderZipCode
- senderCountry
- senderHomePhone
- senderMailingAddress
- senderMailingAddress2
- senderMailingAddress3
- senderMailingCity
- senderMailingState
- senderMailingZipCode
- senderMailingCountry
- receiverFirstName
- receiverMiddleName
- receiverLastName
- receiverLastName2
- receiverAddress
- receiverAddress2
- receiverAddress3
- direction1
- direction2
- direction3
- receiverCity
- receiverState
- receiverZipCode
- receiverCountry
- receiverPhone
- receiverPhoneCountryCode
- receiverEmail
- testQuestion
- testAnswer
- messageField1
- messageField2
- senderPhotoIdType
- senderPhotoIdNumber
- senderPhotoIdState
- senderPhotoIdCountry
- senderLegalIdType
- senderLegalIdNumber
- senderDOB
- senderOccupation
- thirdPartyFirstName
- thirdPartyMiddleName
- thirdPartyLastName
- thirdPartyLastName2
- thirdPartyAddress
- thirdPartyAddress2
- thirdPartyAddress3
- thirdPartyCity
- thirdPartyState
- thirdPartyZipCode
- thirdPartyCountry
- thirdPartyLegalIdType
- thirdPartyLegalIdNumber
- thirdPartyDOB
- thirdPartyOrg
- senderBirthCity
- senderBirthCountry
- senderLegalIdIssueCountry
- senderEmailAddress

- senderMobilePhone
- senderMobilePhoneCountryCode
- marketingOptIn
- pcTerminalNumber
- agentUseSendData
- sendCurrency
- consumerId
- senderPhotoIdStored
- senderNationalityCountry
- senderNationalityAtBirthCountry
- agentTransactionId
- **mgTransactionSessionID**
- **formFreeStaging**
- timeToLive
- primaryReceiptLanguage
- secondaryReceiptLanguage
- sendPurposeOfTransaction
- sendPurposeOfTransactionOther
- sourceOfFunds
- sourceOfFundsOther
- paymentTenderedType
- relationshipToReceiver
- relationshipToReceiverOther
- proofOfFunds
- proofOfFundsOther
- senderGender
- senderOccupationOther
- senderBirthState
- senderNameSuffix
- senderNameSuffixOther
- senderCitizenshipCountry
- senderCitizenshipAtBirthCountry
- senderDualCitizenshipCountry
- senderPhotoIdIssueMonth
- senderPhotoIdIssueYear
- senderPhotoIdIssueDay
- senderPhotoIdExpirationMonth
- senderPhotoIdExpirationYear
- senderPhotoIdExpirationDay
- senderPhotoIdIssueAuthority
- senderLegalIdIssueMonth
- senderLegalIdIssueYear
- senderLegalIdIssueDay
- senderLegalIdExpirationMonth
- senderLegalIdExpirationYear
- senderLegalIdExpirationDay
- senderLegalIdIssueAuthority
- senderLegalIdState
- senderTransactionEmailNotificationOptIn
- senderTransactionSMSNotificationOptIn
- senderMarketingEmailNotificationOptIn
- senderMarketingSMSNotificationOptIn
- receiverTransactionEmailNotificationOptIn
- receiverTransactionSMSNotificationOptIn
- senderHomePhoneNotAvailable
- senderHomePhoneCountryCode
- receiverNameSuffix
- receiverNameSuffixOther
- senderFirstNameNotAvailable
- receiverFirstNameNotAvailable
- thirdPartyFirstNameNotAvailable
- thirdPartySenderBirthCity
- thirdPartySenderBirthState
- thirdPartySenderBirthCountry
- thirdPartySenderGender
- thirdPartySenderOccupation
- thirdPartySenderOccupationOther
- thirdPartySenderNameSuffix
- thirdPartySenderNameSuffixOther
- thirdPartySenderCitizenshipCountry
- thirdPartySenderCitizenshipAtBirthCountry
- thirdPartySenderDualCitizenshipCountry
- thirdPartyLegalIdIssueMonth
- thirdPartyLegalIdIssueYear
- thirdPartyLegalIdIssueDay
- thirdPartyLegalIdExpirationMonth

- thirdPartyLegalIdExpirationYear
- thirdPartyLegalIdExpirationDay
- thirdPartyLegalIdIssueAuthority
- thirdPartyLegalIdState
- thirdPartyLegalIdIssueCountry
- senderIntendedUseOfMGIServices
- receiptImages
- promoCodeValues
 - promoCode
- fieldValues
 - xmlTag
 - value

Field Detail

Tag	Datatype	Information and Rules	Input	Data						
agentStagingChannel	string Maximum length: 128	The AgentStagingChannel field is required when Agents <i>do not</i> use MoneyGram’s FormFree staging and completion process and still want to do a two part transaction. The first part is the transaction <i>staging/initiation</i> portion and the second part is the <i>completion</i> portion. This is used for agent applications where the send transaction is completed in 2 parts: 1) transaction staging/initiation and 2) transaction completion. 1) During transaction staging/initiation, the customer provides all transaction information at a kiosk, mobile application or online. All transaction information collected is saved in the agent’s database. 2) During transaction completion, the customer goes to the agent location and provides phone number or other information to retrieve the transaction information from the agent’s system. All data is verified by the agent including photo ID. This field identifies the type of channel for the POS application where part 1 of the transaction was staged/initiated. Valid channel type codes are listed below: <table><tr><th>Channel Type Code</th><th>Description</th></tr><tr><td>ATM</td><td>Transaction is done using ATM that has MoneyGram products enabled.</td></tr><tr><td>KIOSK</td><td>Transaction is done with either a MoneyGram or agent owned kiosk.</td></tr></table>	Channel Type Code	Description	ATM	Transaction is done using ATM that has MoneyGram products enabled.	KIOSK	Transaction is done with either a MoneyGram or agent owned kiosk.	application	optional
Channel Type Code	Description									
ATM	Transaction is done using ATM that has MoneyGram products enabled.									
KIOSK	Transaction is done with either a MoneyGram or agent owned kiosk.									

Tag	Datatype	Information and Rules		Input	Data
		LOCATION	Transaction is done at a physical location (Brick & Mortar)		
		MOBILE	Transaction is done using either a MoneyGram owned or agent owned web interface via a mobile device		
		SYSTEM	Transaction is done using backend processes or rules.		
		WEB	Transaction is done using either a MoneyGram owned or agent owned web interface. Does not include transactions through a mobile device.		
		TABLET	Transaction staged using Tablet device either a MoneyGram owned or agent owned web interface. Does not include transactions through a Kiosk or Mobile device.		
		OTHER	Other staging initiation and completion Channel		
operatorName	string Maximum length: 80	Additional Information Operator name or operator ID of the associate or user performing the transaction; it must be auto-populated from the agent's system and cannot be editable by the user Agent Facing – Teller ID/User ID mapped to operatorName		application	required

Tag	Datatype	Information and Rules	Input	Data
		- Customer Facing/Self Service (kiosk, online, mobile) – User ID/User Login mapped to operatorName - ATM – unique customer ID (customer number) mapped to operatorName		
amount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	<i>Additional Information</i> 1. Value must be the same as that used in the getFieldsForProductRequest	application	required
feeAmount	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	<i>Additional Information</i> 1. Recommended flow: should not use this value. Funds should be collected after sendValidation is sent based on the fee returned in the sendValidationResponse 2. Value must be the same as the totalSendFees returned in the feeLookupResponse for the selected delivery option 3. If the feeAmount is provided from the feeLookup response and if the fee has changed from the time of fee quote was done, an error will be returned.	Application	GFFP
mgRewardsNumber	string Maximum length: 20	The sender's MoneyGram Plus Rewards number. <i>Additional Information</i> 1. Value must be the same as the mgRewardsNumber used in the feeLookupRequest or freqCustCardNumber from moneyGramConsumerLookupRequest/Response 2. This value must be provided in order for the customer to receive rewards benefits such as accrual and discounts	application	optional
agentCustomerNumber	string	<i>Field Rules</i>	not allowed	optional

Tag	Datatype	Information and Rules	Input	Data
	Maximum length: 25	1. This is agent's number used to uniquely identify a customer. Value is stored unencrypted and must not contain PCI data. 2. If this is used on the transaction, customer transaction history can be retrieved using the moneyGramConsumerLookup API		
destinationCountry	string Length: 3 Must be a valid country code	Value must be the same as <code>receiveCountry</code> that was used in the getFieldsForProductRequest	application	required
destinationState	string Length: 2 Must be a valid state code	<i>Field Rules</i> 1. Data and GUI input are required if transaction originates from USA or Jamaica and <code>destinationCountry</code> is CAN or USA 2. Data and GUI input are not allowed if <code>destinationCountry</code> is not CAN or USA	GUI	GFFP
deliveryOption	string Length: 50 Must be a valid delivery option	<i>Additional Information</i> 1. Value must be the same as that used in the getFieldsForProductRequest	application	required
receiveCurrency	string Length: 3 Must be a valid currency code	Value must be the same as that used in the getFieldsForProductRequest	application	required
receiveAgentID	string Length: 8	Value must be the same as that used in the getFieldsForProductRequest	application	GFFP

Tag	Datatype	Information and Rules	Input	Data
accountNumber	string Maximum length: 255	The account identifier where funds should be deposited into for directed send/account deposit transactions	GUI	GFFP
customerReceiveNumber	string Maximum length: 40	1. If available, must use the same value from getFieldsForProductRequest 2. This field must not be displayed on the application screen.	Application	GFFP
senderFirstName	string Maximum length: 40	See Data Quality Edits Addendum for data quality rules	GUI/application	required
senderMiddleName	string Length: 40	See Data Quality Edits Addendum for data quality rules	GUI/application	GFFP
senderLastName	string Maximum length: 40	See Data Quality Edits Addendum for data quality rules	GUI/application	required
senderLastName2	string Maximum length: 40	See Data Quality Edits Addendum for data quality rules	GUI/application	GFFP
senderAddress	string Maximum length: 80	See Data Quality Edits Addendum for data quality rules	GUI/application	required
senderAddress2	string Maximum length: 80	See Data Quality Edits Addendum for data quality rules	GUI/application	GFFP
senderAddress3	string Maximum length: 80	See Data Quality Edits Addendum for data quality rules	GUI/application	GFFP
senderCity	string Maximum length: 40	See Data Quality Edits Addendum for data quality rules	GUI/application	required

Tag	Datatype	Information and Rules	Input	Data
senderState	string Length: 2 Must be a valid state code	See Business Rules to Code section above regarding this API	GUI/application	GFFP
senderZipCode	string Minimum length: 3 Maximum length: 14	Application should not code to a specific country postal code format. Postal code should remain a free form text field adhering to the maximum length. Postal code format is validated based on the country of the senderCountry	GUI/application	GFFP
senderCountry	string Length: 3 Must be a valid country code	None	GUI/application	required
senderHomePhone	string Maximum length: 14	This is the primary phone number. This can contain the home phone or the mobile phone. The field label should be Sender Phone. Numeric only, do not include plus(+) or dash(-) signs or parenthesis. If data is provided in this field, senderHomePhoneCountryCode field must also be collected and sent.	GUI/application	required
senderMailingAddress	string maximum length: 80	Mailing address for the sender. Currently only applies to agents in Puerto Rico See Data Quality Edits Addendum for data quality rules	GUI/application	GFFP
senderMailingAddress2	string maximum length: 80	Mailing address for the sender. Currently only applies to agents in Puerto Rico See Data Quality Edits Addendum for data quality rules	GUI/application	GFFP

Tag	Datatype	Information and Rules	Input	Data
senderMailingAddress3	string maximum length: 80	Mailing address for the sender. Currently only applies to agents in Puerto Rico See Data Quality Edits Addendum for data quality rules	GUI/application	GFFP
senderMailingCity	string maximum length: 40	Mailing city for the sender. Currently only applies to agents in Puerto Rico See Data Quality Edits Addendum for data quality rules	GUI/application	GFFP
senderMailingState	string maximum length: 2	Mailing state for the sender. Currently only applies to agents in Puerto Rico See Data Quality Edits Addendum for data quality rules	GUI/application	GFFP
senderMailingZipCode	string maximum length: 10	Mailing zip code for the sender. Currently only applies to agents in Puerto Rico See Data Quality Edits Addendum for data quality rules	GUI/application	GFFP
senderMailingCountry	string length: 3	Mailing country for the sender. Currently only applies to agents in Puerto Rico See Data Quality Edits Addendum for data quality rules	GUI/application	GFFP
receiverFirstName	string Maximum length: 40	See Data Quality Edits Addendum for data quality rules	GUI/application	required
receiverMiddleName	string Maximum length: 40	See Data Quality Edits Addendum for data quality rules	GUI/application	GFFP
receiverLastName	string Maximum length: 40	See Data Quality Edits Addendum for data quality rules	GUI/application	required

Tag	Datatype	Information and Rules	Input	Data
receiverLastName2	string Maximum length: 40	See Data Quality Edits Addendum for data quality rules	GUI/application	GFFP
receiverAddress	string Maximum length: 80	See Data Quality Edits Addendum for data quality rules	GUI/application	GFFP
receiverAddress2	string Maximum length: 80	See Data Quality Edits Addendum for data quality rules	GUI/application	GFFP
receiverAddress3	string Maximum length: 80	See Data Quality Edits Addendum for data quality rules	GUI/application	GFFP
direction1	string Maximum length: 40	None	GUI/application	GFFP
direction2	string Maximum length: 40	None	GUI/application	GFFP
direction3	string Maximum length: 40	None	GUI/application	GFFP
receiverCity	string Maximum length: 40	See Data Quality Edits Addendum for data quality rules	GUI/application	GFFP
receiverState	string Length: 2 Must be a valid state code	See Business Rules to Code section above regarding this API	GUI/application	GFFP
receiverZipCode	string Minimum length: 3 Maximum length: 14	Application should not code to a specific country postal code format. Postal code should remain a free form text field adhering to the maximum length.	GUI/application	GFFP

Tag	Datatype	Information and Rules	Input	Data
		Postal code format is validated based on the country of the receiverCountry		
receiverCountry	string Length: 3 Must be a valid country code	None	GUI/application	
receiverPhone	string Maximum length: 14	1. Numeric only, do not include plus(+) or dash(-) signs or parenthesis. 2. If data is provided in this field, receiverPhoneCountryCode field must also be collected and sent.	GUI/application	GFFP
receiverPhoneCountryCode	string Length: 3	1. Country dial in code (ISD). Numeric only, do not include plus(+) or dash(-) signs or parenthesis. 2. If data is provided in this field, receiverPhone field must also be collected and sent.	GUI/application	GFFP
receiverEmail	string Maximum length: 128		GUI/application	GFFP
testQuestion	string Maximum length: 30	<i>Field Rules</i> 1. Data is required if a value is provided for testAnswer	GUI	GFFP
testAnswer	string Maximum length: 30	<i>Field Rules</i> 1. Data is required if a value is provided for testQuestion	GUI	GFFP
messageField1	string Maximum length: 40	Any message or note the sender wants the receiver to receive	GUI	GFFP

Tag	Datatype	Information and Rules	Input	Data
messageField2	string Maximum length: 40	Any message or note the sender wants the receiver to receive	GUI	GFFP
senderPhotoIdType	string	Enumerated value – agent application must use the valid enumerations returned from getFieldsForProduct (GFFP) response and allow only valid values to be selected. The list returned can be different based on the agent's country	GUI	required
senderPhotoIdNumber	string Minimum length: 4 Maximum length: 25	<i>Field Rules</i> 1. Only alphanumeric and hyphen (-) characters allowed	GUI	required
senderPhotoIdState	string Length: 2 Must be a valid state code	See Business Rules to Code section above regarding this API	GUI	GFFP
senderPhotoIdCountry	string Length: 3 Must be a valid country code	None	GUI	required
senderLegalIdType	string	Enumerated value – agent application must use the valid enumerations returned from getFieldsForProduct (GFFP) response and allow only valid values to be selected. The list returned can be different based on the agent's country	GUI	GFFP
senderLegalIdNumber	string Minimum length: 4 Maximum length: 20	<i>Field Rules</i> 1. Only alphanumeric and hyphen (-) characters allowed	GUI	GFFP
senderDOB	date	<i>Field Rules</i>	GUI	required

Tag	Datatype	Information and Rules	Input	Data
	Format: CCYY-MM-DD	- Cannot be later than the current date - Some countries have minimum age requirements which will be validated based on the country where the transaction is sent from		
senderOccupation	string Maximum length: 30	Enumerated value – agent application must use the valid enumerations returned from getFieldsForProduct (GFFP) response and allow only valid values to be selected. The list returned can be different based on the agent's country	GUI	GFFP
thirdPartyFirstName	string Maximum length: 40	See Data Quality Edits Addendum for data quality rules	GUI	GFFP
thirdPartyMiddleName	string Maximum length: 40	See Data Quality Edits Addendum for data quality rules	GUI	GFFP
thirdPartyLastName	string Maximum length: 40	See Data Quality Edits Addendum for data quality rules	GUI	GFFP
thirdPartyLastName2	string Maximum length: 40	See Data Quality Edits Addendum for data quality rules	GUI	GFFP
thirdPartyAddress	string Maximum length: 80	See Data Quality Edits Addendum for data quality rules	GUI	GFFP
thirdPartyAddress2	string Maximum length: 80	See Data Quality Edits Addendum for data quality rules	GUI	GFFP
thirdPartyAddress3	string Maximum length: 80	See Data Quality Edits Addendum for data quality rules	GUI	GFFP
thirdPartyCity	string Maximum length: 40	See Data Quality Edits Addendum for data quality rules	GUI	GFFP

Tag	Datatype	Information and Rules	Input	Data
thirdPartyState	string Length: 2 Must be a valid state code	See Business Rules to Code section above regarding this API	GUI	GFFP
thirdPartyZipCode	string Minimum length: 3 Maximum length: 14	Application should not code to a specific country postal code format. Postal code should remain a free form text field adhering to the maximum length. Postal code format is validated based on the country of the thirdPartyCountry	GUI	GFFP
thirdPartyCountry	string Length: 3 Must be a valid country code	None	GUI	GFFP
thirdPartyLegalIdType	string	Enumerated value – agent application must use the valid enumerations returned from getFieldsForProduct (GFFP) response and allow only valid values to be selected. The list returned can be different based on the agent's country	GUI	GFFP
thirdPartyLegalIdNumber	string Minimum length: 4 Maximum length: 20	<i>Field Rules</i> 1. Only alphanumeric and hyphen (-) characters allowed	GUI	GFFP
thirdPartyDOB	date Format: CCYY-MM-DD	<i>Field Rules</i> 1. Cannot be later than the current date 2. Some countries have minimum age requirements which will be validated based on the country where the transaction is sent from	GUI	GFFP
thirdPartyOrg	string	The name of the third party organization	GUI	GFFP

Tag	Datatype	Information and Rules	Input	Data
	Maximum length: 60			
senderBirthCity	string Maximum length: 40	City where customer was born. If city is collected, senderBirthCountry must be collected	GUI	GFFP
senderBirthCountry	string Length: 3 Must be a valid country code	Country where customer was born	GUI	GFFP
senderLegalIdIssueCountry	string Length: 3 Must be a valid country code	None	GUI	GFFP
senderEmailAddress	string Maximum length: 128	If moneygramConsumerLookup was used and sender was selected from there, this field must be populated from the lookup using the <code>senderEmailAddress</code> field. The field must be displayed on the application and be editable to allow the user to update the email Validation pattern: Must contain one and only one commercial at symbol (@) Validation pattern: Otherwise restricted to alphanumeric, dot (.), dash (-), and underscore (_) characters	GUI	GFFP
senderMobilePhone	string Maximum length: 14	If moneygramConsumerLookup was used and sender was selected from there, this field must be populated from the lookup using the <code>senderMobilePhone</code> field. The field must be displayed on the application and be editable to allow the user to update the mobile phone Numeric only, do not include plus(+) or dash(-) signs or parenthesis.	GUI	GFFP

Tag	Datatype	Information and Rules	Input	Data
		2. If data is provided in this field, senderMobilePhoneCountryCode field must also be collected and sent.		
senderMobilePhoneCountryCode	string Length: 3	1. Country dial in code (ISD). Numeric only, do not include plus(+) or dash(-) signs or parenthesis. 2. If data is provided in this field, senderMobilePhone field must also be collected and sent.	GUI	GFFP
marketingOptIn	boolean	<i>Additional Information</i> 1. If <code>true</code> , the customer agrees to allow MoneyGram to send marketing materials 2. If <code>false</code> , the customer does not agree to allow MoneyGram to send marketing materials	GUI	GFFP
pcTerminalNumber	string Maximum length: 10	The agent-assigned ID number of the point-of-sale.	Not allowed	optional
agentUseSendData	string Maximum length: 200	Additional data chosen by the agent for the agent's use. Stored with the transaction by MoneyGram. <i>Additional Information</i> 1. Data is available immediately using the detailLookup API	GUI/application	optional
sendCurrency	string Length: 3 Must be a valid currency code	Value must be the same as that used in the getFieldsForProductRequest	application	GFFP
consumerId	string Maximum length: 20	Value must be the same as that used in the getFieldsForProductRequest	not allowed	GFFP
senderPhotoIdStored	boolean	<i>Additional Information</i>	GUI/application	GFFP

Tag	Datatype	Information and Rules	Input	Data
		- If <code>true</code>, the agent has photocopied and stored the sender's photo ID information - If <code>false</code>, the agent has not photocopied and stored the sender's photo ID information		
senderNationalityCountry	string Length: 3 Must be a valid country code	If applicable, refer to local country regulations	GUI	GFFP
senderNationalityAtBirthCountry	string Length: 3 Must be a valid country code	If applicable, refer to local country regulations	GUI	GFFP
agentTransactionId	string Maximum length: 20	An ID number that uniquely identifies the send transaction across APIs. <i>Additional Information</i> The agent's externally generated transaction ID	not allowed	GFFP
mgTransactionSessionID	string Maximum length: 38	An ID number that uniquely identifies the send transaction across APIs. <i>Additional Information</i> Value must be that returned in the feeLookupResponse for the <code>feeInfo</code> selected	not allowed	required
formFreeStaging	boolean	Value must be the same as that used in the getFieldsForProductRequest Whether or not the transaction is a FormFree transaction. <i>Additional Information</i> If <code>true</code>, the transaction is being set up as FormFree and will be completed at a later time. The exchange	not allowed	required

Tag	Datatype	Information and Rules	Input	Data
		rate, receive amount, taxes (if applicable) and fees provided in this API response are no longer guaranteed and may change when the transaction is completed at a later time. 2. If <code>false</code>, the transaction is not FormFree and will be completed as a full service transaction within this session		
timeToLive	integer Maximum length: 5	For future use only	NA	not allowed
primaryReceiptLanguage	string Length: 3	Primary language to be used on prepayment disclosures and receipts. <i>Field Rules</i> 1. Value must be <code>ENG</code> for USA and territories	application	optional
secondaryReceiptLanguage	string Length: 3 Valid values: eng, spa, deu, fra, zho	Secondary language to be used on prepayment disclosures and receipts. <i>Field Rules</i> 1. Data is required for US-based agents 2. Data is optional for non-US agents	GUI	conditional
sendPurposeOfTransaction	string Length: 30	Enumerated value – agent application must use the valid enumerations returned from <code>getFieldsForProduct</code> (GFFP) response and allow only valid values to be selected. The list returned can be different based on the agent's country This field is intended to understand the reason the consumer is using MoneyGram product/service specific to an individual transaction. Please refer to Business Rule #9 for additional field visibility requirements	GUI	GFFP

Tag	Datatype	Information and Rules	Input	Data
sendPurposeOfTransactionOther	string Length: 40	For future use	GUI	GFFP
sourceOfFunds	string Length: 30	Enumerated value – agent application must use the valid enumerations returned from getFieldsForProduct (GFFP) response and allow only valid values to be selected. The list returned can be different based on the agent's country Please refer to Business Rule #9 for additional field visibility requirements	GUI	GFFP
sourceOfFundsOther	string Length: 30	For future use	GUI	GFFP
paymentTenderedType	string Length: 20	For future use Enumerated value – agent application must use the valid enumerations returned from getFieldsForProduct (GFFP) response and allow only valid values to be selected. The list returned can be different based on the agent's country	GUI	GFFP
relationshipToReceiver	string Length: 30	Enumerated value – agent application must use the valid enumerations returned from getFieldsForProduct (GFFP) response and allow only valid values to be selected. The list returned can be different based on the agent's country Please refer to Business Rule #9 for additional field visibility requirements	GUI	GFFP
relationshipToReceiverOther	string Length: 30	For future use	GUI	GFFP
proofOfFunds	string Length: 30	Enumerated value – agent application must use the valid enumerations returned from getFieldsForProduct (GFFP) response and allow only valid values to be	GUI	GFFP

Tag	Datatype	Information and Rules	Input	Data
		selected. The list returned can be different based on the agent's country Please refer to Business Rule #9 for additional field visibility requirements		
proofOfFundsOther	string Length: 30	<u>For future use</u>	GUI	GFFP
senderGender	string Length: 30	Enumerated value – agent application must use the valid enumerations returned from getFieldsForProduct (GFFP) response and allow only valid values to be selected. The list returned can be different based on the agent's country	GUI/application	GFFP
senderOccupationOther	string Length: 30	<u>For future use</u>	GUI	GFFP
senderBirthState	string Length: 20	For future use	GUI/application	GFFP
senderNameSuffix	string Length: 30	<u>Enumerated value – agent application must use the valid enumerations returned from getFieldsForProduct (GFFP) response and allow only valid values to be selected.</u> The list returned can be different based on the agent's country	GUI/application	GFFP
senderNameSuffixOther	string Length: 30	For future use	GUI/application	GFFP
senderCitizenshipCountry	string Length: 3 Must be a valid country code	Current citizenship. Legal status of the country where the customer is registered Please refer to Business Rule #9 for additional field visibility requirements	GUI/application	GFFP

Tag	Datatype	Information and Rules	Input	Data
senderCitizenshipAtBirthCountry	string Length: 3 Must be a valid country code	Citizenship at the time the customer was born	GUI/application	GFFP
senderDualCitizenshipCountry	string Length: 3 Must be a valid country code	For future use	GUI/application	GFFP
senderPhotoIdIssueMonth	string Length: 2 Format: MM	If information is available, issue month must be collected, then issue year must also be collected	GUI	GFFP
senderPhotoIdIssueYear	string Length: 4 Format: CCYY	If information is available, issue year must be collected	GUI	GFFP
senderPhotoIdIssueDay	string Length: 2 Format: DD	If information is available, issue day must be collected in addition to issue month and issue year	GUI	GFFP
senderPhotoIdExpirationMonth	string Length: 2 Format: MM	If information is available, expiration month must be collected, then expiration year must also be collected	GUI	GFFP
senderPhotoIdExpirationYear	string Length: 4 Format: CCYY	If information is available, expiration year must be collected	GUI	GFFP

Tag	Datatype	Information and Rules	Input	Data
senderPhotoIdExpirationDay	string Length: 2 Format: DD	If information is available, expiration day must be collected in addition to expiration month and expiration year	GUI	GFFP
senderPhotoIdIssueAuthority	string Length: 30	For future use	GUI	GFFP
senderLegalIdIssueMonth	string Length: 2 Format: MM	If information is available, issue month must be collected, then issue year must also be collected	GUI	GFFP
senderLegalIdIssueYear	string Length: 4 Format: CCYY	If information is available, issue year must be collected	GUI	GFFP
senderLegalIdIssueDay	string Length: 2 Format: DD	If information is available, issue day must be collected in addition to issue month and issue year	GUI	GFFP
senderLegalIdExpirationMonth	string Length: 2 Format: MM	If information is available, expiration month must be collected, then expiration year must also be collected	GUI	GFFP
senderLegalIdExpirationYear	string Length: 4 Format: CCYY	If information is available, expiration year must be collected	GUI	GFFP
senderLegalIdExpirationDay	string Length: 2 Format: DD	If information is available, expiration day must be collected in addition to expiration month and expiration year	GUI	GFFP

Tag	Datatype	Information and Rules	Input	Data
senderLegalIdIssueAuthority	string Length: 30	For future use	GUI	GFFP
senderLegalIdState	string Length: 2	For future use	GUI	GFFP
senderTransactionEmailNotificationOptIn	boolean	1a. If moneygramConsumerLookup was used and sender was selected from there, this field must be populated from the lookup using the senderTransactionEmailNotificationOptIn field. This field must be displayed on the application and be editable to allow the user to change their preference. 1b. If moneygramConsumerLookup was not used, default value must always be <i>blank/null</i>. The customer must agree to opt-in for notification when this is changed to <i>true</i>. 2. If true, senderEmailAddress is required	Application/ GUI	GFFP
senderTransactionSMSNotificationOptIn	boolean	1a. If moneygramConsumerLookup was used and sender was selected from there, this field must be populated from the lookup using the senderTransactionSMSNotificationOptIn field. The field must be displayed on the application and be editable to allow the user to change their preference. 1b. If moneyGramConsumerLookup was not used, default value must always be <i>blank/null</i>. The customer must agree to opt-in for notification when this is changed to <i>true</i>. 2. If true, senderHomePhone and senderHomePhoneCountryCode are required	Application/ GUI	GFFP
senderMarketingEmailNotificationOptIn	boolean	1a. If moneygramConsumerLookup was used and sender was selected from there, this field must be populated from the lookup using the	application/ GUI	GFFP

Tag	Datatype	Information and Rules	Input	Data
		senderMarketingEmailNotificationOptIn field. The field must be displayed on the application and be editable to allow the user to change their preference. 1b. If moneygramConsumerLookup was not used, default value must always be <i>blank/null</i>. The customer must agree to opt-in for notification when this is changed to <i>true</i>. 2. If true, senderEmailAddress is required		
senderMarketingSMSNotificationOptIn	boolean	1a. If moneygramConsumerLookup was used and sender was selected from there, this field must be populated from the lookup using the senderMarketingSMSNotificationOptIn field. The field must be displayed on the application and be editable to allow the user to change their preference. 1b. If moneyGramConsumerLookup was not used, default value must always be <i>blank/null</i>. The customer must agree to opt-in for notification when this is changed to <i>true</i>. 2. If true, senderHomePhone and senderHomePhoneCountryCode are required	application/ GUI	GFFP
receiverTransactionEmailNotificationOptIn	boolean	1. Default value must always be <i>false</i>. The sender must agree to opt-in for notification for the receiver when this is changed to <i>true</i>. 2. If true, receiverEmail is required	GUI	GFFP
receiverTransactionSMSNotificationOptIn	boolean	1. Default value must always be <i>false</i>. The sender must agree to opt-in for notification for the receiver when this is changed to <i>true</i>. 2. If true, receiverPhone and receiverPhoneCountryCode are required.	GUI	GFFP
senderHomePhoneNotAvailable	boolean	For future use	GUI	GFFP

Tag	Datatype	Information and Rules	Input	Data
senderHomePhoneCountryCode	string Length: 3	1. Country dial in code (ISD). Numeric only, do not include plus(+) or dash(-) signs or parenthesis. 2. If data is provided in this field, senderHomePhone field must also be collected and sent.	GUI	required
receiverNameSuffix	string Maximum length: 20	Enumerated value – agent application must use the valid enumerations returned from getFieldsForProduct (GFFP) response and allow only valid values to be selected. The list returned can be different based on the agent's country	GUI/application	GFFP
receiverNameSuffixOther	string Maximum length: 20	For future use	GUI/application	GFFP
senderFirstNameNotAvailable	boolean	For future use	GUI	GFFP
receiverFirstNameNotAvailable	boolean	For future use	GUI/application	GFFP
thirdPartyFirstNameNotAvailable	boolean	For future use	GUI/application	GFFP
thirdPartySenderBirthCity	string Length: 40		GUI	GFFP
thirdPartySenderBirthState	string Length: 2	For future use	GUI	GFFP
thirdPartySenderBirthCountry	string Length: 3 Must be a valid country code		GUI	GFFP
thirdPartySenderGender	string		GUI	GFFP

Tag	Datatype	Information and Rules	Input	Data
	Length: 30			
thirdPartySenderOccupation	string Length: 30	Enumerated value – agent application must use the valid enumerations returned from getFieldsForProduct (GFFP) response and allow only valid values to be selected. The list returned can be different based on the agent's country	GUI	GFFP
thirdPartySenderOccupationOther	string Length: 30	For future use	GUI	GFFP
thirdPartySenderNameSuffix	string Length: 30	Enumerated value – agent application must use the valid enumerations returned from getFieldsForProduct (GFFP) response and allow only valid values to be selected. The list returned can be different based on the agent's country	GUI	GFFP
thirdPartySenderNameSuffixOther	string Length: 30	For future use	GUI	GFFP
thirdPartySenderCitizenshipCountry	string Length: 3 Must be a valid country code	Current citizenship. Legal status of the country where the customer is registered	GUI	GFFP
thirdPartySenderCitizenshipAtBirthCountry	string Length: 3 Must be a valid country code	Citizenship at the time the customer was born	GUI	GFFP
thirdPartySenderDualCitizenshipCountry	string Length: 3 Must be a valid country code	For future use	GUI	GFFP

Tag	Datatype	Information and Rules	Input	Data
thirdPartyLegalIdIssueMonth	string Length: 2 Format: MM	If information is available, issue month must be collected, then issue year must also be collected	GUI	GFFP
thirdPartyLegalIdIssueYear	string Length: 4 Format: CCYY	If information is available, issue year must be collected	GUI	GFFP
thirdPartyLegalIdIssueDay	string Length: 2 Format: DD	If information is available, issue day must be collected in addition to issue month and issue year	GUI	GFFP
thirdPartyLegalIdExpirationMonth	string Length: 2 Format: MM	If information is available, expiration month must be collected, then expiration year must also be collected	GUI	GFFP
thirdPartyLegalIdExpirationYear	string Length: 4 Format: CCYY	If information is available, expiration year must be collected	GUI	GFFP
thirdPartyLegalIdExpirationDay	string Length: 2 Format: DD	If information is available, expiration day must be collected in addition to expiration month and expiration year	GUI	GFFP
thirdPartyLegalIdIssueAuthority	string Length: 30	For future use	GUI	GFFP
thirdPartyLegalIdState	string Length: 2	For future use	GUI	GFFP

Tag	Datatype	Information and Rules	Input	Data
thirdPartyLegalIdIssueCountry	string Length: 3 Must be a valid country code		GUI	GFFP
senderIntendedUseOfMGIServices	string length: 30	Enumerated value – agent application must use the valid enumerations returned from getFieldsForProduct (GFFP) response and allow only valid values to be selected. The list returned can be different based on the agent's country Field can be labeled as: How do you plan to use MoneyGram? The purpose of this question is to identify, in general why the consumer plans to use MoneyGram products/services. Please refer to Business Rule #9 for additional field visibility requirements	GUI	GFFP
receiptImages	complex	For future use	NA	NA
promoCodeValues	complex	None	GUI	optional
promoCode	string Maximum number of occurrences: unbounded Maximum length: 20	The promotional code to apply to the transaction. <i>Additional Information</i> 1. Value is provided by consumer	application	optional
fieldValues	complex Maximum number of occurrences: unbounded	Contains information for fields required in the request which aren't included in the static API definition.	application	conditional
xmlTag	string Maximum length: 80	The field's XML tag from getFieldsForProductResponse where <i>dynamic</i> is <i>true</i> and <i>visibility</i> is <i>required</i>	conditional	conditional

Tag	Datatype	Information and Rules	Input	Data
value	string	The field's value; data for the corresponding xmlTag	conditional	conditional

sendValidationResponse

Additional Information

1. Display rules apply to fields when data is returned

Field Summary

- mgTransactionSessionID
- customerReceiveNumber
- displayAccountID
- customerServiceMessage
- accountNickname
- promotionInfo
 - promotionCode
 - promotionDiscountId
 - promotionCategoryId
 - promotionDiscount
 - promotionDiscountAmount
 - promotionErrorCode
 - promotionErrorMessage
 - longLanguageCode
 - textTranslation
- promotionalMessage
 - longLanguageCode
 - textTranslation
- readyForCommit
- disclosureText
 - longLanguageCode
 - textTranslation
- receiveAgentName
- receiveAgentAddress
 - agentAddressLine
- additionalFieldsToCollect
- sendAmounts
 - sendAmount
 - sendCurrency
 - totalSendFees
 - totalDiscountAmount
 - totalSendTaxes
- totalAmountToCollect
- detailSendAmounts
 - amountType
 - amount
 - amountCurrency
- receiveAmounts
 - receiveAmount
 - receiveCurrency
 - validCurrencyIndicator
 - payoutCurrency
 - totalReceiveFees
 - totalReceiveTaxes
 - totalReceiveAmount
 - receiveFeesAreEstimated
 - receiveTaxesAreEstimated
 - detailReceiveAmounts
 - amountType
 - amount
 - amountCurrency
- exchangeRateApplied
- receiveFeeDisclosureText
- receiveTaxDisclosureText
- confirmationNumber
- receipts

Field Detail

Tag	Datatype	Information and Rules	Display
mgTransactionSessionID	string Maximum length: 38	An ID number that uniquely identifies the send transaction across APIs. <i>Additional Information</i> 1. Value must be used in the commitTransactionRequest API	not allowed
customerReceiveNumber	string Maximum length: 20	The receiver's registration number for transactions that require receiver registration. <i>Additional Information</i> 1. Must <i>not</i> appear on consumer's receipt or application screen	not allowed
displayAccountID	string Maximum length: 255	Partial or entire account identifier which was used for the transaction which can be printed on receipts and displayed on screens. Partial account identifier is returned for data privacy and security standards	optional
customerServiceMessage	string Maximum length: 255	<i>Additional Information</i> 1. Must appear on consumer's receipt for transactions that require receiver registration	optional
accountNickname	string Maximum length: 30	None	optional
promotionInfo	complex Maximum number of occurrences: unbounded	None	N/A
promotionCode	string Maximum length: 20	The code used to identify the promotion.	required

Tag	Datatype	Information and Rules	Display
promotionDiscountId	string Length: 2 Valid values: 01, 02, 03	The code used to identify the type of discount. <i>Additional Information</i> 4. 01 is flat fee. Flat Fee is a promotion that provides the services with a specified fee. 5. 02 is amount off. Amount Off is a promotion that provides services with a specified amount off the fee. 6. 03 is percent off. Percent Off is a promotion that provides services with a percent off the fee.	required
promotionCategoryId	string Length: 2	Internal Use Only	required
promotionDiscount	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	The promotion's discount value.	required
promotionDiscountAmount	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	The discount amount applied to nonDiscountedFeeExclTax.	required
promotionErrorCode	string Length: 4	The error code returned if the promotion code was invalid.	required
promotionErrorMessage		The error message to display if the promotion code was invalid.	required
longLanguageCode	string Length: 3	The language of the promotional message.	required

Tag	Datatype	Information and Rules	Display
textTranslation	string Maximum length: 2000	The translated promotional message.	required
promotionalMessage	complex Maximum number of occurrences: unbounded	None	N/A
longLanguageCode	string Length: 3	The language of the promotional message.	required
textTranslation	string Maximum length: 2000	The translated promotional message.	required
readyForCommit	boolean	<i>Additional Information</i> 1. If <code>true</code> , the agent application may continue the transaction.	not allowed
disclosureText	complex Maximum number of occurrences: unbounded		N/A
longLanguageCode	string Length: 3	The language of the disclosure message.	required
textTranslation	string Maximum length: 2000	Data must be printed on the pre-payment disclosure receipt. Additional disclosure info when taxes/fees can't be determined based on included fields. When populated, required on prepayment disclosure and post-payment receipt.	required
receiveAgentName	string Maximum length: 40	The name of the intended receive agent.	optional

Tag	Datatype	Information and Rules	Display
receiveAgentAddress	complex Maximum number of occurrences: unbounded	None	N/A
agentAddressLine	string Maximum length: 80	A line of the receive agent's address.	optional
additionalFieldsToCollect	complex Maximum number of occurrences: unbounded	For future use	N/A
sendAmounts	complex Maximum number of occurrences: unbounded	None	N/A
sendAmount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	None	required
sendCurrency	string Length: 3 Must be a valid currency code	None	required
totalSendFees	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Sum of <code>discountedMGIFee</code> and <code>nonMGISendFee</code> . Total of all fees charged to sender by MoneyGram, agents, etc.	required

Tag	Datatype	Information and Rules	Display
totalDiscountAmount	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Discount amount applied to nonDiscountedFeeExclTax.	required
totalSendTaxes	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Total taxes charged to the sender by MoneyGram, government agents, etc.	required
totalAmountToCollect	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Total of all fees, taxes, and the send amount.	required
detailSendAmounts	complex Maximum number of occurrences: unbounded	None	N/A

Tag	Datatype	Information and Rules	Display
amountType	string Valid values: mgiNonDiscountedSendFee, nonMgiSendFee, totalNonDiscountedFees, discountedMgiSendFee, mgiSendTax, nonMgiSendTax, totalMgiCollectedFeesAndTaxes, totalAmountToMgi, totalSendFeesAndTaxes, totalNonMGISendFeesAndTaxes	The type of fee or tax Additional Information 1. mgiNonDiscountedSendFee is the fee amount charged by MoneyGram before discounts are applied 2. nonMgiSendFee is the total of non-MoneyGram fees charged to the sender by government agents, banking channels, etc.; MoneyGram does not collect this fee 3. totalNonDiscountedFees is the sum of mgiNonDiscountedFee and nonMGISendFee 4. discountedMgiSendFee is the fee collected by MoneyGram after discounts 5. mgiSendTax is taxes collected by MoneyGram 6. nonMgiSendTax is taxes the agent collects and remits 7. totalMgiCollectedFeesAndTaxes is the total taxes and fees charged by MoneyGram 8. totalAmountToMgi is nonMGISendFee and nonMGISendTax subtracted from totalAmountToCollect; this is the amount MoneyGram collects from the sending agent at settlement 9. totalSendFeesAndTaxes is the total of all fees and taxes for the transaction 10. totalNonMGISendFeesAndTaxes is the total of all non-MoneyGram fees and taxes charged to the sender by government agents, banking channels, etc.	optional
amount	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	None	optional

Tag	Datatype	Information and Rules	Display
amountCurrency	string Length: 3 Must be a valid currency code	None	optional
receiveAmounts	complex Maximum number of occurrences: unbounded	None	N/A
receiveAmount	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	None	required
receiveCurrency	string Length: 3 Must be a valid currency code	Use payoutCurrency	not allowed
validCurrencyIndicator	boolean	<i>Additional Information</i> 1. If <code>true</code> , <code>validReceiveAmount</code> , <code>validReceiveCurrency</code> , and <code>validExchangeRate</code> are used to calculate the final payout amount 2. If <code>false</code> , estimated amounts may be available to calculate the final payout amount	optional
payoutCurrency	string Length: 3 Must be a valid currency code	The <code>receiveAmount</code> , <code>totalReceiveFees</code> , <code>totalReceiveTaxes</code> , <code>totalReceiveAmount</code> , and the all 4 of the amount fields in <code>detailReceiveAmounts</code> should be returned in the <code>payoutCurrency</code> for indicative situations (instead of USD). This must be displayed on the application screen as the payout currency regardless of the <code>validCurrencyIndicator</code>	required

Tag	Datatype	Information and Rules	Display
totalReceiveFees	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Total fees charged to the receiver by MoneyGram, agents, government entity, etc.	required
totalReceiveTaxes	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Total taxes charged to the receiver by MoneyGram, agents, government entity, etc.	required
totalReceiveAmount	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Receive amount minus any receive fees/taxes.	required
receiveFeesAreEstimated	boolean	If true, indicates whether the receive-side taxes are "estimates" The word "estimated" must appear before "other fees" only when true.	Conditional
receiveTaxesAreEstimated	boolean	If true, indicates whether the receive-side taxes are "estimates" The word "estimated" must appear before "other taxes" only when true.	conditional
detailReceiveAmounts	complex Maximum number of occurrences: unbounded	None	N/A

Tag	Datatype	Information and Rules	Display
amountType	string Valid values: mgiReceiveFee, nonMGIReceiveFee, mgiReceiveTax, nonMgiReceiveTax	The type of fee or tax <i>Additional Information</i> 1. mgiReceiveFee is the fee amount charged by MoneyGram 2. nonMGIReceiveFee is the total of non-MoneyGram fees charged to the receiver by government agents, banking channels, etc.; MoneyGram does not collect this fee 3. mgiReceiveTax is taxes collected by MoneyGram 4. nonMgiReceiveTax is taxes the agent collects and remits	optional
amount	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	None	optional
amountCurrency	string Length: 3 Must be a valid currency code	None	optional
exchangeRateApplied	decimal Minimum inclusive value: 0 Maximum length: 14	The exchange rate applied between sendCurrency and receiveCurrency. <i>Field Rules</i> 1. Value returned to four decimal places for USA and US territories 2. Value returned to six decimal places elsewhere	required
receiveFeeDisclosureText	boolean	<i>Additional Information</i> 1. If true, the disclosureText field contains disclosure text for the receive transaction fee 2. If false, the disclosureText field does not contain disclosure text for the receive transaction fee	not allowed


Tag	Datatype	Information and Rules	Display
receiveTaxDisclosureText	boolean	<i>Additional Information</i> 1. If <code>true</code> , the <code>disclosureText</code> field contains disclosure text for the receive transaction taxes 2. If <code>false</code> , the <code>disclosureText</code> field does not contain disclosure text for the receive transaction taxes	not allowed
confirmationNumber	string Length: 7	<i>Additional Information</i> 1. Only used for FormFree transactions (if <code>formFreeStaging = true</code>). This is returned when a transaction is successfully staged/set up for completion	optional
receipts		For future use	

5. *commitTransaction*

The agent application uses the [commitTransaction](#) API to commit a send transaction.

Business Rules to Code

1. The [commitTransactionRequest](#) may only be used when the readyForCommit field of the last [sendValidationResponse](#) was true.
2. The [commitTransactionRequest](#) must be sent within the time 30 minutes of the [sendValidationRequest](#).
3. If the agent's application does not receive a commitTransactionResponse within 10-40 seconds, application must send the commitTransactionRequest again. This must be retried up to 3 times. If the retry attempt fails, check transaction status using the [detailLookup](#) API to confirm if transaction was successful.
4. If error code 935 is returned on commit, it must be handled the same way as if the commit response is not received (see rule above).
5. Other errors can be returned on commit stopping the transaction. Application must handle scenarios where the transaction fails (an error code is returned) on commit.
6. Refer to AC1512 Receipts module for detailed information and requirements for receipts.
7. If the transaction is prepared for FormFree (formFreeStaging=true in sendValidationRequest), commitTransaction API is not needed.

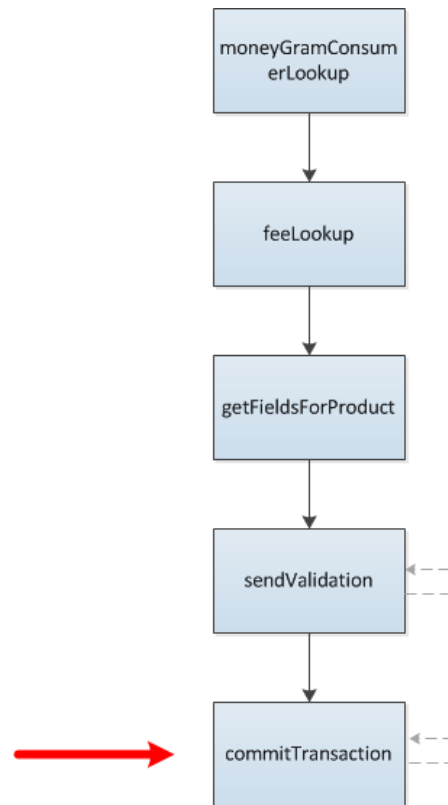Transaction Flow**Figure 12: Location of commitTransaction in Process Flow**

commitTransactionRequest

Field Summary

- **mgTransactionSessionID**
- **productType**
- fieldValues
 - xmlTag
 - fieldValue
- stateRegulatorVersion

Field Detail

Tag	Datatype	Information and Rules	Input	Data
mgTransactionSessionID	string Maximum length: 38	An ID number that uniquely identifies the send transaction across APIs. <i>Additional Information</i> 1. Value must be that returned in the feeLookupResponse	not allowed	required
productType	string Valid values: SEND	None	application	required
fieldValues	complex Maximum number of occurrences: unbounded	For future use	NA	NA
xmlTag	string Maximum length: 80	For future use	NA	NA
fieldValue	String Maximum length: 255	For future use	NA	NA
stateRegulatorVersion	string Maximum length: 20	Version of the state regulator information used on the transaction receipt. Obtain from doddFrankStateRegulatorInfo API. <i>Field Rules</i> 1. Data is required for US agents for this product. 2. Data is not allowed for non-US agents	application	conditional

commitTransactionResponse

Additional Information

1. Display rules only apply to fields that are returned

Field Summary

- referenceNumber
- partnerConfirmationNumber
- partnerName
- freePhoneCallPIN
- tollFreePhoneNumber
- expectedDateOfDelivery
- transactionDateTime
- receiptTextInfo
 - longLanguageCode
 - textTranslation
- Receipts
- referenceNumberTextCode
- referenceNumberText
- referenceNumberConsumerText

Field Detail

Tag	Datatype	Information and Rules	Display
referenceNumber	string Length: 12	Must be printed on receipt	required
partnerConfirmationNumber	string Maximum length: 11	When populated, must be provided on receipt	required
partnerName	string	1. MoneyGram's Directed Sends Partner name when the delivery option is an Account Deposit, Card Deposit or Home Delivery. 2. Data is not returned for a 10 minute service delivery option. 3. Data is required to be displayed after a successfully committed transaction.	required
freePhoneCallPIN	string Maximum length: 14	PIN used to call using the telephone number in <code>tollFreePhoneNumber</code>	optional
tollFreePhoneNumber	string Maximum length: 14	<i>Additional Information</i> 1. Toll-free telephone number used by consumer with <code>freePhoneCallPIN</code> to make free phone call	required
expectedDateOfDelivery	date Format: CCYY-MM-DD	The date a send transaction is expected to be delivered or deposited.	required
transactionDateTime	dateTime Format: CCYY-MM-DDThh:mm:ss.sss-hh:mm The time zone offset is required	<i>Additional Information</i> 1. Value indicates the date and the time at which a particular transaction is successfully completed. 2. Data is always returned	required

Tag	Datatype	Information and Rules	Display
receiptTextInfo	complex Maximum number of occurrences: unbounded	None	N/A
longLanguageCode	string Length: 3	The language of the receipt message.	required
textTranslation	string Maximum length: 2000	Additional information must be printed on the receipt.	required
receipts	complex Maximum number of occurrences: unbounded	For future use. Receipt data when receipts are managed by MoneyGram	N/A
referencenumberTextCode	string maximum length: 20	This is the code used to identify the referenceNumberText and referenceNumberConsumerText. All 3 fields will be populated when a message needs to be displayed to the sender.	optional
referenceNumberText	string Maximum length: 240	Data may be returned due to compliance rules that requires the agent to notify the customer to call MoneyGram. This must be displayed on the screen for the agent to advise the customer	required
referenceNumberConsumerText	string Maximum length: 240	Data may be returned due to compliance rules that requires the agent to notify the customer to call MoneyGram. This must be printed on the receipt, and/or displayed on the screen for customer view.	required

6. *detailLookup*

The agent application uses the [detailLookup](#) API to lookup details including status of a particular transaction (using the reference number originally performed by the location).

Additional Information

1. Agent application can look up a transaction by mgiTransactionSessionID. The session ID can be used to look up the transaction for up to 24 hours to check the transaction status
2. This API can only be used by the original sending location/agent ID.
3. This is an Optional API to code and not required in the actual Send transaction flow.

detailLookupRequest

Field Summary

- referenceNumber
- mgTransactionSessionID
- includeUseData
- operatorName

Field Detail

Tag	Datatype	Information and Rules	Input	Data
referenceNumber	string Maximum length: 12	Required if mgiTransactionSessionID is not used	GUI	required
mgiTransactionSessionID	string Maximum length: 38	An ID number that uniquely identifies the send session transaction across APIs.	application	optional
includeUseData	Boolean Default value: false	<i>Additional Information</i> 1. If <code>true</code>, any data used in agentUseSendData field on the original transaction is returned in the response. 2. If <code>false</code>, any data used in agentUseSendData field during the original transaction is not returned in the response. 3. MoneyGram recommends that if agentUseSendData field is not used by Agents during Send transactions, this field is set to false.	application	required
operatorName	string Maximum length: 7	<i>Additional Information</i> 1. Operator name or operator ID of the associate or user performing the transaction; it must be auto-populated from the agent's system and cannot be editable by the user • Agent Facing – Teller ID/User ID mapped to operatorName • Customer Facing/Self Service (kiosk, online, mobile) – User ID/User Login mapped to operatorName • ATM – unique customer ID (customer number) mapped to operatorName	application	optional

detailLookupResponse

Field Summary

- mgTransactionSessionID
- transactionStatus
- dateTimeSent
- referenceNumber
- freqCustCardNumber
- receiveCountry
- deliveryOption
- senderFirstName
- senderMiddleName
- senderLastName
- senderLastName2
- senderAddress
- senderAddress2
- senderAddress3
- senderCity
- senderState
- senderZipCode
- senderCountry
- senderHomePhone
- receiverFirstName
- receiverMiddleName
- receiverLastName
- receiverLastName2
- receiverAddress
- receiverAddress2
- receiverAddress3
- receiverCity
- receiverState
- receiverZipCode
- receiverCountry
- receiverPhone
- direction1
- direction2
- direction3
- testQuestion
- testAnswer
- messageField1
- messageField2
- senderPhotoIdType
- senderPhotoIdNumber
- senderPhotoIdState
- senderPhotoIdCountry
- senderLegalIdType
- senderLegalIdNumber
- senderDOB
- senderOccupation
- thirdPartyFirstName
- thirdPartyMiddleName
- thirdPartyLastName
- thirdPartyLastName2
- thirdPartyAddress
- thirdPartyAddress2
- thirdPartyAddress3
- thirdPartyCity
- thirdPartyState
- thirdPartyCountry
- thirdPartyZipCode
- thirdPartyDOB
- thirdPartyLegalIdType
- thirdPartyLegalIdNumber
- thirdPartyOccupation
- thirdPartyOrg
- senderBirthCity
- senderBirthCountry
- senderPassportIssueDate
- senderPassportIssueCity
- senderPassportIssueCountry
- operatorName

- validIndicator
- agentUseSendData
- customerReceiveNumber
- receiveAgentID
- receiveAgentName
- receiveAgentAbbreviation
- expectedDateOfDelivery
- redirectIndicator
- redirectInfo
 - originalSendAmount
 - originalSendCurrency
 - originalSendFee
 - originalExchangeRate
 - originalReceiveAmount
 - originalReceiveCurrency
 - originalReceiveCountry
 - newSendFee
 - newExchangeRate
 - newReceiveAmount
 - newReceiveCurrency
 - feeDifference
 - redirectType
- agentCheckAuthorizationNumber
- accountNickname
- promotionInfo
 - promotionCode
 - promotionDiscountId
 - promotionCategoryId
 - promotionDiscount
 - promotionDiscountAmount
 - promotionErrorCode
 - promotionErrorMessage
 - o longLanguageCode
 - o textTranslation
- disclosureText
 - longLanguageCode
 - textTranslation
- feeRefundRequired
- sendAmounts
 - sendAmount
 - sendCurrency
 - totalSendFees
 - totalDiscountAmount
 - totalSendTaxes
 - totalAmountToCollect
 - detailSendAmounts
 - amountType
 - amount
 - amountCurrency
- receiveAmounts
 - receiveAmount
 - receiveCurrency
 - validCurrencyIndicator
 - payoutCurrency
 - totalReceiveFees
 - totalReceiveTaxes
 - totalReceiveAmount
 - receiveFeesAreEstimated
 - receiveTaxesAreEstimated
 - detailReceiveAmounts
 - amountType
 - amount
 - amountCurrency
- exchangeRateApplied
- referenceNumberTextCode
- referenceNumberText

Field Detail

Tag	Datatype	Information and Rules	Display
mgTransactionSessionID	string Maximum length: 38	An ID number that uniquely identifies the send transaction across APIs. <i>Additional Information</i> 1. Value must be that returned in the feeLookupResponse	not allowed
transactionStatus	string Valid values: AVAIL, CANCL, RECVD, REFND, AFR, UNCOMMITTED, PRCSS	<i>Additional Information</i> 1. AVAIL is available 2. CANCL is canceled 3. RECVD is received 4. REFND is refunded 5. AFR is available for refund 6. UNCOMMITTED is pending commit 7. PRCSS is Processing	optional
dateTimeSent	dateTime Format: CCYY-MM-DDThh:mm:ss.sss-hh:mm The time zone offset is required	None	optional
referenceNumber	string Maximum length: 12	None	optional
freqCustCardNumber	string Maximum length: 20	The sender's MoneyGram Plus Rewards number.	optional
receiveCountry	string Length: 3	None	optional

Tag	Datatype	Information and Rules	Display
deliveryOption	string	None	optional
senderFirstName	string Maximum length: 40	See Data Quality Edits Addendum for data quality rules	optional
senderMiddleName	string Length: 40	See Data Quality Edits Addendum for data quality rules	optional
senderLastName	string Maximum length: 40	See Data Quality Edits Addendum for data quality rules	optional
senderLastName2	string Maximum length: 40	See Data Quality Edits Addendum for data quality rules	optional
senderAddress	string Maximum length: 80	See Data Quality Edits Addendum for data quality rules	optional
senderAddress2	string Maximum length: 80	See Data Quality Edits Addendum for data quality rules	optional
senderAddress3	string Maximum length: 80	See Data Quality Edits Addendum for data quality rules	optional
senderCity	string Maximum length: 40	None	optional
senderState	string Length: 2	None	optional
senderZipCode	string length: 10		optional

Tag	Datatype	Information and Rules	Display
senderCountry	string Length: 3	None	optional
senderHomePhone	string Maximum length: 14	None	optional
receiverFirstName	string Maximum length: 40	See Data Quality Edits Addendum for data quality rules	optional
receiverMiddleName	string Maximum length: 40	See Data Quality Edits Addendum for data quality rules	optional
receiverLastName	string Maximum length: 40	See Data Quality Edits Addendum for data quality rules	optional
receiverLastName2	string Maximum length: 40	See Data Quality Edits Addendum for data quality rules	optional
receiverAddress	string Maximum length: 80	See Data Quality Edits Addendum for data quality rules	optional
receiverAddress2	string Maximum length: 80	See Data Quality Edits Addendum for data quality rules	optional
receiverAddress3	string Maximum length: 80	See Data Quality Edits Addendum for data quality rules	optional
receiverCity	string Maximum length: 40	None	optional
receiverState	string Length: 2	None	optional

Tag	Datatype	Information and Rules	Display
receiverZipCode	string Minimum length: 3 Maximum length: 10		optional
receiverCountry	string Length: 3	None	optional
receiverPhone	string Maximum length: 14	None	optional
direction1	string Maximum length: 40	<i>Field Rules</i> 1. Only used with delivery options HDS_USD, HDS_LOCAL, and HOME_DELIVERY	optional
direction2	string Maximum length: 40	<i>Field Rules</i> 1. Only used with delivery options HDS_USD, HDS_LOCAL, and HOME_DELIVERY	optional
direction3	string Maximum length: 40	<i>Field Rules</i> 1. Only used with delivery options HDS_USD, HDS_LOCAL, and HOME_DELIVERY	optional
testQuestion	string Maximum length: 30	None	optional
testAnswer	string Maximum length: 30	None	optional
messageField1	string Maximum length: 40	None	optional
messageField2	string Maximum length: 40	None	optional

Tag	Datatype	Information and Rules	Display
senderPhotoIdType	string	None	optional
senderPhotoIdNumber	string Minimum length: 4 Maximum length: 25	<i>Field Rules</i> 1. Only alphanumeric and hyphen (-) characters allowed	optional
senderPhotoIdState	string Length: 2	None	optional
senderPhotoIdCountry	string Length: 3	None	optional
senderLegalIdType	string	None	optional
senderLegalIdNumber	string Minimum length: 4 Maximum length: 20	<i>Field Rules</i> 1. Only alphanumeric and hyphen (-) characters allowed	optional
senderDOB	date Format: CCYY-MM-DD	<i>Field Rules</i> 1. Cannot be later than the current date	optional
senderOccupation	string Maximum length: 30	None	optional
thirdPartyFirstName	string Maximum length: 40	See Data Quality Edits Addendum for data quality rules	optional
thirdPartyMiddleName	string Length: 40	See Data Quality Edits Addendum for data quality rules	optional
thirdPartyLastName	string Maximum length: 40	See Data Quality Edits Addendum for data quality rules	optional

Tag	Datatype	Information and Rules	Display
thirdPartyLastName2	string Maximum length: 40	See Data Quality Edits Addendum for data quality rules	optional
thirdPartyAddress	string Maximum length: 80	See Data Quality Edits Addendum for data quality rules	optional
thirdPartyAddress2	string Maximum length: 80	See Data Quality Edits Addendum for data quality rules	optional
thirdPartyAddress3	string Maximum length: 80	See Data Quality Edits Addendum for data quality rules	optional
thirdPartyCity	string Maximum length: 40	None	optional
thirdPartyState	string Length: 2	None	optional
thirdPartyCountry	string Length: 3	None	optional
thirdPartyZipCode	string Minimum length: 3 Maximum length: 10		optional
thirdPartyDOB	date Format: CCYY-MM-DD	<i>Field Rules</i> 1. Cannot be later than the current date	optional
thirdPartyLegalIdType	string	None	optional

Tag	Datatype	Information and Rules	Display
thirdPartyLegalIdNumber	string Minimum length: 4 Maximum length: 20	<i>Field Rules</i> 1. Only alphanumeric and hyphen (-) characters allowed	optional
thirdPartyOccupation	string Maximum length: 30	None	optional
thirdPartyOrg	string Maximum length: 60	None	optional
senderBirthCity	string Maximum length: 40	None	optional
senderBirthCountry	string Length: 3	None	optional
senderPassportIssueDate	date Format: CCYY-MM-DD	None	optional
senderPassportIssueCity	string Maximum length: 40	None	optional
senderPassportIssueCountry	string Length: 3	None	optional
operatorName	string Maximum length: 7	None	optional

Tag	Datatype	Information and Rules	Display
validIndicator	boolean	<i>Additional Information</i> - If <code>true</code>, <code>validReceiveAmount</code>, <code>validReceiveCurrency</code>, and <code>validExchangeRate</code> are used to calculate the final payout amount - If <code>false</code>, the transaction receive amount may be converted into another currency before being paid using an independent exchange rate	optional
agentUseSendData	string Maximum length: 200	None	optional
customerReceiveNumber	string Maximum length: 20 Validation pattern: MG123456789	The unique MoneyGram-managed RRN (receiver registration number) that identifies the receiver of the transaction.	optional
receiveAgentID	string Length: 8	None	not allowed
receiveAgentName	string Maximum length: 40	None	optional
receiveAgentAbbreviation	string Maximum length: 10	The abbreviated form of the agent's name to use if there isn't enough space to use <code>receiveAgentName</code> .	optional
expectedDateOfDelivery	date Format: CCYY-MM-DD	The date a send transaction is expected to be delivered.	optional
redirectIndicator	boolean	<i>Additional Information</i> - If <code>true</code>, the transaction is a currency redirect - If <code>false</code>, the transaction is not a currency redirect	not allowed

Tag	Datatype	Information and Rules	Display
redirectInfo	complex Maximum number of occurrences: 1	None	N/A
originalSendAmount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	None	optional
originalSendCurrency	string Length: 3 Must be a valid currency code	None	optional
originalSendFee	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	None	optional
originalExchangeRate	decimal Minimum exclusive value: 0 Maximum length: 14	<i>Field Rules</i> 1. Value returned to four decimal places for USA and US territories 2. Value returned to six decimal places elsewhere	optional
originalReceiveAmount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	None	optional
originalReceiveCurrency	string Length: 3	None	optional

Tag	Datatype	Information and Rules	Display
originalReceiveCountry	string Length: 3	None	optional
newSendFee	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	None	optional
newExchangeRate	decimal Minimum exclusive value: 0 Maximum length: 14	<i>Field Rules</i> 1. Value returned to four decimal places for USA and US territories 2. Value returned to six decimal places elsewhere	optional
newReceiveAmount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	None	optional
newReceiveCurrency	string Length: 3	None	optional
feeDifference	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	None	optional
redirectType	string Valid values: CURRENCY_REDIRECT, COUNTRY_REDIRECT, COUNTRY_CURRENCY_REDIRECT	None	optional

Tag	Datatype	Information and Rules	Display
agentCheckAuthorizationNumber	string Maximum length: 5	None	NA
accountNickname	string Maximum length: 30	None	required
promotionInfo	complex Maximum number of occurrences: unbounded	None	N/A
promotionCode	string Maximum length: 20	The code used to identify the promotion.	required
promotionDiscountId	string Length: 2 Valid values: 01, 02, 03	The code used to identify the type of discount. <i>Additional Information</i> 1. 01 is flat fee 2. 02 is amount off 3. 03 is percent off	NA
promotionCategoryId	string Length: 2	The code used to identify the promotion category.	NA
promotionDiscount	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	The promotion's discount value as setup in MoneyGram system based on the promotionDiscountId.	NA
promotionDiscountAmount	decimal Minimum inclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	The discount amount applied to nonDiscountedFeeExclTax.	required

Tag	Datatype	Information and Rules	Display
promotionErrorCode	string Length: 4	The error code returned if the promotion code was invalid.	required
promotionErrorMessage	complex Maximum number of occurrences: unbounded	None	N/A
longLanguageCode	string Length: 3	The language of the promotional message.	required
textTranslation	string Maximum length: 2000	The translated promotional message.	required
disclosureText	complex Maximum number of occurrences: unbounded		N/A
longLanguageCode	string Length: 3	The language of the disclosure message.	required
textTranslation	string Maximum length: 2000	Additional disclosure info when taxes/fees can't be determined based on included fields.	required
feeRefundRequired	boolean	<i>Additional Information</i> 1. If <code>true</code> , the transaction fee must be refunded when reversing the transaction 2. If <code>false</code> , the transaction fee is not refunded when reversing the transaction	N/A
sendAmounts	complex Maximum number of occurrences: unbounded	None	N/A

Tag	Datatype	Information and Rules	Display
sendAmount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	None	required
sendCurrency	string Length: 3	None	required
totalSendFees	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Sum of <code>discountedMGIFee</code> and <code>nonMGISendFee</code> . Total of all fees charged to sender by MoneyGram, agents, etc.	required
totalDiscountAmount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Discount amount applied to <code>nonDiscountedFeeExclTax</code> .	required
totalSendTaxes	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Total taxes charged to the sender by MoneyGram, government agents, etc.	required
totalAmountToCollect	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Total of all fees, taxes, and the send amount.	required

Tag	Datatype	Information and Rules	Display
detailSendAmounts	complex Maximum number of occurrences: unbounded	None	N/A
amountType	string Valid values: mgiNonDiscountedSendFee, nonMgiSendFee, totalNonDiscountedFees, discountedMgiSendFee, mgiSendTax, nonMgiSendTax, totalMgiCollectedFeesAndTaxes, totalAmountToMgi, totalSendFeesAndTaxes, totalNonMGISendFeesAndTaxes	The type of fee or tax <i>Additional Information</i> 1. mgiNonDiscountedSendFee is the fee amount charged by MoneyGram before discounts are applied 2. nonMgiSendFee is the total of non-MoneyGram fees charged to the sender by government agents, banking channels, etc.; MoneyGram does not collect this fee 3. totalNonDiscountedFees is the sum of mgiNonDiscountedFee and nonMGISendFee 4. discountedMgiSendFee is the fee collected by MoneyGram after discounts 5. mgiSendTax is taxes collected by MoneyGram 6. nonMgiSendTax is taxes the agent collects and remits 7. totalMgiCollectedFeesAndTaxes is the total taxes and fees charged by MoneyGram 8. totalAmountToMgi is nonMGISendFee and nonMGISendTax subtracted from totalAmountToCollect; this is the amount MoneyGram collects from the sending agent at settlement 9. totalSendFeesAndTaxes is the total of all fees and taxes for the transaction 10. totalNonMGISendFeesAndTaxes is the total of all non-MoneyGram fees and taxes charged to the sender by government agents, banking channels, etc.	optional
amount	decimal	None	optional

Tag	Datatype	Information and Rules	Display
amountCurrency	string Length: 3	None	optional
receiveAmounts	complex Maximum number of occurrences: unbounded	None	N/A
receiveAmount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	None	required
receiveCurrency	string Length: 3	None	required
validCurrencyIndicator	boolean	<i>Additional Information</i> 1. If <code>true</code> , <code>validReceiveAmount</code> , <code>validReceiveCurrency</code> , and <code>validExchangeRate</code> are used to calculate the final payout amount 2. If <code>false</code> , estimated amounts may be available to calculate the final payout amount	optional
payoutCurrency	string Length: 3	None	required
totalReceiveFees	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Total fees charged to the receiver by MoneyGram, agents, government entity, etc.	required

Tag	Datatype	Information and Rules	Display
totalReceiveTaxes	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Total taxes charged to the receiver by MoneyGram, agents, government entity, etc.	required
totalReceiveAmount	decimal Minimum exclusive value: 0 Maximum length: 14 Maximum decimal digits: 3	Receive amount minus any receive fees/taxes.	required
receiveFeesAreEstimated	boolean	If "true" indicates whether the receive-side fees are "estimates"	required
receiveTaxesAreEstimated	boolean	If "true" indicates whether the receive-side taxes are "estimates"	required
detailReceiveAmounts	complex Maximum number of occurrences: unbounded	None	N/A
amountType	string Valid values: mgiReceiveFee, nonMGIReceiveFee, mgiReceiveTax, nonMgiReceiveTax	The type of fee or tax Additional Information 1. mgiReceiveFee is the fee amount charged by MoneyGram 2. nonMGIReceiveFee is the total of non-MoneyGram fees charged to the receiver by government agents, banking channels, etc.; MoneyGram does not collect this fee 3. mgiReceiveTax is taxes collected by MoneyGram 4. nonMgiReceiveTax is taxes the agent collects and remits	optional
amount	decimal	None	optional

Tag	Datatype	Information and Rules	Display
amountCurrency	string Length: 3	None	optional
exchangeRateApplied	decimal Minimum inclusive value: 0 Maximum length: 14	The exchange rate applied between <code>sendCurrency</code> and <code>receiveCurrency</code> . <i>Field Rules</i> 1. Value returned to four decimal places for USA and US territories 2. Value returned to six decimal places elsewhere	required
referencenumberTextCode	string maximum length: 20	This is the code used to identify the <code>referenceNumberText</code> message. Both fields will be populated when a message needs to be displayed to the sender.	optional
referenceNumberText	string Maximum length: 240	Data may be returned due to compliance rules that requires the agent to notify the customer to call MoneyGram. This must be displayed on the screen for the agent to advise the customer	required

Table of Figures

Figure 1: Explanation of Process Flow Diagrams	v
Figure 2: Send Process Flow	1
Figure 3: Pre-Payment Disclosure.....	3
Figure 4: Agent Receipt Example.....	4
Figure 5: Customer Receipt Example	5
Figure 6: Location of moneyGramConsumerLookup in Process Flow	7
Figure 7: Delivery Options Field Layout Example	22
Figure 8: Delivery Options Screen Example	23
Figure 9: Location of feeLookup in Process Flow	24
Figure 10: Location of getFieldsForProduct in Process Flow	43
Figure 11: Location of sendValidation in Process Flow	57
Figure 12: Location of commitTransaction in Process Flow	100



CORPORATE OFFICE	2828 N. Harwood, Floor 15 Dallas, TX 75201 USA
TOLL FREE	1.800.328.5678
WEB SITE	www.moneygram.com