



Wallet to Bank

Billing & IT – Mobile Money and VAS

INSIGHT PAYMENT GATEWAY SPECIFICATION DOCUMENT

Wallet to Bank

Version 1.4

18 July 2023

Document Owner: Belewete, Christian, Vodacom DRC

**Wallet to Bank****Billing & IT – Mobile Money and VAS**

Version History

Version	Date	Changed By	Change summary
1.0.	12-Sep-18	Christian Belewete	Initial draft
1.1	12-Sep-18	Christian Belewete	Updating pre-requisites Updating Callback request field names
1.2	5-Apr-19	Christian Belewete	Updating Callback request field names
1.3	4-Apr-22	Christian Belewete	Updating error codes
1.4	18-Jul-23	Christian Belewete	Adding Basic Authorization Updating network architecture

**Wallet to Bank****Billing & IT – Mobile Money and VAS**

Contents

Version History.....	2
1 Introduction	4
1.1 Prerequisites	4
2 Service flow	5
3 API Calls Parameters	7
3.1 Third Party Signal (Callback Request)	7
3.1.1 Request Parameters.....	7
3.1.2 Response Parameters	7
4 API Calls Samples	8
4.1 Third Party Signal	8
4.1.1 Request	8
4.1.2 Response	11

Wallet to Bank

Billing & IT – Mobile Money and VAS

1 Introduction

The iNSight Payment Gateway sits in front of G2 which manages a customer's wallet. This wallet, in the case of mobile network operators, the "Mobile Money Platform" is physically separated from the payment gateway (sometimes also referred to as a "Broker" or an "Orchestration Layer") providing the benefit of a simplified interface and abstraction of both function and security.

1.1 Prerequisites


Below items are required before for System Owner of iNSight Payment Gateway to proceed with Third-Party onboarding

#	ITEMS	OWNER
1	Ensure end to end connectivity	VDRC / NETWORK TEAM
2	Third-Party Identification details : - Name - Contacts - ShortCode	VDRC / M-COMMERCE TEAM
3	Third-Party to provide Callback URL for notification (This service must run on Port 443 or 3000)	THIRD-PARTY
4	Third-Party username creation	VDRC / PAYMENT GATEWAY OWNER


Wallet to Bank

Billing & IT – Mobile Money and VAS

2 Service flow

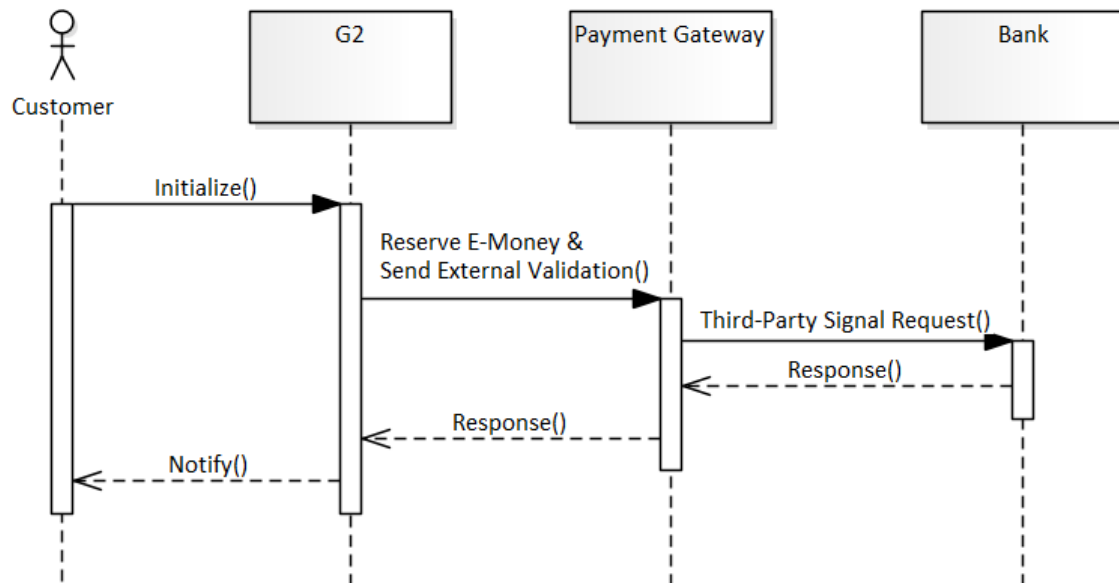

3 Network architecture

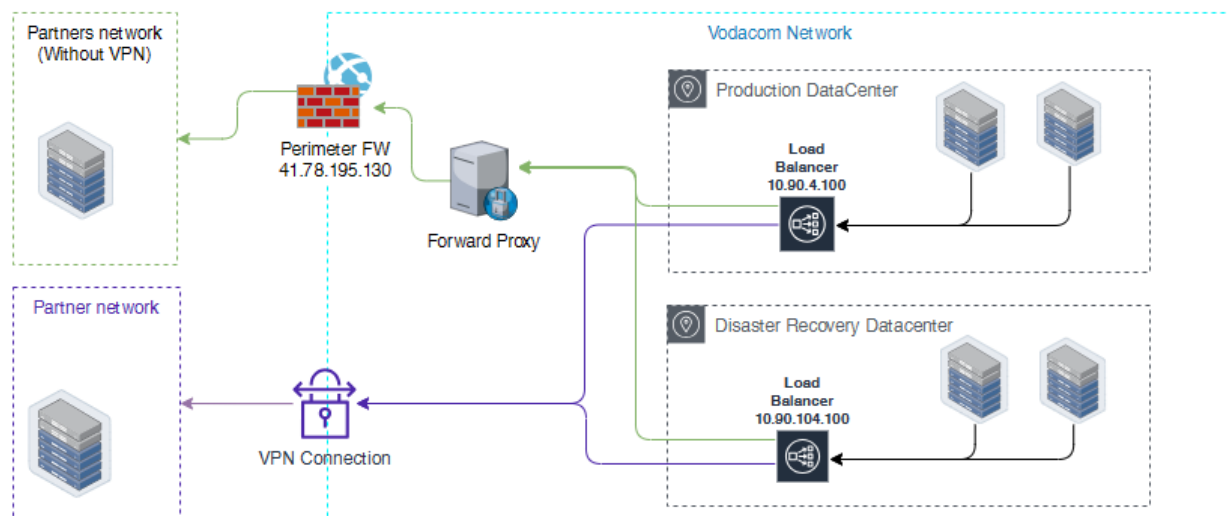

Vodacom Proprietary and Confidential. Rev4

Copyright © 2023. Vodacom Congo S.A

Page 5 of 11



Wallet to Bank

Billing & IT – Mobile Money and VAS

Wallet to Bank

Billing & IT – Mobile Money and VAS

4 API Calls Parameters

4.1 Third Party Signal (Callback Request)

4.1.1 Request Parameters

Name	Notes	Type
Request Data Items		
MSISDN	<i>MSISDN of the customer</i>	String
Currency	<i>Currency Code for the transaction. For example: CDF or USD</i>	String
Amount	<i>Amount of the said currency to transfer from the Bank to the customer</i>	String
TransactionDate	<i>Date of the transaction. Format YYYYMMDDHH24MiSS.</i>	Date
TransactionID	<i>G2 TransactionID</i>	String
BankShortCode	<i>Shortcode of the ThirdParty</i>	String
BankAccount	<i>Customer's bank account number.</i>	String
TransactionType	<i>The type of transaction.on Third Party side</i>	String
CustomerKYC	<i>Customer KYC</i>	String Optional

4.1.2 Response Parameters

Name	Notes	Type	Sample Values
Response Data Items			
BankReceipt	<i>The unique transaction ID from the Bank</i>	String	12sdxq3634dadsas242
ResponseCode	<i>Code indicating the result of the transaction</i>	String	0, -1, -2, ... 0 for Success Any other code for failure
ResponseDescription	<i>Description indicating the result of the transaction</i>	String	OK, Failed
AccountName	<i>Customer's Account Name</i>	String	John Doe

5 API Calls Samples

5.1 Third Party Signal

5.1.1 Request (Without Basic Auth)

Body :

```
<?xml version="1.0" encoding="utf-8"?>
<soapenv:Envelope
  xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:soap="http://www.4cgroupp.co.za/soapauth"
  xmlns:gen="http://www.4cgroupp.co.za/genericsoap">
  <soapenv:Header>
    <soap:EventID>1</soap:EventID>
  </soapenv:Header>
  <soapenv:Body>
    <gen:getGenericResult>
      <Request>
        <dataItem>
          <name>MSISDN</name>
          <value>243811231231</value>
          <type>String</type>
        </dataItem>
        <dataItem>
          <name>Currency</name>
          <value>USD</value>
          <type>String</type>
        </dataItem>
        <dataItem>
          <name>Amount</name>
          <value>200</value>
          <type>String</type>
        </dataItem>
        <dataItem>
          <name>TransactionDate</name>
          <value> 20190405093213 </value>
          <type>Date</type>
        </dataItem>
        <dataItem>
          <name>TransactionID</name>
          <value>6D555YXUZD</value>
          <type>String</type>
        </dataItem>
      </Request>
    </gen:getGenericResult>
  </soapenv:Body>
</soapenv:Envelope>
```

**Wallet to Bank****Billing & IT – Mobile Money and VAS**

```
<dataItem>
  <name>BankShortCode</name>
  <value>123456</value>
  <type>String</type>
</dataItem>
<dataItem>
  <name> BankAccount </name>
  <value>1234567890</value>
  <type>String</type>
</dataItem>
<dataItem>
  <name>TransactionType</name>
  <value>VA</value>
  <type>String</type>
</dataItem>
</Request>
</gen:getGenericResult>
</soapenv:Body>
</soapenv:Envelope>
```

5.1.2 Request (With Basic Auth)

The basic Authorization value will be provided by the partner and configured on the Payment Gateway

Header :
Authorization : Basic dGVzdDp0ZXN0

Body :

```
<?xml version="1.0" encoding="utf-8"?>
<soapenv:Envelope
  xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:soap="http://www.4cgroup.co.za/soapauth"
  xmlns:gen="http://www.4cgroup.co.za/genericsoap">
  <soapenv:Header>
    <soap:EventID>1</soap:EventID>
  </soapenv:Header>
  <soapenv:Body>
    <gen:getGenericResult>
      <Request>
        <dataItem>
          <name>MSISDN</name>
          <value>243811231231</value>
          <type>String</type>
```

**Wallet to Bank****Billing & IT – Mobile Money and VAS**

```
</dataItem>
<dataItem>
  <name>Currency</name>
  <value>USD</value>
  <type>String</type>
</dataItem>
<dataItem>
  <name>Amount</name>
  <value>200</value>
  <type>String</type>
</dataItem>
<dataItem>
  <name>TransactionDate</name>
  <value> 20190405093213 </value>
  <type>Date</type>
</dataItem>
<dataItem>
  <name>TransactionID</name>
  <value>6D555YXUZD</value>
  <type>String</type>
</dataItem>
<dataItem>
  <name>BankShortCode</name>
  <value>123456</value>
  <type>String</type>
</dataItem>
<dataItem>
  <name> BankAccount </name>
  <value>1234567890</value>
  <type>String</type>
</dataItem>
<dataItem>
  <name>TransactionType</name>
  <value>VA</value>
  <type>String</type>
</dataItem>
</Request>
</gen:getGenericResult>
</soapenv:Body>
</soapenv:Envelope>
```

Wallet to Bank**Billing & IT – Mobile Money and VAS**

5.1.3 Response

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<response>
  <dataItem>
    <name>BankReceipt</name>
    <type>String</type>
    <value>ABCDE12345</value>
  </dataItem>
  <dataItem>
    <name>ResponseCode</name>
    <type>String</type>
    <value>0</value>
  </dataItem>
  <dataItem>
    <name>ResponseDescription</name>
    <type>String</type>
    <value>Success</value>
  </dataItem>
  <dataItem>
    <name>AccountName</name>
    <type>String</type>
    <value>John Doe</value>
  </dataItem>
</response>
```