

PROJECT NAME: M-PESA	
DOCUMENT NAME: B2C API SPECIFICATION	VERSION: 1.3
COMPANY/DIVISION: PRODUCT AND SERVICE DEVELOPMENT	DATE: 18 TH JUNE 2013

B2C API Specification

PROJECT NAME: M-PESA	
DOCUMENT NAME: B2C API SPECIFICATION	VERSION: 1.3
COMPANY/DIVISION: PRODUCT AND SERVICE DEVELOPMENT	DATE: 18 TH JUNE 2013

Approvals

This document needs below approvals for implementation.

Author(s)	Name	Signature	Date
Service Development Engineer	Eneth Kubai		
Reviewers	Name	Signature	Date
Senior Manager Service Development	Reginald Tole		
Principal Service Development Engineer	Eric Mokaya		

Revision Log

Revision Number	Revision Date	Revision	Revision made by
1.0	18th June, 2013	Initial Draft	Eneth Kubai
1.1	9 th July, 2013	Added section 3.8.1: Password Encryption	Eric Mokaya
1.2	29 th July 2013	Added Result codes	Eneth Kubai
1.3	13 th Jan 2014	Added Result code explanations	Eneth Kubai

PROJECT NAME: M-PESA	
DOCUMENT NAME: B2C API SPECIFICATION	VERSION: 1.3
COMPANY/DIVISION: PRODUCT AND SERVICE DEVELOPMENT	DATE: 18 TH JUNE 2013

Abbreviations

Term	Definition
API	Application Programming Interface
B2C	Business to Customer
Broker	Service Access Gateway
SP	Service Provider

PROJECT NAME: M-PESA	
DOCUMENT NAME: B2C API SPECIFICATION	VERSION: 1.3
COMPANY/DIVISION: PRODUCT AND SERVICE DEVELOPMENT	DATE: 18 TH JUNE 2013

Table of Contents

Approvals.....	ii
Revision Log.....	ii
Abbreviations	iii
1 Introduction.....	6
1.1 Scope	6
2 Message Flow Description.....	7
3 Data Type Definition.....	8
3.1 IdentityType enumeration.....	8
3.2 IdentifierType enumeration	8
3.3 ParameterType structure	8
3.4 Parameters structure	8
3.5 ReferenceData structure	8
3.6 Transaction structure	9
3.7 Caller structure	9
3.8 Initiator structure	10
3.8.1 Password Encryption	10
3.9 PrimartyParty structure.....	11
3.10 ReceiverParty structure	11
3.11 AccessDevice structure	11
3.12 Identity structure	11
3.13 Request structure	11
3.14 Response structure.....	12
3.15 ResultParameters structure	12
3.16 Result structure.....	12
3.17 Result code	12
4 Web Service Interface Definition.....	17
4.1 Interface: RequestMgrPortType	17
4.1.1 Operation: GenericAPIRequest	17
4.2 Interface: ResultMgrPortType	20
4.2.1 Operation: GenericAPIResult.....	20
4.3 Interface: QueueTimeoutNotificationPort	21
4.3.1 Operation: notifyQueueTimeout.....	21

PROJECT NAME: M-PESA	
DOCUMENT NAME: B2C API SPECIFICATION	VERSION: 1.3
COMPANY/DIVISION: PRODUCT AND SERVICE DEVELOPMENT	DATE: 18 TH JUNE 2013

4.4	Interface: QueryTransactionPort	22
4.4.1	Operation: queryTransaction	22
5	Example	25
5.1	GenericAPIRequest	25
5.1.1	The 3rd party send B2C request to the Broker	25
5.1.2	The Broker return response to the 3rd party	30
5.2	GenericAPIResult	32
5.2.1	The Broker send notification to the 3rd party	32
5.2.2	The 3rd party return response to the Broker	33
5.3	notifyQueueTimeout	34
5.3.1	The Broker send notification to the 3rd party	34
5.3.2	The 3rd party return response to the Broker	35
5.4	queryTransaction	36
5.4.1	The 3rd party sends query request to the Broker	36
5.4.2	The Broker return response to the 3rd party	37

PROJECT NAME: M-PESA	
DOCUMENT NAME: B2C API SPECIFICATION	VERSION: 1.3
COMPANY/DIVISION: PRODUCT AND SERVICE DEVELOPMENT	DATE: 18 TH JUNE 2013

1 Introduction


1.1 Scope

The present document specifies the real time B2C Web Service aspects of the interface. All aspects of B2C Web Service are defined here, these being:

- Message Flow Description
- Data Type Definition
- Web Service Interface Definition
- WSDL for this specification
- Example

PROJECT NAME: M-PESA	
DOCUMENT NAME: B2C API SPECIFICATION	VERSION: 1.3
COMPANY/DIVISION: PRODUCT AND SERVICE DEVELOPMENT	DATE: 18 TH JUNE 2013

2 Message Flow Description

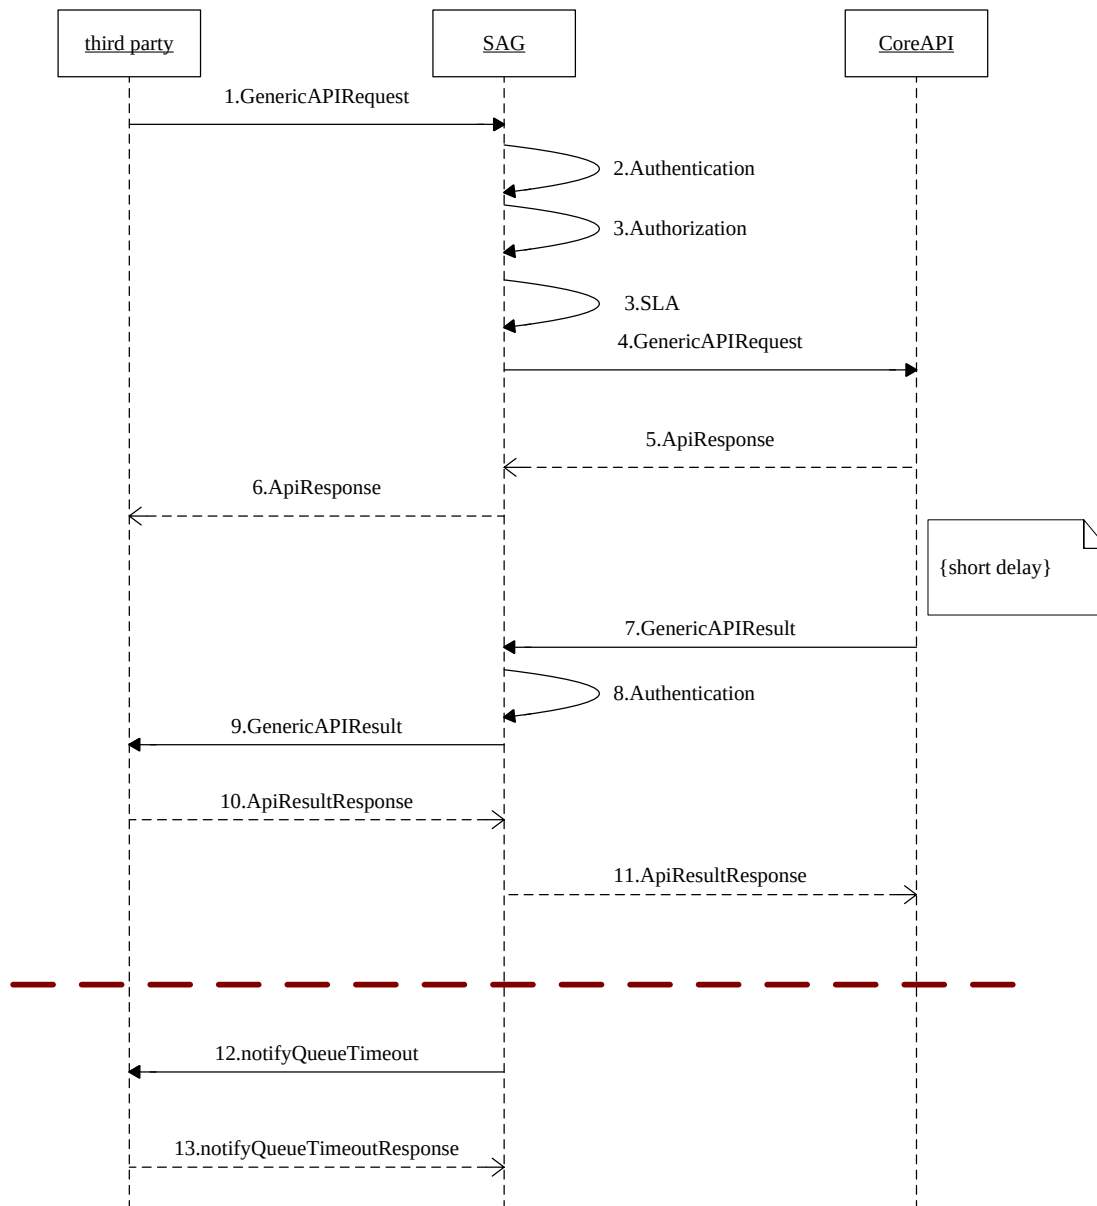

PROJECT NAME: M-PESA	
DOCUMENT NAME: B2C API SPECIFICATION	VERSION: 1.3
COMPANY/DIVISION: PRODUCT AND SERVICE DEVELOPMENT	DATE: 18 TH JUNE 2013

3 Data Type Definition

3.1 IdentityType enumeration

List of IdentityType values.

Enumeration	Description
1000	Customer
2000	SPOperator
3000	OrganizationOperator
5000	Organization
6000	Till
8000	SP

3.2 IdentifierType enumeration

List of IdentityType values.

Enumeration	Description
1	MSISDN
2	TillNumber
3	SPShortCode
4	OrganizationShortCode
5	IdentityID
6	O2CLink
9	SPOperatorCode
10	POSNumber
11	OrganizationOperatorUserName
12	OrganizationOperatorCode
13	VoucherCode

3.3 ParameterType structure

Element name	Element type	Optional	Description
Key	xsd:string	No	It indicates a parameter name.
Value	xsd:string	No	It indicates a parameter value.

3.4 Parameters structure

Element name	Element type	Optional	Description
Parameter	ParameterType[1..unbounded]	No	It is used to carry specific parameters for specific transaction or business operation.

3.5 ReferenceData structure

Element name	Element type	Optional	Description
ReferenceItem	ParameterType[1..unbounded]	No	It is used carry some reference data that MM need not analyze but need to record it into transaction log..

PROJECT NAME: M-PESA	
DOCUMENT NAME: B2C API SPECIFICATION	VERSION: 1.3
COMPANY/DIVISION: PRODUCT AND SERVICE DEVELOPMENT	DATE: 18 TH JUNE 2013

3.6 Transaction structure

Element name	Element type	Optional	Description
CommandID	xsd:string	No	The unique identifier of transaction/business operation. Max length is 64.eg - SalaryPayment - BusinessPayment - BusinessPaymentWithWithdrawalChargePaid - SalaryPaymentWithWithdrawalChargePaid - PromotionPayment - TransferFromBankToCustomer
LanguageCode	xsd:string	Yes	It indicates language. It's reserved.
OriginatorConversationID	xsd:string	No	The unique identifier of the request message generated by third party. It is used to identify a request between the third party and MM. Max length is 128
ConversationID	xsd:string	Yes	The unique identifier generated by MM for a previous request message. It is used to support communication multi-times between the third party and MM for one operation/transaction.
Remark	xsd:string	Yes	The remark information about this operation. Max length is 255
EncryptedParameters	xsd:string	Yes	It is used to carry the value for the element Parameters which are encrypted. The value for this parameter should be a CDATA and encode with base64
Parameters	Parameters	Yes	It is used to carry specific parameters for specific transaction or business operation. If the element EncryptedParameters presents, this parameter should not present.
ReferenceData	ReferenceData	Yes	It is used carry some reference data that MM need not analyze but need to record it into transaction log.
Timestamp	xsd:string	No	The timestamp generated by the third party.

3.7 Caller structure

Element name	Element type	Optional	Description
CallerType	xsd:integer	No	Indicates the type of the caller: 2-APICaller 3-Other(Reserved)
ThirdPartyID	xsd:string	No	The unique identifier of a third party system defined in MM. It indicates the third party which initiates the request. Max length is 20
Password	xsd:string	Yes	This security credential of the ThirdPartyID defined in MM. If the password feature for third party is used in MM, then this parameter must be presented in the request message.
Checksum	xsd:string	Yes	Currently it is unused. It is reserved for API security.
ResultURL	xsd:string	Yes	It indicates the destination URL where Broker should send the result message to.

PROJECT NAME: M-PESA	
DOCUMENT NAME: B2C API SPECIFICATION	VERSION: 1.3
COMPANY/DIVISION: PRODUCT AND SERVICE DEVELOPMENT	DATE: 18 TH JUNE 2013

3.8 Initiator structure

Element name	Element type	Optional	Description
IdentifierType	IdentifierType	No	It indicates the identifier type of the initiator. The value of this parameter must be a valid identifier type supported by MM.
Identifier	xsd:string	No	It indicates the identifier of the initiator. Its value must match the inputted value of the parameter IdentifierType.
SecurityCredential	xsd:string	No	It indicates the security credential of the initiator. Its value must match the inputted value of the parameter IdentifierType.
ShortCode	xsd:string	Yes	When the initiator is an organization operator, this parameter must be present in the request to indicate which organization the operator belongs to. If the initiator is not an organization operator, this parameter should not be present.

3.8.1 Password Encryption

The Caller will be required to confirm its authority to act on behalf of the Initiator (in other words, a specific B2C organisation) by presenting the user name and password for the Initiator, the latter encrypted with the public key from an X509 certificate issued to the Initiator specifically for this purpose.

The following algorithm must be followed by the Initiator to encrypt passwords:

First, create the block of data to be encrypted:

- Write the unencrypted password value.
- Then, encrypt the block of data created in step 1 with the public portion of the password key certificate. Use the RSA algorithm, and use PKCS #1.5 padding (not OAEP), and add the result to the encrypted stream – this becomes the encrypted password which is submitted via the API.
- Convert the resulting encrypted byte array into a string using base64 encoding. Present this base64 encoded string in the API request as the initiator SecurityCredential value.

PROJECT NAME: M-PESA	
DOCUMENT NAME: B2C API SPECIFICATION	VERSION: 1.3
COMPANY/DIVISION: PRODUCT AND SERVICE DEVELOPMENT	DATE: 18 TH JUNE 2013

3.9 PrimartyParty structure

Element name	Element type	Optional	Description
IdentifierType	IdentifierType	No	It indicates the identifier type of the primary party. The value of this parameter must be a valid identifier type supported by MM and must match the inputted value of the parameter IdentityType.
Identifier	xsd:string	No	It indicates a parameter value.
ShortCode	xsd:string	Yes	It is reserved

3.10 ReceiverParty structure

Element name	Element type	Optional	Description
IdentifierType	IdentifierType	No	It indicates the identifier type of the recipient party. The value of this parameter must be a valid identifier type supported by MM.
Identifier	xsd:string	No	It indicates the identifier of the recipient party. Its value must match the inputted value of the parameter IdentifierType.
ShortCode	xsd:string	Yes	When the receiver party is an organization operator or a Till, this parameter must be present in the request to indicate which organization the receiver party belongs to. If the receiver party is not an organization operator or a Till, this parameter should not be present.

3.11 AccessDevice structure

Element name	Element type	Optional	Description
IdentifierType	IdentifierType	No	It indicates the identifier type of the access device.
Identifier	xsd:string	No	It indicates the identifier of the access device. Its value must match the inputted value of parameter IdentifierType

3.12 Identity structure

Element name	Element type	Optional	Description
Caller	Caller	No	It indicates the third party which initiates the request
Initiator	Initiator	No	It indicates the identity who makes the request
PrimartyParty	PrimartyParty	Yes	If business operation/action, this element is not present; if transaction, this can be either the debit party or the credit party according to the transaction type.
ReceiverParty	ReceiverParty	Yes	If business operation/action, this is the affected party; if transaction, it is the opposite party to the PrimaryParty
AccessDevice	AccessDevice	Yes	It indicates the access device which the initiator uses to initiate the request.

3.13 Request structure

Element name	Element type	Optional	Description
Transaction	Transaction	No	It indicates a transaction.
Identity	Identity	No	This section is used to specify all identities involved in the request
KeyOwner	xsd:integer	No	It indicates which Key is used to encrypt the elements Initiator.SecurityCredential and the EncryptedParameters. Its value are enumerated as follows: 1:the API Caller's Key 2:the Initiator's Key

PROJECT NAME: M-PESA	
DOCUMENT NAME: B2C API SPECIFICATION	VERSION: 1.3
COMPANY/DIVISION: PRODUCT AND SERVICE DEVELOPMENT	DATE: 18 TH JUNE 2013

3.14 Response structure

Element name	Element type	Optional	Description
ResponseCode	xsd:string	No	It indicates whether MM accepts the request or not.
ResponseDesc	xsd:string	Yes	Its value is a description for the parameter ResultCode.
ConversationID	xsd:string	Yes	The unique identifier generated by M-Pesa for the request message.
OriginatorConversationID	xsd:string	Yes	The unique identifier generated by the third party for the request message.
ServiceStatus	xsd: integer	Yes	It indicates the MM service status.

3.15 ResultParameters structure

Element name	Element type	Optional	Description
ResultParameter	ParameterType [0...unbounded]	Yes	It is used to carry specific parameters for specific transaction or business operation.

3.16 Result structure

Element name	Element type	Optional	Description
ResultType	xsd:integer	Yes	0: completed 1: waiting for further messages
ResultCode	xsd:string	No	It indicates whether MM processes the request successfully or not. Max length is 10
ResultDesc	xsd:string	Yes	Its value is a description for the parameter ResultCode. Max length is 1024
OriginatorConversationID	xsd:string	Yes	The unique identifier of the request message generated by third party. Its value comes from the request message.
ConversationID	xsd:string	Yes	The unique identifier generated by MM for a request
TransactionID	xsd:string	Yes	It's only for transaction. When the request is a transaction request, MM will generate a unique identifier for the transaction.
ResultParameters	ResultParameters	Yes	It is used to carry specific parameters for specific transaction or business operation.
ReferenceData	ReferenceData	Yes	It comes from the request message

3.17 Result code

Error code	Error Description	
0	Success	ApiResponse
1	Insufficient Funds	ApiResponse
2	Less Than Minimum Transaction Value	ApiResponse
3	More Than Maximum Transaction Value	ApiResponse
4	Would Exceed Daily Transfer Limit	ApiResponse
5	Would Exceed Minimum Balance	ApiResponse
6	Unresolved Primary Party	ApiResponse
7	Unresolved Receiver Party	ApiResponse
8	Would Exceed Maximum Balance	ApiResponse
11	Debit Account Invalid	ApiResponse
12	Credit Account Invalid	ApiResponse

PROJECT NAME: M-PESA	
DOCUMENT NAME: B2C API SPECIFICATION	VERSION: 1.3
COMPANY/DIVISION: PRODUCT AND SERVICE DEVELOPMENT	DATE: 18 TH JUNE 2013

Error code	Error Description	
13	Unresolved Debit Account	ApiResponse
14	Unresolved Credit Account	ApiResponse
15	Duplicate Detected	ApiResponse
17	Internal Failure	ApiResponse
18	Initiator Credential Check Failure	ApiResponse
19	Message Sequencing Failure	ApiResponse
20	Unresolved Initiator	ApiResponse
21	Initiator to Primary Party Permission Failure	ApiResponse
22	Initiator to Receiver Party Permission Failure	ApiResponse
23	Request schema validation error	ApiResponse
24	Missing mandatory fields	ApiResponse
25	Cannot communicate with Caller	ApiResponse
26	Traffic blocking condition in place	ApiResponse

The following table lists result codes and result descriptions which are provided to the caller. These may be communicated either in the synchronous *ApiResponse* message, or in the asynchronous *ApiResponse* message.

0 Success

This is indicated for both *ApiResponse* and *ApiResponse* messages. An *ApiResponse* value of 0 indicates that the request has passed basic validation tests and been passed on to the core system for further processing. An *ApiResponse* value of 0 means that the requested financial transaction has been completed successfully.

1 InsufficientFunds

Typically indicates that the primary party does not have enough money to complete the requested financial transaction. In the case of the B2C API, this means that the business organisation does not have enough money in its utility account.

This is returned by the *ApiResponse* and represented internally as a transaction reason.

2 LessThanMinimumTransactionValue

3 MoreThanMaximumTransactionValue

Each of these potential failures derive from the rules which govern MPesa financial transactions. In the case of the B2C API, these are taken from *DefaultBusinessUtilityAccount* rules, which specify a lower bound of 10 KE shillings and an upper bound of 70000. For promotion payments and salary payments to unregistered users, the upper limit is lower: 35000. Likewise, the lower bound for these 2 transactions is also different: 101 rather than 10.

These are both returned by the *ApiResponse* and represented internally as a transaction reason.

4 WouldExceedDailyTransferLimit

This is a limit on daily activity. For the business organisation, this is very high: 100000000 KE shillings. It is much more likely that this rule will apply to the customer, where the limit is 140000 KE shillings.

PROJECT NAME: M-PESA	
DOCUMENT NAME: B2C API SPECIFICATION	VERSION: 1.3
COMPANY/DIVISION: PRODUCT AND SERVICE DEVELOPMENT	DATE: 18 TH JUNE 2013

This is returned by the *ApiResponse* and represented internally as a transaction reason.

5 **WouldExceedMinimumBalance**

This rule is rather confusingly named – it actually means that a transaction would bring the business organisations utility account below the required minimum – which is currently 0.

This is returned by the *ApiResponse* and represented internally as a transaction reason. It is computed during execution of the financial transaction.

6 **UnresolvedPrimaryParty**

7 **UnresolvedReceiverParty**

The primary party or receiver party cannot be associated with an MPesa identity. For transactions (such as promotion payment and salary payment) which are supported for unregistered users, the unresolved receiver party rule is not applied.

These are returned in the *ApiResponse* and checked before the linked financial transaction is created.

8 **WouldExceedMaximumBalance**

For the B2C API, this applies to the recipient MMF customer – the limit here is 100,000 KE shillings.

This is returned by the *ApiResponse* and represented internally as a transaction reason. It is computed during execution of the financial transaction.

9 **LessThanMinAirtimeValue**

10 **MoreThanMaxAirtimeValue**

Neither of these apply to B2C API operations.

11 **DebitAccountInvalid**

12 **CreditAccountInvalid**

13 **UnresolvedDebitAccount**

14 **UnresolvedCreditAccount**

These are all existing failure transaction reasons for B2C financial transactions – they would be issued to the caller in the *ApiResponse* message. The latter 2 in particular are unlikely to occur, as the request would be rejected by Core API specific checks before the request reached the accounting engine.

15 **DuplicateDetected**

Currently, any requests which presents an originator conversation id which has been seen before will be rejected. This rule will need to be reconsidered in contexts which require multi-stage conversations or multiple Callers. This check (along with the message expiry check) is the first thing done by the transaction processor when handling an API request. The outcome is reported in the *ApiResponse* message.

16 **PayUtilityInvalidAccountNumberFormat**

Does not apply to the B2C API operations.

17 **InternalFailure**

PROJECT NAME: M-PESA	
DOCUMENT NAME: B2C API SPECIFICATION	VERSION: 1.3
COMPANY/DIVISION: PRODUCT AND SERVICE DEVELOPMENT	DATE: 18 TH JUNE 2013

A catch all for failures which are not identified more specifically – this can occur in either the *ApiResponse* or *ApiResult* – although the intent is to replace any such error with a more precise message.

18 InitiatorCredentialCheckFailure

The password check for the initiator failed, either because the presented password is wrong, or something has gone wrong in the encryption or decryption steps. This is issued in the *ApiResult* before the creation of a financial transaction.

19 ApiRequestMessageExpiryFailure

Initiators have the option to specify a request timestamp. If the gap between this value and the time at which the message is received by the transaction processor is too great, then the request is rejected. The specific interval is configured separately for each API operation (and indeed, for each API operation stage). This is the first check performed on an API request arriving at the transaction processor, and as such is included in the *ApiResult* message.

20 UnresolvedInitiator

The initiator username presented with the request cannot be found. This is included in the *ApiResult*.

21 InitiatorToPrimaryPartyPermissionFailure

The initiator presented does not have the right to issue requests for the specified primary party (as established during creation of the initiator on the admin web site). This is part of the *ApiResult*, and computed prior to issuing a financial transaction.

22 InitiatorStatusCheckFailure

The presented initiator username can be received, but the initiator is not currently active. This fact is returned in the *ApiResult*.

23 RequestSchemaValidationError

Incoming API requests are validated against the schema defined in *CPSInterface_Request.xsd*. This is part of the *ApiResponse* message – the details of the validation error are included in the response.

24 MissingRequestParameters

Required input parameters are defined for each type of API operation. If these are missing, then this is issued in the *ApiResult* message. The names of the missing parameters are included in the result parameters field.

25 InvalidRequestParameters

If all required parameters are presented, then validation checks are performed. Specifically, the parameter is checked to see if it can be converted to the intended type, and then checked against (optional) configuration regular expression based validation rules. For the B2C API, only the type check (i.e the amount specified is a valid decimal) is performed. Failures are indicated in the *ApiResult* message, with the details included in the result parameters.

26 SystemTooBusy

Included in the *ApiResponse* message if a traffic blocking condition is in place. See section 5.1 for more detail.

PROJECT NAME: M-PESA	
DOCUMENT NAME: B2C API SPECIFICATION	VERSION: 1.3
COMPANY/DIVISION: PRODUCT AND SERVICE DEVELOPMENT	DATE: 18 TH JUNE 2013

28 InitiatorAllowedOperationCheckFailure

Upon creation, initiators are assigned permissions for specific API operations – if the operation specified in the request message is not included in this list, then this *ApiResponse* message is received.

29 InvalidCommand

The command specified in the request is not defined – this is part of the *ApiResponse*.

30 ErrorSerializingRequest

After XML schema validation, the API attempts to convert the XML request into an internal *ApiRequest* object – any failures result in this *ApiResponse* message. The details of the exception are included.

31 InitiatorNotSpecified

The initiator username is not specified, or not specified in a way that can be parsed.

32 ErrorSerializingRequest

The presented identifier for the initiator is not a username.

33 PrimaryPartyNotSpecified

34 PrimaryPartyIdentifierInvalid

35 ReceiverPartyNotSpecified

36 ReceiverPartyIdentifierInvalid

In all these case, one of the API parties is either missing from the request, or has been presented with the wrong identifier type., This kind of failure is indicated in the *ApiResponse* message.,

37 MissingApiCommand

No command is included in the request – in general this problem should be captured by the XML schema validation, but if it is not this *ApiResponse* message is issued.

38 InvalidConversationId

39 UnknownConversationId

Not currently checked for – this will take place for multi-stage conversations.

40 InvalidParameterDefinition

PROJECT NAME: M-PESA	
DOCUMENT NAME: B2C API SPECIFICATION	VERSION: 1.3
COMPANY/DIVISION: PRODUCT AND SERVICE DEVELOPMENT	DATE: 18 TH JUNE 2013

4 Web Service Interface Definition

4.1 Interface: RequestMgrPortType

4.1.1 Operation: GenericAPIRequest

The 3rd party invokes this operation to send a B2C request

I. 4.1.1.1 Message Header: RequestSOAPHeader

Element name	Element type	Optional	Description
spld	xsd: string	No	SP ID. This is the Service Provider Identifier that is allocated by the Broker to the 3 rd party. [Example] 000201
spPassword	xsd: string	Yes	This is an encrypted form of the SP password issued to an SP when an account is created on the Broker. The encrypted password is a Base64 encoded string of the SHA-256 hash of the concatenation of the spld, password and the timeStamp as illustrated below: Given the following parameters spld: 601399 password: spPassword timestamp: 20130702212854 spPassword = BASE64(SHA-256(spld + Password + timeStamp)) e.g. spPassword = BASE64(SHA-256(601399spPassword20130702212854)) [Example] e6434ef249df55c7a21a0b45758a39bb
serviceId	xsd: string	Yes	Service ID. This is the Service Identifier that is allocated by the Broker for every service created. [Example] 3500001000012

PROJECT NAME: M-PESA	
DOCUMENT NAME: B2C API SPECIFICATION	VERSION: 1.3
COMPANY/DIVISION: PRODUCT AND SERVICE DEVELOPMENT	DATE: 18 TH JUNE 2013

Element name	Element type	Optional	Description
Timestamp	xsd: string	Yes	Time stamp (UTC time). The value is required during SHA-256 encryption for spPassword. NOTE If the spPassword parameter must be set, this parameter is mandatory. [Format] yyyyMMddHHmmss [Example] 20100731064245

II. 4.1.1.2 Input Message: RequestMsg

Element name	Element type	Optional	Description
RequestMsg	xsd: string	No	Request Message from 3 rd party. Its value should be an instance of Request Type and a CDATA

Note:

1. If there is no configuration for notification URL on Broker side, which indicates the callback url for accepting notification of GenericAPIResult, the **ResultURL** parameter inside Identity tag must present.
2. If there is no configuration for notification URL on Broker side, which indicates the callback url for accepting notification of cached requests expired, the 3rd party must add a key-pair parameter into **ReferenceData** and the key is **QueueTimeoutURL**.

III. 4.1.1.3 Output Message: ResponseMsg

Element name	Element type	Optional	Description
ResponseMsg	xsd: string	No	Response return to 3 rd party. Its value should be an instance of Response Type and a CDATA.

PROJECT NAME: M-PESA	
DOCUMENT NAME: B2C API SPECIFICATION	VERSION: 1.3
COMPANY/DIVISION: PRODUCT AND SERVICE DEVELOPMENT	DATE: 18 TH JUNE 2013

IV. 4.1.1.4 Response Codes

ResponseCode	ResponseDesc
000000000	Success
100000000	Request was cached, waiting for resending
100000001	The system is overload
100000002	Throttling error
100000003	Exceed the limitation of the LICENSE
100000004	Internal Server Error
100000005	Invalid input value:%1 %1 indicates the parameter's name.
100000006	SP's status is abnormal
100000007	Authentication failed
100000008	Service's status is abnormal
100000009	API's status is abnormal
100000010	Insufficient permissions
100000011	Exceed the limitation of request rate
100000012	Insufficient balance
100000013	No route
100000014	Missing mandatory parameter:%1 %1 indicates the parameter's name.

PROJECT NAME: M-PESA	
DOCUMENT NAME: B2C API SPECIFICATION	VERSION: 1.3
COMPANY/DIVISION: PRODUCT AND SERVICE DEVELOPMENT	DATE: 18 TH JUNE 2013

4.2 Interface: ResultMgrPortType

4.2.1 Operation: GenericAPIResult

This operation must be implemented by a Web Service at the 3rd party side if it requires notification of the final result for B2C request. It will be invoked by Broker to notify the 3rd party once Broker received the notification from CoreAPI.

V. 4.2.1.1 Input Message: ResultMsg

Element name	Element type	Optional	Description
ResultMsg	xsd: string	No	Request Message from Broker. Its value should be a instance of Result Type and a CDATA.

VI. 4.2.1.2 Output Message: ResponseMsg

Element name	Element type	Optional	Description
ResponseMsg	xsd: string	No	Response return to Broker. Its value should be a instance of Response Type and a CDATA.

VII. 4.2.1.3 Response Codes

ResponseCode	ResponseDesc
000000000	Success
200000001	The system is overload
200000002	Throttling error
200000003	Internal Server Error

PROJECT NAME: M-PESA	
DOCUMENT NAME: B2C API SPECIFICATION	VERSION: 1.3
COMPANY/DIVISION: PRODUCT AND SERVICE DEVELOPMENT	DATE: 18 TH JUNE 2013

4.3 Interface: QueueTimeoutNotificationPort

4.3.1 Operation: notifyQueueTimeout

This operation must be implemented by a Web Service at the 3rd party side if it requires notification of cached B2C requests are expired. It will be invoked by Broker to notify the 3rd party once cached B2C requests are expired.

VIII. 4.3.1.1 Input Message: notifyQueueTimeout

Element name	Element type	Optional	Description
originatorConversationID	xsd:string		originatorConversationID from the request sent by the 3 rd party
originRequest	xsd:string	No	Original request without SOAP Header sent by 3 rd party. Its value is encoded with base64, when the 3rd party receive the request, it should decode it.
extensionInfo	Parameters	Yes	Extended parameters.

IX. 4.3.1.2 Output Message: notifyQueueTimeoutResponse

Element name	Element type	Optional	Description
result	Result	No	
extensionInfo	Parameters	Yes	Extended parameters.

X. 4.3.1.3 Response Code

ResponseCode	ResponseDesc
00000000	Success
00000001	Failed

PROJECT NAME: M-PESA	
DOCUMENT NAME: B2C API SPECIFICATION	VERSION: 1.3
COMPANY/DIVISION: PRODUCT AND SERVICE DEVELOPMENT	DATE: 18 TH JUNE 2013

4.4 Interface: QueryTransactionPort

4.4.1 Operation: queryTransaction

The 3rd party invokes this operation to query transaction information..

XI. 4.3.1.1 Message Header: RequestSOAPHeader

Element name	Element type	Optional	Description
spId	xsd: string	No	SP ID. It's allocated by the Broker to the 3 rd party. [Example] 000201
spPassword	xsd: string	Yes	Encrypted authentication password for partners to access the Broker. The value is a character string encrypted from spId + Password + timeStamp by SHA-256. The encryption formula is as follows: $spPassword = \text{BASE64}(\text{SHA-256}(\text{spId} + \text{Password} + \text{timeStamp}))$ In the preceding formula: timeStamp: value of timeStamp. Password: authentication password for 3rd parties to access the Broker. The value is allocated by the Broker. NOTE The authentication modes include SPID&Password, SPID&IP&Password, and SPID&IP. When the authentication mode is SPID&Password or SPID&IP&Password, this parameter is mandatory. [Example] e6434ef249df55c7a21a0b45758a39bb
serviceId	xsd: string	Yes	Service ID. The value is allocated by the Broker to the 3 rd party. [Example] 3500001000012
timeStamp	xsd: string	Yes	Time stamp (UTC time). The value is required during SHA-256 encryption for spPassword . NOTE If the spPassword parameter must be set, this parameter is mandatory. [Format] yyyyMMddHHmmss [Example] 20100731064245

PROJECT NAME: M-PESA	
DOCUMENT NAME: B2C API SPECIFICATION	VERSION: 1.3
COMPANY/DIVISION: PRODUCT AND SERVICE DEVELOPMENT	DATE: 18 TH JUNE 2013

XII. 4.3.1.2 Input Message: queryTransaction

Element name	Element type	Optional	Description
originatorConversationID	xsd:string		The unique identifier of the request message generated by third party. It is used to identify a request between the third party and MM. Max length is 128
extensionInfo	Parameters	Yes	Extended parameters.

XIII. 4.3.1.3 Output Message: queryTransactionResponse

Element name	Element type	Optional	Description
result	Response	No	
submitApiRequestList	xsd:string[0-unbounded]	Y	Requests sent by the 3 rd party. Its value is the requests sent by the 3 rd party with base64 encoded.
submitApiResponseList	xsd:string[0-unbounded]	Y	Responses returned from the Broker. Its value is the responses returned from the Broker with base64 encoded.
submitApiResponseList	xsd:string[0-unbounded]	Y	Results sent to the 3 rd party. Its value is the requests sent by the Broker with base64 encoded.
queueTimeoutList	xsd:string[0-unbounded]	Y	QueueTimeout requests sent to the 3 rd party. Its value is the requests sent by the Broker with base64 encoded.
extensionInfo	Parameters	Yes	Extended parameters.

PROJECT NAME: M-PESA	
DOCUMENT NAME: B2C API SPECIFICATION	VERSION: 1.3
COMPANY/DIVISION: PRODUCT AND SERVICE DEVELOPMENT	DATE: 18 TH JUNE 2013

XIV. 4.3.1.4 Response Codes

ResponseCode	ResponseDesc
00000000	Success
100000001	The system is overload
100000002	Throttling error
100000003	Exceed the limitation of the LICENSE
100000004	Internal Server Error
100000005	Invalid input value:%1 %1 indicates the parameter's name.
100000006	SP's status is abnormal
100000007	Authentication failed
100000008	Service's status is abnormal
100000010	Insufficient permissions
100000014	Missing mandatory parameter:%1 %1 indicates the parameter's name.

PROJECT NAME: M-PESA	
DOCUMENT NAME: B2C API SPECIFICATION	VERSION: 1.3
COMPANY/DIVISION: PRODUCT AND SERVICE DEVELOPMENT	DATE: 18 TH JUNE 2013

5 Example

5.1 GenericAPIRequest

5.1.1 The 3rd party send B2C request to the Broker

Example1: Request with ResultURL and QueueTimeoutURL

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:req="http://api-v1.gen.mm.vodafone.com/mminterface/request">
  <soapenv:Header>
    <tns:RequestSOAPHeader xmlns:tns="http://www.huawei.com.cn/schema/common/v2_1">
      <tns:spld>35000011</tns:spld>
      <tns:spPassword>c5216e519a071d601bedd150f3fcd026</tns:spPassword>
      <tns:serviceId>350000001000009</tns:serviceId>
      <tns:timeStamp>20120101010101</tns:timeStamp>
    </tns:RequestSOAPHeader>
  </soapenv:Header>
  <soapenv:Body>
    <req:RequestMsg><![CDATA[<?xml version="1.0" encoding="UTF-8"?>
<request xmlns="http://api-v1.gen.mm.vodafone.com/mminterface/request">
  <Transaction>
    <CommandID>PromotionPayment</CommandID>
    <LanguageCode></LanguageCode>
    <OriginatorConversationID>4596</OriginatorConversationID>
    <ConversationID> </ConversationID>
    <Remark> </Remark>
    <EncryptedParameters>EncryptedParameters0</EncryptedParameters>
    <Parameters>
      <Parameter>
        <Key>Amount</Key>
        <Value>1</Value>
      </Parameter>
      <Parameter>
```

PROJECT NAME: M-PESA	
DOCUMENT NAME: B2C API SPECIFICATION	VERSION: 1.3
COMPANY/DIVISION: PRODUCT AND SERVICE DEVELOPMENT	DATE: 18 TH JUNE 2013

```

        <Key>Key1</Key>

        <Value>Value1</Value>

    </Parameter>

</Parameters>

<ReferenceData>

    <ReferenceItem>

        <Key>QueueTimeoutURL</Key>

        <Value>http://10.66.49.789:7888/new</Value>

    </ReferenceItem>

    <ReferenceItem>

        <Key>Occasion</Key>

        <Value>Jamuhuri</Value>

    </ReferenceItem>

</ReferenceData>

<Timestamp>2013-07-29T18:50:41.2109675Z</Timestamp>

</Transaction>

<Identity>

    <Caller>

        <CallerType>2</CallerType>

        <ThirdPartyID> </ThirdPartyID>

        <Password>Password0</Password>

        <Checksum>Checksum0</Checksum>

        <ResultURL>ResultURL0</ResultURL>

    </Caller>

    <Initiator>

        <IdentifierType>11</IdentifierType>

        <Identifier>username</Identifier>

        <SecurityCredential>SecurityCredential0</SecurityCredential>

        <ShortCode>859636</ShortCode>

    </Initiator>

    <PrimartyParty>

```

PROJECT NAME: M-PESA	
DOCUMENT NAME: B2C API SPECIFICATION	VERSION: 1.3
COMPANY/DIVISION: PRODUCT AND SERVICE DEVELOPMENT	DATE: 18 TH JUNE 2013

```

<IdentifierType>4</IdentifierType>

<Identifier>859636</Identifier>

<ShortCode>859636</ShortCode>

</PrimartyParty>

<ReceiverParty>

  <IdentifierType>1</IdentifierType>

  <Identifier>2547204789659</Identifier>

  <ShortCode>ShortCode1</ShortCode>

</ReceiverParty>

<AccessDevice>

  <IdentifierType>1</IdentifierType>

  <Identifier>Identifier3</Identifier>

</AccessDevice>

</Identity>

<KeyOwner>1</KeyOwner>

</request>]]></req:RequestMsg>

</soapenv:Body>

</soapenv:Envelope>

```

Example2: Request without ResultURL and QueueTimeoutURL

```

<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:req="http://api-v1.gen.mm.vodafone.com/mminterface/request">

  <soapenv:Header>

    <tns:RequestSOAPHeader xmlns:tns="http://www.huawei.com/schema/osg/common/v2_1">

      <tns:spld>35000001</tns:spld>

      <tns:spPassword>c5216e519a071d601bedd150f3fcd026</tns:spPassword>

      <tns:timeStamp>20080101010101</tns:timeStamp>

      <tns:serviceId>35000001000009</tns:serviceId>

      <tns:OA>861234567890</tns:OA>

      <tns:FA>861234567890</tns:FA>

    </tns:RequestSOAPHeader>

  </soapenv:Header>

```

PROJECT NAME: M-PESA	
DOCUMENT NAME: B2C API SPECIFICATION	VERSION: 1.3
COMPANY/DIVISION: PRODUCT AND SERVICE DEVELOPMENT	DATE: 18 TH JUNE 2013

```

<soapenv:Body>

  <req:RequestMsg><![CDATA[<?xml version="1.0" encoding="UTF-8"?>
<request xmlns="http://api-v1.gen.mm.vodafone.com/mminterface/request">

  <Transaction>

    <CommandID>CommandID0</CommandID>

    <LanguageCode>LanguageCode0</LanguageCode>

    <OriginatorConversationID>OriginatorConversationID0</OriginatorConversationID>

    <ConversationID>ConversationID0</ConversationID>

    <Remark>Remark0</Remark>

    <EncryptedParameters>EncryptedParameters0</EncryptedParameters>

    <Parameters>

      <Parameter>

        <Key>Key0</Key>

        <Value>Value0</Value>

      </Parameter>

      <Parameter>

        <Key>Key1</Key>

        <Value>Value1</Value>

      </Parameter>

    </Parameters>

    <ReferenceData>

      <ReferenceItem>

        <Key>Key2</Key>

        <Value>Value2</Value>

      </ReferenceItem>

    </ReferenceData>

    <Timestamp>

    </Timestamp>

  </Transaction>

  <Identity>

    <Caller>

```

PROJECT NAME: M-PESA	
DOCUMENT NAME: B2C API SPECIFICATION	VERSION: 1.3
COMPANY/DIVISION: PRODUCT AND SERVICE DEVELOPMENT	DATE: 18 TH JUNE 2013

```

    <CallerType>0</CallerType>

    <ThirdPartyID>ThirdPartyID0</ThirdPartyID>

    <Password>Password0</Password>

    <Checksum>Checksum0</Checksum>

</Caller>

<Initiator>

    <IdentifierType>1</IdentifierType>

    <Identifier>Identifier0</Identifier>

    <SecurityCredential>SecurityCredential0</SecurityCredential>

    <ShortCode>

    </ShortCode>

</Initiator>

<PrimaryParty>

    <IdentifierType>1</IdentifierType>

    <Identifier>Identifier1</Identifier>

    <ShortCode>ShortCode0</ShortCode>

</PrimaryParty>

<ReceiverParty>

    <IdentifierType>1</IdentifierType>

    <Identifier>Identifier2</Identifier>

    <ShortCode>ShortCode1</ShortCode>

</ReceiverParty>

<AccessDevice>

    <IdentifierType>1</IdentifierType>

    <Identifier>Identifier3</Identifier>

</AccessDevice>

</Identity>

<KeyOwner>0</KeyOwner>

</request>]]></req:RequestMsg>

</soapenv:Body>

</soapenv:Envelope>

```

PROJECT NAME: M-PESA	
DOCUMENT NAME: B2C API SPECIFICATION	VERSION: 1.3
COMPANY/DIVISION: PRODUCT AND SERVICE DEVELOPMENT	DATE: 18 TH JUNE 2013

5.1.2 The Broker return response to the 3rd party

Example1: Forward CoreAPI response to the 3rd party

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:req="http://api-v1.gen.mm.vodafone.com/mminterface/request">

  <soapenv:Header/>

  <soapenv:Body>

    <req:ResponseMsg><![CDATA[<?xml version="1.0" encoding="UTF-8"?>

<response xmlns="http://api-v1.gen.mm.vodafone.com/mminterface/response">

  <ResponseCode>ResponseCode0</ResponseCode>

  <ResponseDesc>ResponseDesc0</ResponseDesc>

  <ConversationID>

  </ConversationID>

  <OriginatorConversationID>

  </OriginatorConversationID>

  <ServiceStatus>0</ServiceStatus>

</response>]]></req:ResponseMsg>

  </soapenv:Body>

</soapenv:Envelope>
```

Example2: Error response caused by authentication failed.

```
<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:req="http://api-v1.gen.mm.vodafone.com/mminterface/request">

  <soapenv:Header/>

  <soapenv:Body>

    <req:ResponseMsg><![CDATA[<?xml version="1.0" encoding="UTF-8"?>

<response xmlns="http://api-v1.gen.mm.vodafone.com/mminterface/response">

  <ResponseCode>100000007</ResponseCode>

  <ResponseDesc>Authentication failed</ResponseDesc>

</response>]]></req:ResponseMsg>

  </soapenv:Body>

</soapenv:Envelope>
```

Example3: Error response caused by waiting for resending.

PROJECT NAME: M-PESA	
DOCUMENT NAME: B2C API SPECIFICATION	VERSION: 1.3
COMPANY/DIVISION: PRODUCT AND SERVICE DEVELOPMENT	DATE: 18 TH JUNE 2013

```

<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:req="http://api-v1.gen.mm.vodafone.com/mminterface/request">
  <soapenv:Header/>
  <soapenv:Body>
    <req:ResponseMsg><![CDATA[<?xml version="1.0" encoding="UTF-8"?>
<response xmlns="http://api-v1.gen.mm.vodafone.com/mminterface/response">
  <ResponseCode>100000000</ResponseCode>
  <ResponseDesc>Request was cached, waiting for resending</ResponseDesc>
</response>]]></req:ResponseMsg>
  </soapenv:Body>
</soapenv:Envelope>

```

PROJECT NAME: M-PESA	
DOCUMENT NAME: B2C API SPECIFICATION	VERSION: 1.3
COMPANY/DIVISION: PRODUCT AND SERVICE DEVELOPMENT	DATE: 18 TH JUNE 2013

5.2 GenericAPIResult

5.2.1 The Broker send notification to the 3rd party

```

<soapenv:Envelope                                     xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:res="http://api-v1.gen.mm.vodafone.com/mminterface/result">

  <soapenv:Header/>

  <soapenv:Body>

    <res:ResultMsg><![CDATA[<?xml version="1.0" encoding="UTF-8"?>

<result xmlns="http://api-v1.gen.mm.vodafone.com/mminterface/result">

  <ResultType>0</ResultType>

  <ResultCode>ResultCode</ResultCode>

  <ResultDesc>ResultDesc0</ResultDesc>

  <OriginatorConversationID>OriginatorConversationID0</OriginatorConversationID>

  <ConversationID>ConversationID0</ConversationID>

  <TransactionID>TransactionID0</TransactionID>

  <ResultParameters>

    <ResultParameter>

      <Key>Key0</Key>

      <Value>Value0</Value>

    </ResultParameter>

    <ResultParameter>

      <Key>Key1</Key>

      <Value>Value1</Value>

    </ResultParameter>

  </ResultParameters>

  <ReferenceData>

    <ReferenceItem>

      <Key>Key2</Key>

      <Value>Value2</Value>

    </ReferenceItem>

    <ReferenceItem>

```

PROJECT NAME: M-PESA	
DOCUMENT NAME: B2C API SPECIFICATION	VERSION: 1.3
COMPANY/DIVISION: PRODUCT AND SERVICE DEVELOPMENT	DATE: 18 TH JUNE 2013

```

    <Key>Key3</Key>

    <Value>Value3</Value>

  </ReferenceItem>

</ReferenceData>

</result>]]></res:ResultMsg>

</soapenv:Body>

</soapenv:Envelope>

```

5.2.2 The 3rd party return response to the Broker

Example1: Success response

```

<soapenv:Envelope                                     xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:req="http://api-v1.gen.mm.vodafone.com/mminterface/request">

  <soapenv:Header/>

  <soapenv:Body>

    <req:ResponseMsg><![CDATA[<?xml version="1.0" encoding="UTF-8"?>

<response xmlns="http://api-v1.gen.mm.vodafone.com/mminterface/response">

  <ResponseCode>00000000</ResponseCode>

  <ResponseDesc>success</ResponseDesc>

</response>]]></req:ResponseMsg>

  </soapenv:Body>

</soapenv:Envelope>

```

Example2: Error response

```

<soapenv:Envelope                                     xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
xmlns:req="http://api-v1.gen.mm.vodafone.com/mminterface/request">

  <soapenv:Header/>

  <soapenv:Body>

    <req:ResponseMsg><![CDATA[<?xml version="1.0" encoding="UTF-8"?>

<response xmlns="http://api-v1.gen.mm.vodafone.com/mminterface/response">

  <ResponseCode>20000003</ResponseCode>

  <ResponseDesc>Internal Server Error</ResponseDesc>

</response>]]></req:ResponseMsg>

  </soapenv:Body>

```


PROJECT NAME: M-PESA	
DOCUMENT NAME: B2C API SPECIFICATION	VERSION: 1.3
COMPANY/DIVISION: PRODUCT AND SERVICE DEVELOPMENT	DATE: 18 TH JUNE 2013

```

<soapenv:Header/>

<soapenv:Body>

  <loc:notifyQueueTimeoutResponse>

    <loc:result>

      <res:ResultCode>00000000</res:ResultCode>

      <res:ResultDesc> success</res:ResultDesc>

    </loc:result>

  </loc:notifyQueueTimeoutResponse>

</soapenv:Body>

</soapenv:Envelope>

```

Example2: Error response

```

<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:loc="http://www.csapi.org/schema/timeoutnotification/data/v1_0/local"
  xmlns:res="http://api-v1.gen.mm.vodafone.com/mminterface/result">

  <soapenv:Header/>

  <soapenv:Body>

    <loc:notifyQueueTimeoutResponse>

      <loc:result>

        <res:ResultCode>000000001</res:ResultCode>

        <res:ResultDesc> failed </res:ResultDesc>

      </loc:result>

    </loc:notifyQueueTimeoutResponse>

  </soapenv:Body>

</soapenv:Envelope>

```

5.4 queryTransaction

5.4.1 The 3rd party sends query request to the Broker

```

<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:v2="http://www.huawei.com.cn/schema/common/v2_1"
  xmlns:loc="http://www.csapi.org/schema/transaction/data/v1_0/local"
  xmlns:res="http://api-v1.gen.mm.vodafone.com/mminterface/result">

  <soapenv:Header>

    <v2:RequestSOAPHeader>

```

PROJECT NAME: M-PESA	
DOCUMENT NAME: B2C API SPECIFICATION	VERSION: 1.3
COMPANY/DIVISION: PRODUCT AND SERVICE DEVELOPMENT	DATE: 18 TH JUNE 2013

```

<v2:spld>3500001</v2:spld>

<v2:spPassword>c5216e519a071d601bedd150f3fcd026</v2:spPassword>

<v2:serviceId>35000001000001</v2:serviceId>

<v2:timeStamp>20120101010101</v2:timeStamp>

</v2:RequestSOAPHeader>

</soapenv:Header>

<soapenv:Body>

  <loc:queryTransaction>

    <loc:originatorConversationID>1223465451551515</loc:originatorConversationID>

  </loc:queryTransaction>

</soapenv:Body>

</soapenv:Envelope>

```

5.4.2 The Broker return response to the 3rd party

Example1: Success response

```

<soapenv:Envelope xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"
  xmlns:loc="http://www.csapi.org/schema/transaction/data/v1_0/local"
  xmlns:res="http://api-v1.gen.mm.vodafone.com/mminterface/response"
  xmlns:res1="http://api-v1.gen.mm.vodafone.com/mminterface/result">

  <soapenv:Header/>

  <soapenv:Body>

    <loc:queryTransactionResponse>

      <loc:result>

        <res:ResponseCode>00000000</res:ResponseCode>

        <res:ResponseDesc>Success</res:ResponseDesc>

      </loc:result>

      <loc:submitApiRequestList>

<loc:submitApiRequest>PHNvYXBibnY6RW52ZWxvcGUgeG1sbnM6c29hcGVudj10dHRwOi8vc2NoZW1hcy54bWxzb2FwLm9y
  Zy9zb2FwL2VudmVsb3BILyB4bWxuc2pyZXE9aHR0cDovL2FwaS12MS5nZW4ubW0udm9kYWZvbUu
  Y29tL21taW50ZXJmYWNIL3JlcXVlc3Q+CiAgIDxzb2FwZW52OkhlYWRIc3Rlcj4KICAgICAgPHRuc2pS
  ZXF1ZXN0U09BUEhYWRlcjB4bWxuc2p0bnM9aHR0cDovL3d3dy5odWF3ZWkuY29tLmNuL3NjaGVt
  YS9jb21tb24vdjJfMT4KICAgICAgICAgPHRuc2pzcElkPjM1MDAwMDAxPC90bnM6c3BJZD4KICAg

```


PROJECT NAME: M-PESA	
DOCUMENT NAME: B2C API SPECIFICATION	VERSION: 1.3
COMPANY/DIVISION: PRODUCT AND SERVICE DEVELOPMENT	DATE: 18 TH JUNE 2013

MGRIQTZMeTloY0drdGRqRXVaMIZ1TG0xdExuWnZaR0ZtYj1bExtTnZiUzI0YldsdQpkR1Z5Wm1G
 alpTOXlaWEYxWlhOMElqNETJQ0FnSUR4VWNtRnVjMkZqZEdsdmJqNETJQ0FnSUNBZ0IDQThRMjI0
 YldGdVpFbEVQa052CmJXMWWhibVJKUkRBOEwwTnZiVzFoYm1SSIJENETJQ0FnSUNBZ0IDQThUR0Z1
 WjNwWafYvKriMlJsUGt4aGJtZDFZV2RsUTI5a1pUQTgKTDB4aGJtZDFZV2RsUTI5a1pUNETJQ0Fn
 SUNBZ0IDQThUM0pwWjJsdVIYUnZja052Ym5abGNuTmhkR2x2YmtsRVBrOXlhV2RwYm1GMApiM0pE
 YjI1MlpYsnpZWFJwYjI1SIJEQThMMDI5YVdkcGJtRjBiM0pEYjI1MlpYsnpZWFJwYjI1SIJENETJ
 Q0FnSUNBZ0IDQThRMjI1CmRtVnljMkYwYVc5dVNVUSTRMjI1ZG1WeWMyRjBhVzI1U1VRd1BDOURi
 MjUyWlhKellYUnBiMjVKUkQ0S0IDQWdJQ0FnSUNBOFVtVnQKWVhKclBsSmxiV0Z5YXpBOEwxSmxi
 V0Z5YXo0S0IDQWdJQ0FnSUNBOFJXNWpjbm3x3ZEdWa1VHRnlZVzFsZEdWeWN6NUZibU55ZVhCMApa
 V1JRwVhKaGJXVjBaWEp6TUR3dIJXNWpjbm3x3ZEdWa1VHRnlZVzFsZEdWeWN6NETJQ0FnSUNBZ0ID
 QThVR0Z5WVcxGRHVnljeJRLckIDQWdJQ0FnSUNBZ0IDQWdQRkJoY21GdFpYUmxajRLSUNBZ0ID
 QWdJQ0FnSUNBZ0IDQWdJRHHMWlhrK1MyVjVNRHd2UzJWNVBnb2cKSUNBZ0IDQWdJQ0FnSUNBZ0ID
 QWdQRlpoYkhWbFBsWmhiSFZsTUR3dIZtRnNkV1UrQ2IBZ0IDQWdJQ0FnSUNBZ0IEd3ZVR0Z5WVcx
 bApkR1Z5UGdvZ0IDQWdJQ0FnSUNBZ0IDQThVR0Z5WVcxGRHVnlQZ29nSUNBZ0IDQWdJQ0FnSUNB
 Z0IDQWdQRXRrsZVQ1TFpYa3hQQzIMClpYaytDaUFnSUNBZ0IDQWdJQ0FnSUNBZ0IDQThWbUZZZFdV
 K1ZtRnNkV1V4UEM5V1IXeDFaVDRLSUNBZ0IDQWdJQ0FnSUNBZ1BDOVEKWVhKaGJXVjBaWEkrQ2IB
 Z0IDQWdJQ0FnUEM5UVIYSmhiV1YwWlhKelBnb2dJQ0FnSUNBZ0IEeFNaV1psY21WdVkyVkvZWfJo
 UGdvZwpJQ0FnSUNBZ0IDQWdJQ0E4VW1WbVpYSmxiU5sU1hSbGJUNETJQ0FnSUNBZ0IDQWdJQ0Fn
 SUNBZ0IEeExaWGsRvVhWbGRXVIVhVzFsCmlZVjBWVkpNUEM5TFpYaytDaUFnSUNBZ0IDQWdJQ0Fn
 SUNBZ0IDQThWbUZZZFdVK1ZtRnNkV1V5UEM5V1IXeDFaVDRLSUNBZ0IDQWcKSUNBZ0IDQWdQZlT
 WldabGntVnVZMIZKZEdWdFBnb2dJQ0FnSUNBZ0IDQWdJQ0E4VW1WbVpYSmxiU5sU1hSbGJUNETJ
 Q0FnSUNBZwpJQ0FnSUNBZ0IDQWdJRHHMWlhrK1MyVjVNend2UzJWNVBnb2dJQ0FnSUNBZ0IDQWdJ
 Q0FnSUNBZ1BGWmhiSFZsUGxaaGJIVmxNend2ClZtRnNkV1UrQ2IBZ0IDQWdJQ0FnSUNBZ0IEd3ZV
 bVZtWlhKbGJtTmxTWFJsYlQ0S0IDQWdJQ0FnSUNBOEwxSmxabVZ5Wlc1alpVUmgKZEdFK0NpQWdJ
 Q0FnSUNBZ1BGUnBiV1Z6ZEdGdGNENETJQ0FnSUNBZ0IDQThMMVJwYldWemRHRnRjRDRLSUNBZ0IE
 d3ZWSEpoYm5OaApZM1JwYjI0K0NpQWdJQ0E4U1dSbGJuUnBkSGsrQ2IBZ0IDQWdJQ0FnUEVOaGJH
 eGxajRLSUNBZ0IDQWdJQ0FnSUNBZ1BFTmhiR3hsCmNsUjVjR1UrTUR3dlEyRnNiR1Z5Vkhds1pU
 NETJQ0FnSUNBZ0IDQWdJQ0FnUEZSb2FYsmtVR0Z5ZEhsSIJENVVhR2x5WkZCaGNuUjUKU1VRd1BD
 OVvhR2x5WkZCaGNuUjVTvVerQ2IBZ0IDQWdJQ0FnSUNBZ0IEeFFZWE56ZDI5eVpENVFZWE56ZDI5
 eVpEQThMMUJoYzNOMwpiM0prUGdvZ0IDQWdJQ0FnSUNBZ0IDQThRMmhsWTJ0VGRXMCTRMmhsWTJ0
 VGRXMHdQQzIEYUdWamExtJFiVDRLSUNBZ0IDQWdJQ0FnCKIDQWdQRkpsYzNWc2RGVINURDVTWlhO

PROJECT NAME: M-PESA	
DOCUMENT NAME: B2C API SPECIFICATION	VERSION: 1.3
COMPANY/DIVISION: PRODUCT AND SERVICE DEVELOPMENT	DATE: 18 TH JUNE 2013

```

MWJIUIZVa3d3UEM5U1pYTjFISFJWVWt3K0NpQWdJQ0FnSUNBZ1BDOURZV3hzWlhJK0NpQWcKSUNB
Z0IDQWdQRWx1YVhScFIYUnZjajRLSUNBZ0IDQWdJQ0FnSUNBZ1BFbGtaVzUwYVdacFpYSIVWEJs
UGpFOEwwbGtaVzUwYVdacApaWEpVZVhCbFBnb2dJQ0FnSUNBZ0IDQWdJQ0E4U1dSbGJuUnBabWxs
Y2o1SlpHVnVkr2xtYVdWeU1Ed3ZTV1JsYm5ScFptbGxajRLCkIDQWdJQ0FnSUNBZ0IDQWdQRk5s
WTNWwEFYUjVRM0psWkdWdWRHbGhiRDVUWldOMWNtbDBIVU55WldSbGJuUnBZV3d3UEM5VFpXTJjEK
Y21sMGVVTnlaV1JsYm5ScFpYUjVjR1UrdVUWldOMWNtbDBIVU55WldSbGJuUnBZV3d3UEM5VFpXTJjEK
Q0FnSUNBZ0IDQWdJRhd2VtJodgpjblJEYjJSbFBnb2dJQ0FnSUNBZ0IEd3ZTVzVwZEsaGRHOXIQ
Z29nSUNBZ0IDQWdJRhhRY21sdFIYUjVjR1UrdVUWldOMWNtbDBIVU55WldSbGJuUnBZV3d3UEM5VFpXTJjEK
blJwWm1sbGNsUjVjR1UrdVUWldOMWNtbDBIVU55WldSbGJuUnBZV3d3UEM5VFpXTJjEK
eEoKwkdWdWRHbG1hV1Z5UGtsa1pXNTBhV1pwWlhJeFBDOUpaR1Z1ZEdsbWFXVnlQZ29nSUNBZ0ID
QWdJQ0FnSUNBOFUYaH2blJEYjJSbApQbE5vYjNKMFEyOWtaVEE4TDFOb2l2SjBRMjlrWIQ0S0ID
QWdJQ0FnSUNBOEwXqnlhVzFoY25SNVVRnlSGsrQ2lBZ0IDQWdJQ0FnCIBGSmxZMlZwZG1WeVVH
RnlkSGsrQ2lBZ0IDQWdJQ0FnSUNBZ0IEEpaR1Z1ZEdsbWFXVnlWSGx3WlQ0eFBDOUpaR1Z1ZEds
bWFXVnlkKVhsd1pUNETJQ0FnSUNBZ0IDQWdJQ0FnUEVsa1pXNTBhV1pwWlhJK1NXUmxiJwWm1s
bGNqSthMMGxRWlc1MGFXWnBaWEkrQ2lBZwpJQ0FnSUNBZ0IDQWdJRhhUYUc5eWRFTnZaR1UrdVtJo
dmNuUkRiMlJsTVR3dlUyaH2blJEYjJSbFBnb2dJQ0FnSUNBZ0IEd3ZVbVZqClpXbDJaWEpRWVhK
MGVUNETJQ0FnSUNBZ0IDQThRV05qWlhOeJHVjJhV05sUGdvZ0IDQWdJQ0FnSUNBZ0IDQThTV1Js
Ym5ScFptbGwK2xSNWNHVStNVhd2U1dSbGJuUnBabWxsY2xSNWNHVStDaUFnSUNBZ0IDQWdJQ0Fn
SUR4SlpHVnVkr2xtYVdWeVBrbGtaVzUwYVdacApaWEI6UEM5SlpHVnVkr2xtYVdWeVBnb2dJQ0Fn
SUNBZ0IEd3ZRV05qWlhOeJHVjJhV05sUGdvZ0IDQWdQZzKwkdWdWRHbDBIVDRlCkIDQWdJRhhM
WlhsUGQyNWxajR3UEM5TFpYbFBkMjVsY2o0S1BDOXlaWEYxWlhOMFBsMWRQand2Y21WeE9sSmxj
WFZsYzNSTmMyYysKQ2lBZ0IEd3ZjMjloY0dWdWRqcENiMlI1UGdvOEwzTnZZWEJsYm5ZNIJXNTJa
V3h2Y0dVK0NnPT08L2xvYzpvcmInaW5SZXFldXN0PgogICAgICA8L2xvYzpub3RpZnIRdWV1ZVRp
bWVvdXQ+CiAgIDwvc29hcGVudjpbC2R5Pgo8L3NvYXBlbnY6RW52ZWxvcGU+Cgo=</loc:queueTimeOut>

</loc:queueTimeOutList>

</loc:queryTransactionResponse>

</soapenv:Body>

</soapenv:Envelope>

```

Example2: Error response

```

<soapenv:Envelope
  xmlns:loc="http://www.csapi.org/schema/transaction/data/v1_0/local"
  xmlns:soapenv="http://schemas.xmlsoap.org/soap/envelope/"

```

PROJECT NAME: M-PESA	
DOCUMENT NAME: B2C API SPECIFICATION	VERSION: 1.3
COMPANY/DIVISION: PRODUCT AND SERVICE DEVELOPMENT	DATE: 18 TH JUNE 2013

```

xmlns:res="http://api-v1.gen.mm.vodafone.com/mminterface/response"
xmlns:res1="http://api-v1.gen.mm.vodafone.com/mminterface/result">

  <soapenv:Header/>

  <soapenv:Body>

    <loc:queryTransactionResponse>

      <loc:result>

        <ResponseCode>100000007</ResponseCode>

        <ResponseDesc>Authentication failed</ResponseDesc>

      </loc:result>

    </loc:queryTransactionResponse>

  </soapenv:Body>

</soapenv:Envelope>

```