

Group 76 Final Report: Classification of Retinal Diseases Using Optical Coherence Tomography (OCT) Images

Elite Lu, Ishpreet Nagi, Kenneth Ong
{lue13,nagii,salimk4}@mcmaster.ca

1 Introduction



Healthcare providers deal with many vision related illnesses such as Diabetic Macular Edema (DME), Choroidal Neovascularization (CNV), and drusen. The utilization of these retinal scans detect and determine these conditions. An issue that arises is the uniqueness of each ailment, as each condition varies in subtle ways. Correctly identifying retinal diseases can prove to be a challenge in a plethora of cases and with approximately 30 million OCT scans performed each year, this process can be time-consuming and labor-intensive for healthcare professionals. By having a classification model that can help speed up this process, healthcare professionals should be able to focus their attention on helping more individuals requiring their aid.

2 Related Work

3 Dataset

3.1 Folder Structure

When downloading the data, the dataset was partitioned as follows:

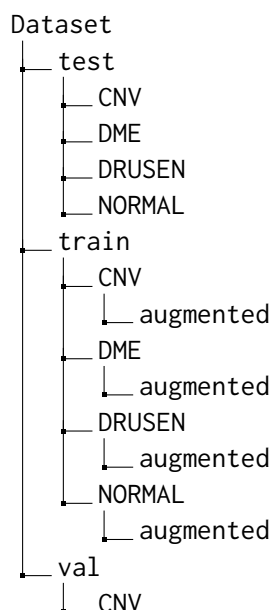

The new added folders for the training data, augmented, contains the augmented image data for each category. The reason for this will be elaborated in the **Data Augmentation** section.

3.2 Initial Image Counts

Type	Disease	# of Images
train	CNV	37205
	DME	11348
	DRUSEN	8616
	NORMAL	26315
test	CNV	242
	DME	242
	DRUSEN	242
	NORMAL	242
val	CNV	8
	DME	8
	DRUSEN	8
	NORMAL	8

3.3 Data Augmentation

One of the encountered problems with the dataset is the class imbalance. As seen in the **Initial Image Counts** table, the number of images vary drastically. For example, CNV has nearly 4.5 times the amount of images the DRUSEN class has. Because of this, the model will be biased towards the classes with

more images, thus resulting in poor performance. To mitigate this, data augmentation was performed on the training dataset to increase the number of images such that each class has the same number of images. This was done by performing the following random actions:

```
augmentation_transforms = transforms.Compose([
    transforms.RandomHorizontalFlip(),
    transforms.RandomRotation(50),
    transforms.RandomResizedCrop(size=224,
        scale=(0.8, 1.0)),
    transforms.ColorJitter(brightness=0.2,
        contrast=0.2),
])
```

This augmentation process includes randomly flipping the image horizontally, randomly rotating the image by up to 50 degrees, randomly cropping and resizing the image, and randomly changing the contrast and brightness of the image. By performing this, not only will the dataset be more robust as a whole, but the model will less likely to overfit or have bias towards a certain class.

As a result, the new image counts after augmentation are as follows:

Type	Disease	# of Images
train	CNV	37205
	DME	37205
	DRUSEN	37205
	NORMAL	37205
test	CNV	242
	DME	242
	DRUSEN	242
	NORMAL	242
val	CNV	8
	DME	8
	DRUSEN	8
	NORMAL	8

This results in the training dataset having a total of 148820 images.