



Lomba Kompetensi Siswa  
Sekolah Menengah Kejuruan  
Tingkat Provinsi Jawa Barat  
Tahun 2022

Modul 3 - Highly Scalable and Fault Tolerant Architecture

July 22, 2022

Bidang Lomba Cloud Computing

# 1 Overview

You have been given a task to deploy a web application on AWS. The application is built using nodejs and it will be hosted on EC2. The architecture must be designed to highly scalable and fault tolerant. You will deploy the application to an Auto Scaling Group in a multi-AZ environment, EFS is used to store uploaded images, ElastiCache for Redis is used to store login session information and Aurora Serverless is used to store data.

## 2 General Rules

1. Failure to comply with the rules will result in immediate disqualification.
2. You have 6 hours to finish the tasks.
3. This is an open book test.
4. You may use AWS Console and AWS CLI to deploy the solutions. You may not use CloudFormation or CDK.
5. Between and after the event, you may not access your account. Any activity on AWS during this period is not allowed.
6. During the event, multiple login is not permitted.
7. If you have any question, do not hesitate to ask.

## 3 External Resources

1. The repository URL for the project is <https://github.com/itsgitz/lks-jabar-2022-modul3>

## 4 Architecture

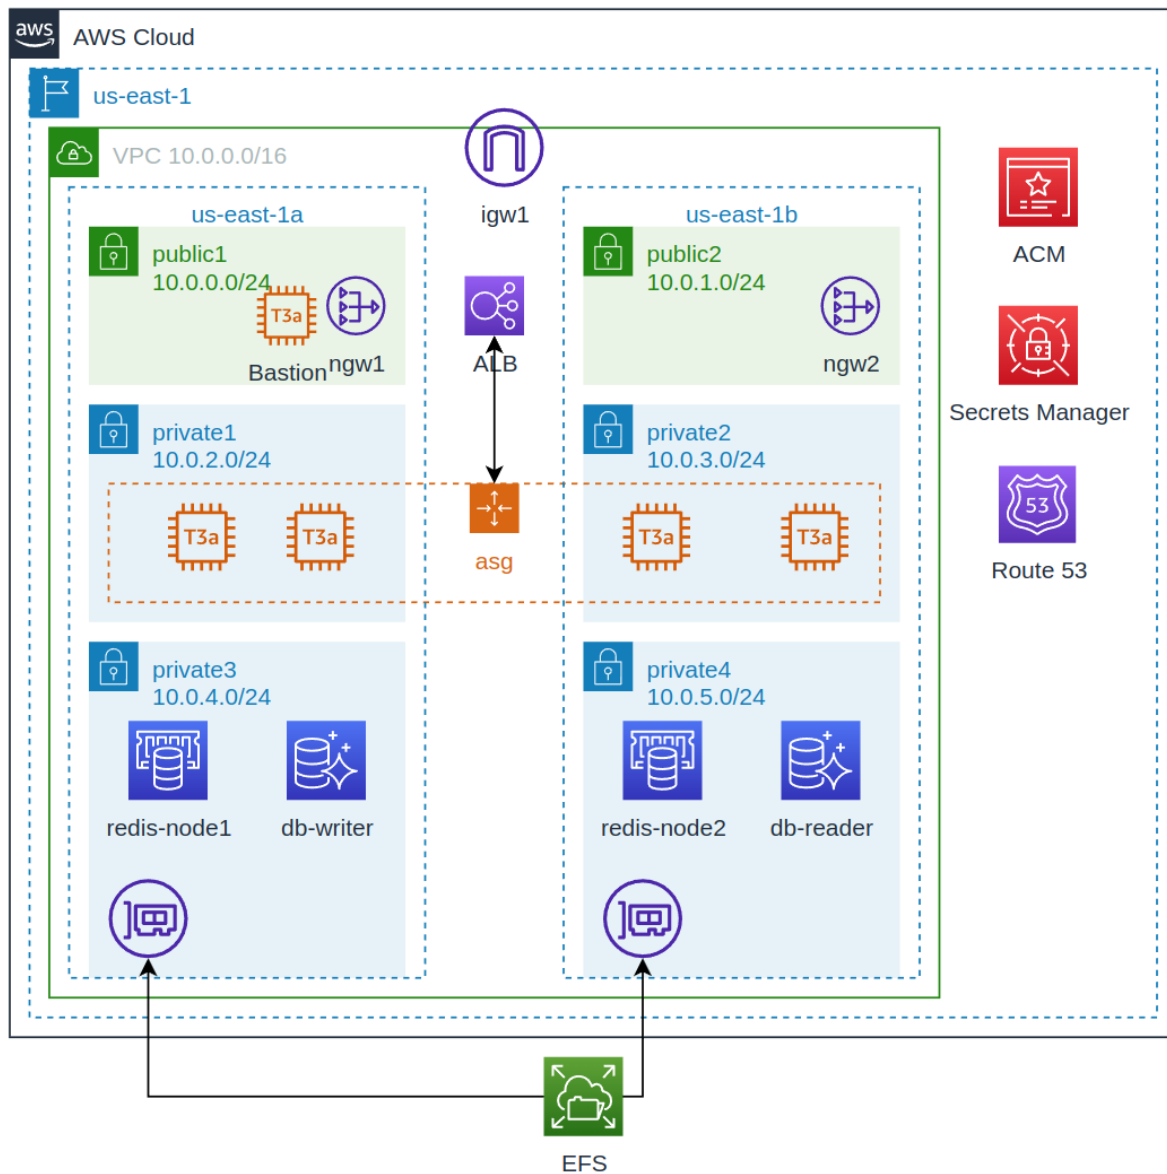


Figure 1: Architecture Diagram

## 5 Task

1. Create VPC with the following specifications:

- IPv4 CIDRs: 10.0.0.0/16
- Number of NAT Gateways: 2
  - (a) Name: ngw1, Subnet: public1
  - (b) Name: ngw2, Subnet: public2
- Subnets:
  - (a) – Subnet Name: public1
  - IPv4 CIDR block: 10.0.0.0/24

- 0.0.0.0/0 is routed to: Internet Gateway
  - (b) – Subnet Name: public2
    - IPv4 CIDR block: 10.0.1.0/24
    - 0.0.0.0/0 is routed to: Internet Gateway
  - (c) – Subnet Name: private1
    - IPv4 CIDR block: 10.0.2.0/24
    - 0.0.0.0/0 is routed to: NAT Gateway (ngw1)
  - (d) – Subnet Name: private2
    - IPv4 CIDR block: 10.0.3.0/24
    - 0.0.0.0/0 is routed to: NAT Gateway (ngw2)
  - (e) – Subnet Name: private3
    - IPv4 CIDR block: 10.0.4.0/24
    - No additional route.
  - (f) – Subnet Name: private4
    - IPv4 CIDR block: 10.0.5.0/24
    - No additional route.
2. Create an EC2 key pair.
    - Name: lksjabar2022modul3
    - Key pair type: RSA
    - Private key file format: .pem
  3. Create a bastion host (EC2 instance) to access resources in private subnet remotely.
    - Name: Bastion
    - OS: Ubuntu 22.04 LTS (HVM)
    - Subnet: public1
    - Instance Type: t3a.micro
    - Public IP Address: Enabled
    - Security Group Rule: Allow SSH traffic from anywhere
    - Key pair: lksjabar2022modul3
  4. Create an RDS database with the following specifications:
    - Aurora Serverless with PostgreSQL compatibility
    - Minimum ACU: 0.5
    - Maximum ACU: 4
    - Multi-AZ deployment: True
    - Network Subnet: private3 and private4
  5. Create a database credential on Secrets Manager and attach it to the database
  6. Create ElastiCache with the following specifications:
    - Redis Cluster
    - Enable cluster mode

- Enable Multi Availability Zone
  - Instance Type: t4g.micro
  - Use default redis port (6379)
  - Number of shards: 1
  - Number of replicas: 2
  - Network Subnet: private3 and private4
7. Create an EFS file system with the following specifications:
- Storage class: Standard
  - Transition into IA: 7 days since last access
  - Transition out of IA: On first access
  - Performance mode: General Purpose
  - Throughput mode: Bursting
  - Encryption: Enable encryption of data at rest
  - Mount targets:
    - (a) AZ: us-east-1a, Subnet: private3
    - (b) AZ: us-east-1b, Subnet: private4
8. Create an EC2 instance
- Name: InstanceTemplate-modul3
  - Key pair: lksjabar2022modul3
  - Instance Type: t3a.micro
  - Storage: 8 GiB of GP2
  - Connect to the instance and finish the following instructions inside the instance:
    - Clone the application repository from section ???. Follow the instruction in README.md to install the application.
    - Mount the EFS file system to APP\_ROOT/public/images/ where APP\_ROOT is the base directory of the application. Make sure the EFS file system is mounted on startup.
    - Restart the VM, make sure the application starts on startup.
9. Create an EC2 Launch Template from InstanceTemplate-modul3 with the following specifications:
- Launch template name: ASG-template-modul3
  - Key pair: lksjabar2022modul3
  - Instance Type: t3a.micro
10. Create Auto Scaling Group with the following specifications:
- Network Subnet: private1 and private2
  - Load balancing: Attach to a new load balancer
    - Load balancer name: ALB-modul3
    - Load balancer type: Application Load Balancer
    - Load balancer scheme: Internet-facing
  - Minimum Capacity: 2
  - Desired: 2
  - Max: 6
  - Scaling policies: Target tracking scaling policy

- Metric type: Average CPU utilization
  - Target value: 70
- 11. Configure ALB-modul3 to redirect HTTP request to HTTPS.
- 12. Create a certificate in ACM
  - Domain Name: modul3.[YOUR\_DOMAIN]
  - Validation Method: DNS validation
- 13. Add custom domain to the Application Load Balancer

## 6 References

- [Amazon Aurora documentation](#)
- [Application Load Balancer documentation](#)
- [Certificate Manager documentation](#)
- [EFS documentation](#)
- [EC2 documentation](#)
- [EC2 Auto Scaling documentation](#)
- [ElastiCache for Redis documentation](#)
- [Route 53 documentation](#)
- [AWS Secrets Manager documentation](#)
- [VPC documentation](#)
- [npm documentation](#)
- [yarn documentation](#)
- [PM2 documentation](#)

**Good luck!**