



Lomba Kompetensi Siswa Sekolah Menengah Kejuruan Tingkat Provinsi Jawa Barat Tahun 2023

Modul 1 - Serverless Architecture

May 7, 2023

Bidang Lomba Cloud Computing

1 Overview

Optimizing images on a website is a critical aspect of enhancing user experience, reducing delivery costs, and boosting search engine rankings. Given that images are typically the heaviest components of a web page in terms of both bytes and number of HTTP requests, it is important to implement effective optimization strategies. Optimizing images can also enhance a website's search engine ranking, as demonstrated by Google's Largest Contentful Paint metric. By implementing this solution, websites can achieve faster load times, lower costs, and improved visibility in search engine results. You have been given a task to deploy an image optimizer solution on AWS. The API is built using AWS serverless components such as Amazon CloudFront, Amazon S3, and AWS Lambda. The solution requires to use a custom domain and an SSL.

2 General Rules

1. Failure to comply with the rules will result in immediate disqualification.
2. You have 3 hours to finish the tasks.
3. You may not open any website unless otherwise specified in section 6 and you may open the control panel of your domain provider to update the nameserver to Route 53.
4. You may use AWS Console and AWS CLI to deploy the solutions. You may not use SAM, CloudFormation or CDK.
5. Between and after the event, you may not access your account. Any activity on AWS during this period is not allowed.
6. During the event, multiple login is not permitted.
7. If you have any question, do not hesitate to ask.

3 Architecture

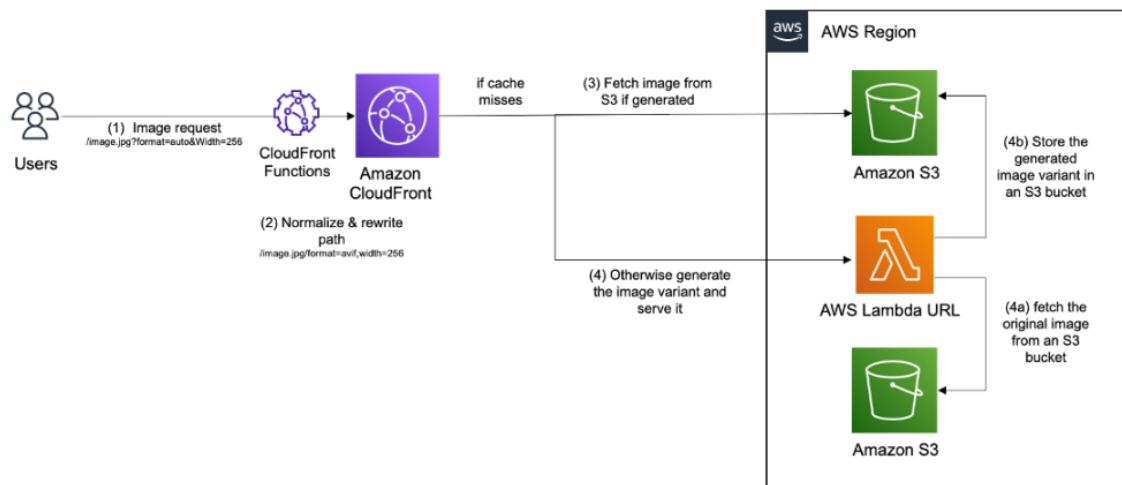


Figure 1: Architecture Diagram

1. A user requests an image with certain transformations, such as encoding and size, these transformations are encoded in the URL as query parameters. For instance, an example URL may look like this: `https://example.com/images/01.jpg?format=webp&width=200`.

2. The image request is initially handled by the nearest CloudFront edge location, ensuring optimal performance. A CloudFront Function is then executed on the viewer request event to rewrite the request URL before it is passed upstream. This function is designed for CDN customizations that require lightweight JavaScript functions capable of handling high-scale, latency-sensitive tasks. In our architecture, the URL is rewritten to validate the requested transformations, normalize the URL by ordering transformations and converting them to lower case, thus increasing the cache hit ratio. Additionally, when an automatic transformation is requested, the function determines the best one to apply. For example, if the user specifies the "format=auto" directive for the most optimized image format (JPEG, WebP, or AVIF), the CloudFront Function selects the optimal format based on the Accept header present in the request.
3. When a user requests an image that is already cached in CloudFront, the image is immediately returned from the CloudFront cache, resulting in a cache hit. However, if the image is not present in the CloudFront cache, the request is forwarded to an S3 bucket created specifically for storing transformed images. If the requested image has already been transformed and stored in S3, it is served and cached in CloudFront, with no need for further transformation.
4. If the requested image does not exist in the bucket for the transformed images, S3 will respond with a 403 error code. CloudFront's Origin Failover feature detects this error and retries the same URL, but this time using the secondary origin based on the Lambda function URL. The Lambda function is then invoked and downloads the original image from a separate S3 bucket where the original images are stored. Using the Sharp library, the Lambda function transforms the image, stores it in S3, and serves it through CloudFront, where it is cached for future requests.

4 Information

1. The repository URL for the required source code to deploy this solution is https://github.com/kensasongko/lkscjabar2023modul2_aplikasi
2. This solution must be deployed in **us-east-1 (N. Virginia) region**. Deploying in another region will result in a major point reduction.

5 Task

Your task is to create the solution from the section 3.

1. Create 2 S3 buckets, one to store the original images and another one to store the transformed images.
 - Original image bucket:
 - Add tag: Key=LKS-ID, Value=MODUL2
 - Add tag: Key=BUCKET-ID, Value=MODUL2-ORIGINAL
 - Transformed image bucket:
 - Create a lifecycle policy to remove images after 30 days.
 - Add tags: Key=LKS-ID, Value=MODUL2
 - add tags: Key=BUCKET-ID, Value=MODUL2-TRANSFORMED
2. Deploy lambda: install sharp, create a development package from the image-processing directory, deploy it. Check README.md for further instruction.
3. Create a CloudFront distribution with the following configuration:
 - Price class: Use all edge locations (best performance)
 - Supported HTTP versions: HTTP/2, HTTP/1.1, HTTP/1.0

- Security policy: TLSv1.2_2021
 - Standard logging: Off
 - Cookie logging: Off
 - Cache Policy:
 - TTL Settings - Minimum TTL (seconds): 10
 - TTL Settings - Maximum TTL (seconds): 31536000
 - TTL Settings - Default TTL (seconds): 86400
 - Cache Keys - Headers: None
 - Cache Keys - Cookies: None
 - Cache Keys - Query strings: All
 - Compression support - Gzip: Disabled
 - Compression support - Brotli: Disabled
 - Response headers policy:
 - Cross-origin resource sharing (CORS) - Access-Control-Allow-Credentials: False
 - Cross-origin resource sharing (CORS) - Access-Control-Allow-Headers: *
 - Cross-origin resource sharing (CORS) - Access-Control-Allow-Methods: GET
 - Cross-origin resource sharing (CORS) - Access-Control-Allow-Origin: *
 - Cross-origin resource sharing (CORS) - Access-Control-Expose-Headers: -
 - Cross-origin resource sharing (CORS) - Access-Control-Max-Age (seconds): 600
 - As shown in the architecture diagram, create 2 origin with origin failover (failover criteria: 403), as explained in section 3
 - Add tag: Key=LKS-ID, Value=MODUL2
4. Create a CloudFront function from the url-rewrite directory and add it to Viewer request function of the CloudFront distribution.

6 References

- [Lambda documentation](#)
- [API Gateway documentation](#)
- [Route 53 documentation](#)
- [Certificate Manager documentation](#)
- [Sharp documentation](#)

Good luck!