Functions

Crossword - Chapter review

Use chapter concepts to solve the clues. Omit spaces and punctuation in the grid.

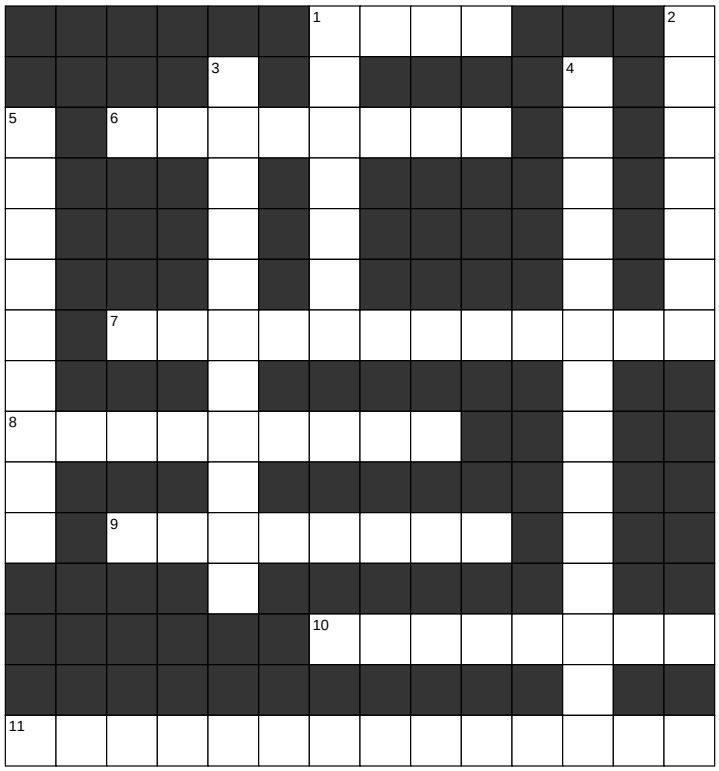

Across

1. _____ is the value a function call has when its body finishes without an explicit `return`, or when `return` runs with no expression after it.

6. A _____ lets us name that computation once and supply different numbers, called arguments, each time we use it:

7. `_____` never assigns `greeting` itself.

8. A function lets us name that computation once and supply different numbers, called _____, each time we use it:

9. A call is the first structure built so far that consumes anything other than `break` and `_____`.

10. `showGreeting` never assigns `_____` itself.

11. `function triple(x) { return x + x + x }` is _____: it means exactly `triple = function(x) { return x + x + x };`, and produces the identical abstract syntax tree (AST).

Down

1. _____ past parsing ever sees the named form; by the time the evaluator runs, every function in this chapter arrived the same way, as a value assigned to a name.

2. `average` is defined once; _____ it with different arguments runs the same three statements against whatever values were supplied that time.

3. (1) The mechanism is the same `$PARENT` chain every _____ has used since Chapter 6.

4. This is _____: a name a function does not bind itself resolves by looking at whoever called it, not by looking at wherever the function happened to be written down.

5. Each call gets a fresh, private place to put its own local variables -- a _____ -- that disappears once the call returns.