


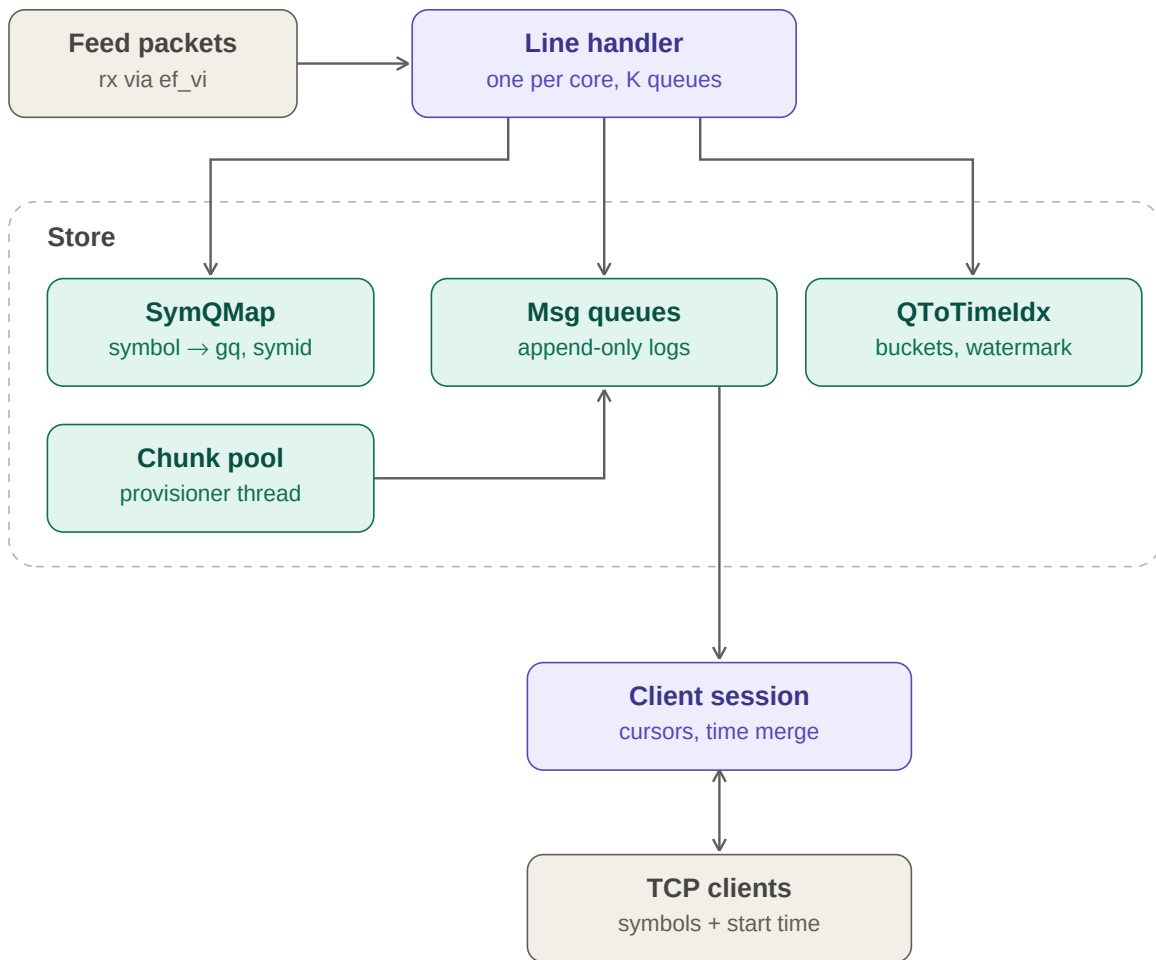

Component map: compute is purple, store state is teal, edges are gray.

A few things the boxes can't show:

- The three arrows out of the line handler are the per-message hot path: one SymQMap probe, one queue append, and a bucket roll only when feed time crosses a boundary. The watermark store happens once per packet.
- The chunk pool arrow is the only cross-thread interaction on the write side, and it's a mailbox: the LH asks at half-chunk, the provisioner answers with a prefaulted, mlocked chunk.
- The session reads all three store components. SymQMap to resolve symbols, QToTimeIdx to narrow the start search and to compute the merge frontier, and the queues' sidecars for the exact search and symbol filtering. Records themselves are touched only when emitted.
- Nothing points from the store back to the line handler. Readers can't slow the writer, and a stalled reader only stalls its own TCP client.