OKYO

Analytics Tagging Specifications

Palo Alto Networks

Gaurav Sirohi & Jeff Leong

Table of Contents

Summary **2**

Overview **3**

Tag Management **3**

What is a Data Layer **3**

Tag Management Script **4**

Palo Alto Network's Data Layer **4**

Page Content **5**

User Register, Login Events & Login States 6

Click Tracking w/ attributes: **8**

Attribute Setting Examples: 8

Attribute Naming Convention 8

Goal Completion Tracking **10**

Pre Order Complete 10

Get Started Flow Complete 11

Form Tracking **12**

eCommerce Tracking (future-state) **13**

Appendix **14**

Testing Adobe & Google Analytics 14

Summary

The purpose of this document is to provide tagging specifications regarding the implementation of an analytics data layer and tag manager so that that the Marketing Web Team and various lines of businesses can measure the newly planed Consumer OKYO Product Offering.

The agency, “Critical Mass”, will complete the implementation of analytics tagging and Palo Alto Network’s tag manager.”

Through the instrumentation of Adobe Analytics, the following objectives have been identified as the primary & initial goals:

Identify unique audiences visiting the pre-order microsite and better understand customer journeys across the site. This measurement strategy contains a framework to:

1. Evaluate customer journeys (are users completing key actions across the site?)
2. Distinguish audiences (who is visiting the site and why?) to understand how visitors are using the site.

The initial launch of the offering will focus on the following Journey’s:

1. **Shopping customers** who wish to inquire further about Okyo Garde
2. **New customers** who wish to pre-order Okyo Garde (Pre-Order user flow)
3. **Redeeming customers** who have had employers pre-purchase Okyo Garde for them (Get Started user flow)
4. **Existing customers** who have already pre-ordered Okyo Garde (login user flow)

Note: To finalize all specifications outlined in this document, we would like to view the journey through wireframes and ensure we are accounting for the user experiences & journeys correctly. In addition to this, we would like to confirm if the website will be a single-page application experience or a traditional website.

Chatbot tracking is handled through the Drift API, which sends data to our Analytics when users engage. No requirements or tagging will be required for this requirement.

Overview

This document will focus on the following.

1. What dataLayer schema to use to ensure proper tracking of all pages and event-level data
2. Attributes to place to ensure tracking of key actions

Tag Management

Palo Alto Networks leverages Adobe Launch to manage all tags and pixels across all digital properties.

Since tag management will be handling all of the data interpretation, the traditional form of 'tagging' the site will not be required. Instead, only relevant pieces of information can be set through a data layer in the form of a JSON variable.

Within this document, each general reporting requirement will be outlined with instructions on what to pass into the data layer, along with a code example. Please note: data layer code needs to be placed in the header BEFORE the tag manager container code snippets.

What is a Data Layer

A data layer is a standard way to format data within a web page. It is a collection of one or more JavaScript Objects (JSO) holding information or important signals about the page and user.

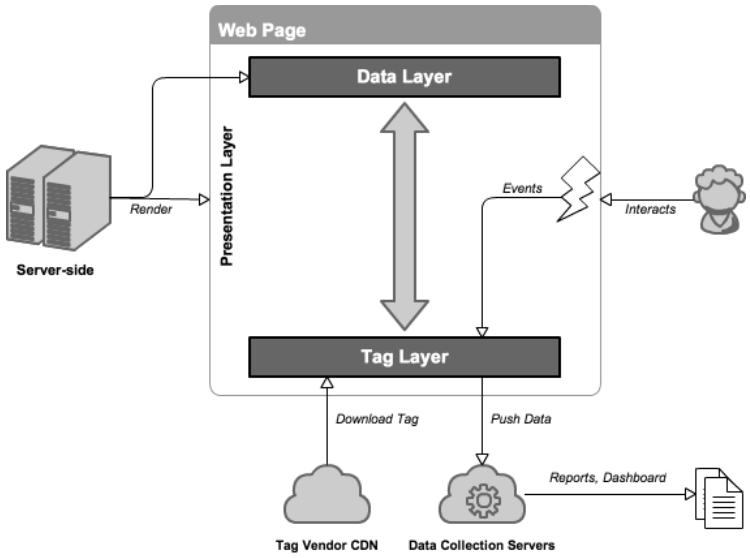

A data layer decouples analytics and marketing tags from data and separates the presentation layer of the page from data without affecting the rendering of a page or performance. In addition, the data layer enables developers to implement clean and highly maintainable tracking codes.

This also makes data reusable and acts as a single source of truth for all analytics and marketing tags. Using data layer tags can communicate and share data on the web page. The application of the data layer is not limited to marketing or analytics tools. Any type of web application can then consume information in the data layer.

PANW's Tag Management Script

Please add the below js library onto **all pages** within the **<head>** section. Also, please ensure that the library is placed after jQuery and after the setting of the data layer.

Two libraries have been included, one for non-production, test/dev/stage environments. The other is only for production. As we develop analytics non-production environments, please ensure that the production library is not used.

Test Environment :

```
//Non Production - Test Environment
<script src="//assets.adobedtm.com/9273d4aedcd2/c45dba3950f8/launch-0a3463504718-development.min.js"
async></script>
```

Production Environment :

```
//Production Only
<script src="//assets.adobedtm.com/9273d4aedcd2/c45dba3950f8/launch-2c1d62fb7608.min.js" async></script>
```

Website Data Layer

At Palo Alto Networks, we use the following JSON variable as our primary analytics data layer.

```
//PANW's Data Layer Variable
var webData = {}
```

Page Content

Within the OKYO website, we will need to implement content metadata into the data layer to account for the page, level 1 (section, level 2 (sub-section), and page type.

Adobe & Other Analytics will treat the same value with different case logic (e.g., home vs. Home) as distinct values. Ideally, all naming conventions should be lower case to avoid any reporting issues.

The following variables will need to be captured within the webData schema on all pages:

Item	Description	JSON	Example Setting
Variables			
Page Name	The unique page name of the page visitor is on	webData.pageName	okyo:home, okyo:learn more:{name of page} okyo:cart okyoLproducts:{name of product detail page} okyo:login
Level 1	The site section of the page (1st folder)	webData.level1	home products
Level 2	The site sub-section of the page (2nd folder) - Only if applicable	webData.level2	value of the 2nd directory
Level 3	The site sub-sub-section of the page (3rd folder) - Only if applicable	webData.level3	value of the 3rd directory
Page Type	The type of page,	webData.pageType	e.g., product detail, product list, checkout, cart, home,

```
// Example
webData = {
        pageName : 'okyo:learn-more:products:okyo-garde',
        pageType : 'product-detail',
        level1 : 'learn-more',
        level2 : XXXX, ' //leave blank if not applicable
        level3 : '' //leave blank if not applicable
};
```

Fulfilled measurement requirements

1. Page and Path visits and engagement
2. Funnel Analysis
3. Path Analysis

User Register, Login Events & Login States

Based on the requirements, new customer vs. returning was highlighted as a requirement. At Palo Alto Networks, we typically track the following.

1. When users complete a registration
2. When users successfully login
3. When users are known, through their login state, e.g., logged-in vs. not logged-in
4. The user's assigned userID when registered and logged in

The following variables will need to be captured within the webData schema on all pages. Events are noted and should only be set when the action occurs or is completed by the user.

Item	Description	JSON	Example Setting
Variables			
User ID	Assigned User ID	webData.userID	abc123
Company Name	User's company or default to the consumer if no company name assigned	webData.company	Hewlett Packard, Cico, Airbnb, or default to if no company name. Consumer
Login State	State of the user's session	webData.loginState	auth or not-auth
Events			
Register	Set only once when the user completes a registration	webData.userEvent = register_success	set the variable path with the event name
Login	Set only once after the user completes their login	webData.userEvent = login_success	set the variable path with the event name

```
// Example of user successfully logged in
webData = {
        pageName : 'okyo:login:sucess',
        pageType : 'profile',
        level1 : 'login',
        level2 : 'success',
        level3 : '', //leave blank if not applicable
        userID : 'abc123',
        loginState : 'auth',
        userEvent : 'login_success'
};

// Example of user successfully registering and logged in automatically
webData = {
        pageName : 'okyo:login:sucess',
        pageType : 'profile',
        level1 : 'login',
        level2 : 'success',
```

```
        level3 : '', //leave blank if not applicable
        userID : 'abc123',
        loginState : 'auth',
        userEvent : 'register_success'
};

// Example of user already authenticated
webData = {
        pageName : 'okyo:login:sucess',
        pageType : 'profile',
        level1 : 'login',
        level2 : 'success',
        level3 : '', //leave blank if not applicable
        userID : 'abc123',
        loginState : 'auth',
        userEvent : "" //Need to update this only once the user logs in.
};

// Example of user browsing not logged in
webData = {
        pageName : 'okyo:learm-more',
        pageType : 'awareness',
        level1 : 'learn-more',
        level2 : '', //leave blank if not applicable
        level3 : '', //leave blank if not applicable
        userID : ',' //leave blank if not applicable
        loginState : 'not-auth',
        userEvent : "" //leave blank if not applicable
};
```

Fulfilled measurement requirements

1. User Registration & Registration Rate
2. User Logins & Login Rate
3. Known vs. Unknown Sessions (Logged in State)
4. Company (if applicable of registered users)

Click Tracking w/ attributes:

Palo Alto Networks enables click-tracking through event logging of what was clicked and incrementor events to account for the # of clicks.

To ensure every link is tracked, please add the following attribute and follow the defined naming convention and syntax to partition where clicks occurred from, what was clicked, and the location of the click within the page.

Attribute Setting Examples:

Please note all the links where users can click should have below two attributes added. Example below

```
// Attribute Example of Essential CTA Box
data-track="true"
data-track-value="pre-order:essential-box:pre-order"

// Attribute Example of Plus CTA Box
data-track="true"
data-track-value="pre-order:plus-box:pre-order"
```

Attribute Naming Convention

We do not have a defined set of rules but use a breadcrumb approach to help identify the following.

1. Page - location of the clicked element.
2. Type - what component type was clicked, e.g., card, box, hero, nav, header, link, etc.
3. CTA Name - assigned CTA value, e.g. pre-order, learn-more, get-started, download-now, etc.

Please feel free to follow the 3 level approach or include a 4th or 5th level as needed. Please also ensure all primary click KPIs are instrumented with these attributes to ensure KPI requirements are captured.

Below are the primary click elements provided by the agency.

- Product Detail CTA Clicks
- Pre Order CTA Clicks
- Get Started CTA Clicks
- PANW Link Clicks

Fulfilled measurement requirements

1. Learn More Journey supporting measures based on clicks
2. Page Content Engagement Rates
3. Click Distribution within a Page by region and type.

Goal Completion Tracking

The following goals have been identified in the OKYO offering

- Pre Order Complete
- Get Started Flow Complete

Palo Alto Networks would like to track these through an event, which can be set through the data layer or set through track call event. Both options have been included below.

Pre Order Complete

```
//Example of user completing a pre-order transaction
webData = {
   pageName: 'okyo:pre-order:confirm',
   pageType: 'order-confirm',
   level1: 'pre-order',
   level2: 'confirm',
   level3: '',
   userID: '',
   userID: 'abc123',
   loginState: 'auth',
   flowName: 'pre-order',
   flowEvent: 'preorder_success', //Everything below is Optional until ecommerce is fully enabled
   productData: [{
         productId: 'PRODUCT ID',
         productSku: 'PRODUCT SKU',
         productName: 'PRODUCT NAME',
         productPrice: 'PRICE',
         productQty: 'QTY'
      },
      {
         productId: 'PRODUCT ID',
         productSku: 'PRODUCT SKU',
         productName: 'PRODUCT NAME',
         productPrice: 'PRICE',
         productQty: 'QTY'
      }
   ], //Should be an array of objects with all relevant product data
   ecommerce: {
      event: 'pre-order',
      checkout_info: {
         step_name: 'checkout', // Place the last step based on the toal # of steps
         details: 'VALUE' //Any other checkout related information
      },
      order_info: {
         transactionId: 'ORDER ID',
         orderTotal: 'ORDER TOTAL',
         tax: 'TAX AMOUNT',
         shipping: 'SHIPPING AMOUNT',
         promotions: [{
            discountType: 'PRODUCT OR ORDER LEVEL',
            discountAmount: 'AMOUNT',
            discountProductSku: 'PRODUCT SKU', //If the discount is at product level.
            promoCode: 'VALUE'
         }]
      }
   }
};
```

Get Started Flow Complete

Please note we do not know what this completion goal is. Is it a series of pages, profile registration,etc.

```
//Example of user completing get started flow
webData = {
   pageName: 'okyo:get-started:confirm',
   pageType: 'get-started',
   level1: 'confirm',
   level2: '',
   level3: '',
   userID: '',
   userID: 'abc123',
   loginState: 'auth',
   flowName: 'get-started',
   flowEvent: 'get_started_success'
};
```

Fulfilled measurement requirements

1. Pre Order Conversions Completed & Rate
2. Get Started Flow Conversions Completed & Rate
3. Preliminary eCommerce enablement of analytics tracking

Form Tracking

If a form will be offered, we track form conversions through a dimension and event as outlined below.

```
// Example
webData = {
        pageName : 'okyo:contact-us',
        pageType : 'form',
        level1 : 'contact-us',
        level2 : '',
        level3 : '',
        userID : '',
        loginState : 'not-auth',
        formName : 'contact-us',
        formEvent : 'form_submit'
};
```

Item	Description	JSON	Example Setting
Variables			
formName	path of URL where the form resides	webData.formName	contact-us
Events			
Form Submit	Set when the user completes the form submission	webData.userEvent = form_submit	set the variable path with the event name

Fulfilled measurement requirements

1. Contact Form Inquiries

eCommerce Tracking (future-state)

Within this section is the general schema we will use to account for the following.

1. Product Detail Views
2. Cart Add, Remove, Update
3. Checkout + Checkout Steps
4. Order Confirm with Purchase ID and Order Values

```
//Example of eCommerce Data Layer for future tracking
webData = {
  productData: [{
    productId: 'PRODUCT ID',
    productSku: 'PRODUCT SKU',
    productName: 'PRODUCT NAME',
    productPrice: 'PRICE',
    productQty: 'QTY'
  }, {
    productId: 'PRODUCT ID',
    productSku: 'PRODUCT SKU',
    productName: 'PRODUCT NAME',
    productPrice: 'PRICE',
    productQty: 'QTY'
  }], //An array of objects with all relevant product data
  ecommerce: {
    event: 'EVENT NAME', //Product list view or product view or cart add or remove or any other ecommerce event.
Give the event name here
    checkout_info: {
      step_name: 'CHECKOUT STEP',
      details: 'VALUE' //Any other checkout related information
    },
    order_info: {
      transactionId: 'ORDER ID',
      orderTotal: 'ORDER TOTAL',
      tax: 'TAX AMOUNT',
      shipping: 'SHIPPING AMOUNT',
      promotions: [{
        discountType: 'PRODUCT OR ORDER LEVEL',
        discountAmount: 'AMOUNT',
        discountProductSku: 'PRODUCT SKU' //If the discount is at product level.
        promoCode: 'VALUE'
      }]
    }
  }
}
```

Appendix

Testing Adobe & Google Analytics

- **Observepoint** - https://chrome.google.com/webstore/detail/observepoint-tag-debugger/daejfbkjipkgidckemjjafiomfeabemo?hl=en-US
- **Omnibug** - https://chrome.google.com/webstore/detail/omnibug/bknpehncffejahipecakbfkomebjmokl?hl=en
- **Adobe Experience Cloud Debugger -** https://chrome.google.com/webstore/detail/adobe-experience-cloud-de/ocdmogmohccmeicdhlhhgepeaijenapj