p

u

b

C

t

p

e

a

a

S

T

a

p

0

d

p

p

r

O

t

0

C

O

P

r

O

l

e

P

r

e

S

e

n

t

e

r

u

t

p

u

t

C

S

S

{

u

n

C

S

h

0

W

P

r

0

l

e

(

m

a

g

U

m

g

e

C

O

V

e

m

a

g

e

U

m

N

a

m

L

b

e

(

n

a

m

e

S

r

n

g

V

a

r

p

r

0

l

e

C

l

0

S

u

r

e

a

p

?

{

t

S

e

}

S

e

t

t

n

g

S

C

l

S

u

r

a

p

?

e

S

e

}

C

a

ɭ

C

u

ɭ

a

t

e

H

g

h

t

O

r

S



n

g

S

t

t

r

b

u

e

S

r

n

D

0

b

e

}

p

u

b

C

p

r

0

t

C

P

r

0

ɭ

e

P

r

e

S

e

n

t

e

r

0

u

t

p

u

t

C

S

S

{

u

n

C

S

h

0

W

P

r

0

ɭ

e

m

a

g

e

d

a

t

a

D

t

?

C

0

V

e

m

a

g

(

d

a

t

a

t

?

N

a

m

a

b

e

(

n

a

m

e

S

t

r

n

a

p

r

0



l

e

C

l

0

S

u

r

e

p

?

g

e

S

e

S

e

t

t

n

g

S

C

ɭ

S

u

r

p

?

g

e

t

S

e

}

C

a

ɭ

C

u

a

t

e

h

t

r

S

t

n

g

S

t

r

b

u

e

d

S

n

g

)

0

u

b

e

}

p

p

p

{

(

g

L

g

R

(

g

p

p

{

}

g

p

}

g

g

e

}

UIImage

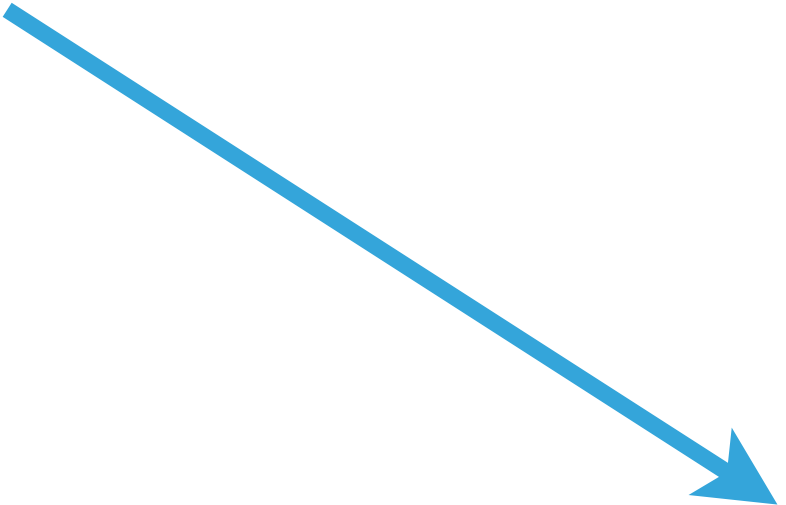

# Data

# URL

```swift
public protocol ProfilePresenterOutput: class {
    func showProfile(image: URL)
    func showCover(image: URL)

    func showNameLabel(name: String)

    var profileClosure: Tap? { get set }
    var settingsClosure: Tap? { get set }

    func calculateHeight(for string: NSAttributedString) -> Double
}
```

URL

```swift
public protocol ProfilePresenterOutput: class {
    func showProfileImage(data: Data?)
    func showCoverImage(data: Data?)

    func showNameLabel(name: String)

    var profileClosure: Tap? { get set }
    var settingsClosure: Tap? { get set }

    func calculateHeight(for string: NSAttributedString) -> Double
}
```

Data

---

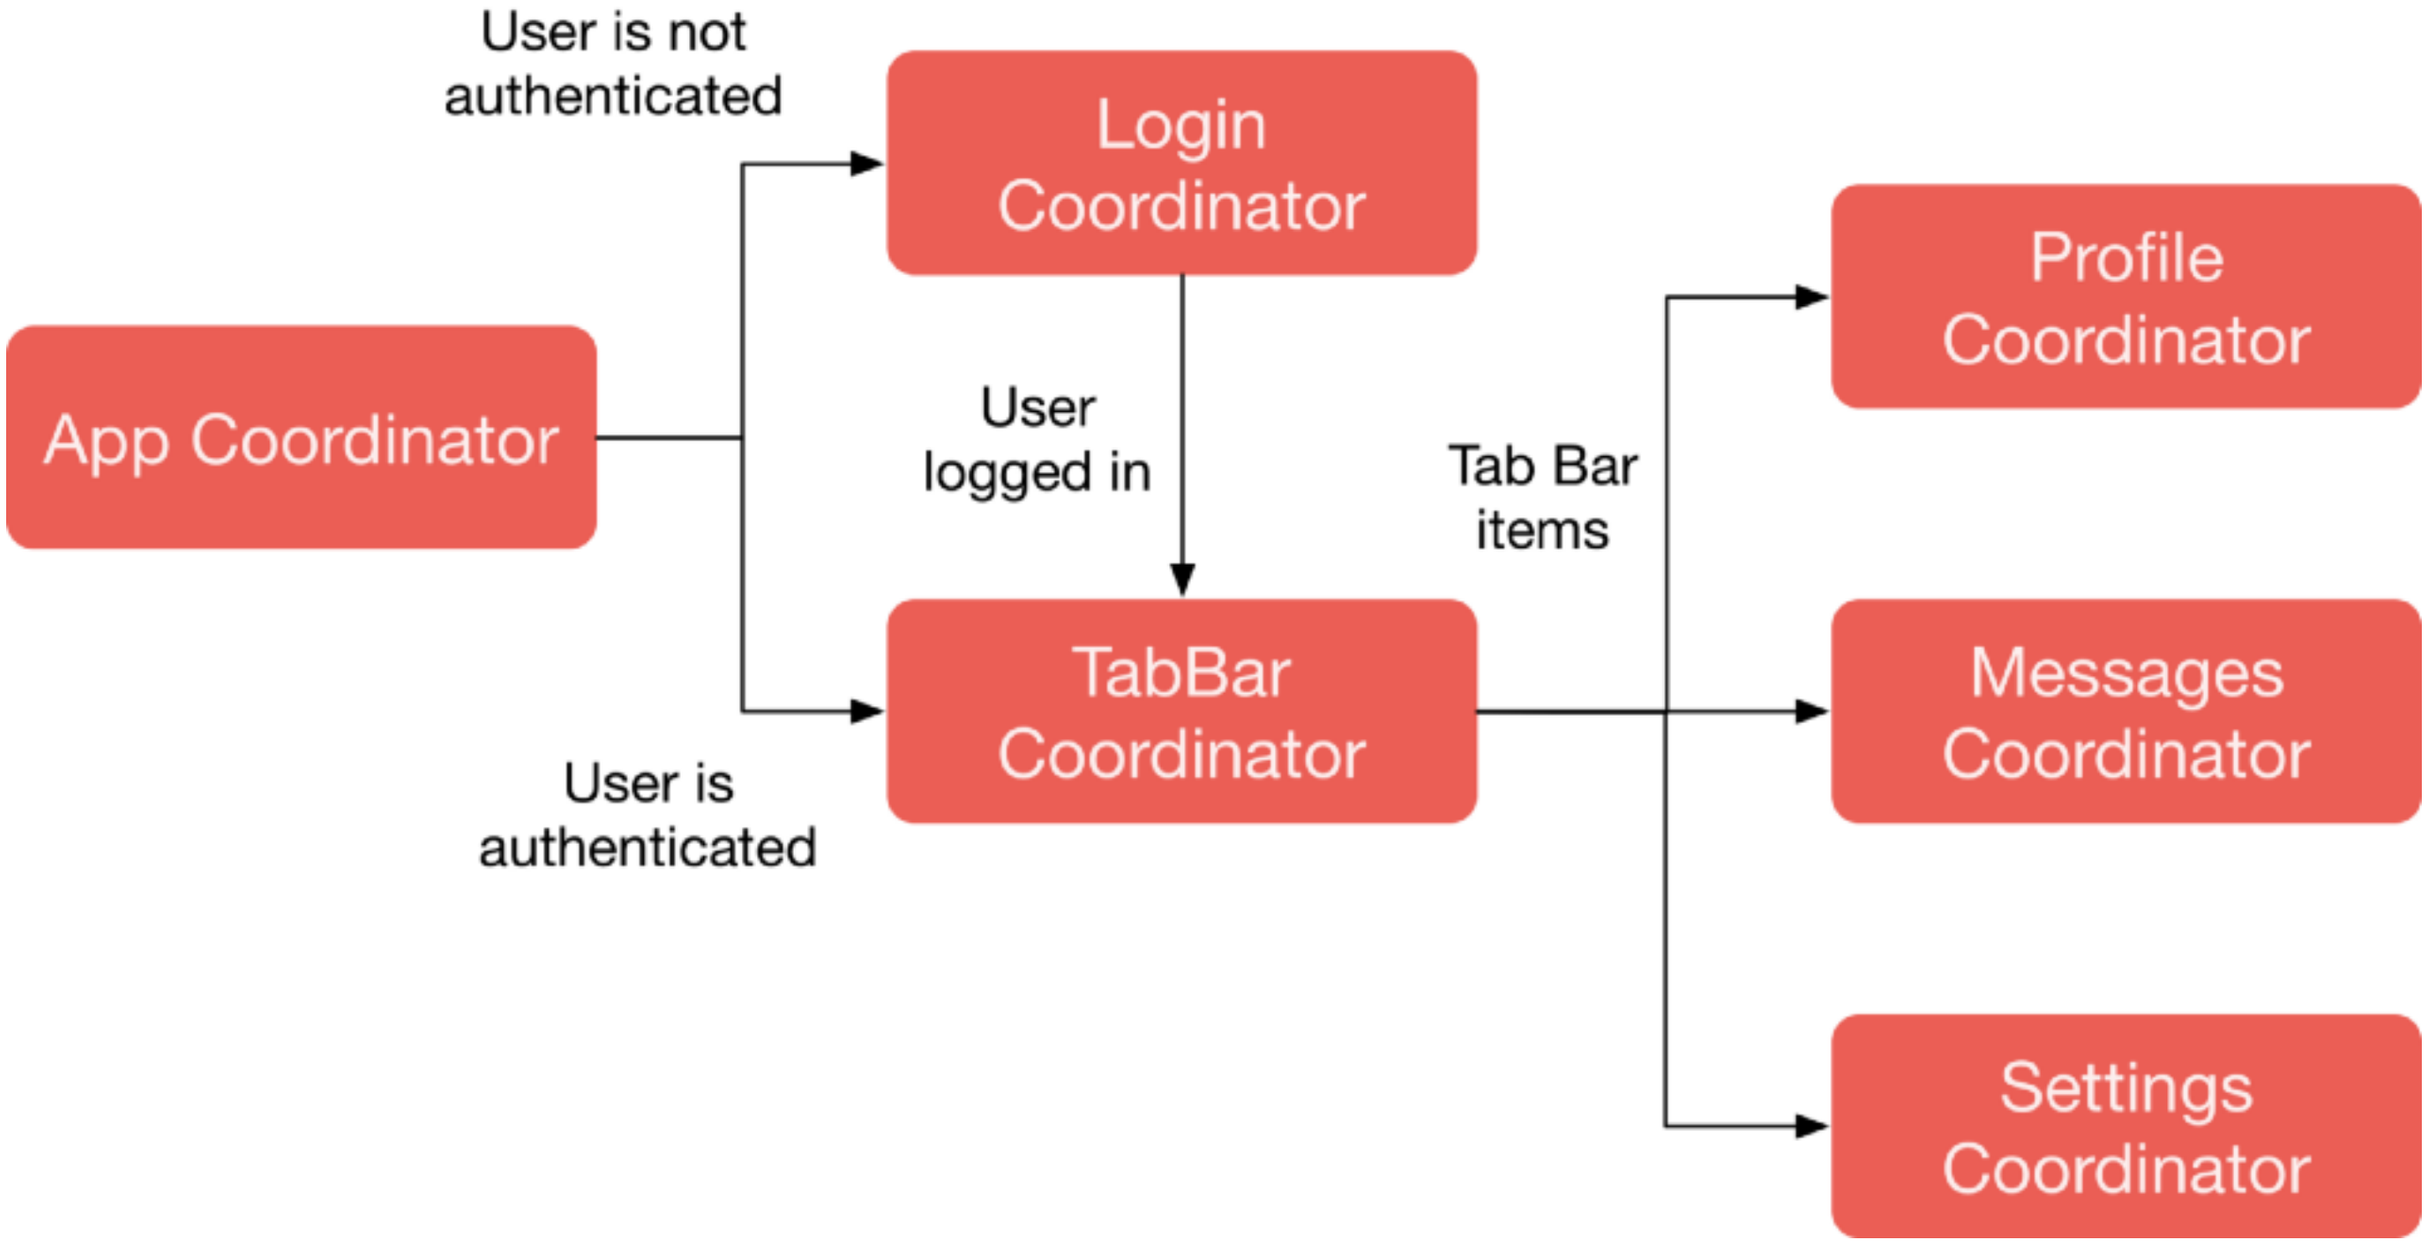
User is not authenticated
Login Coordinator
App Coordinator
User logged in
Tab Bar items
Profile Coordinator
TabBar Coordinator
Messages Coordinator
User is authenticated
Settings Coordinator