





# DEPENDENCY INJECTION, MODULES









PRESENTER



# INTERACTORS



SERVICES


COORDINATOR







A























































































































































































































































































































































































































































































































































































































































































































































































































































































































































































































































































































































```


func routeProfiles(feature: ProfileFollowFeature) {
    //deque module from container
    let profileFollowModule: ProfileFollowModule = config.appModules.module()

    //setup with a controller to navigate on (host), and pass additional details
    //results in a tuple of router / ViewController
    let result: (router: Routing, viewController: UIViewController) = profileFollowModule.setup(feature: feature, host:
viewController!, config: config)

    //put the (router) coordinator in the tree
    addChild(router: result.router)

    //call start on the router which will know how to present it's view
    result.router.start()
}

```

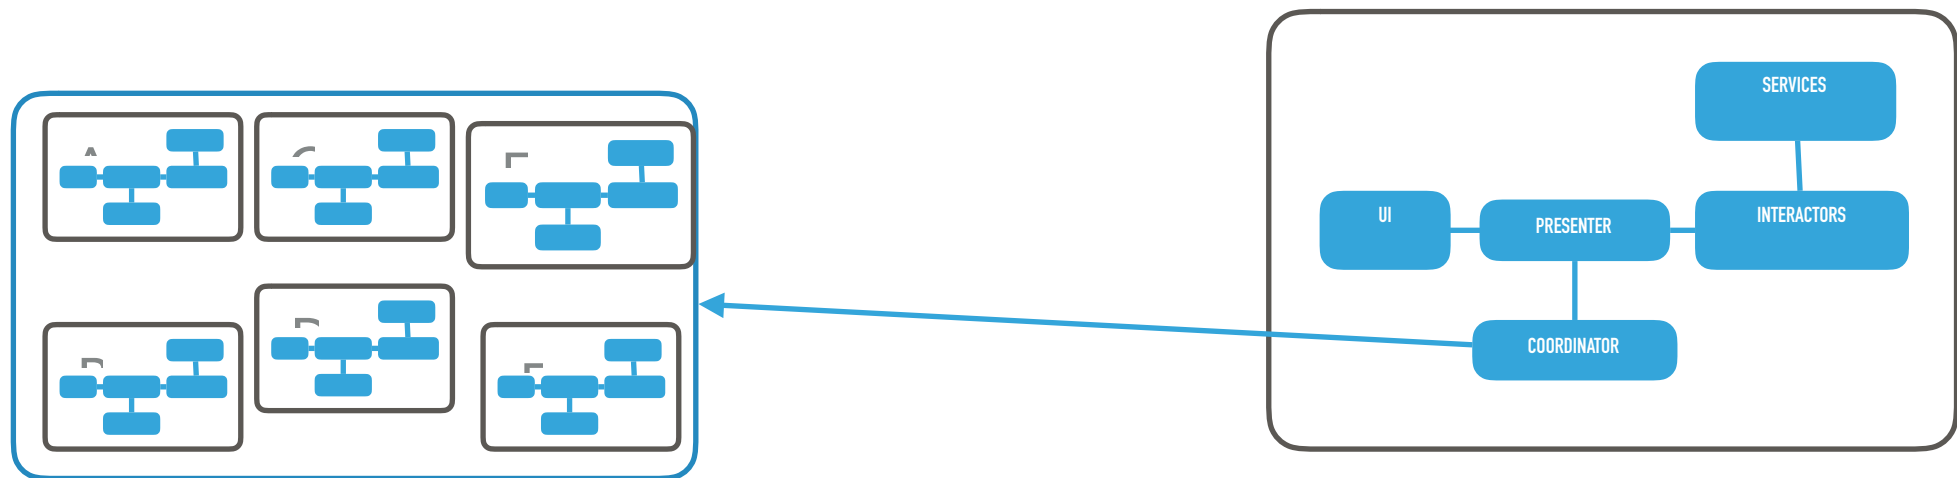


---

# DEPENDENCY INJECTION, MODULES

---

**ARE WE THERE YET?**