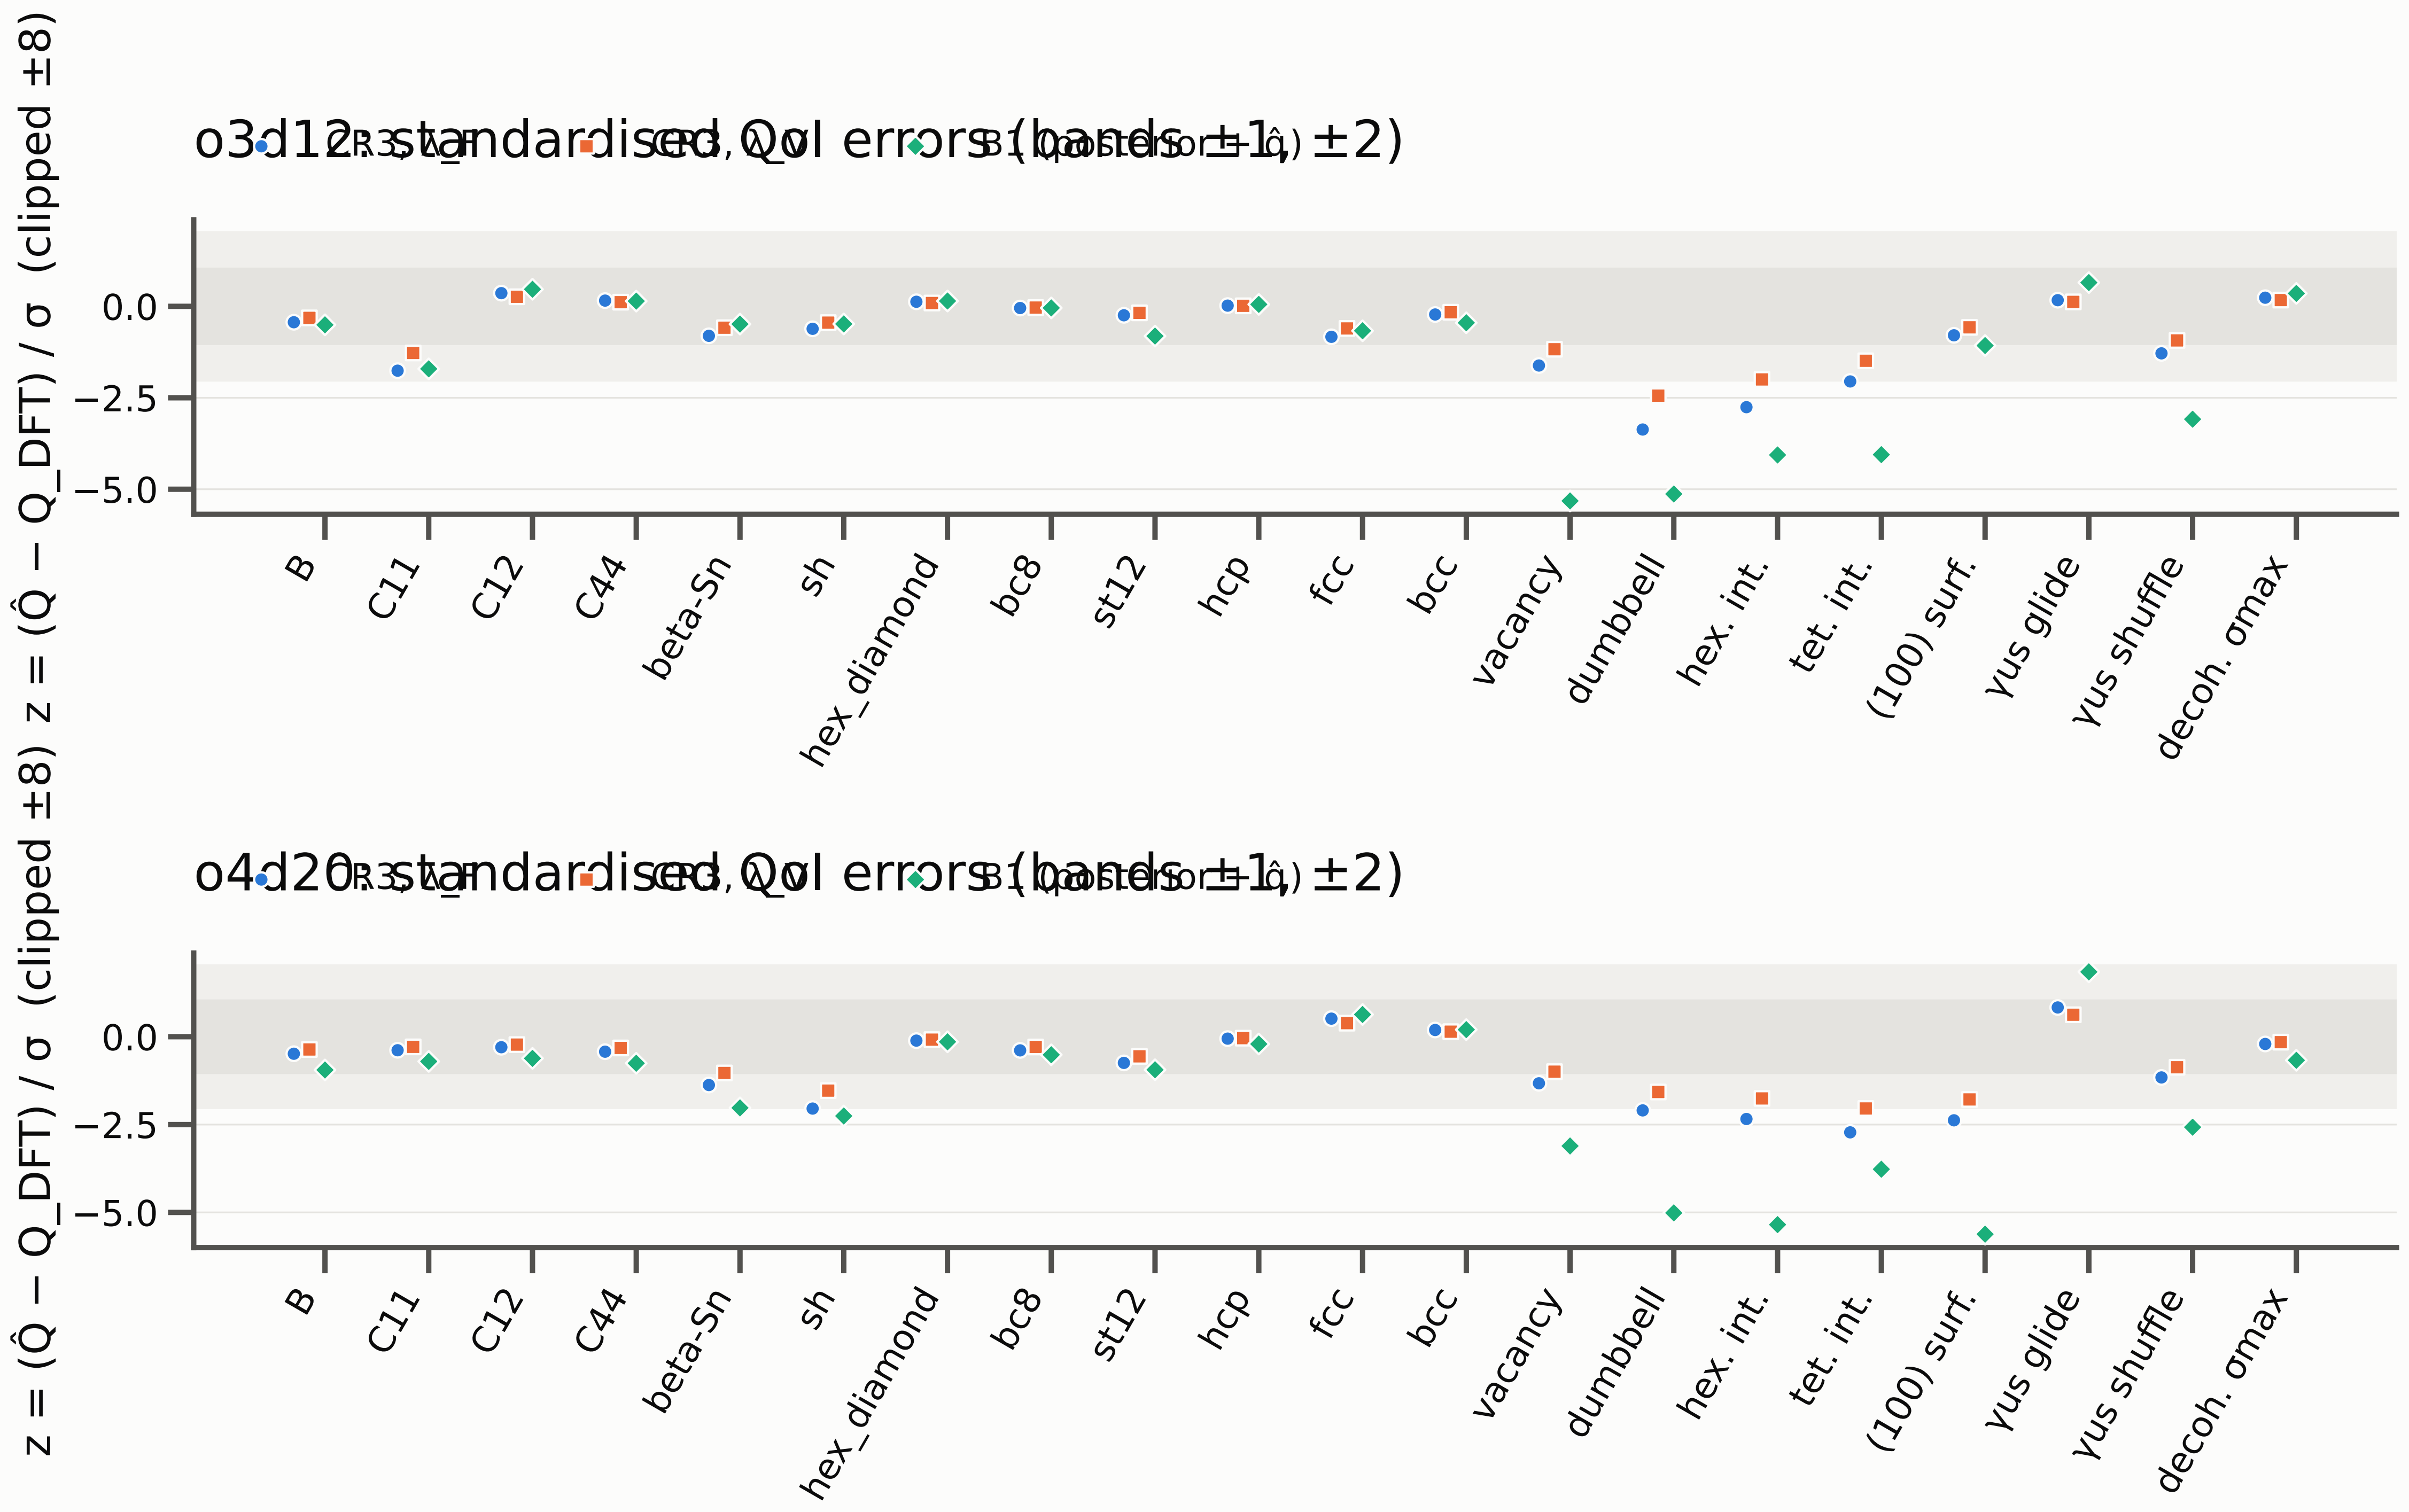
o3d12: standardised QoI errors (bands ±1, ±2)
● CR3, λ_F
■ CR3, λ_V
◆ B1 (posterior q̂)
z = (Q̂ − Q_DFT) / σ (clipped ±8)
0.0
−2.5
−5.0
B
C11
C12
C44
beta-Sn
sh
hex_diamond
bc8
st12
hcp
fcc
bcc
vacancy
dumbbell
hex. int.
tet. int.
(100) surf.
γus glide
γus shuffle
decoh. σmax
o4d20: standardised QoI errors (bands ±1, ±2)
● CR3, λ_F
■ CR3, λ_V
◆ B1 (posterior q̂)
z = (Q̂ − Q_DFT) / σ (clipped ±8)
0.0
−2.5
−5.0
B
C11
C12
C44
beta-Sn
sh
hex_diamond
bc8
st12
hcp
fcc
bcc
vacancy
dumbbell
hex. int.
tet. int.
(100) surf.
γus glide
γus shuffle
decoh. σmax