


PLAYBILL

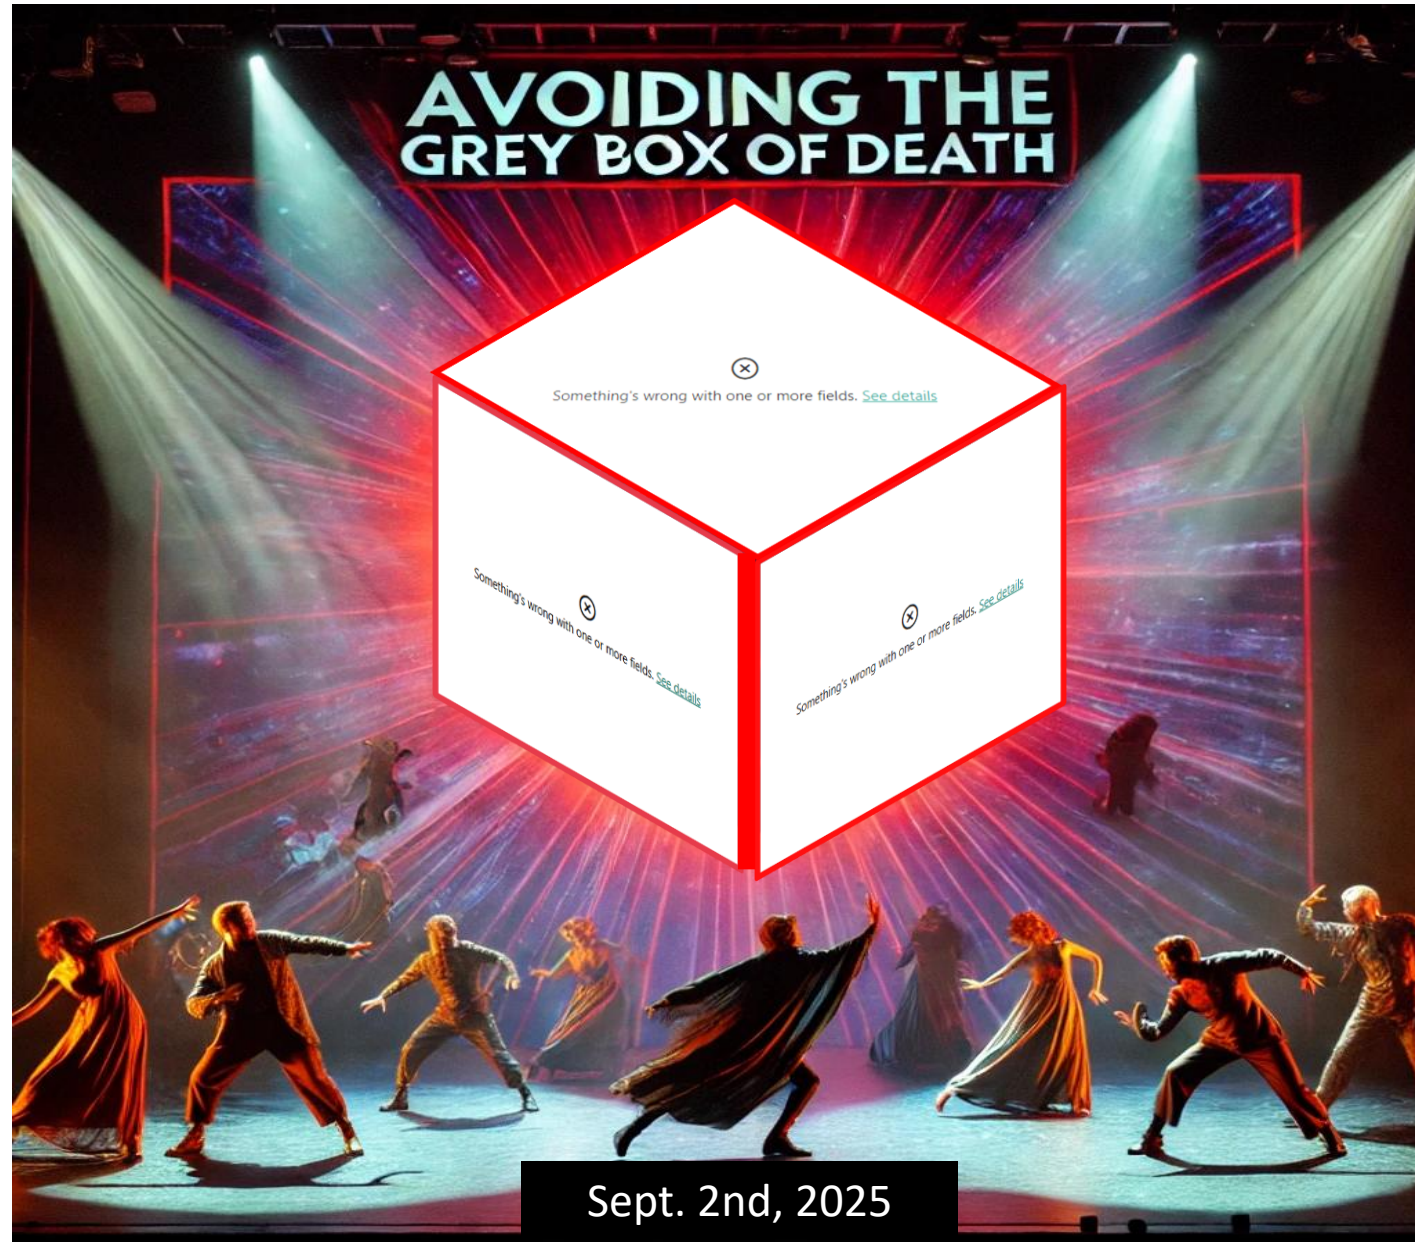

About Me

Experience

- 11+ years with Microsoft BI stack
- 8+ years with PowerPivot/Power BI
- 5+ years with Azure DevOps

Credentials

- MCSE: Productivity
- MS: PBI Data Analyst
- PMP



Contact Me

in [John Kerski](#)

 [Blog](#)

Slides:



Agenda

- Act I: The Challenge with Broken Visuals
- Act II: Microsoft Playwright
- Act III: Visual Error Testing
 - Locally
 - Automatically



ACT I: The Challenge



Something's wrong with one or more fields. [See details](#)



Something's wrong with one or more fields. [See details](#)

What do we do?



- Manually check each workspace...
 - Each page...
 - Each bookmark...
 - Each report...
- If RLS/OLS manually check each workspace...
 - Each role
 - Each report
 - Each bookmark
 - Each page

Other Ways Broken Visuals Occur

1. Power BI visuals have been disabled by your administrator.
2. This visual has exceeded the available resources.
3. Couldn't retrieve the data for this visual.
4. Data shapes must contain at least one group or calculation that outputs data.

ACT II: Microsoft Playwright



ACT III: Visual Error Testing (Local Mode)




Prerequisites

1. Node
2. Visual Studio Code
3. Premium-backed workspace
 1. Will work with PPU
4. XMLA/Service Principals



Visual Error Testing (Local Mode)

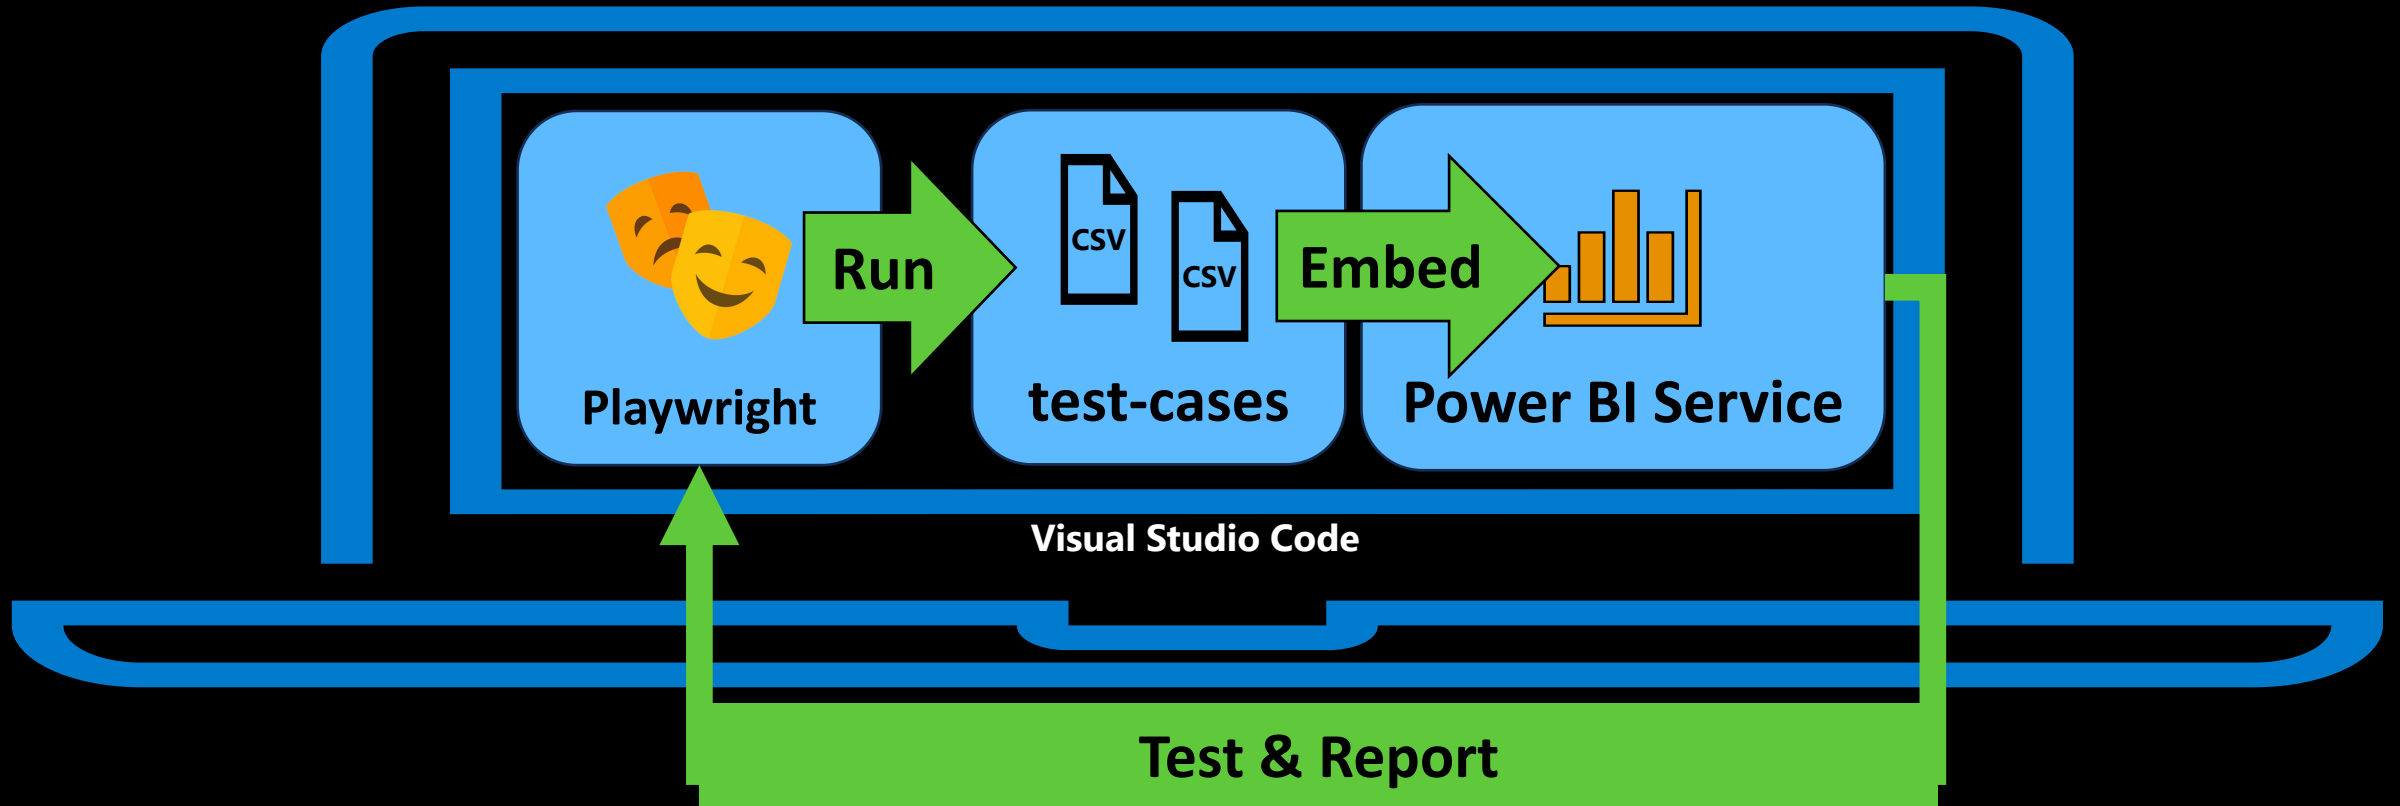

Act III: Visual Error Testing (CI Mode)




Visual Error Testing (CI Mode)

Prerequisites

1. Azure DevOps
2. XMLA/Service Principals
3. Premium-backed workspace
 1. Will work with PPU

Visual Error Testing (CI Mode)

Azure DevOps 

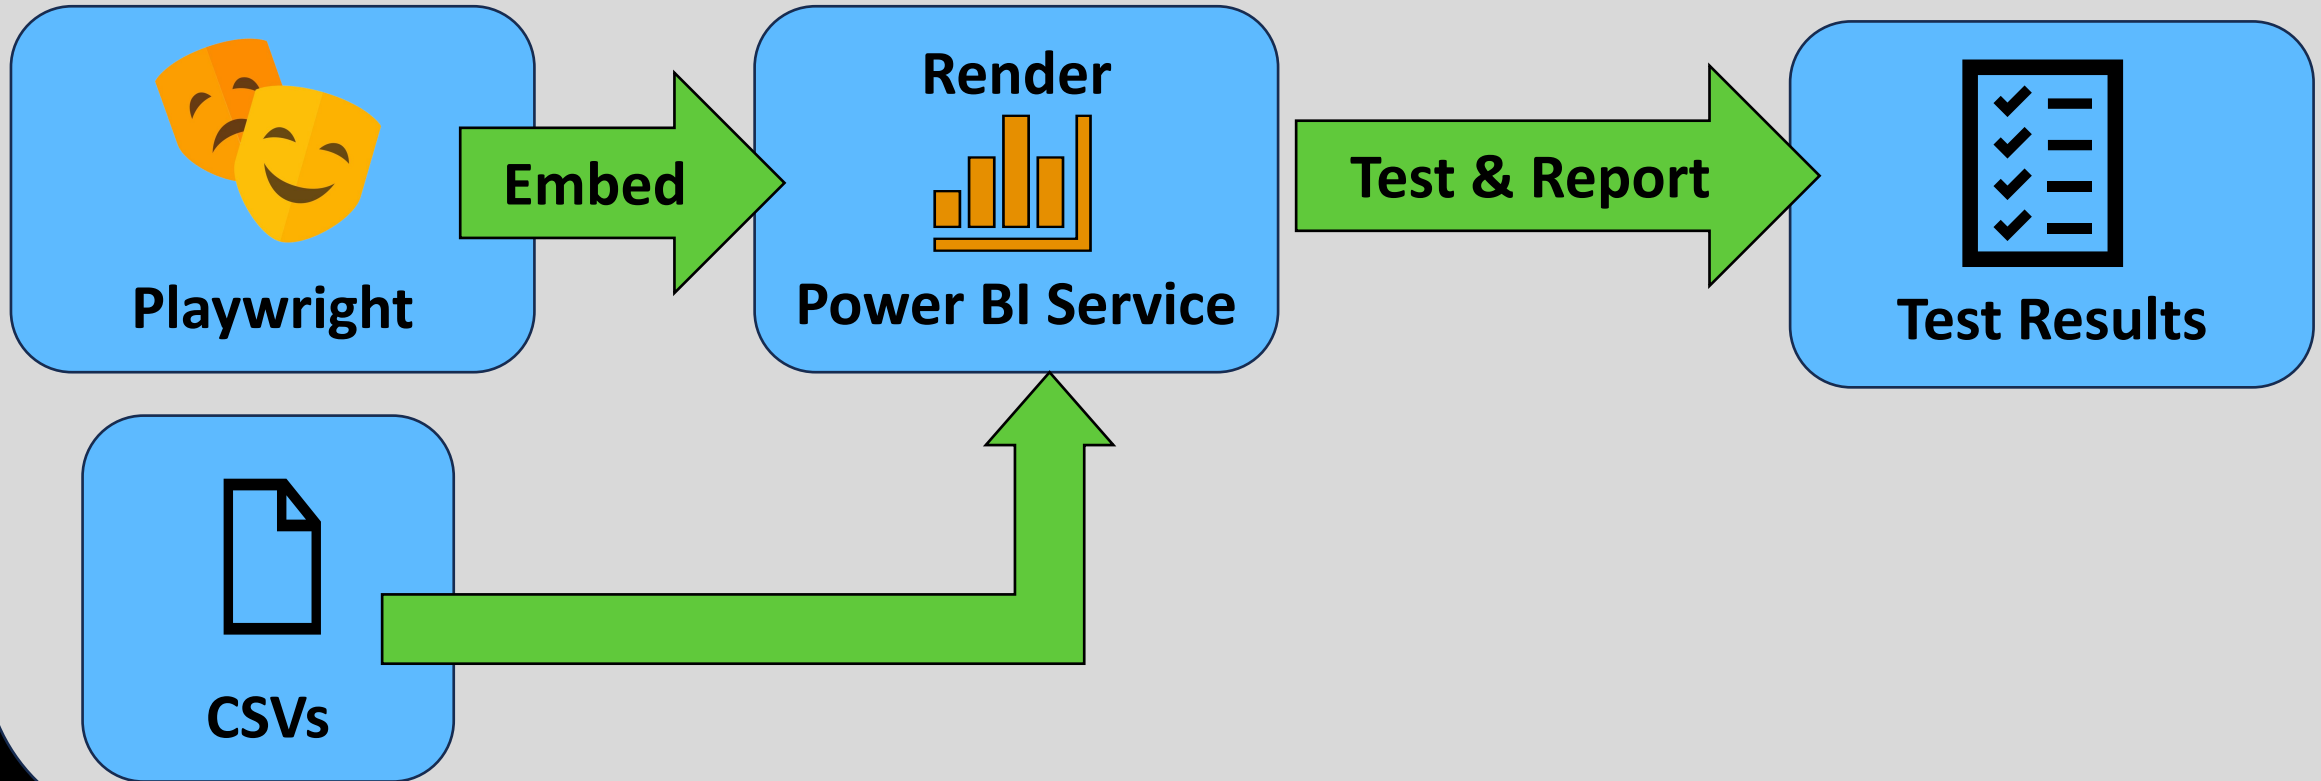

Visual Error Testing (CI Mode) Azure App Testing (Preview)


Comprehensive testing to ensure quality and reliability of your apps

Use a fully managed testing service to run functional and non-functional tests at scale across frameworks like Apache JMeter, Locust, or Playwright and gain actionable insights.



Azure Load Testing

Enhance app performance by authoring, running, and analyzing large load tests easily.

[Learn more](#) 

Create

View resources



Playwright Workspaces (Preview)

Enhance app quality by running UI tests faster across browser and OS combinations. [Learn](#)

[more](#) 

Create

View resources



Best practices and guidance

Learn how to create, manage, and run tests, analyze test results, and gain actionable insights.

[View documentation](#) 

Questions?



Test Case (No Parameters)

```
1  [
2    {
3      "test_case": "25343195-00ab-47a6-b144-9e766eae382",
4      "workspace_id": "c4698d28-b05c-40bc-926c-707563ac85e7",
5      "report_id": "916325b9-944c-4f8c-b79b-668e6c830a05",
6      "report_name": "PaginatedExample-WithFilter",
7      "dataset_ids": [
8        {
9          "id": "4c353b5c-d311-4e90-b9d1-5766b87f59dc",
10         "xmlaPermissions": "ReadOnly"
11       }
12     ],
13     "wait_seconds": 20
14   },
15   {
16     "test_case": "0e7e601b-fd4e-4b36-a37e-d23ffce58ff5",
17     "workspace_id": "c4698d28-b05c-40bc-926c-707563ac85e7",
18     "report_id": "916325b9-944c-4f8c-b79b-668e6c830a05",
19     "report_name": "PaginatedExample-WithFilter",
20     "dataset_ids": [
21       {
22         "id": "4c353b5c-d311-4e90-b9d1-5766b87f59dc",
23         "xmlaPermissions": "ReadOnly"
24       }
25     ],
26     "report_parameters": [
27       {
28         "name": "ReportParameter1",
29         "value": null
30       }
31     ],
32     "wait_seconds": 20
33   }
```

Test Case (With Parameters)