


# PLAYBILL

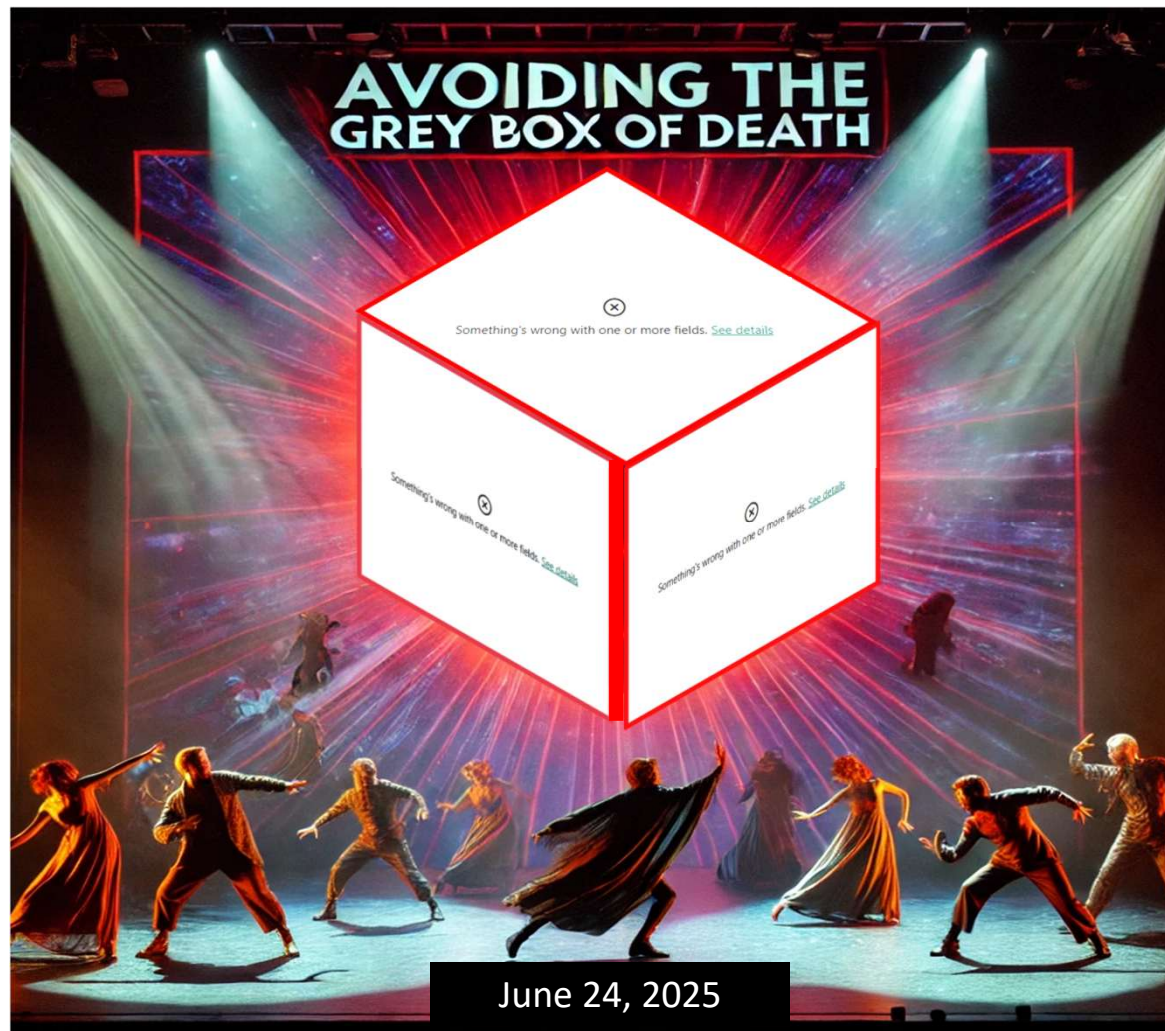

# About Me

## Experience

- 11+ years with Microsoft BI stack
- 8+ years with PowerPivot/Power BI
- 5+ years with Azure DevOps

## Credentials

- MCSE: Productivity
- MS: PBI Data Analyst
- PMP



## Contact Me

 [John Kerski](#)

 [Blog](#)

Slides:



# Agenda

- Act I: The Challenge with Broken Visuals
- Act II: Microsoft Playwright
- Act III: Visual Error Testing
  - Locally
  - Automatically



# ACT I: The Challenge



Something's wrong with one or more fields. [See details](#)



Something's wrong with one or more fields. [See details](#)

# What do we do?



- Manually check each workspace...
  - Each page...
  - Each bookmark...
  - Each report...
- If RLS/OLS manually check each workspace...
  - Each role
  - Each report
  - Each bookmark
  - Each page

## Other Ways Broken Visuals Occur

1. Power BI visuals have been disabled by your administrator.
2. This visual has exceeded the available resources.
3. Couldn't retrieve the data for this visual.
4. Data shapes must contain at least one group or calculation that outputs data.



# ACT II: Microsoft Playwright





# ACT III: Visual Error Testing (Local Mode)




## Prerequisites

1. Node
2. Visual Studio Code
3. Premium-backed workspace
  1. Will work with PPU
4. XMLA/Service Principals



# Visual Error Testing (Local Mode)

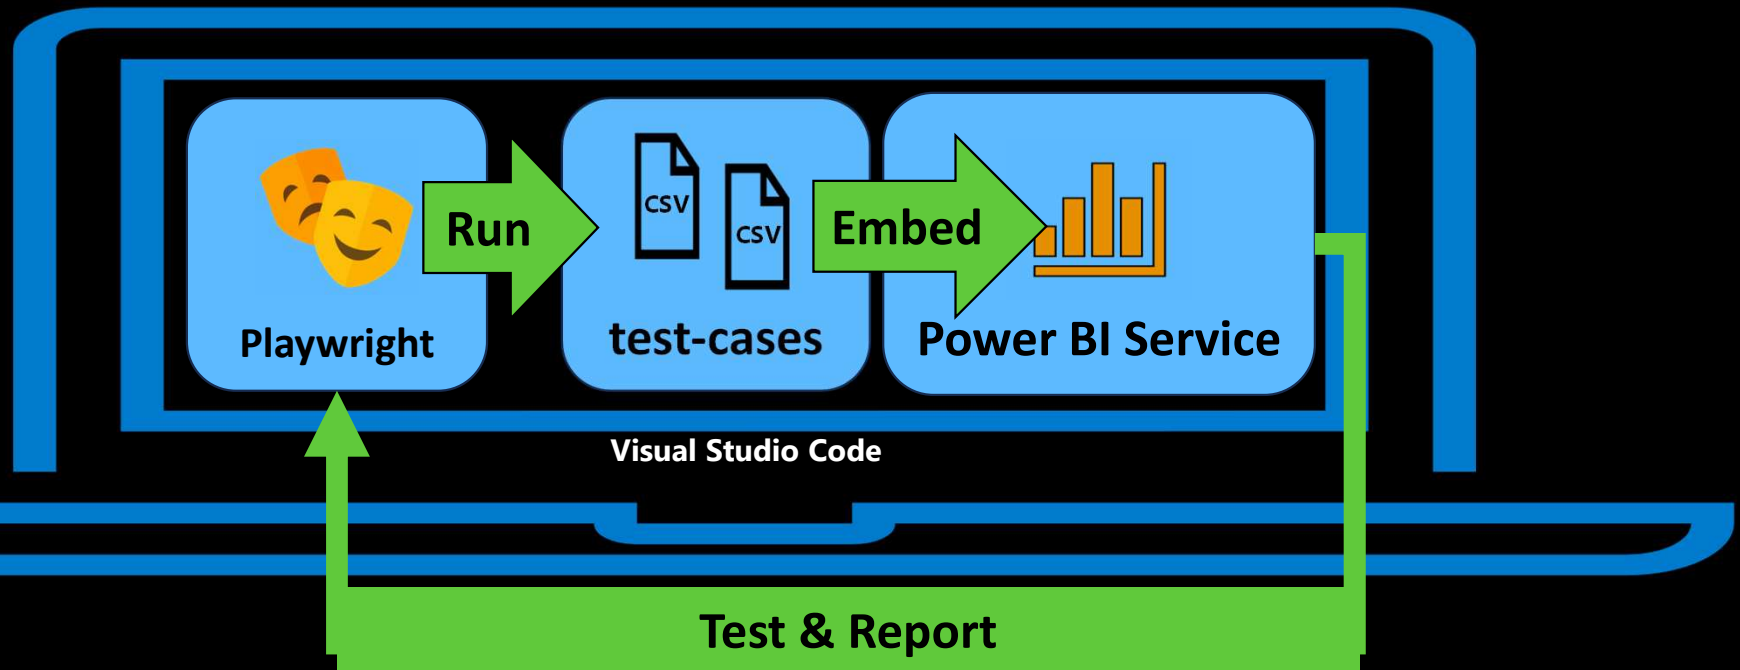

# Act III: Visual Error Testing (CI Mode)




# Visual Error Testing (CI Mode)

## Prerequisites

1. Azure DevOps
2. XMLA/Service Principals
3. Premium-backed workspace
  1. Will work with PPU

# Visual Error Testing (CI Mode)

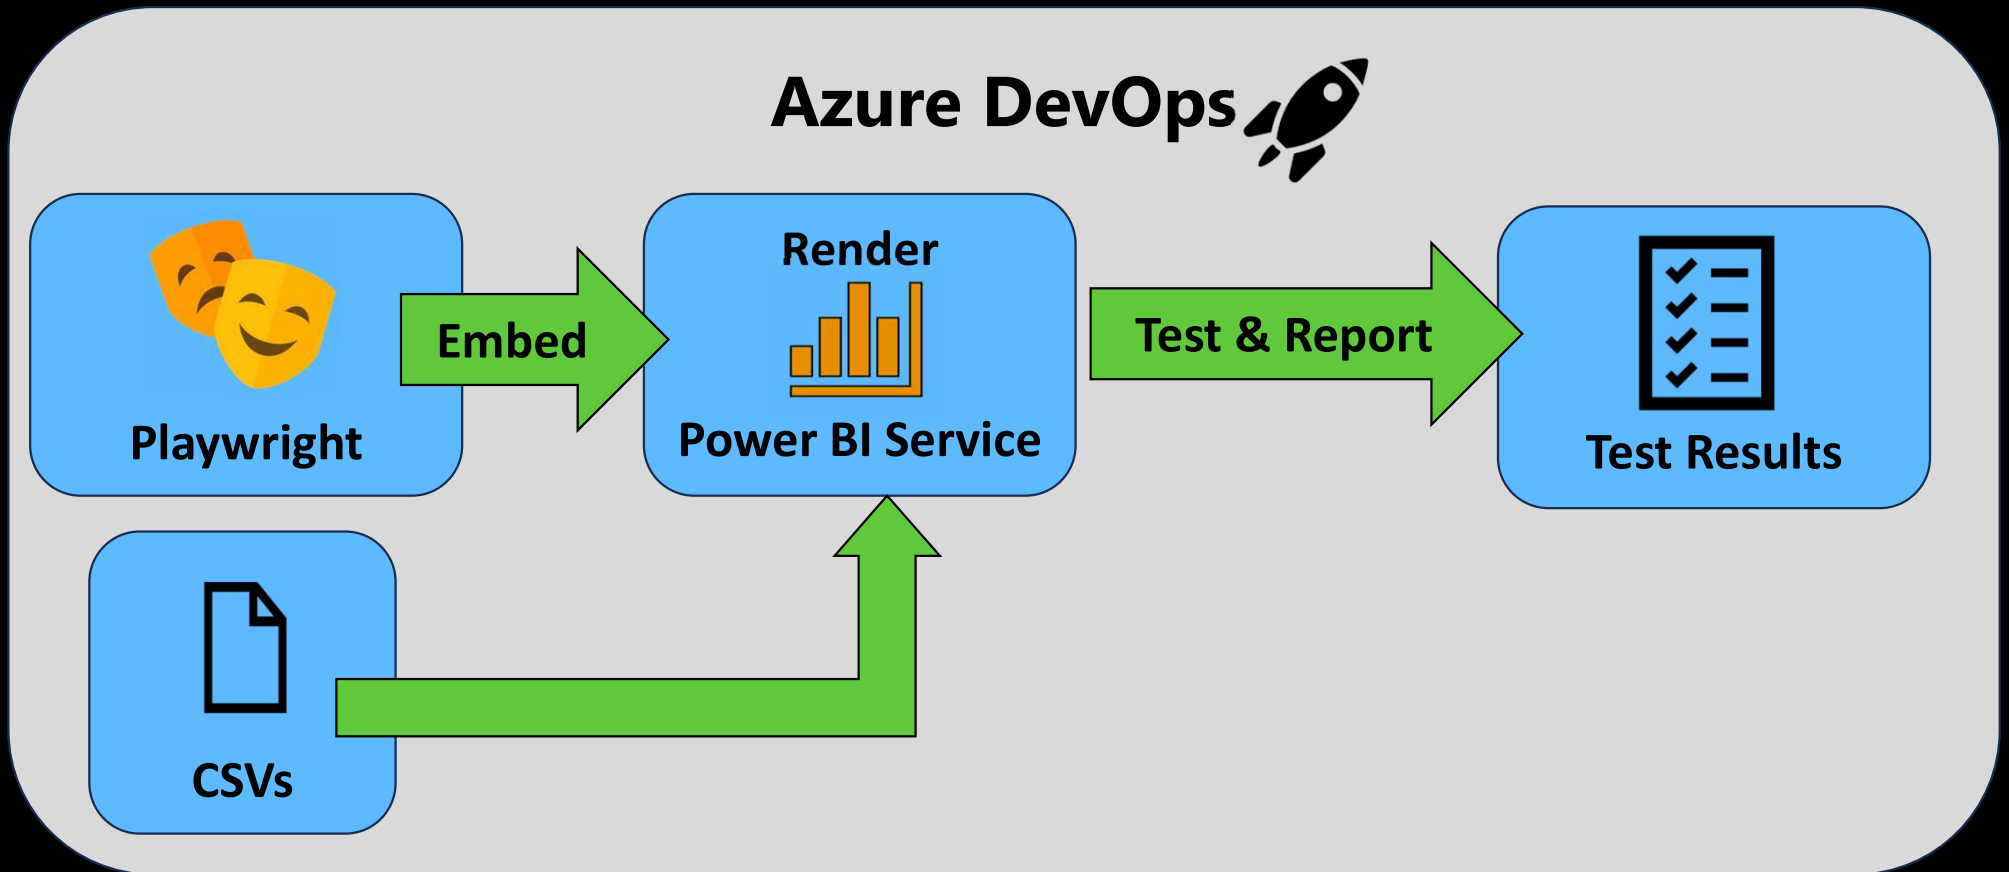

# Visual Error Testing (CI Mode) Coming Soon

Microsoft Playwright Testing

PREVIEW

Scalable end-to-end testing for modern web apps.

Sign in



# Questions?



Test Case (No Parameters)

```
1  [
2    {
3      "test_case": "25343195-00ab-47a6-b144-9e7666eae382",
4      "workspace_id": "c4698d28-b05c-40bc-926c-707563ac85e7",
5      "report_id": "916325b9-944c-4f8c-b79b-668e6c830a05",
6      "report_name": "PaginatedExample-WithFilter",
7      "dataset_ids": [
8        {
9          "id": "4c353b5c-d311-4e90-b9d1-5766b87f59dc",
10         "xmlaPermissions": "ReadOnly"
11       }
12     ],
13     "wait_seconds": 20
14   },
15   {
16     "test_case": "0e7e601b-fd4e-4b36-a37e-d23ffce58ff5",
17     "workspace_id": "c4698d28-b05c-40bc-926c-707563ac85e7",
18     "report_id": "916325b9-944c-4f8c-b79b-668e6c830a05",
19     "report_name": "PaginatedExample-WithFilter",
20     "dataset_ids": [
21       {
22         "id": "4c353b5c-d311-4e90-b9d1-5766b87f59dc",
23         "xmlaPermissions": "ReadOnly"
24       }
25     ],
26     "report_parameters": [
27       {
28         "name": "ReportParameter1",
29         "value": null
30       }
31     ],
32     "wait_seconds": 20
33   }
34 ]
```

Test Case (With Parameters)