PROMPT 1 :

```
I want to build a simple C++ console program that generates funny roast messages based on a user's name.
Can you explain the basic logic step-by-step before writing the code?
```

PROMPT 2:

```
I want to build a simple C++ console program that generates funny roast messages.

Requirements:
- Ask the user to enter their name
- Store at least 10 roast templates in a vector (use {name} as placeholder)
- Randomly select one roast each time the program runs
- Replace {name} with the actual input
- Display the final roast message

Keep the code beginner-friendly and add comments explaining each step.
```

PROMPT 3:

```
Make the roast templates more creative and funny, but keep them safe and non-offensive.

The humor should be light, sarcastic, and relatable to students or programmers.

Give at least 10 unique roast templates using {name} as a placeholder.
```

BUG OUTPUT :

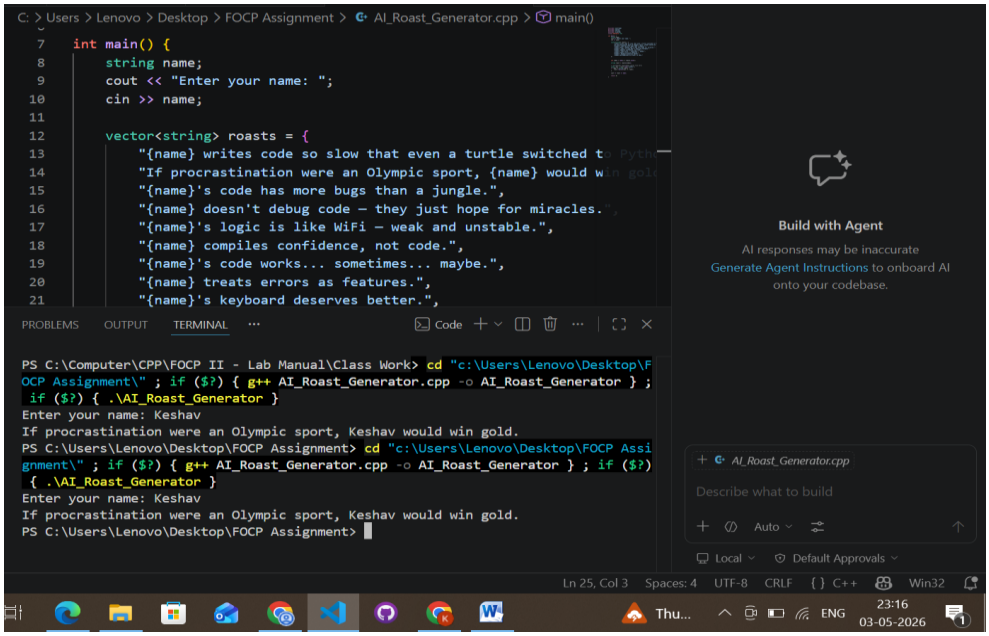

PROMPT 4:

```
My program is generating the same roast every time I run it.

Explain why this is happening in C++ and fix the issue so that the output is different on each run.

Keep the explanation simple and then provide the corrected code.
```

PROMPT 5:

```
The {name} placeholder is not being replaced correctly in some cases.

Explain what might be wrong with my string replacement logic and fix it so that {name} is always replace

Use a safe and reliable approach.
```

PROMPT 6:

```
Modify the program so that it handles edge cases properly.

Specifically:
- If the user enters an empty name, show an error message
- Allow names with spaces (like "Rahul Sharma")

Update the input method and validation logic accordingly.
```

PROMPT 7:

```
Explain the final C++ program in simple terms.

Focus on:
- How random selection works
- How {name} replacement works
- How input is handled

Keep the explanation beginner-friendly.
```

WITHOUT BUG OUTPUT :

C: > Users > Lenovo > Desktop > FOCP Assignment > AI_Roast_Generator.cpp > main()

```cpp
#include <iostream>
#include <string>
#include <random>
using namespace std;

int main() {
    string name;
    cout << "Enter your name: ";
    getline(cin, name);

    if (name.empty()) {
        cout << "Please enter a valid name!" << endl;
        return 0;
    }
```

PROBLEMS OUTPUT DEBUG CONSOLE TERMINAL PORTS Code

```
PS C:\Computer\CPP\FOCP II - Lab Manual\Class Work> cd "c:\Users\Lenovo\Desktop\F
OCP Assignment\" ; if ($?) { g++ AI_Roast_Generator.cpp -o AI_Roast_Generator } ;
 if ($?) { .\AI_Roast_Generator }
Enter your name: Keshav
If procrastination were an Olympic sport, Keshav would win gold.
PS C:\Users\Lenovo\Desktop\FOCP Assignment> cd "c:\Users\Lenovo\Desktop\FOCP Assi
gnment\" ; if ($?) { g++ AI_Roast_Generator.cpp -o AI_Roast_Generator } ; if ($?)
 { .\AI_Roast_Generator }
Enter your name: Keshav
Keshav doesn't debug code, they just hope for miracles.
PS C:\Users\Lenovo\Desktop\FOCP Assignment>
```

Build with Agent

AI responses may be inaccurate

Generate Agent Instructions to onboard AI onto your codebase.

AI_Roast_Generator.cpp

Describe what to build

Auto

Local Default Approvals

Ln 22, Col 40 Spaces: 4 UTF-8 CRLF { } C++ Win32

Tem... ENG 23:20 03-05-2026