PROMPT 1:

```
I want to build a simple C++ console program that generates creative student excuses based on a user's nam
Can you explain the basic logic step-by-step before writing the code?
```

PROMPT 2:

```
I want to create a simple C++ console program that generates random excuses for missing homework.

Requirements:
- Ask the user to enter their name
- Store at least 10 excuse templates in a vector (use {name} as a placeholder)
- Randomly select one excuse each time the program runs
- Replace {name} with the actual input
- Display the final excuse

Keep the code beginner-friendly and include comments explaining each part.
```

PROMPT 3:

```
Make the excuses more creative, funny, and realistic for students.

Avoid offensive language. Use situations like WiFi issues, laptop problems, last-minute errors, etc.

Give at least 10 unique templates using {name}.
```

BUG OUTPUT:

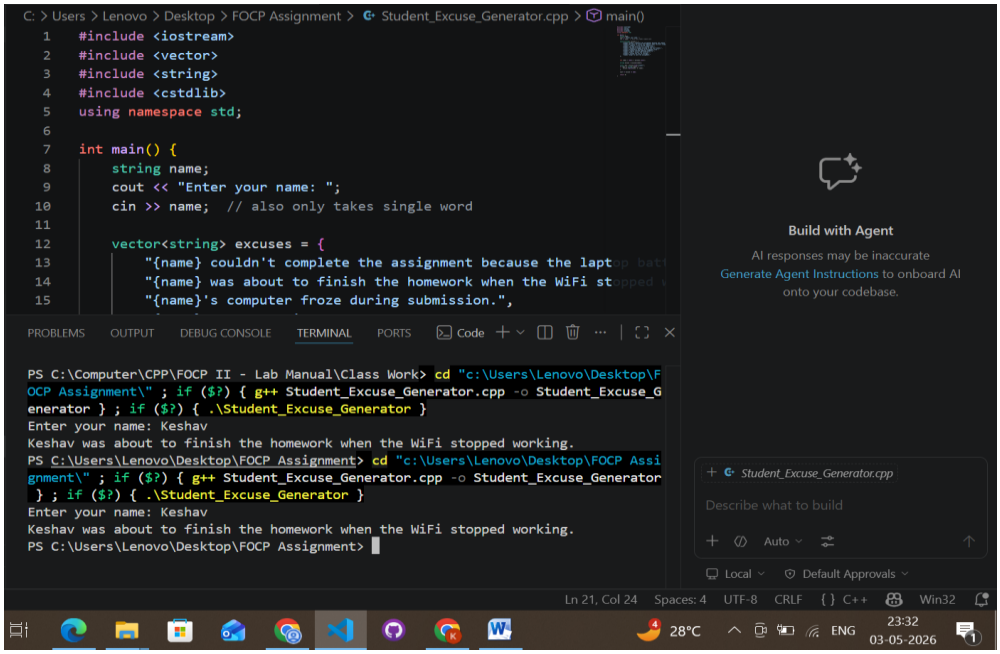

PROMPT 4:

```
My program is generating the same excuse every time I run it.

Explain why this happens in C++ and fix the randomness issue so that a different excuse appears each time

Keep the explanation simple.
```

PROMPT 5:

```
The {name} placeholder is not always being replaced correctly in my program.

Explain what might be wrong with the string replacement logic and fix it so it works reliably.
```

PROMPT 6:

```
Improve the program so that it:
- Accepts full names with spaces (like "Priya Sharma")
- Handles empty input properly

Update the input method and validation logic.
```

PROMPT 7:

```
Explain how the final program works in simple terms.

Focus on:
- How random selection works
- How {name} replacement works
- How user input is handled

Keep it beginner-friendly.
```
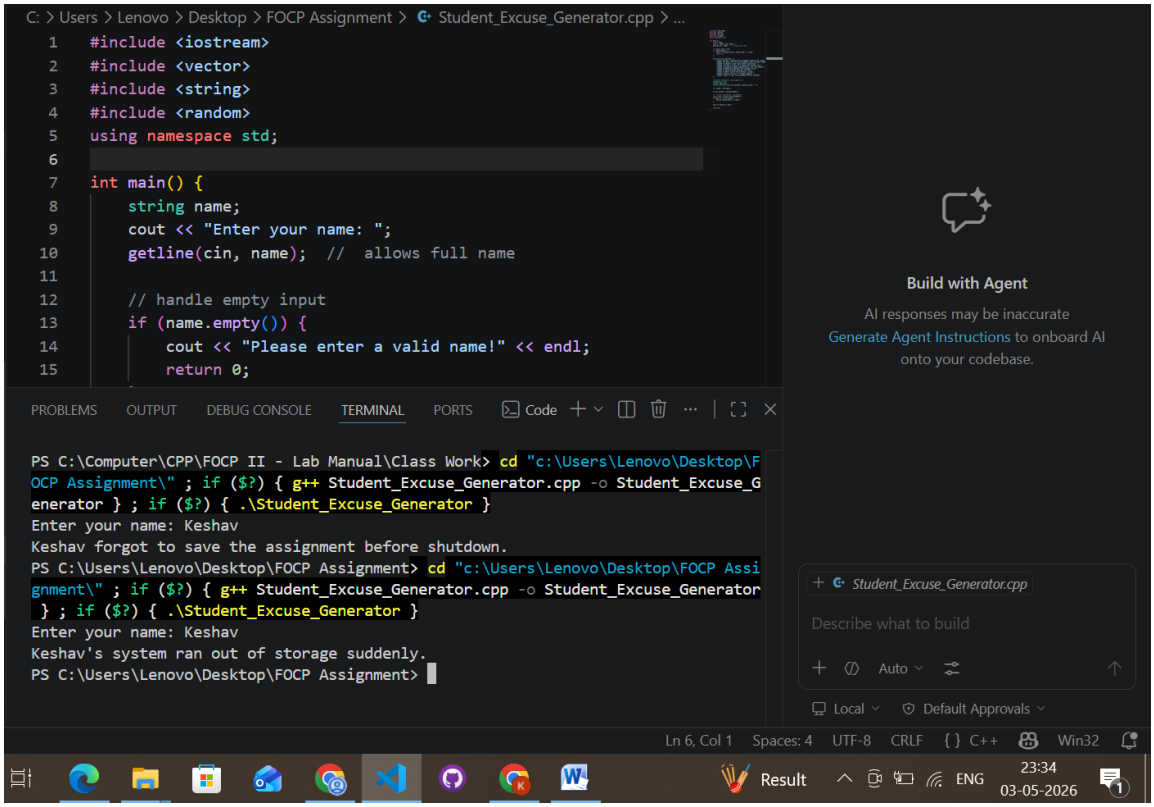
WITHOUT BUG OUTPUT: