

MONOALPHABETIC CIPHER TECHNIQUE

AIM:

To implement the Monoalphabetic Cipher technique for encrypting a plaintext message.

ALGORITHM:

1. Start.
2. Read the plaintext.
3. Read the key (shift value).
4. Encrypt each alphabet by shifting it according to the key.
5. Display the ciphertext.
6. Stop.

PROGRAM:

```
#include <stdio.h>
```

```
#include <string.h>
```

```
int main()
```

```
{
```

```
    char text[100];
```

```
    int key, i;
```

```
    printf("Enter Plain Text: ");
```

```
    scanf("%s", text);
```

```
    printf("Enter Key: ");
```

```
    scanf("%d", &key);
```

```
    for(i = 0; text[i] != '\0'; i++)
```

```
    {
```

```
        if(text[i] >= 'A' && text[i] <= 'Z')
```


```
            text[i] = ((text[i] - 'A' + key) % 26) + 'A';
```

```
        else if(text[i] >= 'a' && text[i] <= 'z')
            text[i] = ((text[i] - 'a' + key) % 26) + 'a';
    }

    printf("Cipher Text: %s", text);

    return 0;
}
```

OUTPUT:

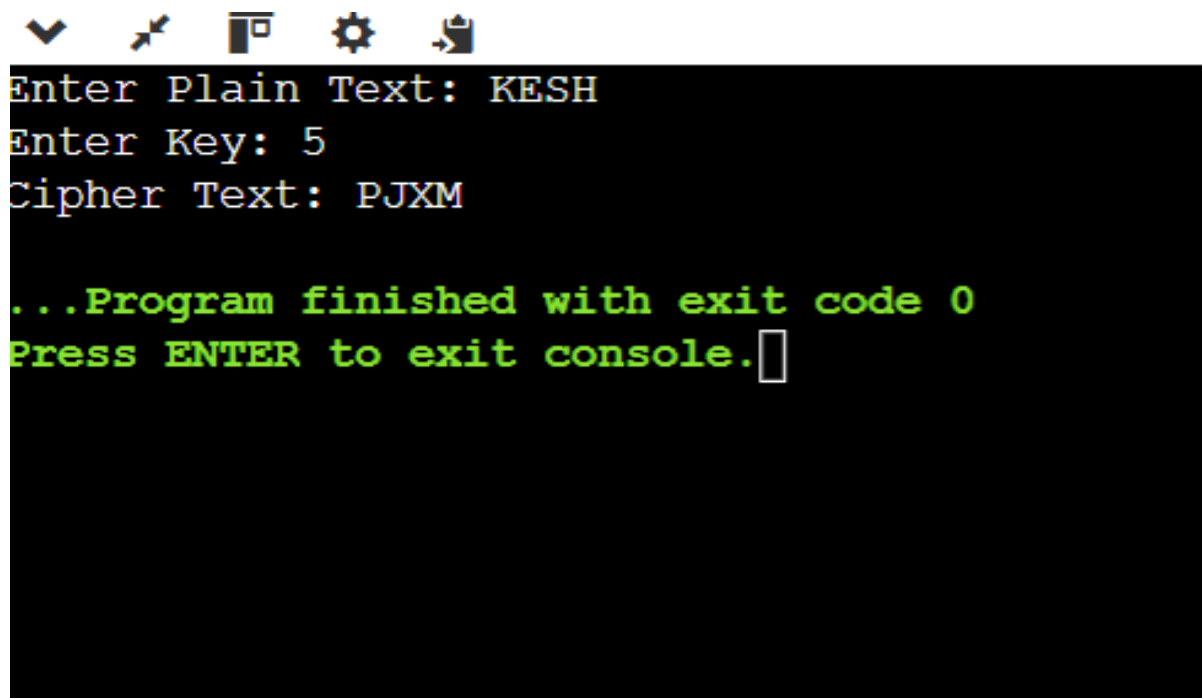

```
Enter Plain Text: KESH
Enter Key: 5
Cipher Text: PJXM

...Program finished with exit code 0
Press ENTER to exit console.
```

RESULT:

The Monoalphabetic Cipher encryption was implemented successfully.