

Input data

Features: instr, class, nb.repeat, attendance, Q1, Q2, Q3, Q4, Q5, Q6, Q7, Q8, Q9, Q10, Q11, Q12, Q13, Q14, Q15, Q16, Q17, Q18, Q19, Q20, Q21, Q22, Q23, Q24, Q25, Q26, Q27, Q28 (total: 32 features)
Target: difficulty

Output data

Features: instr, class, nb.repeat, attendance, Q1, Q2, Q3, Q4, Q5, Q6, Q7, Q8, Q9, Q10, Q11, Q12, Q13, Q14, Q15, Q16, Q17, Q18, Q19, Q20, Q21, Q22, Q23, Q24, Q25, Q26, Q27, Q28 (total: 32 features)
Meta attributes: difficulty

Settings


Continuize Discrete Variables: One feature per value
Normalize Features: Standardize to $\mu=0$, $\sigma^2=1$

Sampling type: Random sample with 5000 data instances, stratified (if possible), deterministic
Input: 5820 instances
Sample: 5000 instances
Remaining: 820 instances

Number of clusters: 3
Optimization: initialize with KMeans++, 10 re-runs limited to 300 steps

Data

Data instances: 5000
Features: instr=1, instr=2, instr=3, class=1, class=2, class=3, class=4, class=5, class=6, class=7, class=8, class=9, class=10, class=11, class=12, class=13, nb.repeat=1, nb.repeat=2, nb.repeat=3, attendance=0, attendance=1, attendance=2, attendance=3, attendance=4, Q1, Q2, Q3, Q4, Q5, Q6, Q7, Q8, Q9, Q10, Q11, Q12, Q13, Q14, Q15, Q16, Q17, Q18, Q19, Q20, Q21, Q22, Q23, Q24, Q25, Q26, Q27, Q28 (total: 52 features)
Meta attributes: difficulty

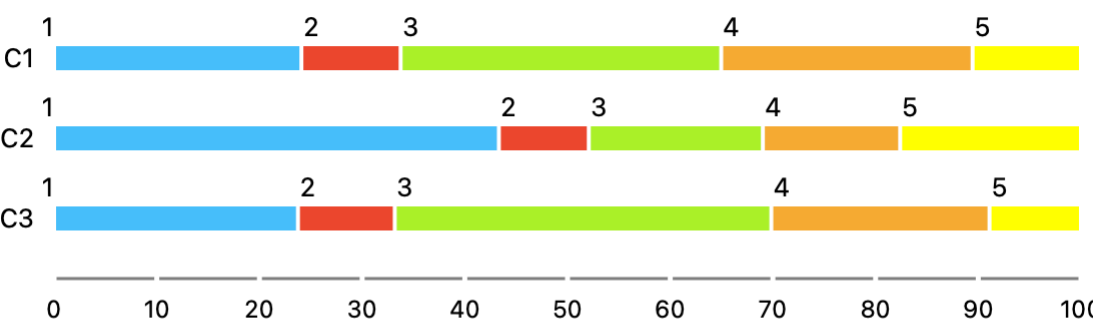

χ^2 : 290.52 (p=0.000, dof=8)

Box plot for attribute 'difficulty' grouped by 'Cluster'