


Files Synchronization Architecture

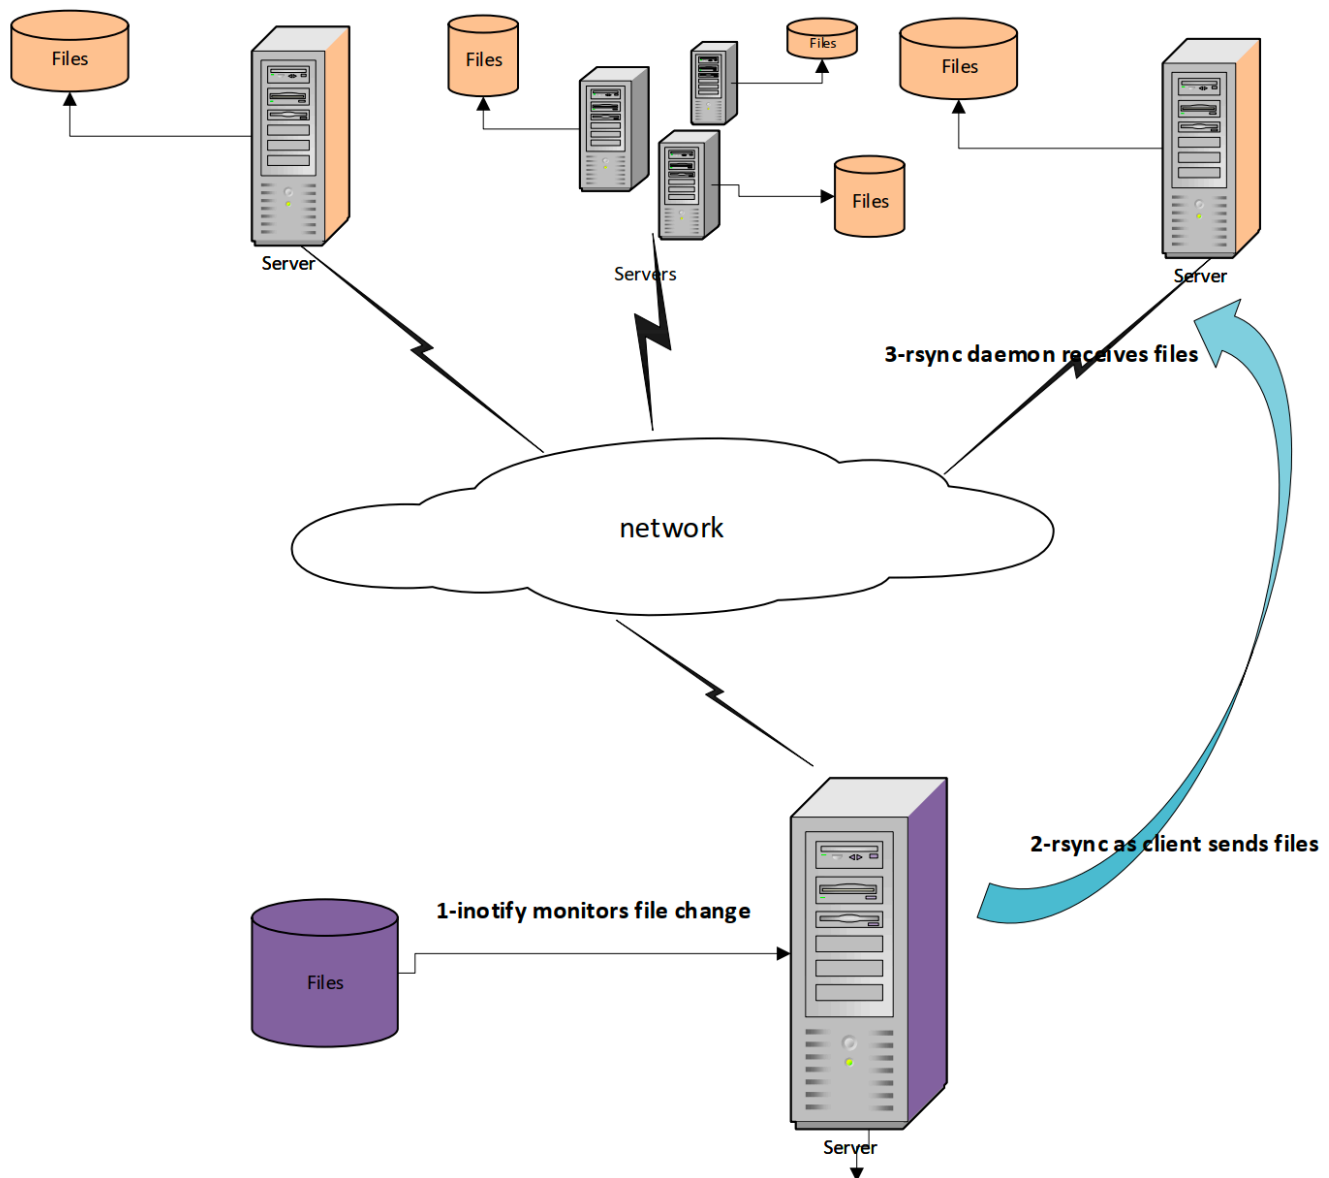

Brief Steps on Source and Target Servers

Source is the sender as rsync client

- S1. install rsync and inotify-tools
- S2. adjust inotify kernel parameters
- S3. write trigger synchronization script
- S4. create the systemd service

Target are receivers as rsync daemon

- T1. install rsync
- T2. edit rsync daemon configuration file
- T3. create the systemd service for rsync daemon if needed

<https://github.com/kevcao/mySynchronization>