# Computer Network Homework 3

B07902034 資工三 王昱凱

How to execute my code:

- \$ make all
- \$./receiver <agent IP> <agent port> <receiver port>
- \$./agent <sender IP> <receiver IP> <sender port> <agent port>
  <receiver port> <loss rate>
- \$./sender <agent IP> <sender port> <agent IP> <file address>

#### Ex:

\$ ./receiver local 8888 8889


\$ ./agent local local 8887 8888 8889 0.1

\$ ./sender local 8887 8888 ./tmp.mpg


麻煩助教按照 receiver -> agent -> sender 這樣的順序去執行,謝謝

## Explain my program structure:

Sender:

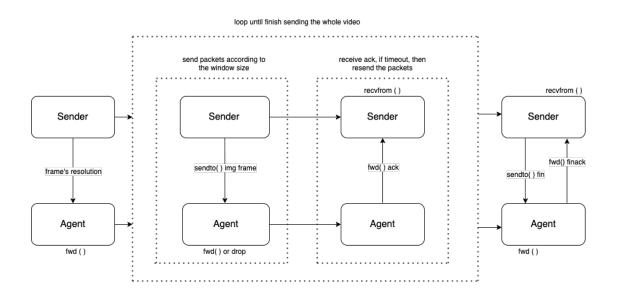

### Receiver:

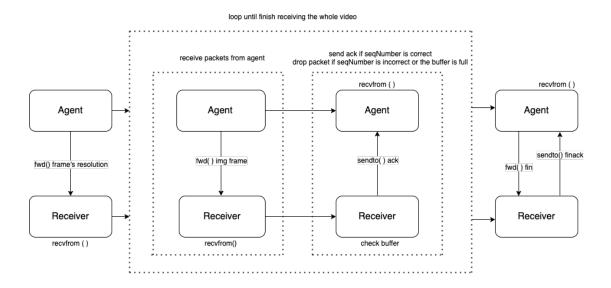

## Agent:

