

chapter 8



The Internet

CHAPTER OBJECTIVES

- Identify and describe important historically significant events in the development of the Internet.
- Discuss the topology of the Internet.
- Define the **Domain Name System** and describe the purpose of Name Servers. DNS
- List and describe common **Internet protocols** and applications.
- Discuss **Internet2, the Abilene Project, and Internet2** working groups. → Internet 연구
- Describe **IPv6** business drivers and addressing Schemes.

AN INTRODUCTION TO THE INTERNET

- The Internet was “born” on September 1, 1969 under the auspices of the Advanced Research Projects Agency (ARPA). 고난이도 연구지원 공공기관
- In its original form, it was known as the **ARPANET**, short for ARPA network. /internet의 근간
- A computer at UCLA was the first computer connected to the ARPANET. 처음엔 각박함
- 4 computers were online by the end of 1969.
- 13 computers were connected to the ARPANET by the end of 1970.
- More than 16 sites in 1971 and 30+ sites in 1972.
- 40+ sites in 1973, and ARPANET had international presence that year.

⇒ 점점 연구하는 사람 증가

AN INTRODUCTION TO THE INTERNET (cont'd)

- Vinton Cerf and Robert Kahn developed **TCP** in 1973.
- Supervision of ARPANET was transferred to the Defense Communications Agency (DCA) in 1975. 목적 : 통신, 슈퍼컴퓨터 network로 이용
- TCP was re-engineered in 1978 into two parts: **TCP** and **IP**. 국방부 부서 인수했다
- TCP and IP became the standard ARPANET transmission protocols in 1981 with complete migration by year end 1982. TCP/IP 완성
- DCA split the ARPANET into two networks in 1983 – **MILNET** and **ARPANET**, both under military supervision. 조개졌다 → 연구, 학술용
→ 보안통신용

AN INTRODUCTION TO THE INTERNET (cont'd)

- The ARPANET experienced significant growth after its split from MILNET.
- The **National Science Foundation** (NSF) began funding connectivity between **CSNET** and ARPANET in the early 1980s.
연구재단
74년 CSNET
- In 1984, the NSF built 5 regional supercomputing centers.
NSF가 슈퍼컴 NW시요고 ARPANET 이랑 연결
- In 1985, NSF linked them together to form the NSFNET.
ARPANET 인수
- The original links for NSFNET were 56 Kbps leased lines.
- By 1987 the connectivity was being upgraded to T1 lines.

AN INTRODUCTION TO THE INTERNET (cont'd)

CATV 유료 방송 단자
MATV 지상파 방송 단자
↓
아파트에서 냉각수로 탕지
(국민은 필수 있어야 한다)
(= 인터넷 망 증량성)

- Military jurisdiction of the Internet ended in 1990.
- As late as the early 1990s, NSFNET was still limited to research and academic activities.
- Private, for profit commercial TCP/IP data networks sprang to life from carriers such as AT&T, MCI, and Sprint.
- Once these commercial data network backbones were in place, the NSF developed a plan to privatize the Internet.
- Privatization took effect in 1994, and the NSF backbone was decommissioned in April 1995, making the Internet a private commercial enterprise maintained by ISPs.

Microsoft TCP/IP 자원 운영체제 많고...


인터넷 망 증량성

인터넷에 접근하는 어떤 애체로
차별해선 안된다.

⇒ 현재 집권정부에 따라
상당부분 훼손됨.

why 인터넷이 세습으로 개악되어서 공공재라고 보았다.

Connectivity to an ISP

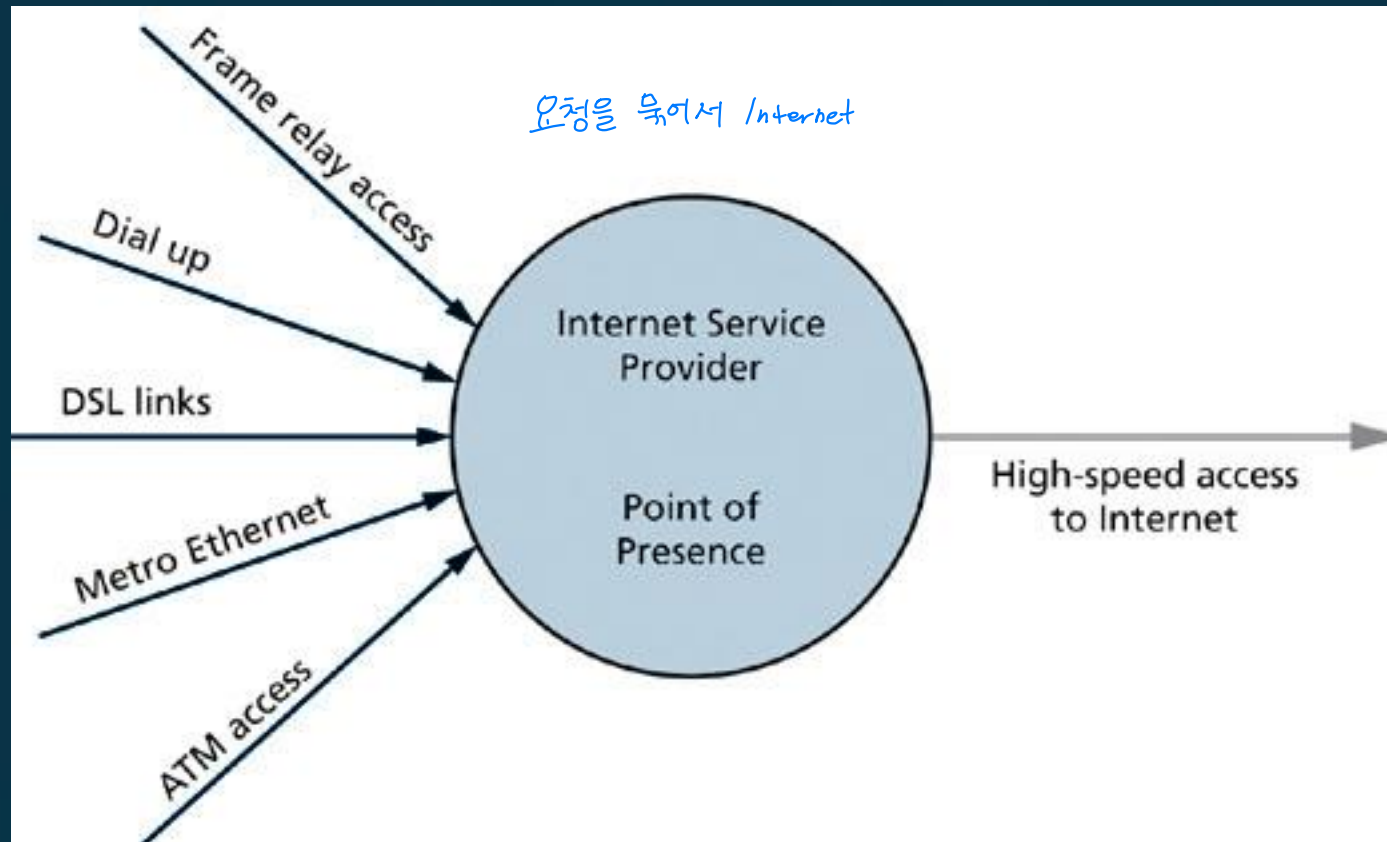

ACCESSING INFORMATION ON THE INTERNET

서버 종류가 나온다

- Mainframe and server computers can be configured to deliver content such as files, Web pages, or streaming media.
- Protocols such as ^{Internet} IP, ^{Internet} DNS, ^{Web} HTTP, and ^{File} FTP assist in locating data on the Internet.
- Internet ^{DNS의 역할} domains such as ^{그룹} .com, ^{번호} .net, .org, and ^{top level domain} .int loosely organize data access by function or geography. 꼭 따라야 하는 건 아니다
- DNS assists data access by resolving friendly names to IP addresses.
- Applications such as email, instant messaging, and VoIP provide person-to-person, person-to-group, and group-to-group communication capability.

ACCESSING INFORMATION ON THE INTERNET (cont'd)

- The Origin of the **Domain Name System**

* 비공개 된 계기

① traffic의 상충복합을 해소하자

② 키질수록 쿼리 비효율적.

- The original ARPANET computers required hosts.txt files to locate other computers on the ARPANET.

초기 ARPANET의 주소는 호스트 파일로 관리함 ㄹㄹ

- Each time a site added a computer, a new entry had to be added to a main hosts.txt, located at the Stanford Research Institute on its Network Information Center (NIC) computer, and then the new hosts.txt had to be downloaded to each site and installed on each computer at each site.

- Updating and downloading hosts.txt increased ARPANET traffic, the potential for two or more sites generating the same name for a new computer was a real possibility, and maintaining a consistent hosts.txt file across an expanding ARPANET was becoming more difficult as the ARPANET grew.

ACCESSING INFORMATION ON THE INTERNET (cont'd)

- The Origin of the Domain Name System (cont'd)
 - The problems related to maintaining hosts.txt presented a serious disruptive threat to the ARPANET in the early 1980s.
 - In 1983, Paul Mockapetris and Jon Postel formulated a distributed database of host names and addresses that could replace hosts.txt.
분산데이터베이스
 - This replacement became known as domain name system (DNS) technology and was originally specified in Request for Comment (RFC) 882.
 - Newer RFCs that have added functionality to DNS supplant the original DNS RFC.

Domain name 입력 시, DNS server에서 그 name을 IP주소로 변환한다

지적재산이라 DNS 서버, 분산 저장, DNS서버끼리 연결, 생으로 근처 내가 갖고있지 않은 서버주소 요청시 다른 DNS서버에 정보 요구

DNS서버는 캐싱기능있다
(한번 이용한 data는 기억)

RFC vs RFP	
RFC	RFP <small>수정안</small>
Request for Comments	Request for Proposal
전문가에게 comments 요청 (집단지성)	사업 계획서 요청

ACCESSING INFORMATION ON THE INTERNET (cont'd)

- The Origin of the Domain Name System (cont'd)
 - With the introduction of DNS, control of host names and addresses shifted from centralized control to distributed control.
중앙제어에서 분산 제어로 바뀌었다
 - DNS distributes host information automatically to DNS servers throughout the network.
 - Internet hosts use the distributed database to resolve host names to IP addresses.

ACCESSING INFORMATION ON THE INTERNET (cont'd)

- Name Servers


- Are known as DNS servers on the Internet.
- Are generally located in pairs at every local, regional, and national ISP.
- Supply client computers with the IP address of the requested Web site.
- Are configured with operating system software and DNS software.
- Store a portion of the DNS database.
- Are configured to communicate with at least one other DNS server.
- Have the ability to cache Web site address information received during a query of another DNS server.

캐싱

ACCESSING INFORMATION ON THE INTERNET (cont'd)

- **Internet Domains** 도메인 규칙
 - Provide organization and hierarchical structure to the Internet.
 - Top-level domains (TLDs) include: .com, .net, .org, .gov, .biz, and others.
 - Millions more domains exist under TLDs.
 - The domain space that we use when we access the Internet starts at the root domain, which is represented as a “.”
 - TLDs exist under the root domain.
 - The **maximum** length of a domain name is **255 characters**, dots excluded, and the portion of the domain name between the dots is restricted to 63 characters.

DNS Name Space

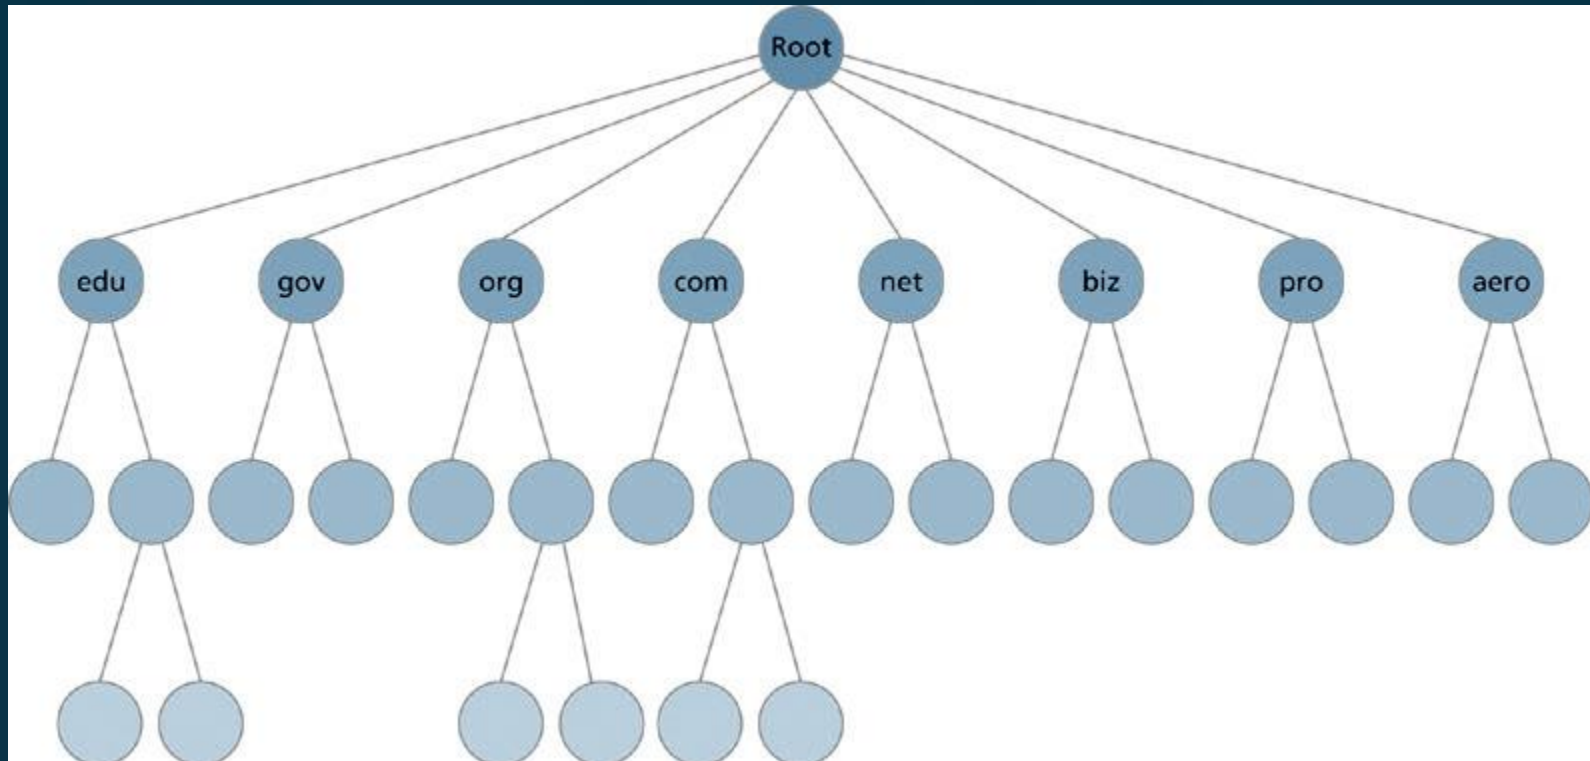

ACCESSING INFORMATION ON THE INTERNET (cont'd)

- Internet Domains (cont'd)
 - The original 7 TLDs, known as generic TLDs (gTLDs) were:
 - ^{기업}.com, ^{미국교육기관}.edu, ^{미국정부}.gov, ^{국제기구}.int, ^{군사}.mil, ^{인터넷}.net, ^{기관.단체}.org, and ^{기념.주요건}.arpa
 - Some of the new TLDs include country code TLDs (ccTLDs) as well as various organization types, including:
 - .aero, .biz, .info, .museum, .name, .pro, and others.

Original Top-Level Domains

TABLE 10.1
Original Top-Level
Domains

TLD	Original Purpose
.com	Commercial organizations
.edu	U.S. educational organizations
.gov	U.S. government organizations
.int	International organizations
.mil	U.S. military organizations
.net	Network infrastructure organizations
.org	Nonprofit organizations
.arpa	ARPANET hosts
New TLD	Purpose
.aero	Air transport organizations
.biz	Businesses
.info	Information
.museum	Museums
.name	Individuals
.pro	Professionals

ACCESSING INFORMATION ON THE INTERNET (cont'd)

• Internet Protocols

다양

TCP/IP 안에 많은 protocol이 속해있다

총칭 TCP/IP Protocol Suite

- TCP and IP were the originals developed in the 1970s to provide efficient data transmission across the ARPANET.
- Today, there's an entire suite of Internet protocols.
 - Address resolution protocol (ARP) is used to map each MAC address to an IP address.

OSI data
MAC을 IP로 mapping
 - DHCP^{③network} automatically assigns IP address information to client computers.

유동IP배정
 - DNS provides name resolution.

domain → IP
 - iSCSI provides data transport in SANs

데이터 센터 구축할 때
데이터 저장용량 늘
 - LDAP provides directory support and access to databases.

directory 관련
 - HTTP supports access to Web pages.

Web page

Lightweight
Directory
Access
Protocol

TCP/IP Protocols within the OSI Model Layers

Application	HTTP HTTPS FTP	Telnet (SMTP PoP3	IMAP4 RTSP SLP	SNMP XMPP SIMPLE
Presentation	이메일 message			
Session	대상의 역할, 계층			
Transport	DNS iSCSI LDAP	TCP UDP	RTP RTCP	
Network	IP DHCP			
Data link	ARP			
Physical				

ACCESSING INFORMATION ON THE INTERNET (cont'd)

- Internet Applications
 - **File Transfer** – FTP and HTTP are OSI application layer protocols that allow Internet users to transfer files between locations.
 - **Remote Computing** – Telnet is an OSI application layer protocol that allows users to log in to remote computers and networking devices. Secure Shell (SSH) is much like Telnet, except SSH encrypts the data transfer between devices.
 - **Streaming Media** – utilizes underlying transport and control protocols such as RTP, UDP, and RTCP, but the OSI application layer protocol that assists with streaming media is RTSP.

ACCESSING INFORMATION ON THE INTERNET (cont'd)

- Internet Applications (cont'd)
 - **Email** – SMTP, POP3, and IMAP4 are the three primary OSI application layer Internet protocols that support email.
 - **Instant Messaging** – Extensible Messaging and Presence Protocol (XMPP) and the Session Initiation Protocol for Instant Messaging and Presence Leveraging Extensions (SIMPLE) are the standardized protocols that support instant messaging and the convergence of multiple data communications technologies such as email, voice mail, group scheduling, videoconferencing, whiteboarding, calendaring, and voice and video chat through instant messaging.

THE FUTURE OF THE INTERNET

Internet 발전 2인론적

- vBNS

- ①
 - MCI runs the very-high-speed Backbone Network Service (vBNS), a high-speed network that came online in 1995 to connect the NSF's supercomputing centers.
 - Development work continues on the vBNS with upgrades to existing bandwidth (currently 2.4 Gbps), but vBNS is no longer funded by the NSF.

THE FUTURE OF THE INTERNET (cont'd)

- Internet2

- ② – Started in 1996 by 34 universities to create the next generation of Internet applications and technologies. *학술연구용 인터넷*
- Today it's a consortium of more than 200 universities collaborating with government and the private sector to build, test, and deploy advanced applications and technologies.
- Internet2 is not a network infrastructure.

THE FUTURE OF THE INTERNET

(cont'd)


- Internet2 (cont'd)

연구용망구축.
SAFE기반

- The **Abilene Project** is the actual physical communications network that supports Internet2 activities.
- Abilene provides universities and research institutions with the bandwidth to test and implement the advanced technologies and applications of Internet2.
- Abilene went live in 1999 with SONET OC-48 circuits that provided 2.4 Gbps of bandwidth.
- In early 2004, Abilene was upgraded to OC-192 circuits that provide 10 Gbps of bandwidth.
- Abilene is not currently interconnected with the commercial ISP networks that comprise the Internet.

The Abilene Network

MEMO

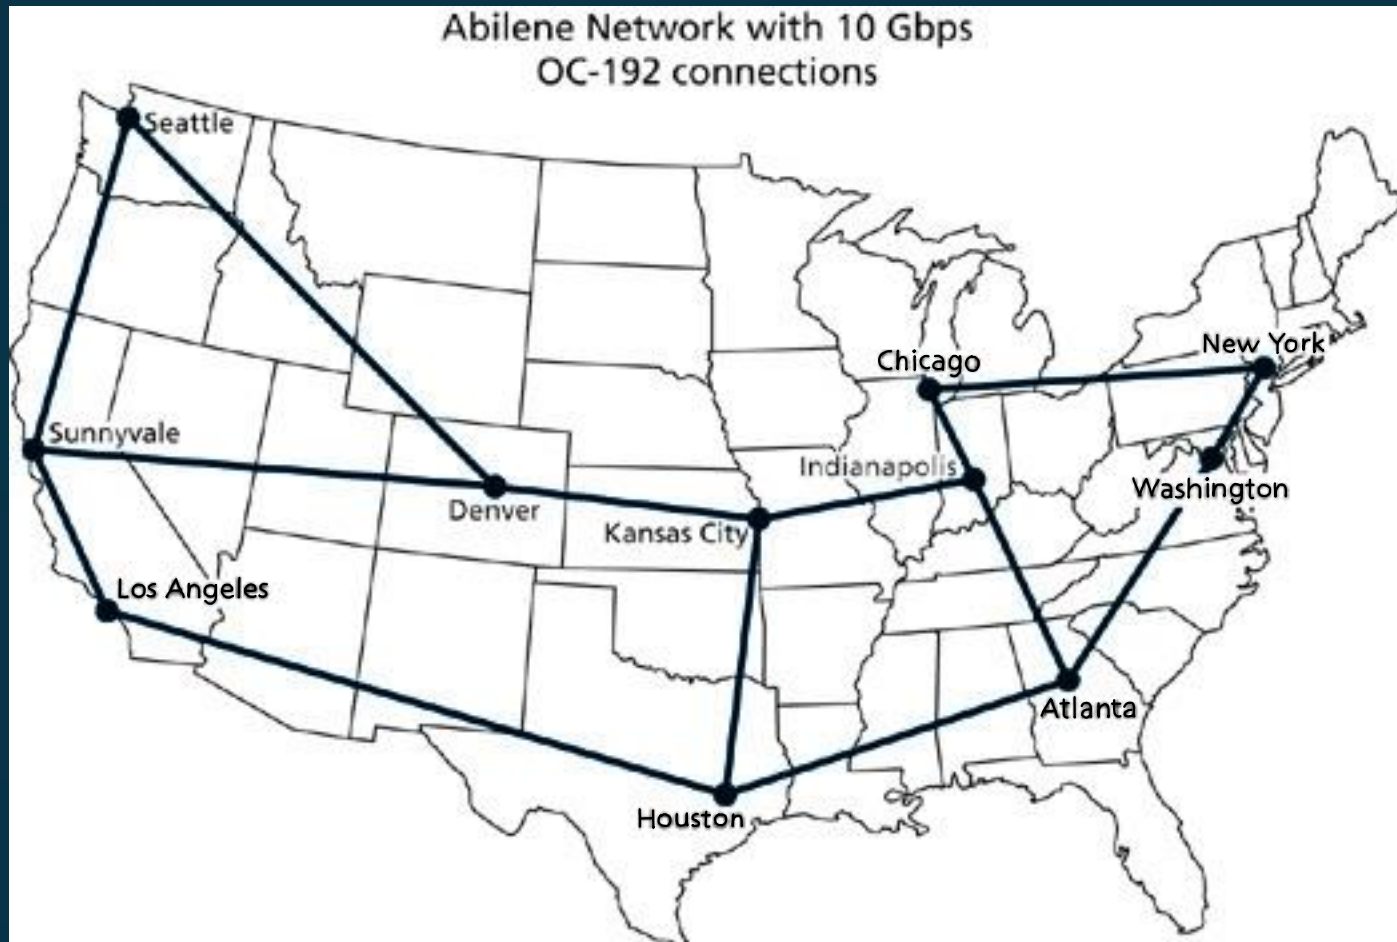

THE FUTURE OF THE INTERNET (cont'd)

- Internet2 (cont'd)
 - Numerous working groups (WGs) support advanced service, application, and technology development.
 - WGs include:
 - Campus Bandwidth Management, Digital Video, Integrated Infrastructure for Instant Messaging, IPv6, MACE-Shibboleth, MACE-WebISO, Multicast, Orthopaedic Surgery, Presence and Integrated Communications, VidMid Video Conferencing, VidMid Video on Demand, Voice over IP, and others.

THE FUTURE OF THE INTERNET (cont'd)

- The Next Generation Internet Protocol
 - Provides the foundation for the Internet applications and services being developed under Internet2.
 - **IPv4** is the current generation of IP addressing and uses 32 bits to define each host.
 - **IPv6** is the next generation of IP addressing, and it uses 128 bits to provide over 340 trillion trillion trillion addresses.
 - IPv6 is currently implemented a numerous sites that utilize vBNS and Abilene.
 - IPv6 is monitored by the IPv6 working group of Internet2.

THE FUTURE OF THE INTERNET (cont'd)

- IPv6 Business Drivers

현재
IPv4 혼잡중
↳ IPv6

- The need to provide IP addresses to a growing number of devices.
- Next-generation business applications.
- The growing use of mobile and wireless devices.
- Increased exposure of data as it is transmitted across the Internet.


v4는 Nwid 있었는데
v6은 없어졌다

THE FUTURE OF THE INTERNET

(cont'd)

- IPv6 Addressing
 - IPv6 addresses use 128 bits that are divided into eight 16-bit sections.
 - There are no address classes such as the Class A, Class B, and Class C addresses that were defined in IPv4.
 - IPv6 addresses are comprised of global routing prefix bits that identify routing information, subnet bits to identify a link within a site, and interface ID bits to identify a specific node.

IPv6 Generic Address Format

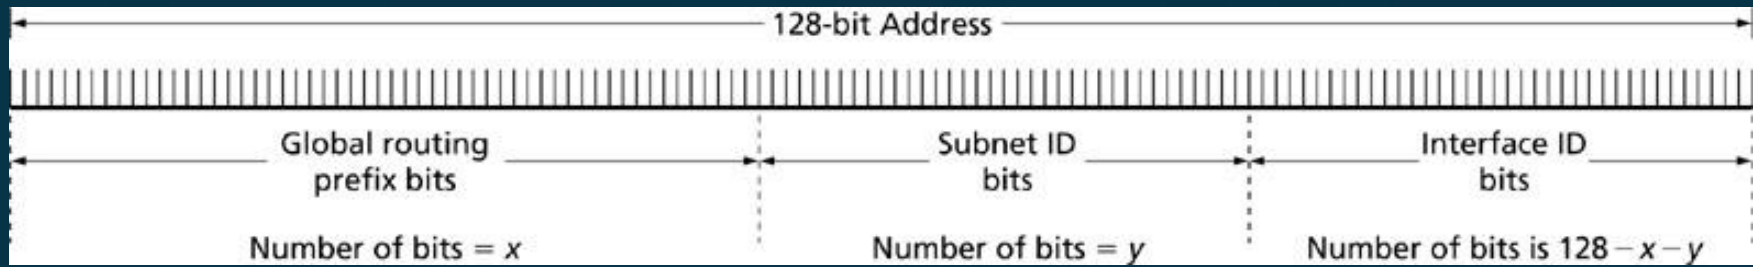

THE FUTURE OF THE INTERNET (cont'd)

- IPv6 Addressing (cont'd)
 - IPv6 addressing includes some abbreviations.
 - The address:

16진수로 표현

FE80:0000:0000:0000:ABCD:FF32:030C:1234

can be abbreviated as

축약 ↓

FE80:0:0:0:ABCD:FF32:30C:1234

or even

FE80::ABCD:FF32:30C:1234

THE FUTURE OF THE INTERNET (cont'd)

v6를 사용하는 이유

- Impact on the Organization
 - Improved transmission performance for time-critical applications.
 - QoS will be substantially improved. 지연, 손실 x
Quality of Service
 - Internet2 applications promise to deliver real-time classroom instruction from anywhere and at anytime to anywhere and at anytime.
 - IPv6 will support next generation services and applications.

THE FUTURE OF THE INTERNET (cont'd)

- Impact on the Organization (cont'd)
 - Application developers will be able to focus on the important features of applications rather than waste time developing authentication and Web logon specifications. 목적지 찾아서 지연없이!
 - Instant messaging promises an Internet of converged services – a world in which all kinds of data such as audio, video, voice, and text can be simultaneously and interactively shared.

개발자들이 본연의 역할에 충실할 수 있다

: buffering 같은건 안들 필요없다!