



Midterm Review

Introduction to Computer Graphics
Yu-Ting Wu

1

1

Announcement

- We **DO NOT** have a midterm exam for ICG
- There is **NO** class on Oct. 31 (moved to the **18th** week)
- The announcement of Homework#2 will be postponed to **Nov. 7**

2

2

HW2 Spoiler


- Implement lighting with shaders



3

3


The Rendering Process

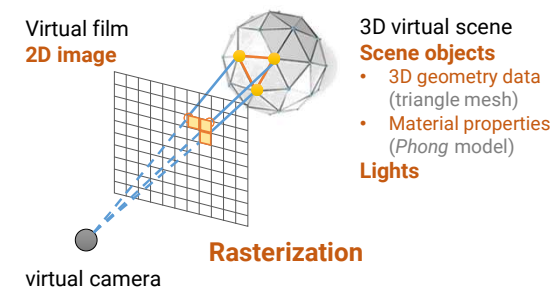

4


4

Transformation

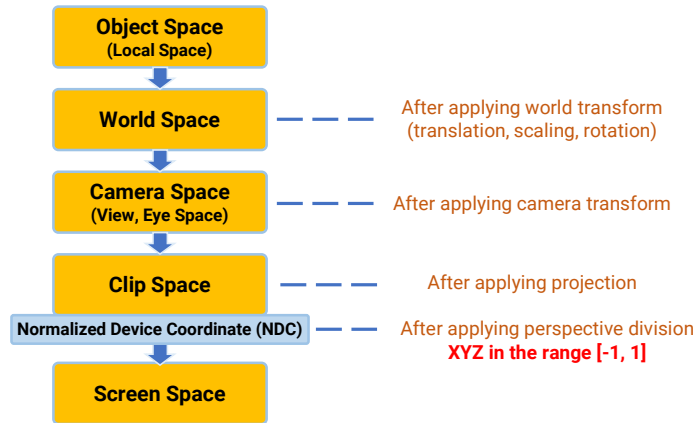


5

Object Space to World Space

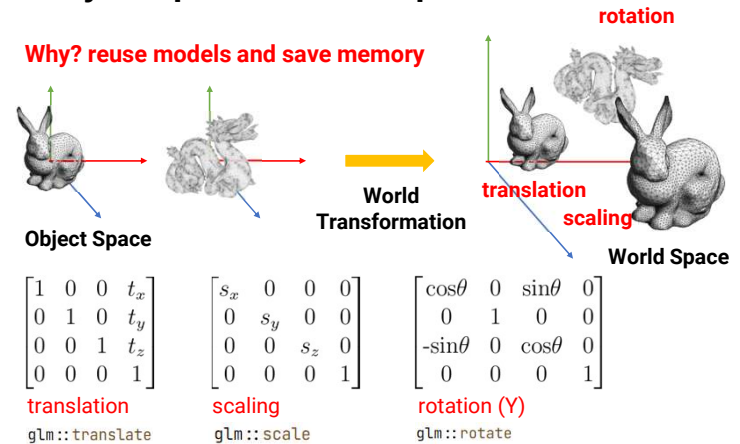

6

World Space to Camera Space




Why? for simpler math!

$$\begin{bmatrix} R_x & R_y & R_z & 0 \\ U_x & U_y & U_z & 0 \\ D_x & D_y & D_z & 0 \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} 1 & 0 & 0 & -P_x \\ 0 & 1 & 0 & -P_y \\ 0 & 0 & 1 & -P_z \\ 0 & 0 & 0 & 1 \end{bmatrix}$$

```
glm::lookAt(camPos, target, up);
```

7

Camera Space to Clip Space (NDC)

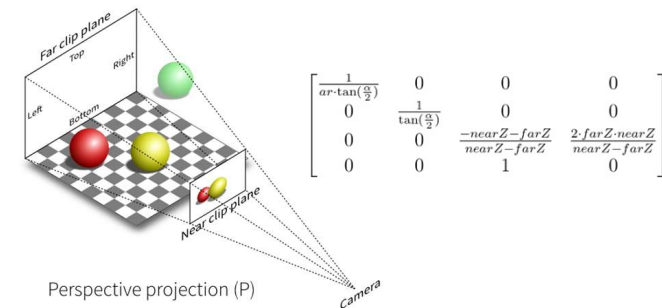

```
glm::perspective(fovy, aspectRatio, nearZ, farZ);
```

8

CPU v.s. GPU Transformation

• CPU




```

void ApplyTransformCPU(std::vector<glm::vec3>& vertexPositions, const glm::mat4x4& mvpMatrix)
{
    for (unsigned int i = 0; i < vertexPositions.size(); ++i) {
        glm::vec4 p = mvpMatrix * glm::vec4(vertexPositions[i], 1.0f);
        if (p.w != 0.0f) {
            float inv = 1.0f / p.w;
            vertexPositions[i].x = p.x * inv;
            vertexPositions[i].y = p.y * inv;
            vertexPositions[i].z = p.z * inv;
        }
    }
}
  
```

9

CPU v.s. GPU Transformation (cont.)

• GPU



```

locMVP = glGetUniformLocation(shaderProgId, "MVP");
glUniformMatrix4fv(locMVP, 1, GL_FALSE, glm::value_ptr(MVP));
  
```

CPU **Vertex Shader**

GPU

```

#version 330 core
layout (location = 0) in vec3 Position;
uniform mat4 MVP;

void main() {
    gl_Position = MVP * vec4(Position, 1.0);
}
  
```

No loop because the vertex shader is executed for each vertex in parallel by nature

10

10

Implementation

- In the **CPU** application, we
 - **Load the scene data (from files)**
 - Create vertex and index buffers
 - Provide material properties
 - Setup lights
 - **Load and create shaders**
 - **Setup the rendering state (via OpenGL APIs)**
 - Background color, polygon mode ... etc.
 - **Set variable values to the GPU shaders**
 - Transformation matrices, material data, light data ... etc.
 - **Call "Draw" functions to render objects (via OpenGL APIs)**
 - Vertex buffer format, primitive type, # of indices

11

11

Implementation (cont.)

- On the **GPU**, we
 - Execute the **Vertex Shader** for each vertex that belongs to a triangle
 - Vertex transformation
 - Vertex lighting (optional)
 - Interpolate vertex attributes (pass to fragment shader)
- OpenGL performs **rasterization** by hardware
- Execute the **Fragment Shader** for each fragment generated by the rasterization for each triangle
 - Fragment shading (lighting, texturing ... etc.)

12

12

Vertex Buffer

- Store vertex data (attributes)
 - Position } in **Object Space** if transformation is performed by the **Vertex Shader** on GPU (otherwise, in **Clip Space**)
 - Normal }
 - Texture coordinate
 - Others
- Upload to GPU for rendering


13

Vertex Buffer Layout

- Depend on the vertex attributes you provide
- Example: only position data

```
// VertexP Declarations.
struct VertexP
{
    VertexP() {
        position = glm::vec3(0.0f, 0.0f, 0.0f);
    }
    VertexP(glm::vec3 p) {
        position = p;
    }
    glm::vec3 position;
};
```

vertex buffer layout



stride = 12

- During rendering

```
glVertexAttribPointer(0, 3, GL_FLOAT, GL_FALSE, sizeof(VertexP), 0);
```

Note in **"Implementation: Simple Drawing"**, we set the stride to 0 because OpenGL allows doing so if there is only 1 attribute and the data is tightly packed

```
glVertexAttribPointer(0, 3, GL_FLOAT, GL_FALSE, 0, 0);
```

14

13


14

Vertex Buffer Layout (cont.)

- Depend on the vertex attributes you provide
- Example: with position/normal/texture data

```
// VertexPTN Declarations.
struct VertexPTN
{
    VertexPTN() {
        position = glm::vec3(0.0f, 0.0f, 0.0f);
        normal = glm::vec3(0.0f, 1.0f, 0.0f);
        texcoord = glm::vec2(0.0f, 0.0f);
    }
    VertexPTN(glm::vec3 p, glm::vec3 n, glm::vec2 uv) {
        position = p;
        normal = n;
        texcoord = uv;
    }
    glm::vec3 position;
    glm::vec3 normal;
    glm::vec2 texcoord;
};
```

vertex buffer layout



stride = 32

- During rendering:


```
glVertexAttribPointer(0, 3, GL_FLOAT, GL_FALSE, sizeof(VertexPTN), 0);
```

15

15

Index Buffer

- Reduce the size of a vertex buffer by reusing vertex data
- When forming a triangle, we specify the indices of vertices in the vertex buffer



Vertex Buffer



Index Buffer

16


16

Rendering with Vertex/Index Buffer

- Render with only the position attribute

```
glEnableVertexAttribArray(0);
glBindBuffer(GL_ARRAY_BUFFER, vboId);
glVertexAttribPointer(0, 3, GL_FLOAT, GL_FALSE, sizeof(VertexPTN), 0);
glBindBuffer(GL_ELEMENT_ARRAY_BUFFER, iboId);
glDrawElements(GL_TRIANGLES, GetNumIndices(), GL_UNSIGNED_INT, 0);
glDisableVertexAttribArray(0);
```

vertex buffer layout



17


17

Rendering with Vertex/Index Buffer (cont.)

- Render with only the position and normal attributes

```
glEnableVertexAttribArray(0);
glEnableVertexAttribArray(1);
glBindBuffer(GL_ARRAY_BUFFER, vboId);
glVertexAttribPointer(0, 3, GL_FLOAT, GL_FALSE, sizeof(VertexPTN), 0);
glVertexAttribPointer(1, 3, GL_FLOAT, GL_FALSE, sizeof(VertexPTN), (const GLvoid*)12);
glBindBuffer(GL_ELEMENT_ARRAY_BUFFER, iboId);
glDrawElements(GL_TRIANGLES, GetNumIndices(), GL_UNSIGNED_INT, 0);
glDisableVertexAttribArray(0);
glDisableVertexAttribArray(1);
```

vertex buffer layout




18

18

Rasterization

- Generate **fragments** for each triangle
- Interpolate vertex attributes at each fragment

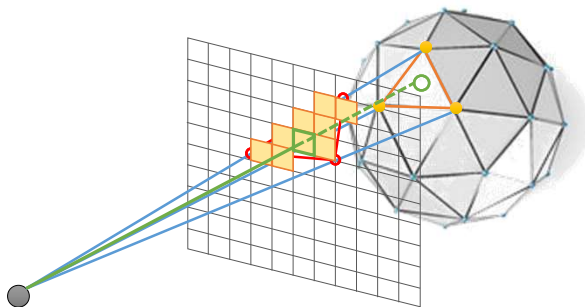


19

19

Vertex Attribute Interpolation

- Color

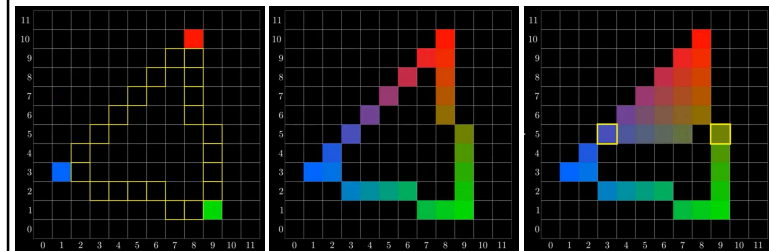

Attributes interpolation
of edge pixels using
vertices


Attributes interpolation
of inner pixels using
edge points

20

20

Vertex Attribute Interpolation (cont.)

- If we want to compute lighting at each fragment (in the fragment shader), we need per-fragment geometry attributes such as 3D position and normal

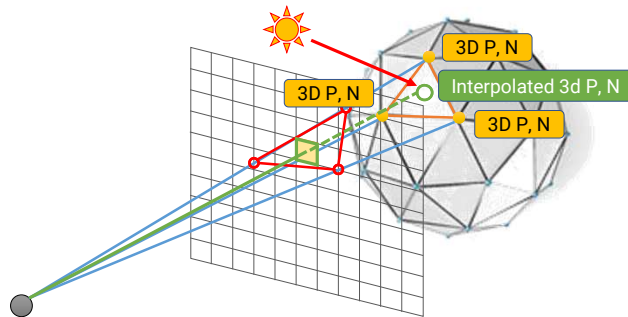

21

21

Vertex Attribute Interpolation (cont.)

- Example: interpolate **world-space vertex position** and **world-space vertex normal**

Vertex Shader

```
#version 330 core
layout (location = 0) in vec3 Position;
layout (location = 1) in vec3 Normal;

// Transformation matrix.
uniform mat4 worldMatrix;
uniform mat4 normalMatrix;
uniform mat4 MVP;

// Data pass to fragment shader.
out vec3 iPosWorld;
out vec3 iNormalWorld;

void main()
{
    gl_Position = MVP * vec4(Position, 1.0);

    // Pass vertex attributes.
    vec4 positionTmp = worldMatrix * vec4(Position, 1.0);
    iPosWorld = positionTmp.xyz / positionTmp.w;

    iNormalWorld = (normalMatrix * vec4(Normal, 0.0)).xyz;
}
```

Tell OpenGL you want to interpolate these attributes

world matrix for transforming normal

Fragment Shader

```
#version 330 core

// Data from vertex shader.
in vec3 iPosWorld;
in vec3 iNormalWorld;

out vec4 FragColor;

void main()
{
    vec3 N = normalize(iNormalWorld);
    vec3 visColor = 0.5 * N + 0.5;
    FragColor = vec4(N, 1.0);
}
```

Ensure the interpolated normal has a unit length
Map the range of normal from [-1, 1] to [0, 1] for visualization

22

22

Vertex Attribute Interpolation (cont.)

- Remember the homogeneous coordinate for a 3D point (x, y, z) is $(x, y, z, 1)$
 - Why? To enable the combination of a **translation** matrix with other transformation matrices


$$\begin{bmatrix} x' \\ y' \\ z' \\ w \end{bmatrix} = \begin{bmatrix} 1 & 0 & 0 & t_x \\ 0 & 1 & 0 & t_y \\ 0 & 0 & 1 & t_z \\ 0 & 0 & 0 & 1 \end{bmatrix} \begin{bmatrix} x \\ y \\ z \\ 1 \end{bmatrix} \quad \begin{aligned} x' &= x + t_x \\ y' &= y + t_y \\ z' &= z + t_z \end{aligned}$$

- When transforming a vector, we represent a 3D direction (dx, dy, dz) by $(dx, dy, dz, 0)$ because we do not want a translation for "direction"
 - Otherwise, the direction $(0.578, 0.578, 0.578)$ will become $(3.578, 4.578, 5.578)$ after a translation of $(3, 4, 5)$

23

23

Vertex Attribute Interpolation (cont.)

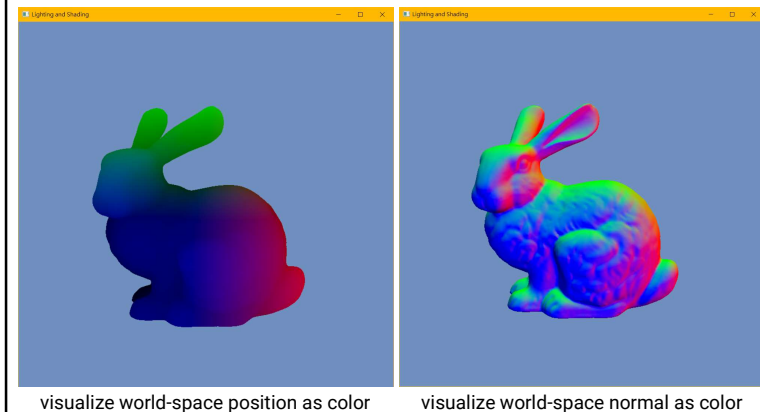

visualize world-space position as color

visualize world-space normal as color

24

24

Any Questions?