

SEMINARARBEIT

Im Studiengang FH Technikum Wien, Bachelorstudiengang BIF
Lehrveranstaltung BIF-VZ-5-WS2025-INFC-EN

Terraform Workshop Protocol

Ausgeführt von: David Veigel

Kevin Forter

Personenkennzeichen: XXXXXXXXXXXXXXXX

BegutachterIn:

Wien, den 3. Dezember 2025

Inhaltsverzeichnis

1	Workshop 1: Terraform Basics	1
1.1	Configuration	1
1.1.1	Provider and Region	1
1.1.2	VPC and Subnets	1
1.1.3	Security Group	1
1.1.4	EC2 Instance	2
1.1.5	Output and Verification	3
1.2	Execution	4
2	Workshop 2: Advanced Networking	5
2.1	Network Infrastructure	5
2.1.1	VPC and Internet Gateway	5
2.1.2	Subnet and Routing	7
2.2	Compute and Access	8
2.2.1	Security Group	8
2.2.2	Network Interface and Elastic IP	9
2.2.3	EC2 Instance	9
2.3	Execution	10
3	Workshop 3: Load Balancing and High Availability	11
3.1	Networking Setup	11
3.1.1	VPC and Internet Gateway	11
3.1.2	Subnets in Multiple AZs	12
3.1.3	Routing	14
3.2	Security Groups	15
3.2.1	Load Balancer Security Group	15
3.2.2	EC2 Security Group	15
3.3	Load Balancer Configuration	16
3.3.1	Application Load Balancer	16
3.3.2	Target Group and Listener	17
3.4	Compute Resources	18
3.4.1	EC2 Instances	18
3.4.2	Target Group Attachment	20
3.5	Verification	20

3.6	Automation and CI/CD	21
3.6.1	GitHub Configuration	21
3.6.2	Terraform Cloud Configuration	22
3.6.3	CI/CD Pipeline	22

1 Workshop 1: Terraform Basics

In this workshop, we set up a simple web server on AWS using Terraform. The goal is to provision an EC2 instance in the default VPC, install an Apache web server using user data, and verify that it is reachable.

1.1 Configuration

1.1.1 Provider and Region

We configure the AWS provider to use the `us-east-1` region, as specified in the requirements.

```
provider "aws" {  
    region = "us-east-1"  
}
```

1.1.2 VPC and Subnets

Instead of creating a new network, we use the existing default VPC and its subnets. This simplifies the setup for this initial workshop.

```
data "aws_vpc" "default" {  
    default = true  
}  
  
data "aws_subnets" "default_vpc_subnets" {  
    filter {  
        name     = "vpc-id"  
        values = [data.aws_vpc.default.id]  
    }  
}
```

1.1.3 Security Group

To make our web server accessible, we create a security group. We allow inbound TCP traffic on port 80 (HTTP) from any IP address (`0.0.0.0/0`). We also allow all outbound traffic to ensure the server can download updates and packages.

```

resource "aws_security_group" "web_sg" {
  name          = "tf-web-sg"
  description   = "Allow_HTTP_in,_all_egress"
  vpc_id        = data.aws_vpc.default.id

  ingress {
    description      = "HTTP"
    from_port        = 80
    to_port          = 80
    protocol          = "tcp"
    cidr_blocks       = ["0.0.0.0/0"]
  }

  egress {
    description      = "All_egress"
    from_port        = 0
    to_port          = 0
    protocol          = "-1"
    cidr_blocks       = ["0.0.0.0/0"]
  }
}

```

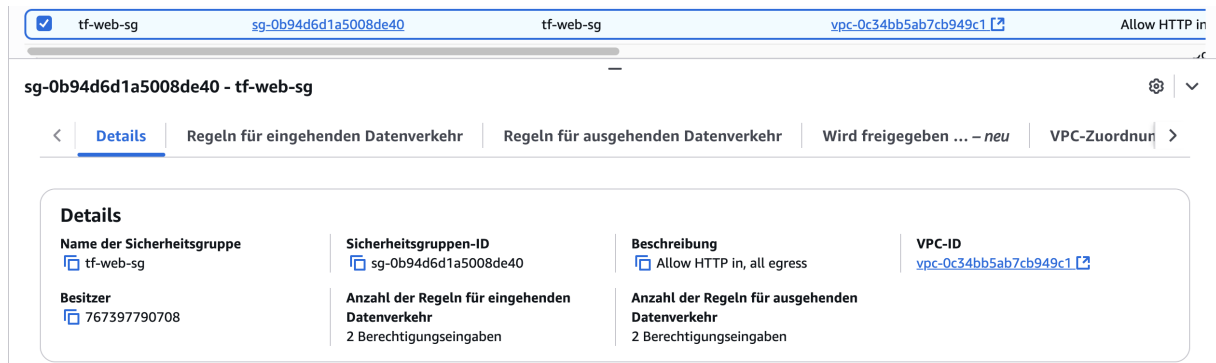


Abbildung 1: Security Group Configuration in AWS Console

1.1.4 EC2 Instance

We provision an EC2 instance using the `t2.micro` instance type, which is eligible for the free tier. We dynamically fetch the latest Ubuntu 22.04 LTS AMI. The `user_data` script is used to automatically install and start the Apache web server upon launch.

```

resource "aws_instance" "web" {
  ami          = data.aws_ami.ubuntu.id
  instance_type = "t2.micro"
  subnet_id    = data.aws_subnets.default_vpc_subnets.ids[0]
}

```


```

vpc_security_group_ids      = [aws_security_group.web_sg.id]
associate_public_ip_address = true

user_data = <<-EOF
#!/bin/bash
sudo apt-get update
sudo apt-get install -y apache2
sudo systemctl start apache2
sudo systemctl enable apache2
echo "<h1>Hello_World</h1>" | sudo tee /var/www/html/index.html
EOF

tags = {
  Name = "tf-apache"
}

```

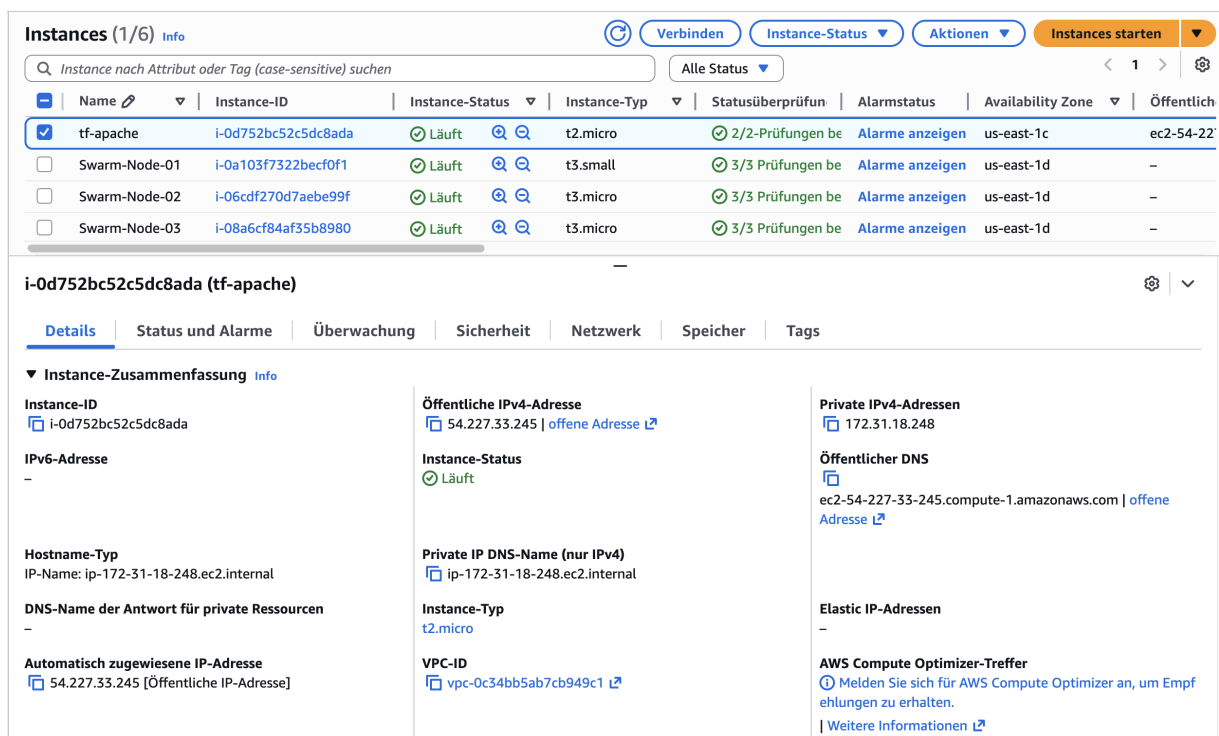

Instances (1/6) Info

Q Instance nach Attribut oder Tag (case-sensitive) suchen

Alle Status

Name	Instance-ID	Instance-Status	Instance-Typ	Statusüberprüfun	Alarmstatus	Availability Zone	Öffentlich
☒ tf-apache	i-0d752bc52c5dc8ada	Lauft	t2.micro	2/2-Prüfungen be	Alarme anzeigen	us-east-1c	ec2-54-227
☐ Swarm-Node-01	i-0a103f7322becf0f1	Lauft	t3.small	3/3 Prüfungen be	Alarme anzeigen	us-east-1d	-
☐ Swarm-Node-02	i-06cdf270d7aeb99f	Lauft	t3.micro	3/3 Prüfungen be	Alarme anzeigen	us-east-1d	-
☐ Swarm-Node-03	i-08a6cf84af35b8980	Lauft	t3.micro	3/3 Prüfungen be	Alarme anzeigen	us-east-1d	-

i-0d752bc52c5dc8ada (tf-apache)

Details | Status und Alarme | Überwachung | Sicherheit | Netzwerk | Speicher | Tags

▼ Instance-Zusammenfassung Info

Instance-ID i-0d752bc52c5dc8ada	Öffentliche IPv4-Adresse 54.227.33.245 offene Adresse	Private IPv4-Adressen 172.31.18.248
IPv6-Adresse -	Instance-Status Lauft	Öffentlicher DNS ec2-54-227-33-245.compute-1.amazonaws.com offene Adresse
Hostname-Typ IP-Name: ip-172-31-18-248.ec2.internal	Private IP DNS-Name (nur IPv4) ip-172-31-18-248.ec2.internal	Elastic IP-Adressen -
DNS-Name der Antwort für private Ressourcen -	Instance-Typ t2.micro	AWS Compute Optimizer-Treffer Melden Sie sich für AWS Compute Optimizer an, um Empfehlungen zu erhalten. Weitere Informationen
Automatisch zugewiesene IP-Adresse 54.227.33.245 [Öffentliche IP-Adresse]	VPC-ID vpc-0c34bb5ab7cb949c1	

Abbildung 2: EC2 Instance Running in AWS Console

1.1.5 Output and Verification

Finally, we output the public DNS of the instance to easily access it. We also include a `null_resource` to verify that the web server is actually reachable via HTTP.

```

output "instance_public_dns" {

```

```
description = "Public_DNS_of_the_EC2_instance"
value       = aws_instance.web.public_dns
}
```

1.2 Execution

We initialize the Terraform project to download the necessary providers.

```
> terraform init
Initializing the backend...
Initializing provider plugins...
- Finding hashicorp/aws versions matching ">= 5.0.0"...
- Finding latest version of hashicorp/null...
- Installing hashicorp/aws v6.20.0...
- Installed hashicorp/aws v6.20.0 (signed by HashiCorp)
- Installing hashicorp/null v3.2.4...
- Installed hashicorp/null v3.2.4 (signed by HashiCorp)
Terraform has created a lock file .terraform.lock.hcl to record the provider
selections it made above. Include this file in your version control repository
so that Terraform can guarantee to make the same selections by default when
you run "terraform init" in the future.

Terraform has been successfully initialized!

You may now begin working with Terraform. Try running "terraform plan" to see
any changes that are required for your infrastructure. All Terraform commands
should now work.

If you ever set or change modules or backend configuration for Terraform,
rerun this command to reinitialize your working directory. If you forget, other
commands will detect it and remind you to do so if necessary.
```

Abbildung 3: Terraform Init

Then we apply the configuration to create the resources.

```

> terraform apply -auto-approve
data.aws_vpc.default: Reading...
data.aws_ami.ubuntu: Reading...
data.aws_ami.ubuntu: Read complete after 4s [id=ami-0c398cb65a93047f2]
data.aws_vpc.default: Read complete after 7s [id=vpc-0c34bb5ab7cb949c1]
data.aws_subnets.default_vpc_subnets: Reading...
data.aws_subnets.default_vpc_subnets: Read complete after 1s [id=us-east-1]

Terraform used the selected providers to generate the following execution plan. Resource actions are indicated with the following symbols:
+ create

Terraform will perform the following actions:

# aws_instance.web will be created
+ resource "aws_instance" "web" {
  + ami                        = "ami-0c398cb65a93047f2"
  + arn                       = (known after apply)
  + associate_public_ip_address = true
  + availability_zone         = (known after apply)
  + disable_api_stop          = (known after apply)
  + disable_api_termination   = (known after apply)
  + ebs_optimized              = (known after apply)
  + enable_primary_ipv6       = (known after apply)
  + force_destroy              = false
  + get_password_data          = false
  + host_id                   = (known after apply)
  + host_resource_group_arn    = (known after apply)
  + iam_instance_profile       = (known after apply)
  + id                        = (known after apply)
  + instance_initiated_shutdown_behavior = (known after apply)
  + instance_lifecycle         = (known after apply)
  + instance_state             = (known after apply)
  + instance_type              = "t2.micro"
  + ipv6_address_count         = (known after apply)
  + ipv6_addresses             = (known after apply)
  + key_name                   = (known after apply)
  + monitoring                 = (known after apply)
  + outpost_arn                = (known after apply)
  + password_data              = (known after apply)
  + placement_group            = (known after apply)
  + placement_group_id         = (known after apply)
  + placement_partition_number = (known after apply)
  + primary_network_interface_id = (known after apply)
  + private_dns                = (known after apply)
  + private_ip                 = (known after apply)
  + public_dns                 = (known after apply)
  + public_ip                  = (known after apply)
  + region                     = "us-east-1"
  + secondary_private_ips      = (known after apply)
  + security_groups             = (known after apply)
  + source_dest_check          = true

```

Abbildung 4: Terraform Apply

2 Workshop 2: Advanced Networking

In the second workshop, we move away from the default VPC and build a custom network infrastructure. This includes creating a VPC, subnets, routing tables, and an Internet Gateway. We also assign a persistent Elastic IP to our web server.

2.1 Network Infrastructure

2.1.1 VPC and Internet Gateway

We create a new VPC with the CIDR block `10.0.0.0/16`. To enable communication with the internet, we attach an Internet Gateway to this VPC.


```
resource "aws_vpc" "web_vpc" {
  cidr_block      = "10.0.0.0/16"
  enable_dns_support = true
  enable_dns_hostnames = true
  tags = { Name = "tf-web-vpc" }
}

resource "aws_internet_gateway" "igw" {
  vpc_id = aws_vpc.web_vpc.id
  tags = { Name = "tf-web-igw" }
}
```

vpc-01642c1407e32f458 / tf-web-vpc Aktionen ▾

Details Info	
VPC-ID vpc-01642c1407e32f458	Status Available
DNS-Auflösung Aktiviert	Tenancy default
Haupt-Netzwerk-ACL acl-0f155e51d51550947	Standard-VPC Nein
IPv6 CIDR (Network Border Group) -	Nutzungsmetriken für Netzwerkadressen Deaktiviert
Verschlüsselungssteuerungs-ID -	Verschlüsselungssteuerungsmodus -
Öffentlichen Zugriff blockieren Aus DHCP-Optionssatz dopt-0804897584b01e432 IPv4-CIDR 10.0.0.0/16 Regelgruppen für Route-53-Resolver-DNS-Firewall Fehler beim Laden der Regelgruppen	
DNS-Hostnamen Aktiviert Haupt-Routing-Tabelle rtb-07e4fa61f19867c7f IPv6-Pool - Besitzer-ID 767397790708	

Ressourcenzuordnung | CIDRs | Flow-Protokolle | Tags | Integrationen

Ressourcenzuordnung Info Alle Details anzeigen

VPC
Ihr virtuelles AWS-Netzwerk
tf-web-vpc

Subnetze (1)
Subnetze innerhalb dieser VPC
us-east-1a
tf-web-subnet

Routing-Tabellen (2)
Netzwerkdatenverkehr an Ressourcen weiterleiten
tf-web-rt
rtb-07e4fa61f19867c7f

Abbildung 5: Custom VPC Created

igw-0c40f497ee5149ed6 / tf-web-igw Aktionen ▾

Details Info	
Internet-Gateway-ID igw-0c40f497ee5149ed6	Status Attached
VPC-ID vpc-01642c1407e32f458 tf-web-vpc	Eigentümer 767397790708

Tags (1) Tags verwalten

Tags suchen

Schlüssel	Wert
Name	tf-web-igw

Abbildung 6: Internet Gateway Attached

2.1.2 Subnet and Routing

We create a subnet (10.0.1.0/24) within our VPC. To allow traffic from the subnet to reach the internet, we create a custom route table that routes all traffic (0.0.0.0/0) to the Internet Gateway, and associate it with our subnet.

```
resource "aws_route_table" "web_rt" {
  vpc_id = aws_vpc.web_vpc.id
  route {
    cidr_block = "0.0.0.0/0"
    gateway_id = aws_internet_gateway.igw.id
  }
  tags = { Name = "tf-web-rt" }
}

resource "aws_subnet" "web_subnet" {
  vpc_id            = aws_vpc.web_vpc.id
  cidr_block        = "10.0.1.0/24"
  availability_zone  = "us-east-1a"
  map_public_ip_on_launch = false
  tags = { Name = "tf-web-subnet" }
}

resource "aws_route_table_association" "web_rta" {
  subnet_id      = aws_subnet.web_subnet.id
  route_table_id = aws_route_table.web_rt.id
}
```

subnet-003febe3900aa2e0f / tf-web-subnet Aktionen

Details

Subnetz-ID
subnet-003febe3900aa2e0f

IPv4-CIDR
10.0.1.0/24

Verfügbare Zone
us-east-1 (us-east-1a)

Netzwerk-ACL
acl-0f155e51d51550947

Kundeneigene IPv4-Adresse automatisch zuweisen
Nein

IPv6 CIDR-Reservierungen
-

Ressourcenname-DNS-A-AAAA-Datensatz
Deaktiviert

Subnetz-ARN
arn:aws:ec2:us-east-1:767397790708:subnet/subnet-003febe3900aa2e0f

Verfügbare IPv4-Adressen
250

Network Border Group
us-east-1

Standard-Subnetz
Nein

Kundeneigener IPv4-Pool
-

Nur IPv6
Nein

DNS64
Deaktiviert

Status
Available

IPv6-CIDR
-

VPC
vpc-01642c1407e32f458 | tf-web-vpc

Öffentliche IPv4-Adresse automatisch zuweisen
Nein

Stützpunkt-ID
-

Hostname-Typ
IP-Name

Eigentümer
767397790708

Öffentlichen Zugriff blockieren
Aus

IPv6-CIDR-Zuordnungs-ID
-

Routing-Tabelle
rtb-09d58ee8e0b88609c | tf-web-rt

IPv6-Adresse automatisch zuweisen
Nein

IPv4 CIDR-Reservierungen
-

Ressourcenname-DNS-A-Datensatz
Deaktiviert

Flow-Protokolle | **Routing-Tabelle** | Netzwerk-ACL | CIDR-Reservierungen | Freigeben | Tags

Routing-Tabelle: rtb-09d58ee8e0b88609c / tf-web-rt Routing-Tabellenzuordnung bearbeiten

Routen (2)

Suchen Routen filtern

Bestimmungsort	Ziel
10.0.0.0/16	local
0.0.0.0/0	igw-0c40f497ee5149ed6

Abbildung 7: Subnet and Route Table Association

2.2 Compute and Access

2.2.1 Security Group

Similar to Workshop 1, we create a security group to allow HTTP traffic.

sg-06bad6ac684893f17 - tf-web-sg Aktionen

Details

Name der Sicherheitsgruppe
tf-web-sg

Besitzer
767397790708

Sicherheitsgruppen-ID
sg-06bad6ac684893f17

Anzahl der Regeln für eingehenden Datenverkehr
2 Berechtigungseingaben

Beschreibung
Allow HTTP in, all egress

Anzahl der Regeln für ausgehenden Datenverkehr
2 Berechtigungseingaben

VPC-ID
vpc-01642c1407e32f458

Regeln für eingehenden Datenverkehr | Regeln für ausgehenden Datenverkehr | Wird freigegeben ... - neu | VPC-Zuordnungen - neu | Tags

Regeln für eingehenden Datenverkehr (2) Tags verwalten Regeln für eingehenden Datenverkehr bearbeiten

Suchen

	Name	ID der Sicherheitsgr...	IP-Version	Typ	Protokoll	Portbereich
☐	-	sgr-082dfdda289601aa7	IPv4	HTTP	TCP	80
☐	-	sgr-0ceac4166dfa6c64f	IPv6	HTTP	TCP	80


Abbildung 8: Security Group Inbound Rules

2.2.2 Network Interface and Elastic IP

Instead of relying on auto-assigned public IPs, we create a Network Interface (ENI) with a fixed private IP (10.0.1.50) and associate an Elastic IP (EIP) with it. This gives our server a static public IP address.

```
resource "aws_network_interface" "web_eni" {
  subnet_id      = aws_subnet.web_subnet.id
  private_ips    = ["10.0.1.50"]
  security_groups = [aws_security_group.web_sg.id]
  tags = { Name = "tf-web-eni" }
}

resource "aws_eip" "web_eip" {
  domain                = "vpc"
  network_interface     = aws_network_interface.web_eni.id
  associate_with_private_ip = "10.0.1.50"
  depends_on            = [aws_internet_gateway.igw]
  tags = { Name = "tf-web-eip" }
}
```

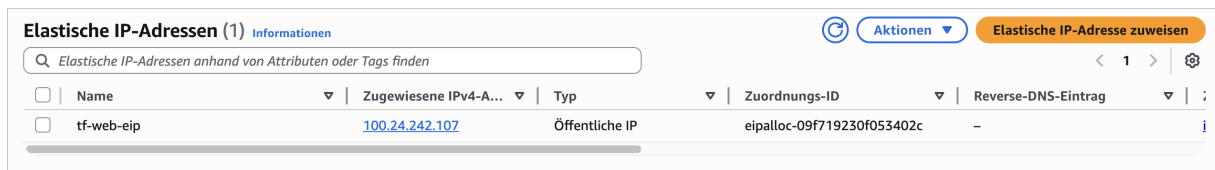

Name	Zugewiesene IPv4-Adresse	Typ	Zuordnungs-ID	Reverse-DNS-Eintrag
tf-web-eip	100.24.242.107	Öffentliche IP	eipalloc-09f719230f053402c	-

Abbildung 9: Elastic IP Allocation

2.2.3 EC2 Instance

We launch the EC2 instance and attach the previously created network interface. This ensures the instance uses our specific network configuration.

```
resource "aws_instance" "web" {
  ami          = data.aws_ami.ubuntu.id
  instance_type = "t2.micro"

  network_interface {
    network_interface_id = aws_network_interface.web_eni.id
    device_index         = 0
  }

  user_data = <<-EOF
    #!/bin/bash
    sudo apt-get update
```

```

sudo apt-get install -y apache2
sudo systemctl start apache2
sudo systemctl enable apache2
echo "<h1>Hello_World</h1>" | sudo tee /var/www/html/index.html
EOF

tags = { Name = "tf-apache-instance" }
}

```

The screenshot displays the AWS Management Console's 'Instance-Zusammenfassung' (Instance Summary) page for an EC2 instance with ID 'i-0b44d8e0decc8c1f3' (tf-apache-instance). The page is organized into three columns of key-value pairs, each with a refresh icon and a link to the resource details.

- Left Column:**
 - Instance-ID:** i-0b44d8e0decc8c1f3
 - IPv6-Adresse:** -
 - Hostname-Typ:** IP-Name: ip-10-0-1-50.ec2.internal
 - DNS-Name der Antwort für private Ressourcen:** -
 - Automatisch zugewiesene IP-Adresse:** -
 - IAM-Rolle:** -
 - IMDSv2:** Optional. A warning icon indicates 'EC2 empfiehlt, IMDSv2 auf erforderlichlich zu setzen.' with a link to 'Weitere Informationen'.
 - Operator:** -
- Middle Column:**
 - Öffentliche IPv4-Adresse:** 100.24.242.107 | offene Adresse
 - Instance-Status:** Läuft (green checkmark icon)
 - Private IP DNS-Name (nur IPv4):** ip-10-0-1-50.ec2.internal
 - Instance-Typ:** t2.micro
 - VPC-ID:** vpc-01642c1407e32f458 (tf-web-vpc)
 - Subnetz-ID:** subnet-003febe3900aa2e0f (tf-web-subnet)
 - Instance-ARN:** arn:aws:ec2:us-east-1:767397790708:instance/i-0b44d8e0decc8c1f3
- Right Column:**
 - Private IPv4-Adressen:** 10.0.1.50
 - Öffentlicher DNS:** ec2-100-24-242-107.compute-1.amazonaws.com | offene Adresse
 - Elastic IP-Adressen:** 100.24.242.107 (tf-web-eip) [Öffentliche IP-Adresse]
 - AWS Compute Optimizer-Treffer:** A warning icon indicates 'Melden Sie sich für AWS Compute Optimizer an, um Empfehlungen zu erhalten.' with a link to 'Weitere Informationen'.
 - Auto-Scaling-Gruppenname:** -
 - Verwaltet:** Falsch

At the top right of the summary, there are buttons for 'Verbinden', 'Instance-Status', and 'Aktionen'.

Abbildung 10: EC2 Instance Summary

2.3 Execution

We apply the configuration and verify the creation of resources. The output confirms the public IP of our instance.

```

> terraform fmt
> terraform validate
Success! The configuration is valid.

> terraform apply -auto-approve
data.aws_ami.ubuntu: Reading...
data.aws_ami.ubuntu: Read complete after 0s [id=ami-00b13f11600160c10]

Terraform used the selected providers to generate the following execution plan. Resource actions are indicated with the following
symbols:
+ create

Terraform will perform the following actions:

# aws_eip.web_eip will be created
+ resource "aws_eip" "web_eip" {
+   allocation_id      = (known after apply)
+   arn                = (known after apply)
+   associate_with_private_ip = "10.0.1.50"
+   association_id     = (known after apply)
+   carrier_ip        = (known after apply)
+   customer_owned_ip  = (known after apply)
+   domain            = "vpc"
+   id                = (known after apply)
+   instance           = (known after apply)
+   ipam_pool_id       = (known after apply)
+   network_border_group = (known after apply)
+   network_interface  = (known after apply)
+   private_dns        = (known after apply)
+   private_ip         = (known after apply)
+   ptr_record         = (known after apply)
+   public_dns         = (known after apply)
+   public_ip          = (known after apply)
+   public_ipv4_pool    = (known after apply)
+   region             = "us-east-1"
+   tags               = {
+     "Name" = "tf-web-eip"
+   }
+   tags_all          = {
+     "Name" = "tf-web-eip"
+   }
}

```

Abbildung 11: Terraform Apply Execution

3 Workshop 3: Load Balancing and High Availability

In this workshop, we implement a highly available web application architecture. We distribute traffic across two EC2 instances in different Availability Zones (AZs) using an Application Load Balancer (ALB). This ensures that if one AZ fails, the application remains accessible.

3.1 Networking Setup

3.1.1 VPC and Internet Gateway

We create a VPC and an Internet Gateway, similar to the previous workshop, to provide a network environment and internet connectivity.

```

resource "aws_vpc" "web_vpc" {
  cidr_block      = "10.0.0.0/16"

```

```

enable_dns_support    = true
enable_dns_hostnames = true
tags = { Name = "tf-web-vpc" }
}

resource "aws_internet_gateway" "igw" {
  vpc_id = aws_vpc.web_vpc.id
  tags = { Name = "tf-web-igw" }
}

```

vpc-0d3e53f5fe370f9c8 / tf-web-vpc

Details | Ressourcenzuordnung | CIDRs | Flow-Protokolle | Tags | Integrationen

Details			
VPC-ID vpc-0d3e53f5fe370f9c8	Status Available	Öffentlichen Zugriff blockieren Aus	DNS-Hostnamen Aktiviert
DNS-Auflösung Aktiviert	Tenancy default	DHCP-Optionssatz dopt-0804897584b01e432	Haupt-Routing-Tabelle rtb-0c9d70a1e6b2db87c
Haupt-Netzwerk-ACL acl-014c8797788a6f9ab	Standard-VPC Nein	IPv4-CIDR 10.0.0.0/16	IPv6-Pool -
IPv6 CIDR (Network Border Group) -	Nutzungsmetriken für Netzwerkadressen Deaktiviert	Regelgruppen für Route-53-Resolver-DNS-Firewall Fehler beim Laden der Regelgruppen	Besitzer-ID 767397790708
Verschlüsselungssteuerungs-ID -	Verschlüsselungssteuerungsmodus -		

Abbildung 12: VPC Configuration

igw-0d6421b724ef21c6a / tf-web-igw

Details | Tags

Details			
Internet-Gateway-ID igw-0d6421b724ef21c6a	Status Attached	VPC-ID vpc-0d3e53f5fe370f9c8 tf-web-vpc	Eigentümer 767397790708

Abbildung 13: Internet Gateway

3.1.2 Subnets in Multiple AZs

To achieve high availability, we create two subnets in different Availability Zones (us-east-1a and us-east-1b).

```

resource "aws_subnet" "subnet_1" {
  vpc_id            = aws_vpc.web_vpc.id
  cidr_block        = "10.0.1.0/24"
  availability_zone  = "us-east-1a"
  map_public_ip_on_launch = true
  tags = { Name = "tf-subnet-1" }
}

```

```

}

resource "aws_subnet" "subnet_2" {
  vpc_id            = aws_vpc.web_vpc.id
  cidr_block        = "10.0.2.0/24"
  availability_zone  = "us-east-1b"
  map_public_ip_on_launch = true
  tags = { Name = "tf-subnet-2" }
}

```

subnet-06da062a016089c28 / tf-subnet-1

Details			
Subnetz-ID subnet-06da062a016089c28	Subnetz-ARN arn:aws:ec2:us-east-1:767397790708:subnet/subnet-06da062a016089c28	Status Available	Öffentlichen Zugriff blockieren Aus
IPv4-CIDR 10.0.1.0/24	Verfügbare IPv4-Adressen 249	IPv6-CIDR -	IPv6-CIDR-Zuordnungs-ID -
Verfügbare Zone use1-az1 (us-east-1a)	Network Border Group us-east-1	VPC vpc-0d3e53f5fe370f9c8 tf-web-vpc	Routing-Tabelle rtb-071cf06657359c5ab tf-web-rt
Netzwerk-ACL acl-014c8797788a6f9ab	Standard-Subnetz Nein	Öffentliche IPv4-Adresse automatisch zuweisen Ja	IPv6-Adresse automatisch zuweisen Nein
Kundeneigene IPv4-Adresse automatisch zuweisen Nein	Kundeneigener IPv4-Pool -	Stützpunkt-ID -	IPv4 CIDR-Reservierungen -
IPv6 CIDR-Reservierungen -	Nur IPv6 Nein	Hostname-Typ IP-Name	Ressourcenname-DNS-A-Datensatz Deaktiviert
Ressourcenname-DNS-AAAA-Datensatz Deaktiviert	DNS64 Deaktiviert	Eigentümer 767397790708	

Abbildung 14: Subnet 1 in us-east-1a

subnet-0804b2f9df7fcbc67 / tf-subnet-2

Details			
Subnetz-ID subnet-0804b2f9df7fcbc67	Subnetz-ARN arn:aws:ec2:us-east-1:767397790708:subnet/subnet-0804b2f9df7fcbc67	Status Available	Öffentlichen Zugriff blockieren Aus
IPv4-CIDR 10.0.2.0/24	Verfügbare IPv4-Adressen 249	IPv6-CIDR -	IPv6-CIDR-Zuordnungs-ID -
Verfügbare Zone use1-az2 (us-east-1b)	Network Border Group us-east-1	VPC vpc-0d3e53f5fe370f9c8 tf-web-vpc	Routing-Tabelle rtb-071cf06657359c5ab tf-web-rt
Netzwerk-ACL acl-014c8797788a6f9ab	Standard-Subnetz Nein	Öffentliche IPv4-Adresse automatisch zuweisen Ja	IPv6-Adresse automatisch zuweisen Nein
Kundeneigene IPv4-Adresse automatisch zuweisen Nein	Kundeneigener IPv4-Pool -	Stützpunkt-ID -	IPv4 CIDR-Reservierungen -
IPv6 CIDR-Reservierungen -	Nur IPv6 Nein	Hostname-Typ IP-Name	Ressourcenname-DNS-A-Datensatz Deaktiviert
Ressourcenname-DNS-AAAA-Datensatz Deaktiviert	DNS64 Deaktiviert	Eigentümer 767397790708	

Abbildung 15: Subnet 2 in us-east-1b

3.1.3 Routing

We configure a route table to send internet traffic to the Internet Gateway and associate it with both subnets.

```
resource "aws_route_table" "web_rt" {
  vpc_id = aws_vpc.web_vpc.id
  route {
    cidr_block = "0.0.0.0/0"
    gateway_id = aws_internet_gateway.igw.id
  }
  tags = { Name = "tf-web-rt" }
}

resource "aws_route_table_association" "rta_1" {
  subnet_id      = aws_subnet.subnet_1.id
  route_table_id = aws_route_table.web_rt.id
}

resource "aws_route_table_association" "rta_2" {
  subnet_id      = aws_subnet.subnet_2.id
  route_table_id = aws_route_table.web_rt.id
}
```

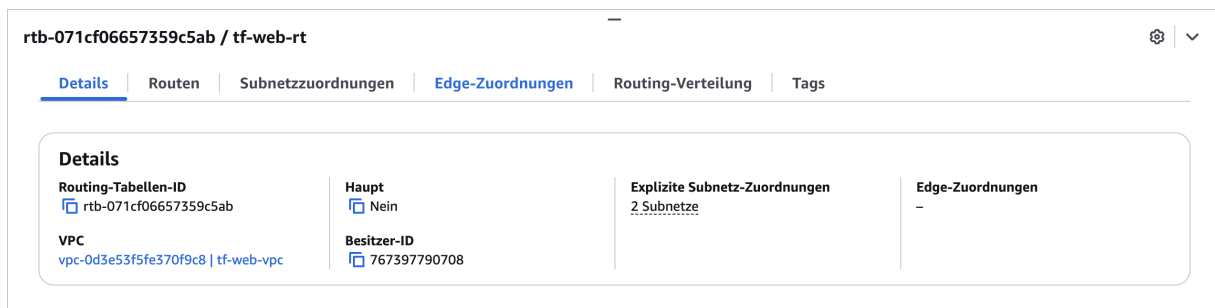


Abbildung 16: Route Table



Abbildung 17: Route Table Association

3.2 Security Groups


3.2.1 Load Balancer Security Group

This security group allows incoming HTTP traffic from anywhere to the Load Balancer.

```
resource "aws_security_group" "lb_sg" {
  name          = "tf-lb-sg"
  description   = "Allow_HTTP_to_Load_Balancer"
  vpc_id        = aws_vpc.web_vpc.id

  ingress {
    description = "HTTP_from_Internet"
    from_port   = 80
    to_port     = 80
    protocol    = "tcp"
    cidr_blocks = ["0.0.0.0/0"]
  }

  egress {
    from_port   = 0
    to_port     = 0
    protocol    = "-1"
    cidr_blocks = ["0.0.0.0/0"]
  }
}
```

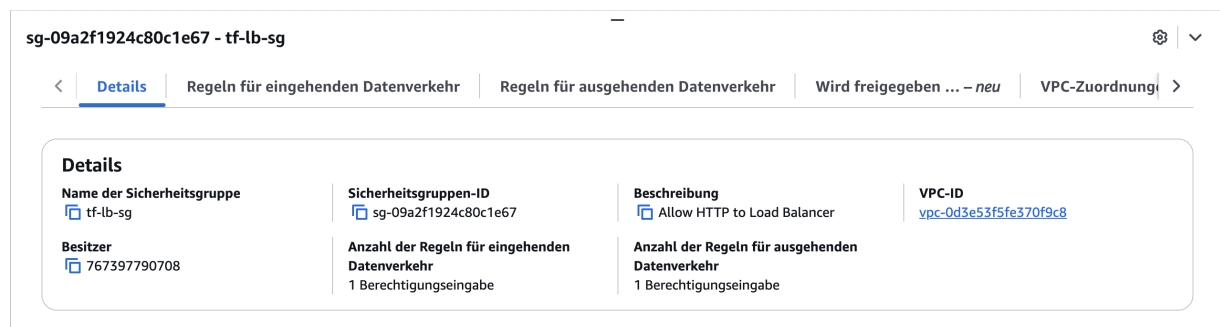

The screenshot shows the AWS Management Console interface for a security group named 'sg-09a2f1924c80c1e67 - tf-lb-sg'. The 'Details' tab is selected, displaying a table with the following information:

Details			
Name der Sicherheitsgruppe tf-lb-sg	Sicherheitsgruppen-ID sg-09a2f1924c80c1e67	Beschreibung Allow HTTP to Load Balancer	VPC-ID vpc-0d3e53f5fe370f9c8
Besitzer 767397790708	Anzahl der Regeln für eingehenden Datenverkehr 1 Berechtigungseingabe	Anzahl der Regeln für ausgehenden Datenverkehr 1 Berechtigungseingabe	

Abbildung 18: Load Balancer Security Group

3.2.2 EC2 Security Group

The EC2 instances should only accept traffic from the Load Balancer. We reference the Load Balancer's security group ID in the ingress rule.

```
resource "aws_security_group" "ec2_sg" {
  name = "tf-ec2-sg"
```

```

description = "Allow_HTTP_from_LB"
vpc_id      = aws_vpc.web_vpc.id

ingress {
  description      = "HTTP_from_Load_Balancer"
  from_port        = 80
  to_port          = 80
  protocol         = "tcp"
  security_groups  = [aws_security_group.lb_sg.id]
}

egress {
  from_port = 0
  to_port   = 0
  protocol  = "-1"
  cidr_blocks = ["0.0.0.0/0"]
}
}

```

sg-03f1a7278cc31611e - tf-ec2-sg

< **Details** | Regeln für eingehenden Datenverkehr | Regeln für ausgehenden Datenverkehr | Wird freigegeben ... - neu | VPC-Zuordnung >

Details			
Name der Sicherheitsgruppe tf-ec2-sg	Sicherheitsgruppen-ID sg-03f1a7278cc31611e	Beschreibung Allow HTTP from LB	VPC-ID vpc-0d3e53f5fe370f9c8
Besitzer 767397790708	Anzahl der Regeln für eingehenden Datenverkehr 1 Berechtigungseingabe	Anzahl der Regeln für ausgehenden Datenverkehr 1 Berechtigungseingabe	

Abbildung 19: EC2 Security Group restricted to LB

3.3 Load Balancer Configuration

3.3.1 Application Load Balancer

We create an external Application Load Balancer spanning our two subnets.

```

resource "aws_lb" "app_lb" {
  name          = "tf-web-lb"
  internal      = false
  load_balancer_type = "application"
  security_groups = [aws_security_group.lb_sg.id]
  subnets      = [aws_subnet.subnet_1.id, aws_subnet.subnet_2.id]
  tags = { Name = "tf-web-lb" }
}

```

Load Balancer: tf-web-lb

Details

Listener und Regeln

Netzwerkzuordnung

Ressourcenkarte

Sicherheit

Überwachung

Integrationen

Attribute

Details

Load-Balancer-Typ

Anwendung

Status

Aktiv

VPC

[vpc-0d3e53f5fe370f9c8](#)

IP-Adresstyp des Load Balancers

IPv4

Schema

Internet-facing

Gehostete Zone

Z35SXDOTRQ7X7K

Availability Zones

[subnet-0804b2f9df7fcbc67](#) us-east-1b (use1-az2)
 [subnet-06da062a016089c28](#) us-east-1a (use1-az1)

Datum erstellt

2. Dezember 2025, 22:31 (UTC+01:00)

Load-Balancer-ARN

[arn:aws:elasticloadbalancing:us-east-1:767397790708:loadbalancer/app/tf-web-lb/40af0919d6641b14](#)

DNS-Name

[tf-web-lb-504647856.us-east-1.elb.amazonaws.com](#) (A-Datensatz)

Abbildung 20: Application Load Balancer

3.3.2 Target Group and Listener

The target group defines where to route requests. The listener listens on port 80 and forwards traffic to this target group.

```
resource "aws_lb_target_group" "web_tg" {
  name      = "tf-web-tg"
  port      = 80
  protocol  = "HTTP"
  vpc_id    = aws_vpc.web_vpc.id

  health_check {
    path                = "/"
    interval            = 30
    timeout             = 5
    healthy_threshold   = 2
    unhealthy_threshold = 2
  }
}

resource "aws_lb_listener" "front_end" {
  load_balancer_arn = aws_lb.app_lb.arn
  port              = "80"
  protocol          = "HTTP"

  default_action {
    type = "forward"
    target_group_arn = aws_lb_target_group.web_tg.arn
  }
}
```

Zielgruppe: tf-web-tg

Details | Ziele | Überwachung | Zustandsprüfungen | Attribute | Tags

Details

arn:aws:elasticloadbalancing:us-east-1:767397790708:targetgroup/tf-web-tg/c689c8a88b048a01

Zieltyp Instance	Protokoll : Port HTTP: 80	Protokollversion HTTP1	VPC vpc-0d3e53f5fe370f9c8
IP-Adresstyp IPv4	Load Balancer tf-web-lb		

2 Ziele insgesamt	2 Fehlerfrei 0 Anomal	0 Fehlerhaft	0 Ungenutzt	0 Anfänglich	0 Auslassen
----------------------	-----------------------------	-----------------	----------------	-----------------	----------------

► **Verteilung der Ziele nach Availability Zone (AZ)**
Wählen Sie Werte in dieser Tabelle aus, um die entsprechenden Filter anzuzeigen, die auf die unten angegebene Tabelle registrierter Ziele angewendet werden.

Abbildung 21: Target Group

Load Balancer: tf-web-lb

< Details | **Listener und Regeln** | Netzwerkzuordnung | Ressourcenkarte | Sicherheit | Überwachung | Integrationen | Attribute >

Listener und Regeln (1) Info

Ein Listener prüft auf Verbindungsanfragen an seinem konfigurierten Protokoll und Port. Der vom Listener empfangene Datenverkehr wird gemäß der Standardaktion und etwaigen zusätzlichen Regeln weitergeleitet.

Listener filtern

☐	Protokoll: Port	Standardaktion	Regeln	ARN	Sicherheitsrichtlinie	Standard-SSL-/TLS
☐	HTTP:80	Zur Zielgruppe weiterleiten tf-web-tg: 1 (100%) Klebrigkeit der Zielgruppe: Aus	1 Regel	ARN	Nicht zutreffend	Nicht zutreffend

Abbildung 22: Listener Configuration

3.4 Compute Resources

3.4.1 EC2 Instances

We launch two EC2 instances. We use the `count` parameter to create multiple instances and the modulo operator to alternate them between the two subnets. The user data script is customized to display the instance number.

```
resource "aws_instance" "web" {
  count          = 2
  ami            = data.aws_ami.ubuntu.id
  instance_type = "t2.micro"
  subnet_id      = count.index % 2 == 0 ? aws_subnet.subnet_1.id : aws_subnet
    .subnet_2.id
  vpc_security_group_ids = [aws_security_group.ec2_sg.id]
```

```

user_data = <<-EOF
#!/bin/bash
sudo apt-get update
sudo apt-get install -y apache2
sudo systemctl start apache2
sudo systemctl enable apache2
echo "<h1>Hello_from_Instance_${count.index}_1</h1>" | sudo tee /var/
  www/html/index.html
EOF

tags = { Name = "tf-web-instance-${count.index}_1" }
}

```

i-0342188f5d898d4ee (tf-web-instance-1)

Details

Status und Alarme

Überwachung

Sicherheit

Netzwerk

Speicher

Tags

▼ Instance-Zusammenfassung Info

Instance-ID

i-0342188f5d898d4ee

IPv6-Adresse

-

Hostname-Typ

IP-Name: ip-10-0-1-72.ec2.internal

DNS-Name der Antwort für private Ressourcen

-

Automatisch zugewiesene IP-Adresse

44.214.104.205 [Öffentliche IP-Adresse]

Öffentliche IPv4-Adresse

44.214.104.205 | offene Adresse

Instance-Status

Läuft

Private IP DNS-Name (nur IPv4)

ip-10-0-1-72.ec2.internal

Instance-Typ

t2.micro

VPC-ID

vpc-0d3e53f5fe370f9c8 (tf-web-vpc)

Private IPv4-Adressen

10.0.1.72

Öffentlicher DNS

ec2-44-214-104-205.compute-1.amazonaws.com | offene Adresse

Elastic IP-Adressen

-

AWS Compute Optimizer-Treffer

Melden Sie sich für AWS Compute Optimizer an, um Empfehlungen zu erhalten. | Weitere Informationen

Abbildung 23: EC2 Instance 1

i-01e10c1d7f5113f4c (tf-web-instance-2)

Details

Status und Alarme

Überwachung

Sicherheit

Netzwerk

Speicher

Tags

▼ Instance-Zusammenfassung Info

Instance-ID

i-01e10c1d7f5113f4c

IPv6-Adresse

-

Hostname-Typ

IP-Name: ip-10-0-2-153.ec2.internal

DNS-Name der Antwort für private Ressourcen

-

Automatisch zugewiesene IP-Adresse

98.93.191.240 [Öffentliche IP-Adresse]

Öffentliche IPv4-Adresse

98.93.191.240 | offene Adresse

Instance-Status

Läuft

Private IP DNS-Name (nur IPv4)

ip-10-0-2-153.ec2.internal

Instance-Typ

t2.micro

VPC-ID

vpc-0d3e53f5fe370f9c8 (tf-web-vpc)

Private IPv4-Adressen

10.0.2.153

Öffentlicher DNS

ec2-98-93-191-240.compute-1.amazonaws.com | offene Adresse

Elastic IP-Adressen

-

AWS Compute Optimizer-Treffer

Melden Sie sich für AWS Compute Optimizer an, um Empfehlungen zu erhalten. | Weitere Informationen

Abbildung 24: EC2 Instance 2

3.4.2 Target Group Attachment

We attach the created instances to the target group so the load balancer can route traffic to them.

```
resource "aws_lb_target_group_attachment" "web_attach" {
  count          = 2
  target_group_arn = aws_lb_target_group.web_tg.arn
  target_id      = aws_instance.web[count.index].id
  port          = 80
}
```

The screenshot shows the AWS Management Console interface for a target group named 'tf-web-tg'. The 'Ziele' (Targets) tab is selected, showing a list of registered targets. The table has columns for Instance-ID, Name, Port, Domäne, Integrität (Health), Details zum Zustand, and Admini... (Admin actions). Two targets are listed, both with a 'Healthy' status.

Instance-ID	Name	Port	Domäne	Integrität...	Details zum Zustand	Admini...	Übers...
i-01e10c1d7f5113f4c	tf-web-instanc...	80	us-east-1b (us...	Healthy	-	No override.	No ove
i-0342188f5d898d4ee	tf-web-instanc...	80	us-east-1a (us...	Healthy	-	No override.	No ove

Abbildung 25: Target Group Attachment

3.5 Verification

After applying the configuration, we access the application via the Load Balancer's DNS name.

```
output "load_balancer_dns" {
  description = "The_DNS_name_of_the_load_balancer"
  value       = aws_lb.app_lb.dns_name
}
```

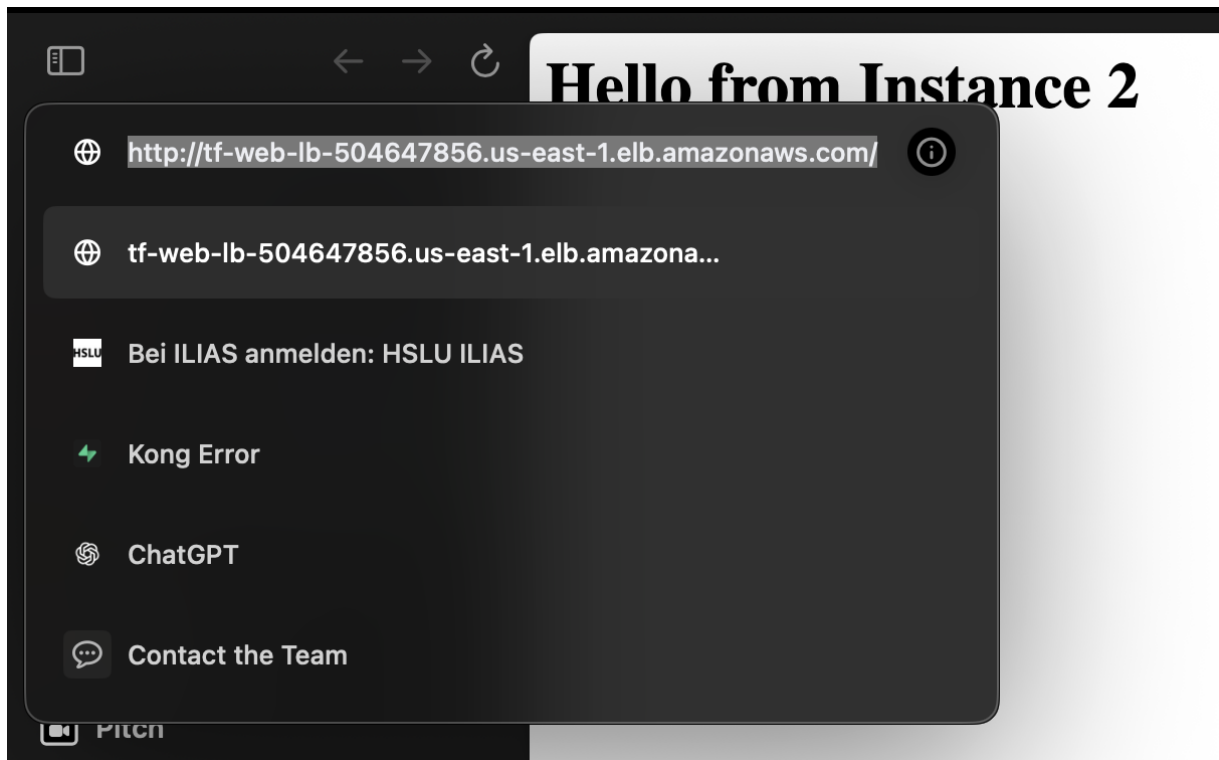


Abbildung 26: Website Accessed via Load Balancer

3.6 Automation and CI/CD

To automate the deployment process, we integrate GitHub Actions with Terraform Cloud. This allows us to automatically provision and manage our infrastructure upon code changes.

3.6.1 GitHub Configuration

We configure the necessary secrets in our GitHub repository to authenticate with Terraform Cloud.

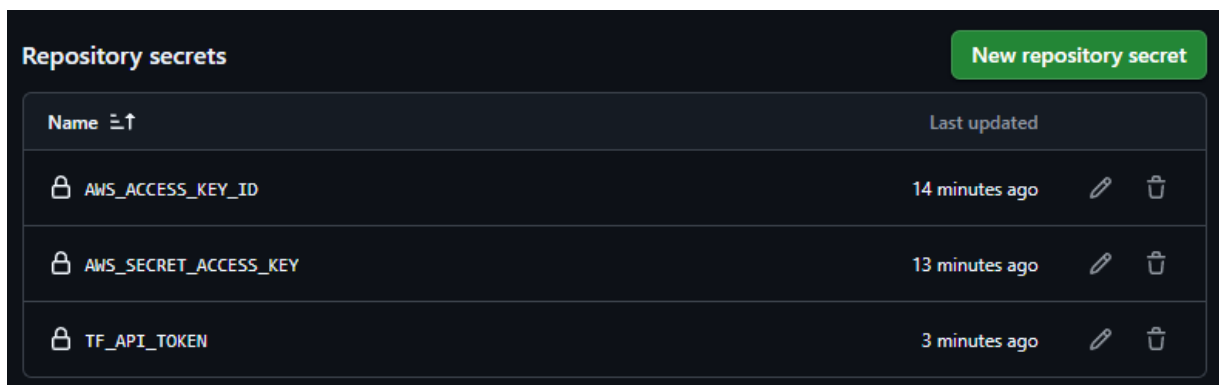


Abbildung 27: GitHub Repository Secrets

3.6.2 Terraform Cloud Configuration

In Terraform Cloud, we define the variables required for our infrastructure, such as AWS credentials and region settings.

Workspace variables (3)

Variables defined within a workspace always overwrite variables from variable sets that have the same type and the same key. Learn more about variable set [precedence](#).

Key	Value	Category	Actions
AWS_ACCESS_KEY_ID	ASIA3FLDZAP2NU3F6LLY	env	...
AWS_SECRET_ACCESS_KEY	C02gmFSowFD7fesiEHM3usYd8KmJ92Sqht oeGosc	env	...
AWS_SESSION_TOKEN	IQoJb3JpZ2luX2VjEFeaCXVzLXdic3QtMjIIM EYCIQD32A57GWmbeCvDmH71p1eCnli25 e4E8L+8H41eZfo89glhAMWbPrKRO+dFlc4 JTOeTcWarw8RWAcNoIPA13b5IO74UKqYC CBoQABoMNzY3Mzk3NzkwNzA4lgysp0V0 +91C2S6TAVYqgwlpB00+grqHu3U1IZLa6K CPb0mEGbiYENUU40q/864udjJPFMkSnhf W1IVFQ0Neh4h3u2JtVkyqdQNdmKDFmze +PltxRg3S3r9cH6kUOw1YuKCOEzntBjFwdS UUIgkBc/oSKp/HQC7QzHox7XgZCHm8Jtn 7CatNdNXdUesYZvE+XA6OUIAsZ3n5FoW6 pSqcWunal66SBU6HP1njK9UljFYeDC3HsF1 83waztkRJdyhqERZriwu1vDJeZIKgW4o3iR/ Nfo+5UNs86+ZT2wmd+0s3lkAfaQyxUb/z gkC0Rmtu1kkY3hRwRc1GEILFDk11bke/Wf ouZ9tmKBXNKkKbABU8M0K8Mle8vMkGO pwBwGXtYkoNeST2RixlMNmiXpP7NXdH8j7 KU/dVA6GdEGbXkTSOqvGo5+WBittVq49M MoZCHLmhT8Y6FPt+wTtp/pm3QILTU1kKE XhdvXy2Rdlyb/X5ZcsRekPQtBN2mp4oEWS RTCKwLyRCK4ztMfLYw4Ej/dvUZ+qrx9Lbn9 UybUjKtYfbbpMGWwhhIkqUW1ez2c2SRtheU qtU0oXXGn	env	...

Abbildung 28: Terraform Cloud Variables

3.6.3 CI/CD Pipeline

When code is pushed to the repository, a GitHub Action is triggered. This action communicates with Terraform Cloud to plan and apply the changes.

Deploying / web_terraform

CodeIssuesPull requestsActionsProjectsWikiSecurityInsightsSettings

Deploy Infrastructure #6

Re-run all jobs

Summary

Jobs

Run details

Usage

Workflow file

terraform apply

Success 1m 44.4s

Search logs

> Setup job

> Checkout Code

> Setup Terraform

> Terraform Init

1 # Run terraform init

2 terraform init -backend=false -lock-timeout=10m -lock-key=terraform-init

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

39

40

41

42

43

44

45

46

47

48

49

50

51

52

53

54

55

56

57

58

59

60

61

62

63

64

65

66

67

68

69

70

71

72

73

74

75

76

77

78

79

80

81

82

83

84

85

86

87

88

89

90

91

92

93

94

95

96

97

98

99

100

101

102

103

104

105

106

107

108

109

110

111

112

113

114

115

116

117

118

119

120

121

122

123

124

125

126

127

128

129

130

131

132

133

134

135

136

137

138

139

140

141

142

143

144

145

146

147

148

149

150

151

152

153

154

155

156

157

158

159

160

161

162

163

164

165

166

167

168

169

170

171

172

173

174

175

176

177

178

179

180

181

182

183

184

185

186

187

188

189

190

191

192

193

194

195

196

197

198

199

200

201

202

203

204

205

206

207

208

209

210

211

212

213

214

215

216

217

218

219

220

221

222

223

224

225

226

227

228

229

230

231

232

233

234

235

236

237

238

239

240

241

242

243

244

245

246

247

248

249

250

251

252

253

254

255

256

257

258

259

260

261

262

263

264

265

266

267

268

269

270

271

272

273

274

275

276

277

278

279

280

281

282

283

284

285

286

287

288

289

290

291

292

293

294

295

296

297

298

299

300

301

302

303

304

305

306

307

308

309

310

311

312

313

314

315

316

317

318

319

320

321

322

323

324

325

326

327

328

329

330

331

332

333

334

335

336

337

338

339

340

341

342

343

344

345

346

347

348

349

350

351

352

353

354

355

356

357

358

359

360

361

362

363

364

365

366

367

368

369

370

371

372

373

374

375

376

377

378

379

380

381

382

383

384

385

386

387

388

389

390

391

392

393

394

395

396

397

398

399

400

401

402

403

404

405

406

407

408

409

410

411

412

413

414

415

416

417

418

419

420

421

422

423

424

425

426

427

428

429

430

431

432

433

434

435

436

437

438

439

440

441

442

443

444

445

446

447

448

449

450

451

452

453

454

455

456

457

458

459

460

461

462

463

464

465

466

467

468

469

470

471

472

473

474

475

476

477

478

479

480

481

482

483

484

485

486

487

488

489

490

491

492

493

494

495

496

497

498

499

500

501

502

503

504

505

506

507

508

509

510

511

512

513

514

515

516

517

518

519

520

521

522

523

524

525

526

527

528

529

530

531

532

533

534

535

536

537

538

539

540

541

542

543

544

545

546

547

548

549

550

551

552

553

554

555

556

557

558

559

560

561

562

563

564

565

566

567

568

569

570

571

572

573

574

575

576

577

578

579

580

581

582

583

584

585

586

587

588

589

590

591

592

593

594

595

596

597

598

599

600

601

602

603

604

605

606

607

608

609

610

611

612

613

614

615

616

617

618

619

620

621

622

623

624

625

626

627

628

629

630

631

632

633

634

635

636

637

638

639

640

641

642

643

644

645

646

647

648

649

650

651

652

653

654

655

656

657

658

659

660

661

662

663

664

665

666

667

668

669

670

671

672

673

674

675

676

677

678

679

680

681

682

683

684

685

686

687

688

689

690

691

692

693

694

695

696

697

698

699

700

701

702

703

704

705

706

707

708

709

710

711

712

713

714

715

716

717

718

719

720

721

722

723

724

725

726

727

728

729

730

731

732

733

734

735

736

737

738

739

740

741

742

743

744

745

746

747

748

749

750

751

752

753

754

755

756

757

758

759

760

761

762

763

764

765

766

767

768

769

770

771

772

773

774

775

776

777

778

779

780

781

782

783

784

785

786

787

788

789

790

791

792

793

794

795

796

797

798

799

800

801

802

803

804

805

806

807

808

809

810

811

812

813

814

815

816

817

818

819

820

821

822

823

824

825

826

827

828

829

830

831

832

833

834

835

836

837

838

839

840

841

842

843

844

845

846

847

848

849

850

851

852

853

854

855

856

857

858

859

860

861

862

863

864

865

866

867

868

869

870

871

872

873

874

875

876

877

878

879

880

881

882

883

884

885

886

887

888

889

890

891

892

893

894

895

896

897

898

899

900

901

902

903

904

905

906

907

908

909

910

911

912

913

914

915

916

917

918

919

920

921

922

923

924

925

926

927

928

929

930

931

932

933

934

935

936

937

938

939

940

941

942

943

944

945

946

947

948

949

950

951

952

953

954

955

956

957

958

959

960

961

962

963

964

965

966

967

968

969

970

971

972

973

974

975

976

977

978

979

980

981

982

983

984

985

986

987

988

989

990

991

992

993

994

995

996

997

998

999

1000

The execution of the plan can be monitored in Terraform Cloud.

infc_workshop

Workspaces

workshop-3

Overview

Runs

States

Search & Import

Variables

Settings

infc_workshop / Workspaces / workshop-3 / Runs / run-chukDgwEa2veo1dT

workshop-3

ID: ws-n7oyNzK8qkApVhZ3

Add workspace description

Running

Resources 17

Tags 0

Terraform v1.14.0

Updated a few seconds ago

Force unlock

New run

Triggered via CLI

Applied

Plan & apply duration

4 minutes

Resources changed

+16 ~0 -0

Actions

0 invoked

swipswup triggered a run from CLI 16 minutes ago

Run Details

Plan finished 16 minutes ago

Resources: 16 to add, 0 to change, 0 to destroy

Started 16 minutes ago

Finished 16 minutes ago

+ 16 to create

Filter resources by address...

Filter by operation

Show data sources Terraform 1.14.0

Download raw log

aws_instance.web[0]

aws_instance.web[1]

aws_internet_gateway.igw

aws_lb_listener.front_end

aws_lb_target_group_attachment.web_attach[0]

aws_lb_target_group_attachment.web_attach[1]

aws_lb_target_group.web_tg

aws_lb.app_lb

aws_route_table_association.rta_1

aws_route_table_association.rta_2

aws_route_table.web_rt

aws_security_group.ec2_sg

aws_security_group.lb_sg

aws_subnet.subnet_1

aws_subnet.subnet_2

aws_vpc.web_vpc

Outputs 1 planned to change

Download Sentinel mocks

Sentinel mocks can be used for testing your Sentinel policies

Apply finished 12 minutes ago

Resources: 16 added, 0 changed, 0 destroyed

Comment

Leave feedback or record a decision.

Add comment

Support Terms Privacy Security Accessibility © 2025 HashiCorp

Abbildung 30: Terraform Cloud Apply Run

25

Finally, we can also manage the destruction of resources through the pipeline or Terraform Cloud directly.

Destroy Infrastructure #1

Summary

Jobs

terraform-deploy

Run details

Usage

Workflow file

terraform-deploy

Set up job

Checkout Code

Setup Terraform

Terraform Init

Terraform Destroy

terraform-deploy

successful row = 16/16

Search logs

1

2

3

4

5

6

7

8

9

10

11

12

13

14

15

16

17

18

19

20

21

22

23

24

25

26

27

28

29

30

31

32

33

34

35

36

37

38

39

40

41

42

43

44

45

46

47

48

49

50

51

52

53

54

55

56

57

58

59

60

61

62

63

64

65

66

67

68

69

70

71

72

73

74

75

76

77

78

79

80

81

82

83

84

85

86

87

88

89

90

91

92

93

94

95

96

97

98

99

100

101

102

103

104

105

106

107

108

109

110

111

112

113

114

115

116

117

118

119

120

121

122

123

124

125

126

127

128

129

130

131

132

133

134

135

136

137

138

139

140

141

142

143

144

145

146

147

148

149

150

151

152

153

154

155

156

157

158

159

160

161

162

163

164

165

166

167

168

169

170

171

172

173

174

175

176

177

178

179

180

181

182

183

184

185

186

187

188

189

190

191

192

193

194

195

196

197

198

199

200

201

202

203

204

205

206

207

208

209

210

211

212

213

214

215

216

217

218

219

220

221

222

223

224

225

226

227

228

229

230

231

232

233

234

235

236

237

238

239

240

241

242

243

244

245

246

247

248

249

250

251

252

253

254

255

256

257

258

259

260

261

262

263

264

265

266

267

268

269

270

271

272

273

274

275

276

277

278

279

280

281

282

283

284

285

286

287

288

289

290

291

292

293

294

295

296

297

298

299

300

301

302

303

304

305

306

307

308

309

310

311

312

313

314

315

316

317

318

319

320

321

322

323

324

325

326

327

328

329

330

331

332

333

334

335

336

337

338

339

340

341

342

343

344

345

346

347

348

349

350

351

352

353

354

355

356

357

358

359

360

361

362

363

364

365

366

367

368

369

370

371

372

373

374

375

376

377

378

379

380

381

382

383

384

385

386

387

388

389

390

391

392

393

394

395

396

397

398

399

400

401

402

403

404

405

406

407

408

409

410

411

412

413

414

415

416

417

418

419

420

421

422

423

424

425

426

427

428

429

430

431

432

433

434

435

436

437

438

439

440

441

442

443

444

445

446

447

448

449

450

451

452

453

454

455

456

457

458

459

460

461

462

463

464

465

466

467

468

469

470

471

472

473

474

475

476

477

478

479

480

481

482

483

484

485

486

487

488

489

490

491

492

493

494

495

496

497

498

499

500

501

502

503

504



28