

國立臺灣大學電機資訊學院資訊工程學系

碩士論文

Department of Computer Science and Information Engineering

College of Electrical Engineering and Computer Science

National Taiwan University

Master Thesis

透過重新排序與近似最鄰近搜尋以改進基於殘差網路  
之人臉特徵擷取器

Improving ResNet-based Feature Extractor for Face  
Recognition via Re-ranking and Approximate Nearest  
Neighbor Search

蕭勝興

Sheng-Hsing Hsiao

指導教授：張智星 教授

Advisor: Prof. Jyh-Shing Roger Jang

中華民國 108 年 7 月

July, 2019

## 摘要

深度殘差網絡 (ResNet) 是圖像分類和物件偵測中最先進的架構之一，當網路架構中最後一層被移除時，它可以當作一個良好的特徵向量抽取器。將人臉轉換成特徵向量後，一些任務例如人臉識別、人臉驗證，就可以使用一些距離測量方法來實現。我們提出了一個基於 ResNet 特徵提取器的人臉識別框架，並加上其他改善性能的步驟，包括人臉偵測，人臉對齊，人臉驗證/識別以及透過近似最近鄰搜索 (ANNS) 來重新排序。首先，我們在三個常見的人臉檢測資料集上評估兩種人臉偵測演算法，MTCNN 和 FaceBoxes，接著總結這兩種方法的最佳使用場景。其次，經過特定的預處理和後處理，我們的系統選擇基於 ResNet 的特徵提取器，並在 LFW 資料集中達到 99.33% 的驗證準確度。第三，我們使用懲罰曲線來確定最佳配置並獲得良好的臉部驗證結果。最後，基於這篇論文提出的重新排序策略，我們的方法在大型類別間變異數據集（在 CASIA-faceV5 資料集上提升 1.47%，在 CASIA-WebFace 資料及上提高 2.28%）與大型類別內變異數據集（在 FG-NET 資料集上提高 1.3%，在 CACD 資料集上提高 2.43%）上都能使辨識率上升。

**關鍵字：** 深度殘差網絡，特徵向量抽取，人臉識別，人臉驗證，重新排序，近似最近鄰搜索。

# Abstract

Deep residual network (ResNet) is one of the state-of-the-art architectures in image classification and object detection, which can serve as a robust feature extractor when the last layer is removed. Once the faces are embedded as feature vectors, tasks such as face recognition, verification and identification can be easily implemented using some distance measurements. This paper proposes a framework for face recognition based on feature extractor from ResNet, together with other steps for improving its performance, including face detection, face alignment, face verification/identification, and re-ranking via Approximate Nearest Neighbor Search (ANNS). First, we evaluate two face detection algorithms, MTCNN, and FaceBoxes on three common face detection benchmarks, and then summarize the best usage scenario for each approach. Second, with certain preprocessing and postprocessing, our system selects the ResNet-based feature extractor, which achieves 99.33% verification accuracy on LFW benchmark. Third, we use the penalty curve to determine the best configuration and obtain improved results of face verification. Lastly, based on the proposed re-ranking policy, our method not only boosts the accuracy in large inter-class variation datasets (1.47% and 2.28% improvement in rank-1 accuracy for CASIA-faceV5 and CASIA-WebFace respectively) but also in large intra-class variation datasets (1.3% and 2.43% improvement in rank-1 accuracy for FG-NET and CACD respectively).

**Keywords:** ResNet, feature extractor, face recognition, face verification, face identification, re-ranking, Approximate Nearest Neighbor Search.

# Contents

<b>摘要</b>	<b>i</b>
<b>Abstract</b>	<b>ii</b>
<b>Contents</b>	<b>iii</b>
<b>List of Figures</b>	<b>v</b>
<b>List of Tables</b>	<b>vii</b>
<b>1 Introduction</b>	<b>1</b>
<b>2 Related Work</b>	<b>5</b>
2.1 Face Detection .....	5
2.2 Face Alignment .....	9
2.3 Face Identification and Verification .....	10
2.3.1 Face representation .....	11
2.3.2 Discriminative metric learning .....	12
2.4 Approximate Nearest Neighbor Search .....	16
2.5 Re-ranking for object retrieval .....	20
<b>3 Method</b>	<b>21</b>
3.1 Face Detection .....	22
3.1.1. MTCNN .....	22
3.1.2. FaceBoxes .....	23
3.2 Face Alignment .....	24
3.3 Face Feature Extractor .....	26
3.4 Approximate Nearest Neighbors Search .....	27

3.5 Re-ranking policy .....	29
<b>4 Experiments</b>	<b>33</b>
4.1 Evaluation of Face Detection .....	33
4.1.1 Evaluate on benchmarks .....	33
4.1.2 Face Detection Runtime Efficiency .....	36
4.1.3 Face Detection Conclusion .....	37
4.2 Evaluation of Face Verification .....	37
4.2.1 Performance on LFW .....	38
4.2.2 Performance on CASIA-FaceV5 and Helen dataset .....	39
4.2.3 Alignment and Average .....	41
4.3 Evaluation of Face Identification .....	43
4.3.1 Experiments on CASIA-FaceV5 .....	43
4.3.2 Experiments on CASIA-WebFace .....	44
4.3.3 Experiments on FG-NET .....	45
4.3.4 Experiments on CACD .....	47
4.4 Parameter Analysis .....	49
<b>5 Conclusions and discussions</b>	<b>51</b>
<b>Reference</b>	<b>52</b>

## List of Figures

Figure 1.1	Proposed Re-ranking framework (without average) .....	3
Figure 2.1	Triplet Loss .....	13
Figure 2.2	Geometry interpretation of A-Softmax loss .....	14
Figure 3.1	System flowchart .....	21
Figure 3.2	The pipeline of MTCNN that includes three-stage multi-task deep convolutional networks .....	23
Figure 3.3	Architecture of the FaceBoxes .....	24
Figure 3.4	Landmark estimates at different levels of the cascade of regressors ...	25
Figure 3.5	The process of rotating a face into canonical view .....	25
Figure 3.6	VGGFace2 template examples .....	27
Figure 3.7	Illustration of the Hierarchical NSW idea .....	28
Figure 3.8	An example of the re-ranking policy (without average) .....	32
Figure 3.9	An example of the re-ranking policy (with average) .....	32
Figure 4.1	Some examples of PASCAL Face dataset .....	34
Figure 4.2	Some examples of AFW dataset .....	34
Figure 4.3	Precision-recall curves on the PASCAL and AFW benchmarks .....	35
Figure 4.4	Evaluate on Fddb benchmark .....	35
Figure 4.5	Some examples of UTKFace .....	36

Figure 4.6	Some examples of LFW .....	38
Figure 4.7	ROC curves on LFW .....	39
Figure 4.8	Some examples of CASIA-FaceV5 and Helen dataset .....	40
Figure 4.9	Penalty curves of different False Accept penalties and different distance measurements .....	41
Figure 4.10	Compare the performance of different configurations in face verification .....	43
Figure 4.11	A visualization of size and estimated noise percentage of datasets ....	45
Figure 4.12	Some examples of FG-NET .....	46
Figure 4.13	The performance of mAP of our approach compared with SOTA algorithms on CACD .....	49
Figure 4.14	The impact of the parameter $\lambda$ on rank-1 accuracy on large inter-class/intra-class variation datasets .....	50

## List of Tables

Table 4.1	FPS and mAP compared on different detection approach .....	37
Table 4.2	Performance evaluation on LFW dataset .....	39
Table 4.3	Performance of different configurations on CASIA-faceV5 .....	44
Table 4.4	Performance of different configurations on CASIA-WebFace .....	45
Table 4.5	Performance of different configurations on FG-NET .....	46
Table 4.6	Performance of different methods on FG-NET .....	47
Table 4.7	The Rank-1 accuracy of different methods on three subsets in CACD ..	49



# Chapter 1

## Introduction

Faces, a basic attribute that can distinguish one person to another. Face recognition is a popular area of research. There are many face recognition applications that have been deployed on many areas, such as face biometrics for payments, public security, authentication on devices, self-driving vehicles, etc.

Face recognition is a generic term that could imply either or both face verification and identification. Verification is the process of affirming that a claimed identity is correct by comparing the offered claims of identity with one or more previously enrolled templates. To put it another way, verification is trying to answer the question “*Is this person who they say they are?*”. A synonym for verification is authentication, which checks if the identity is in the database or not. Identification means the system need to determine the identity of the individual or tries to answer the question “*Who is this person?*”. The information of the face is collected and compared to all the identities in a database.

Both face verification identification and identification have three steps in general, 1) face detection 2) face alignment 3) face feature embedding. Face detection is a fundamental step for many facial applications. The essential properties of a face detector must be detecting faces with a high degree of variability in scale, pose, illumination and expression. Alignment is the module to localize the facial landmarks of eyes, nose, lips, etc. These landmarks are used to align faces such as rotation or scaling. Third, the face feature extractor encodes the facial information to a high-dimension feature. These features are used to measure the similarity between two faces. A good feature extractor should be robust to distinguish one from the other person.

Since 2012, AlexNet (Krizhevsky et al.) has won the ImageNet competition by using some deep learning techniques and large data as input, Convolutional Neural Networks (CNNs) has become the mainstream for computer vision like image classification (Simonyan and Zisserman) and object detection (Girshick et al.). Deep CNNs (DCNNs) now are highly used because they learn hierarchical levels of features that correspond to different levels of abstraction. Every level includes the different features, showing strong invariance to the face pose, scale, and lighting change. Therefore, the datasets need to

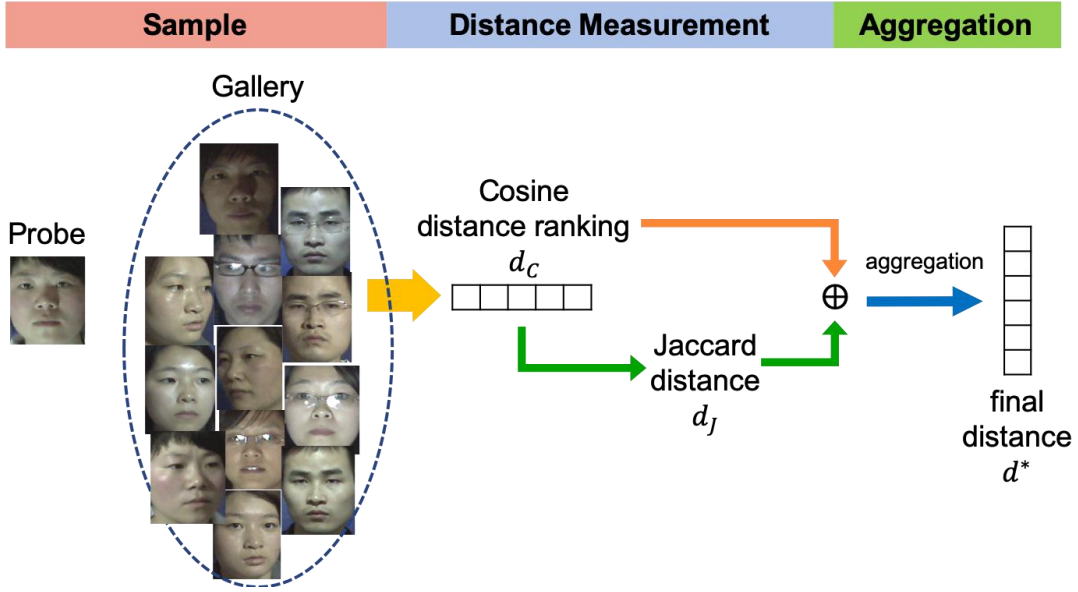


Figure 1.1: Proposed re-ranking framework (without average). Given the probe  $p$  and the gallery, the cosine distance  $d_c$  is applied to obtain the original ranking list, and then the corresponding Jaccard distance  $d_j$  can be computed from the  $k$ -nearest neighbors of each candidate in original ranking list. The final distance  $d^*$  is the combination of  $d_c$  and  $d_j$ , which is used to obtain the final ranking list.

keep growing to provide a corresponding large amount of faces in large variations like CASIA-WebFace (Yi et al.), MegaFace (Kemelmacher-Shlizerman et al.), VGGFace (Parkhi et al.), MSCeleb-1M (Guo et al.), and WIDER Face (Yang et al. "Wider Face: A Face Detection Benchmark").

The  $k$ -reciprocal nearest neighbor (Danfeng Qin et al.) is an effective solution to improve the accuracy on image retrieval. In this paper, inspired by  $k$ -reciprocal nearest neighbor, we develop a re-ranking method to calculate the final distance between two different similarity measurements. The framework of the proposed approach (without average) is illustrated in Fig. 1.1.

To summarize, the major contributions of this paper are as follows:

- A comparison and analysis of two different face detectors, MTCNN (Kaipeng Zhang et al.) and FaceBoxes (Shifeng Zhang et al. "Faceboxes: A Cpu Real-Time Face Detector with High Accuracy") on major face detection benchmark, such as PASCAL Face (Everingham et al.), Annotated Faces in the Wild (AFW) (Ramanan and Zhu), and FDDB dataset (Jain and Learned-Miller).
- The usage of CASIA-FaceV5<sup>1</sup> dataset as the authorized users while Helen (Le et al.) dataset as the intruders and evaluate the performance of face verification in different configurations.
- We present the ANNS-based re-ranking method to improve the performance on large inter-class variation datasets (*i.e.* CASIA-FaceV5 and CASIA-WebFace) and large intra-class variation datasets (*i.e.* FG-NET<sup>2</sup> and CACD (Bor-Chun Chen et al. "Cross-Age Reference Coding for Age-Invariant Face Recognition and Retrieval"))).

The rest of the paper is organized as follows. First, we discuss recent researches in face detection (section 2.1), face alignment (section 2.2), face recognition (section 2.3), approximate nearest neighbors search (section 2.4) and re-ranking methods for object

---

<sup>1</sup> <http://biometrics.idealtest.org/>

<sup>2</sup> [https://yanweifu.github.io/FG\\_NET\\_data/index.html](https://yanweifu.github.io/FG_NET_data/index.html)

retrieval (section 2.5). Then, we present our face recognition system pipeline and re-ranking methods in section 3, and the experimental results are provided in section 4. Finally, the conclusion of this paper and discussion of future works are presented in section 5.

## **Chapter 2**

### **Related Work**

In the face recognition pipeline, it contains face detection (section 2.1), face alignment (section 2.2) and face identification/verification (section 2.3). After that, we will discuss some approaches for Approximate Nearest Neighbors Search (ANNS) in section 2.4 and focus on some methods of re-ranking for object retrieval in section 2.5.

#### **2.1 Face Detection**

The first step in any face recognition/ verification system is face detection. Face detection algorithm will output all the locations of faces from an input image or a frame, most of the outputs are in the form of bounding boxes. A good face detection method should be robust to large variations in pose, facial expression, rotation, illumination, scale, resolution, gender, age, ethnicity, occlusion, make-up, etc. Face detection methods can

be divided into two different subcategories, one is based on 1) handcraft features and the other is 2) CNN-based face detector.

**Handcraft-based methods** are usually used for previous face detection systems. As the pioneering work, Viola-Jones face detector (Viola and Jones) utilized Haar-Like features and AdaBoost learning to train cascade inference for face detection, which achieves real-time face detection. Many subsequent works are inspired by this detector, such as Liao *et al.* (Liao et al.) and Yang *et al.* (Yang et al. "Aggregate Channel Features for Multi-View Face Detection") proposed new local features, Pham *et al.* (Pham and Cham) and Brubaker *et al.* (Brubaker et al.) designed new boosting algorithms to reduce the training time and Bourdev *et al.* (Bourdev and Brandt) and Li, *et al.* (Stan Z Li et al.) indicated that new cascade structures can speed up the detection process.

In addition to the cascade structure, some researches (Mathias et al.; Ramanan and Zhu; Yan et al. "The Fastest Deformable Part Model for Object Detection"; Yan et al. "Face Detection by Structural Models") achieved remarkable performance in deformable part models for face detection tasks. These works need high computational expense and may usually require expensive annotation in the training stage to achieve better detection performance.

**CNN-based methods** can be traced back to 1994, Vaillant *et al.* (Vaillant et al.) as the pioneer to train CNN in the manner of a sliding window to detect faces. Osadchy *et al.* (Osadchy et al.) proposed a multi-tasks CNN system for simultaneous face detection and pose estimation. Recently, CNN achieves remarkable progress in many computer vision tasks and consequently, most of detection methods are replaced by CNN to learn deeper features. CNN-based face detectors are derived from object detection approaches and can be divided into two types: 1) region-based, and 2) sliding window-based.

**1) Region-based** methods firstly generate a set object-proposals and use CNN to classify each proposal as a face or not. R-CNN (Girshick et al.) obtained region proposals by selective search (Uijlings et al.). Some recent face detectors are inspired by this, like multi-task learning algorithm HyperFace (Ranjan et al. "Hyperface: A Deep Multi-Task Learning Framework for Face Detection, Landmark Localization, Pose Estimation, and Gender Recognition") and multi-purpose algorithm All-in-One Face (Ranjan et al. "An All-in-One Convolutional Neural Network for Face Analysis"). Faster R-CNN (Ren et al.), R-FCN (Dai et al.) employed Region Proposal Network (RPN) to generate region proposals. Besides, ROI-pooling (Ge et al.) and position-sensitive RoI pooling (Dai et al.) are applied to extract features from each region. Jiang *et al.* (Jiang and Learned-Miller)

use Faster R-CNN to detect faces and Li *et al.* (Yunzhu Li et al.) proposed a multi-task face detector based on Faster R-CNN framework. These improvements allow them to speed up by significantly reducing the number of face proposals and get better quality of face proposals.

**2) Sliding window-based** approaches directly output every face detection on multi-scale feature maps. Each detection is composed of the detection confidence and a bounding box. This approach does not need the separate region proposal step and thus faster than region-based approaches. Ranjan *et al.* (Ranjan et al. "A Deep Pyramid Deformable Part Model for Face Detection") created an image pyramid at multiple scales to detect faces and Farfade *et al.* (Farfade et al.) also fine-tuned CNN model for face / non-face classification tasks. Yang *et al.* (Yang et al. "From Facial Parts Responses to Face Detection: A Deep Learning Approach") trained a series CNNs for facial attribute recognition to yield candidate windows of occluded faces. CascadeCNN (Haoxiang Li et al.) used a cascade architecture built on CNNs for multiple resolutions. Qin *et al.* (Hongwei Qin et al.) proposed joint training to achieve end-to-end optimization for CNN cascade. MTCNN (Kaipeng Zhang et al.) adopted a cascaded CNNs that predict faces and landmarks location in a coarse-to-fine manner. The Single Shot Detector (SSD) (Wei



Liu et al.) is also a multi-scale sliding window-based object detector, instead of using image pyramid, it utilizes the hierarchical structure of a single deep CNN. This one-stage face detection method has attracted more attention due to its higher inference efficiency and straightforward system deployment, like ScaleFace (Yang et al. "Face Detection through Scale-Friendly Deep Convolutional Networks"), S3FD (Shifeng Zhang et al. "S3fd: Single Shot Scale-Invariant Face Detector"), and Pyramidbox (Tang et al.). FaceBoxes (Shifeng Zhang et al. "Faceboxes: A Cpu Real-Time Face Detector with High Accuracy") also inspired by the RPN in Faster R-CNN (Ren et al.) and the multi-scale mechanism in SSD (Wei Liu et al.).

In addition to the development of improved face detection algorithms, the benchmark of face detection has been collected by large annotation datasets. Pascal person layout dataset, which is a subset from Pascal VOC (Everingham et al.). It contains 1,335 faces from 851 images with large appearance variations. Annotated Faces in the Wild (AFW) (Ramanan and Zhu), it has 205 images with 473 faces. FDDB (Jain and Learned-Miller) consists 5,171 faces in 2,845 images. MALF (Yang et al. "Fine-Grained Evaluation on Face Detection in the Wild") dataset has a similar scale which has 5,250 images with 11,931 faces. WIDER Face (Yang et al. "Wider Face: A Face

Detection Benchmark") is a much larger dataset, it contains 32,203 images and labels 393,703 faces with a high degree of variability in scale, pose and occlusion. This dataset has many tiny faces, some of face detectors mentioned before still struggle with recognizing small faces. Hu *et al.* (Hu and Ramanan) indicate that context is crucial and define templates that make use of massively large receptive fields.

## 2.2 Face Alignment

Face alignment is the process of transforming a face into some canonical view and usually done by facial keypoints localization (Kazemi and Sullivan). Facial keypoints include points around the eyes, nose, and mouth on a face. Bansal *et al.* (Bansal et al.) indicated it is important for face identification or verification.

There are two types of facial keypoints detection methods, model-based and regression-based. Model-based methods create a representation of shape during training and use model to fit facial landmarks during testing, include the classic Active Appearance Model (AAM)(Matthews and Baker; Saragih and Goecke) and Constrained Local Models (CLM) (Asthana et al.; Kim et al.).

Regression-based methods directly fit the image appearance with the target output. Kazemi *et al.* (Kazemi and Sullivan) showed an ensemble of regression tree can be used

to estimate the face's landmark positions and achieve real-time performance with high quality. CFAN (Jie Zhang et al.) used coarse-to-fine auto-encoder networks which cascades a few successive stacked auto-encoder networks. Kumar *et al.* (Kumar et al.) proposed an algorithm for extracting key-point descriptors using CNN and also presented a face alignment algorithm base on these descriptors.

The capability of facial landmark detection often evaluates on the 300 Faces In-the-Wild database (300W) (Sagonas et al.) which comprises of four sub-datasets: Annotated Faces in the Wild (AFW) (Ramanan and Zhu), IBUG (Sagonas et al.), LFPW (Belhumeur et al.), and Helen (Le et al.).

## **2.3 Face Identification and Verification**

In this section, we will introduce some related works base on deep network architecture for face recognition. According to (Learned-Miller et al.), there are two widely used paradigms: identification and verification.

In identification, the system has to learn the information from a specific set of identities. At the testing period, a new image or group of images is presented, and the target is to decide which of the gallery identities. By contrast, verification is to analyze two faces images and decide whether they are the same person or not.

There are two main parts of a face identification/ verification system: 1) Face representation; and 2) a classifier (for identification) or similarity measure (for verification).

### 2.3.1 Face representation

Deep networks have shown the ability to learn the difference between two different people. Huang *et al.* (Huang et al. "Learning Hierarchical Representations for Face Verification with Convolutional Deep Belief Networks") proposed deep learning as a source and combine with traditional methods, such as Local Binary Patterns (LBP). By combining these representations, their method achieves comparable accuracy on the LFW (Huang et al. "Labeled Faces in the Wild: A Database For studying Face Recognition in Unconstrained Environments") dataset.

In 2014, DeepFace (Taigman et al.) achieved the state-of-the-art accuracy on the LFW benchmark. They used a proprietary face dataset consisting of four million faces belonging to more than 4,000 identities. Similarly, in 2015, Google's FaceNet (Schroff et al.) used over 200 million training data of 3 million people. It directly optimized the embedding itself by using triplets of roughly aligned matching / non-matching face patches. In the same year, VGGface (Parkhi et al.) designed a procedure to collect a large-scale dataset from the Internet, and Parkhi *et al.* (Parkhi et al.) trained the VGGNet (Simonyan and Zisserman) on this dataset and then fine-tuned the networks via a triplet

loss function similar to FaceNet. This model achieved competitive results on both LFW and YTF (Wolf et al.) datasets.

The DeepID series models (Sun et al. "Deep Learning Face Representation by Joint Identification-Verification"; Sun et al. "Deepid3: Face Recognition with Very Deep Neural Networks"; Sun et al. "Deep Learning Face Representation from Predicting 10,000 Classes") used an ensemble of the smaller number of hidden neurons than DeepFace or FaceNet. There are four layers for feature extraction and their training data, CelebFaces+, is enlarged from CelebFaces (Sun et al. "Hybrid Deep Learning for Face Verification") dataset, which contains 202,599 face images of 10,177 celebrities. The proposed features are extracted from various face regions to form complementary and over-complete representations, which help it achieve almost as good as human performance on LFW dataset.

### **2.3.2 Discriminative metric learning**

Learning a classifier or a similarity metric is the next step after getting face features. For verification, features of two faces from the same person should be similar while features from different persons should be dissimilar.

Inheriting from object classification networks such as AlexNet (Krizhevsky et al.), the most widely used cross-entropy based softmax-loss for feature learning. But in recent years, people noticed that the softmax loss is not sufficient, the softmax loss often biases to the sample distribution. Several modified studies have been proposed to explore discriminative loss functions for more robust face representation. Before 2017, Euclidean-distance-based loss played an important role. After that, some loss functions like Angular/cosine-margin-based loss are designed to facilitate the training procedure.

**Euclidean-distance-based Loss:** Euclidean-distance-based loss is a metric learning method (Weinberger and Saul; Xing et al.) that maps images into Euclidean space to cluster the same person face representations while separate the different person face representations. The most intuitive approach is contrastive loss(Sun et al. "Deeply Learned Face Representations Are Sparse, Selective, and Robust"), using pairs of images to train a feature embedding where positive pairs are closer and negative pairs are farther apart. But the following problem is the margin parameters of the contrastive loss are often difficult to choose.

The triplet loss, however, tries to enforce a margin between each pair of faces for one identity to all other faces (Fig. 2.1). Along with FaceNet (Schroff et al.) from Google,

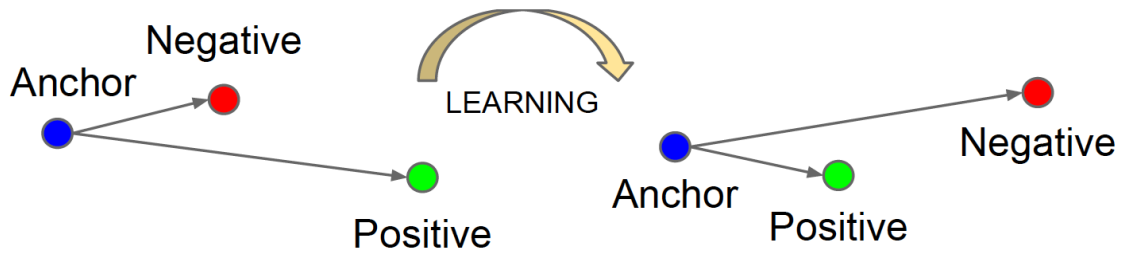


Figure 2.1: Triplet Loss. The Triplet Loss minimizes the distance between an anchor and a positive, both of which have the same identity, and maximizes the distance between the anchor and a negative of a different identity. (Schroff et al.)

Parkhi *et al.* (Parkhi et al.), Swami *et al.* (Sankaranarayanan et al.), Liu *et al.* (Jingtuo Liu et al.), Ding *et al.* (Ding and Tao) are also use triplet loss to embed feature into a discriminative space and got performance improvements on face verification.

No matter contrastive loss or triplet loss will encounter training instability due to the ineffective sampling policy and take a long time to converge. Therefore, Wen *et al.* (Wu et al.) introduced the Center loss, Center loss learned center for each class and penalized the distances between the deep features and their corresponding class centers. After center loss was proposed, many of its variations are also presented. Range loss (Xiao Zhang et al.) is used to handle long-tailed data and reduce overall intrapersonal variations while enlarging interpersonal differences simultaneously. Wu *et al.* (Wu et al.) proposed a center invariant loss that penalizes the different between each center of classes. Deng *et*



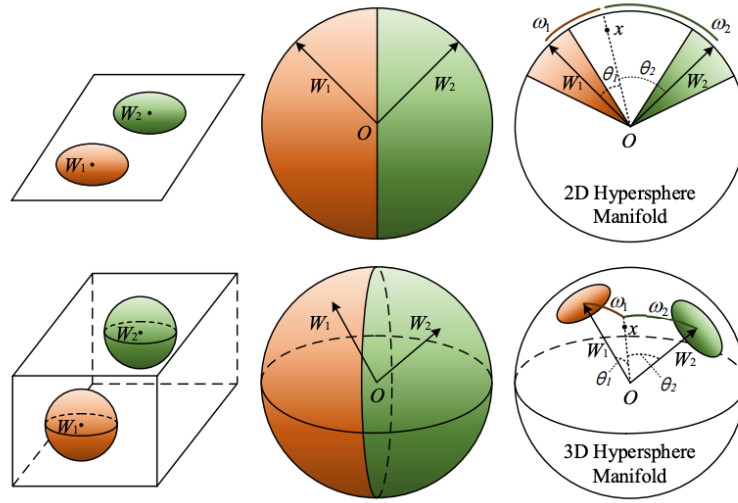


Figure 2.2: Geometry interpretation of A-Softmax loss. (Weiyang Liu et al. "Sphereface: Deep Hypersphere Embedding for Face Recognition")

*al.* (Deng et al. "Marginal Loss for Deep Face Recognition") proposed marginal loss which simultaneously minimizes the intra-class variances as well as maximizes the inter-class distances by focusing on the marginal samples.

**Angular/cosine-margin-based Loss:** In 2016, Liu, *et al.* (Weiyang Liu et al. "Large-Margin Softmax Loss for Convolutional Neural Networks") proposed the large-margin softmax (L-Softmax) loss, which is reformulated from original softmax loss. L-softmax makes the classification more rigorous in order to produce a decisive margin. At the next year, SphereFace (Weiyang Liu et al. "Sphereface: Deep Hypersphere Embedding for Face Recognition") proposed angular softmax (A-Softmax) loss which further normalized the weight by its L2 norm such that the normalized vector will lie on a hypersphere, and then the discriminative face features can be learned on a hypersphere

manifold with an angular margin (Fig. 2.2). To solve the difficulty of optimizing L-Softmax and A-Softmax, ArcFace (Deng et al. "Arcface: Additive Angular Margin Loss for Deep Face Recognition") and CosFace (Hao Wang et al.) also added the angular margin,  $\cos(\theta + m)$  while Wang *et al.* (Feng Wang et al. "Additive Margin Softmax for Face Verification") added cosine margin,  $\cos\theta - m$ . They are easy to implement and able to converge without the supervision of softmax.

In addition to the two losses mentioned above, there are many other approaches to modify the original softmax loss. Normface (Feng Wang et al. "Normface: L<sup>2</sup> Hypersphere Embedding for Face Verification") explained the necessity of feature and weight normalization. Ranjan *et al.* (Ranjan et al. "L2-Constrained Softmax Loss for Discriminative Face Verification") regularized the softmax loss with a scaled L2-norm constraint (L2-softmax loss) and achieved the STOA on IJB-A (Klare et al.). COCO loss (Yu Liu et al.) optimized the cosine similarity among data and Ring loss (Yutong Zheng et al.) presented a simple soft normalization, where it gradually learns to constrain the norm rather than directly enforcing through a hard normalization operation. Crystal loss (Ranjan et al. "Crystal Loss and Quality Pooling for Unconstrained Face Verification and

Recognition") restricts the features to lie on a hypersphere of a fixed radius and overcomes the limitations of the regular softmax loss.

## 2.4 Approximate Nearest Neighbor Search

Nowadays, constantly increasing information has led to the growing of time and computation complexity. K-Nearest Neighbor Search (K-NNS) is a common approach for information retrieval, such as image feature matching in the large dataset (Lowe) and semantic document retrieval (Deerwester et al.). A naïve brute force approach is computing the distance between the query and every element in the dataset. But the complexity of the approach scales linearly with the number of elements in storage. There are several solutions to speed up the retrieval time when the dimension is small, such as Voronoi diagrams (Preparata and Shamos), kd-trees (Bentley), metric trees (Uhlmann), ball-trees (Omohundro). However, many real-world applications are facing the high dimensional data and also demanded to achieve sub-linear efficiency, for example in computer vision.

To overcome the “*curse of dimensionality*” (Indyk and Motwani), Approximate Nearest Neighbors Search (ANNS) was proposed, which instead of finding the exact nearest element but providing a good approximation that is close enough to the query. ANNS can be performed efficiently and sufficiently useful for many practical problems and therefore attracting many studies. There are two ANNS benchmarks, (Naidan et al.)

and ANN-benchmarks (Aumüller et al.). In addition, ANNS algorithms can be classified into three categories: **Hashing-based**, **Partition-based** and **Graph-based**.

**Hashing-based:** The approaches belonging this category project data to low-dimensional representation. Thus, each element could be encoded to hash code. Locality sensitive hashing (LSH) is a basic hashing-based approach, which refers to a family of functions (known as LSH families) to hash similar data ( $\text{distance} < r$ ) to the same bucket with high probability, while dissimilar data points ( $\text{distance} > cr$ ) are likely to be in different buckets. It is vital for the LSH-based method to design a good locality sensitive hash function. In Euclidian distance measurement, many hash functions are proposed, such as (Datar et al.), (Andoni and Indyk) and (Andoni and Razenshteyn). Random linear projections (Gionis et al.; Panigrahy) are the most commonly used hash functions to generate hash code, and the parameters are chosen from Gaussian distribution.

If we apply many hash functions, the hash table can be constructed and the collision probability from dissimilar points will decrease. However, it also reduces the collision probability of nearby points, the common solution is creating multiple hash tables but causing time-consuming query time and excessive memory usage. Some methods (Lv et al.), (Joly and Buisson), are proposed to search more hash buckets that may contain the

nearby neighbors of the query point so that can improve the quality of query and decrease the number of hash tables.

Recently, Product Quantization (PQ) (Jegou et al.) methods become popular for ANNS, which decomposes the original high-dimensional space into the Cartesian product of a finite number of low-dimensional subspaces that are then quantized separately. There are many approaches base on PQ, one of them is Optimized Product Quantization (OPQ) (Ge et al.), which uses pre-rotation to further minimize the quantization distortion.

**Partition-based:** Methods in this category are hierarchical structure based models, namely, the high dimensional space is partitioned into several disjoint regions in a hierarchical manner. Let query  $q$  be located in a region  $r_q$ , then its nearby neighbors should be in region  $r_q$  or near  $r_q$ .

According to the way to partition, there are three subcategories, pivoting, hyperplane and compact partitioning schemes. Pivoting approaches partition the vector space relying on the distance from the data point to pivots, such as VP-Tree (Yianilos) , ball-tree (Ting Liu et al.) , M-Tree (Ciaccia et al.) ,etc. Hyperplane partitioning methods recursively divide the space by the hyperplane with random direction, such as Annoy<sup>3</sup>, Random-

---

<sup>3</sup> <https://github.com/spotify/annoy>

Projection Tree (Dasgupta and Freund) , FLANN (Muja and Lowe) . Lastly, compact partitioning methods either divide the data points into clusters or create possibly approximate Voronoi partitions to use its locality (Navarro) , (Beygelzimer et al.).

**Graph-based:** The most common type of graphs used for complex data retrieval using a similarity search is the Proximity Graphs, which define as  $G = (V, E)$ . A proximity graph is a graph in which each pair of vertices  $(u, v) \in V \times V$  is connected by an edge  $e = (u, v)$  ,  $e \in E$ , if and only if  $u$  and  $v$  satisfy the neighbor-relationship. The core idea of graph-based methods is “*a neighbor’s neighbor also be a neighbor*”, and thus they can explore neighbor’s neighbor efficiently by following the edges.

Recently, new types of graphs have been proposed for ANNS. A representative of this type of graph is the Navigable Small World graph (NSW) (Malkov et al.). The NSW is based on an approximation of the Delaunay graph and there are two types of edges in NSW: *short-range links* for greedy search, and *long-range links*, which define the small-world navigation property. The construction of NSW is based on iteratively inserting new vertices to the graph. For each new vertex, locate the position and then search its  $k$  nearest neighbors in the current graph. The edges connected the new vertex and its  $k$  nearest neighbors are defined as *short-range links*. At the  $i$  iteration, the *short-range links* of

$i - 1$  iteration become *long-range links*. HNSW (Malkov and Yashunin) is an extension of NSW and can be seen as a multi-layer structure consisting of a hierarchical set of proximity graphs for nested subsets of the stored elements. As far as we know, HNSW is one of the state-of-the-art ANNS algorithms so far.

## 2.5 Re-ranking for object retrieval

The face recognition can be seen as a retrieval process, the input image is the probe image and query the database or gallery. Nowadays, Re-ranking methods have been successfully studied to improve object retrieval accuracy (Liang Zheng et al.). There are many approaches utilize the k-nearest neighbors to explore similarity relationships to address the re-ranking problem. Chum *et al.* (Chum et al.) propose the average query expansion (AQE) method, which averages the vectors in the top-k returned results. Shen In 2016, Sparse contextual activation (SCA) (Bai and Bai) encodes the local distribution of an image and indicates samples similarity by generalized Jaccard distance. Qin *et al.* (Danfeng Qin et al.) present the k-reciprocal nearest neighbors, which are considered as highly relevant candidates. In this paper, we inspired by k-reciprocal nearest neighbors and calculated the final distance between two different similarity measurements to overcome the “*curse of dimensionality*”.





# Chapter 3

## Methods

In this section, we discuss the pipeline in our system, including face detection, face alignment, face encoding, and re-ranking stage. An overview of the pipeline is displayed in Fig. 3.1. First, the introduction of two different face detectors in section 3.1. Then the way how to use 2D face alignment to obtain canonical representations of faces is described in section 3.2. Section 3.3 is a fine description of the ResNet-based face descriptor which pre-trained on MS-Celeb-1M (Guo et al.) and fine-tuned on VGGFace2

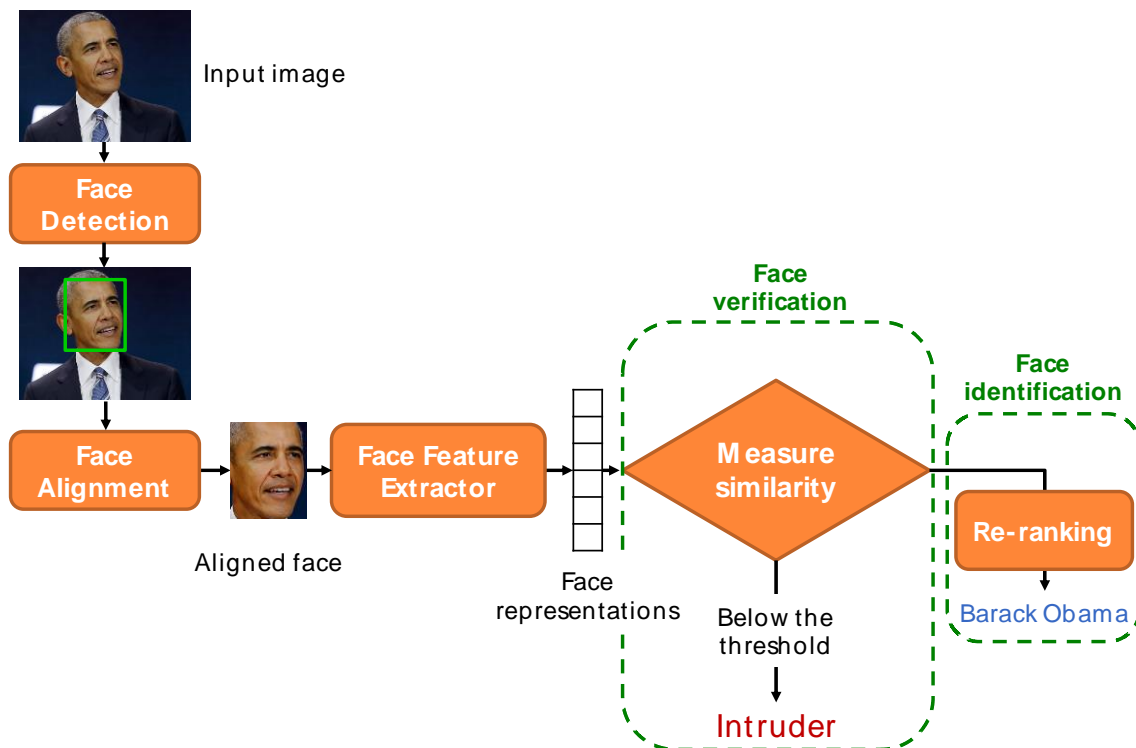


Figure 3.1: System flowchart

(Cao et al.) . Lastly, for the purpose of accelerating and re-ranking the retrieval of face recognition, we apply ANNS and explain our proposed re-ranking method in section 3.4.

### 3.1 Face Detection

This section briefly describes the two face detection methods we applied, MTCNN and FaceBoxes.

#### 3.1.1 MTCNN

Multi-task cascaded CNN (MTCNN) (Kaipeng Zhang et al.) includes three-stage multi-task CNNs trained on WIDER Face (Yang et al. "Wider Face: A Face Detection Benchmark") . As can be seen in Fig. 3.2, MTCNN build a coarse-to-fine detection approach. Before passing an image to the first CNN stage, initially resize it to different scales to build an image pyramid. **Stage 1:** The first stage is the Proposal Network (P-Net), to obtain the candidate windows. After that, use the estimated bounding box regression vectors to calibrate the candidates, then apply non-maximum suppression (NMS) to eliminate highly overlapped windows. **Stage 2:** This is a Refine Network (R-Net) to reject false candidates and also perform bounding box calibration and NMS. **Stage 3:** Output Network (O-Net) is similar to R-Net but aim to locate five facial landmarks' positions. This cascading CNN architecture achieves superior accuracy on the several

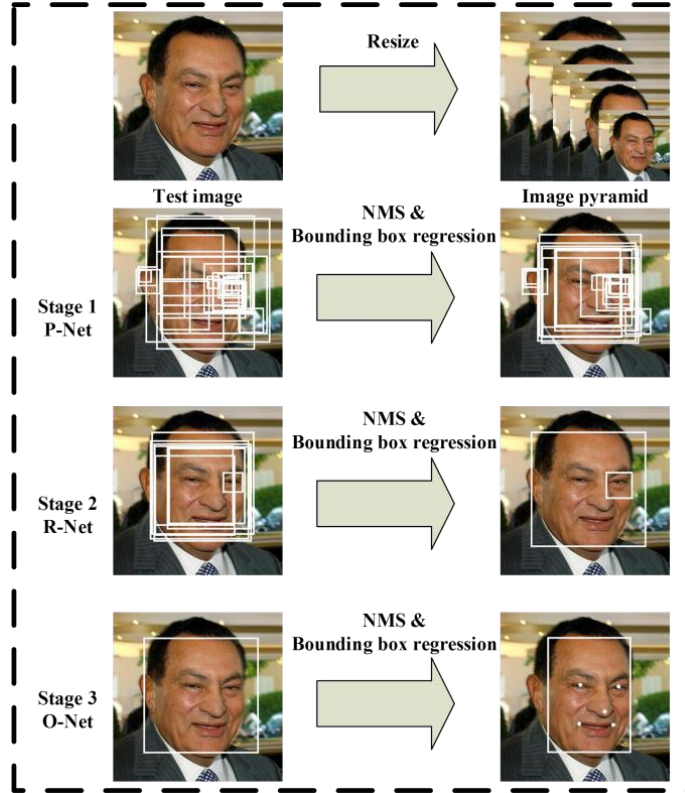


Figure 3.2: The pipeline of MTCNN that includes three-stage multi-task deep convolutional networks.

(Kaipeng Zhang et al.)

challenging benchmarks (Jain and Learned-Miller) while keeps real-time performance (99fps) on GPU.

### 3.1.2 FaceBoxes

As illustrated in Fig. 3.3 , FaceBoxes (Shifeng Zhang et al. "Faceboxes: A Cpu Real-Time Face Detector with High Accuracy") consists of the Rapidly Digested Convolutional Layers (RDCL), the Multiple Scale Convolutional Layers (MSCL) and the anchor densification strategy. **RDCL** is designed to shrink the input spatial size rapidly by choosing a suitable kernel size. Furthermore, utilize the CReLU (Shang et al.)

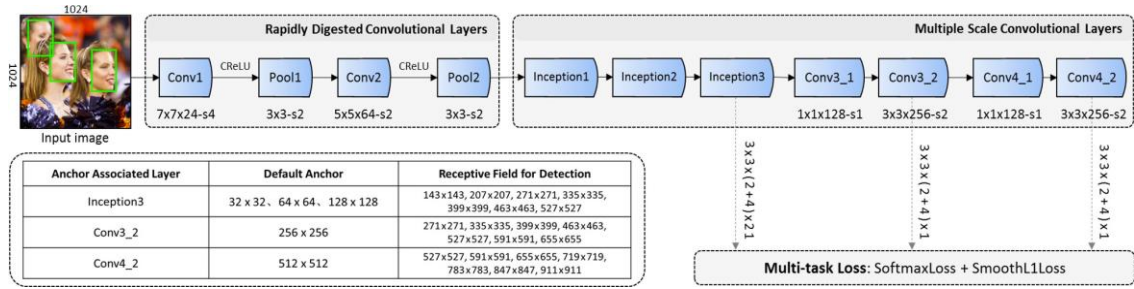


Figure 3.3: Architecture of the FaceBoxes. (Shifeng Zhang et al. "Faceboxes: A Cpu Real-Time Face Detector with High Accuracy")

activation function can double the number of output channels by simply concatenating negated outputs while significantly increases the speed with a negligible decline in accuracy. **MSCL** is similar to SSD (Wei Liu et al.) , consisting of several layers, which decrease in size progressively and form the multi-scale feature maps in order that can naturally handle faces of various sizes. Also, the Inception modules (Szegedy et al.) are engaged in not only to learn visual patterns for different scales of faces but enrich the receptive fields. **Anchor densification strategy:** the author proposes a new anchor densification strategy to eliminate the imbalance of the density of anchor. This strategy guarantees that different scales of anchor have the same density (i.e., 4) on the image. so that various scales of faces can match almost the same number of anchors. As a consequence, FaceBoxes runs at 20 FPS on a single CPU core and 125 FPS using a GPU for VGA-resolution images.

### 3.2 Face Alignment

This section we describe the intuitive 2D face alignment procedure of our system.

The Ensemble of Regression Trees (Kazemi and Sullivan) is used to find 68 facial landmarks, and implementation of the algorithm is available in dlib (King) toolkit. The core of the algorithm is based on the gradient boosting tree for learning an ensemble of regression trees that optimizes the sum of square error loss and naturally handles missing or partially labeled data. Fig. 3.4 shows the Landmark estimates at different levels of the cascade initialized with the mean shape centered at the output of a basic Viola & Jones (Viola and Jones) face detector. After the first level of the cascade, the error is already greatly reduced.

After predicting the facial landmarks, we can use these landmarks to rotate the image such that the eyes lie on a horizontal line. As seen in Fig. 3.4, firstly, use the eyes region landmarks to compute the center of each eye and compute the angle between two eyes. After that, calculate the midpoint between two eyes, which will serve as the coordinates in which we rotate the face. After rotating around the midpoint between the left and right eyes, we get the canonical view of a face (see Fig. 3.5).

### 3.3 Face Feature Extractor

In this section, we discuss the detail of the face feature extractor in our system for face verification and identification. We employ VGGFace2 (Cao et al.) as the face

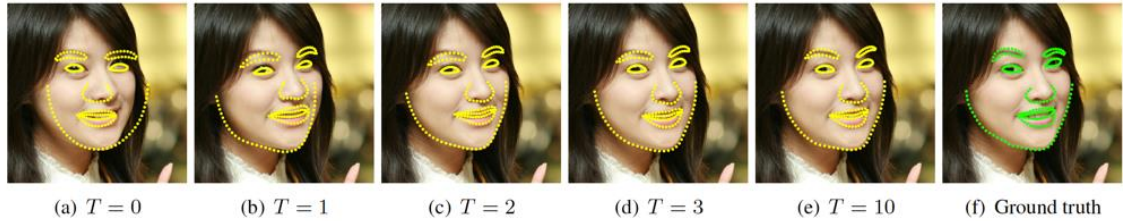


Figure 3.4: Landmark estimates at different levels of the cascade of regressors. (Kazemi and Sullivan)

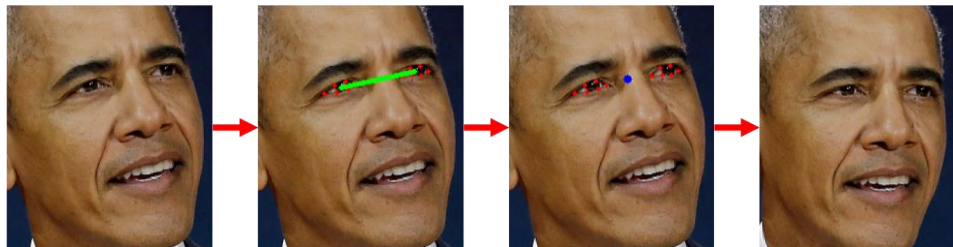


Figure 3.5: The process of rotating a face into canonical view.

descriptor, which is a ResNet-50 (He et al.) architecture pre-trained on MS-Celeb-1M (Guo et al.) and then fine-tuned on VGGFace2 dataset.

VGGFace (Parkhi et al.) is the previous version, different from VGGFace2, VGGFace initially trains a VGG16 (Simonyan and Zisserman) based N-ways classifier on the VGGFace dataset. After that, remove the classifier layer to fine-tune the score vector in Euclidean space using the triplet-loss training scheme. The performance of them is illustrated in section 4.

The VGGFace2 dataset contains 3.31 million images from 9131 celebrities (8631 for training, 500 for evaluation) spanning a wide range of different ethnicities, accents, professions, and ages. The Images were downloaded from Google Image Search and show large variations in pose, age, illumination, and background. Face distribution for different identities is varied, from 87 to 843, with an average of 362 images for each subject. Examples are shown in Fig. 3.6.

As discussed above, the training scheme is removing the fully connected layer from a pre-trained model on MS-Celeb-1M which is trained for classification, and then fine-tuning on the VGGFace2 dataset as an 8631-classes classifier. Finally, we removed the classifier of the model as the face feature extractor. Note that all the networks are using





Figure 3.6: VGGFace2 template examples. **Left:** examples of three different viewpoints (arranged by row) – frontal, three-quarter, profile. **Right:** examples of two subjects for young and mature ages (arranged by row). (Cao et al.)

softmax loss function. During training and testing, the preprocessing of the images is subtracting the mean value of each channel for each pixel.

### 3.4 Approximate Nearest Neighbors Search

Approximate Nearest Neighbors Search (ANNS) is a popular and fundamental method in various applications, such as database, multimedia, and computer vision. As far as we know, Hierarchical Navigable Small World (HNSW) (Malkov and Yashunin) algorithm is one of the most efficient ANNS algorithms; hence we apply HNSW to our system.

HNSW can be seen as a coarse-to-fine hierarchical NSW, the ground layer has all data points while the higher layer contains fewer points. Similar to NSW, HNSW is

constructed via inserting a new data point, one-by-one. For each inserting, an integer maximum layer  $l$  is randomly and there are two phases of the insertion process. The first step starts from the top layer to  $l + 1$  by greedily traversing the graph in order to find the closest neighbor to the inserted data point in the layer, which is used as the enter-point to continue the search in the next layer. The second step is adding the new data point to all layers from layer  $l$  down to layer ground.  $M$  nearest neighbors are found and connected with the new point. The number of enter-points  $ef$  also controls the searching quality of HNSW. The search can be seen as a  $l = 0$  insertion, starting from the upper layer which only the longest links and greedily traverse the upper layer until a local minimum is reached. After that, the search switch to the lower layer (which has shorter links), restarting the traversal to the local minimum (see Fig. 3.7 for illustration).

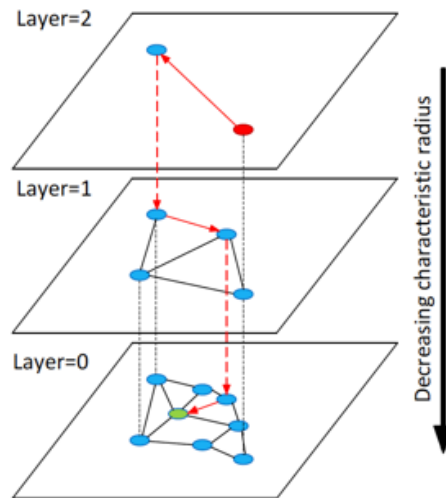


Figure 3.7: Illustration of the Hierarchical NSW idea. The search starts from an element from the top layer (shown red). Red arrows show direction of the greedy algorithm from the entry point to the query (shown green). (Malkov and Yashunin)

### 3.5 Re-ranking policy

In this section, we will introduce our re-ranking approach in two different configurations, Without and With Average. **Without Average** means we compare the probe image to every image in gallery while **With Average** is averaging the image of each identity in the gallery.

**Without Average:** Our feature extractor  $f(x)$ , which returns face representation, given a probe image  $p$  and compared with whole gallery  $\mathcal{G}$  which contains  $N$  images  $\mathcal{G} = \{ g_i | i = 1, 2, \dots, N \}$ . The distance between  $p$  and  $g_i$  is measured by Cosine distance,

$$d_c(p, g_i) = d_{g_i}^p = 1 - \text{cosine similarity} = 1 - \frac{\sum_1^n \bar{V}_p V_{g_i}}{\sqrt{\sum_1^n \bar{V}_p^2} \sqrt{\sum_1^n V_{g_i}^2}}$$

where the robust vector  $\bar{V}_p = \frac{1}{2} ( f(p) + f(p') )$  is the average of representation of  $p$  and its mirror image  $p'$  and  $V_{g_i} = f(g_i)$  represents the face vector of the gallery image  $g_i$ . The query expansion from the probe  $p$  may share similar features and bring more comprehensive information of this person.

The initial ranking list  $L(p, G) = \{ g_1^0, g_2^0, \dots, g_M^0 \}$  can be obtained by the original Cosine distance between  $p$  and  $g_i$ , where  $d_c(p, g_i^0) < d_c(p, g_{i+1}^0)$ . Our goal is to

update the original  $L(p, G)$ , so that the more positive samples move top in the list and improve the performance. We define  $N(p, k)$  as the  $k$ -nearest neighbors of  $\bar{V}_p$ ,

$$N(p, k) = \{g_1^0, g_2^0, \dots, g_k^0\}, |N(p, k)| = k$$

where  $|\cdot|$  denotes the number of the candidates. To find the further relationship between probe  $p$  and  $g_i$ , we define  $N(g_i, k)$  as the  $k$ -nearest neighbors of each  $g_i$  in  $N(p, k)$ .

And the Jaccard distance of  $g_i$  can be define as:

$$d_j(p, g_i) = 1 - \frac{|N(p, k) \cap N(g_i, k)|}{k}$$

After that, we jointly aggregate the original Cosine distance and the corresponding Jaccard distance to final distance  $d^*$ :

$$d^*(p, g_i) = \lambda d_c(p, g_i) + (1 - \lambda) d_j(p, g_i)$$

where  $\lambda \in [0, 1]$  denotes the weight between the distances. When  $\lambda = 0$ , only the Jaccard distance is considered. By contrast, when  $\lambda = 1$ , only the Cosine distance is considered. The effect of  $\lambda$  is discussed in section 4.4. We can obtain the final ranking list by ascending sort of the  $d^*$  and the re-ranking process is illustrated in Fig. 3.8.

**With Average:** In this configuration, the original gallery which contains  $M$  images in  $N$  identities can also be defined as  $\mathcal{G} = \{g_i^j \mid i = 1, 2, \dots, N; j = 1, 2, \dots, n_i\}$ , where each identity has  $n_i$  images in the gallery. We update the original gallery to  $\bar{\mathcal{G}}$  by

averaging every representation of the images belonging to the identity in the dataset (*i.e.*

$\bar{\mathcal{G}} = \{ \bar{V}_i | i = 1, 2, \dots, N \}$ , where  $\bar{V}_i = \frac{\sum_{j=1}^{n_i} f(g_i^j)}{n_i}$ ). Given a probe image  $p$ , The Cosine distance between  $p$  and  $\bar{V}_i$ ,

$$d_c(p, \bar{V}_i) = d_{\bar{V}_i}^p = 1 - \text{cosine similarity} = 1 - \frac{\sum_1^n V_p \bar{V}_i}{\sqrt{\sum_1^n V_p^2} \sqrt{\sum_1^n \bar{V}_i^2}}$$

where  $V_p = f(p)$  which is the representation of probe  $p$ .

As discussed above, two ranking lists,  $N(p, k)$  and the ranking list of the flipped image  $p'$ ,  $N(p', k)$  can be obtained in cosine distance by HNSW. After that, we can get the final ranking list by ascending sort of the averaged distance of each identity who is in  $N(p, k)$  and  $N(p', k)$ . The process of re-ranking in this configuration is shown in Fig 3.9.

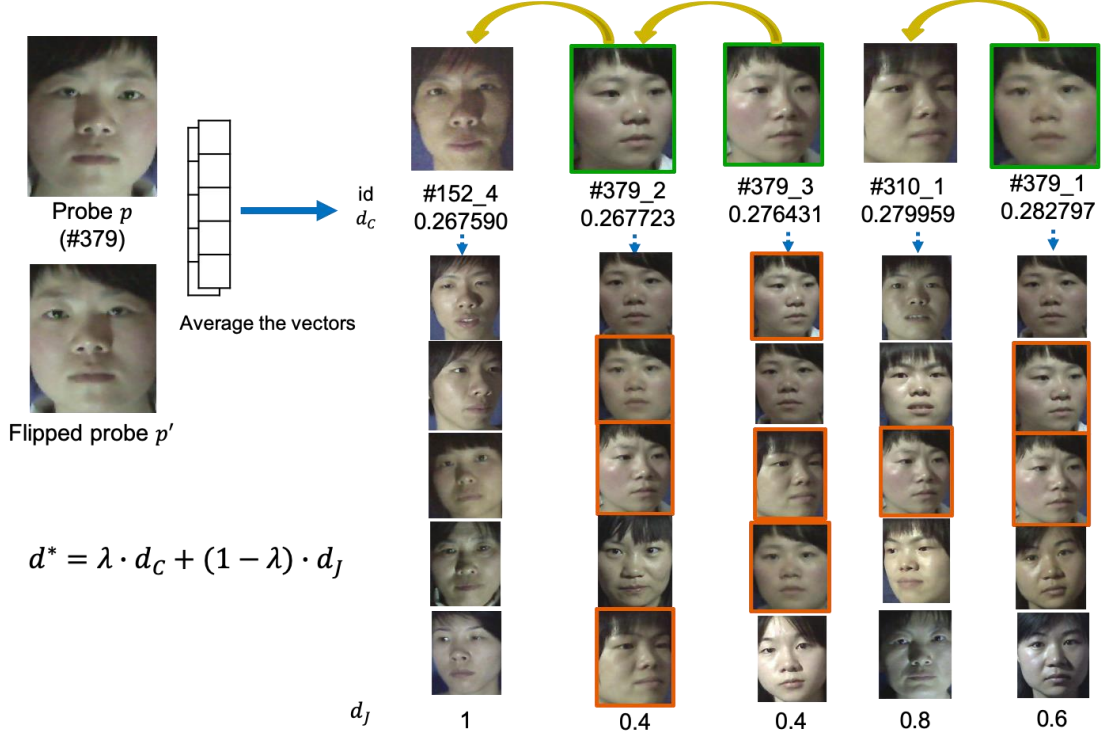


Figure 3.8: An example of the re-ranking policy (without average). The query vector shown in the top-left is the average of the face representations of probe  $p$  and its flipped  $p'$ . The original top-5 ranking list and its Cosine distance  $d_c$  are shown in the top-right, where the green box denotes the image is positive. Each column in the bottom shows the 5-nearest neighbors of the corresponding candidate in the original list. The image with orange box represents that the face is also appearing in the original ranking list so that Jaccard distance  $d_j$  can be calculated for each candidate. We can observe that the positive candidates can move forward in the appropriate  $\lambda$  to obtain a better ranking list.



Figure 3.9: An example of the re-ranking policy (with average). We calculate the average of the cosine distances from those closest neighbors of probe  $p$  and  $p'$  to obtain the final ranking list.

## Chapter 4

### Experiments

In section 4.1, we firstly compare the performance of two different face detection algorithms, MTCNN and FaceBoxes, then analyze the runtime efficiency. After analyzing face detection, we evaluate the performance of face verification in section 4.2 and face identification in section 4.3. Finally, the parameters of our method are analyzed in section 4.4. In the following sections, we describe the evaluation datasets and our experimental protocols. We also describe the changes to the system we made if there are any. All the experiments were conducted on Ubuntu 16.04 LTS operation system using GeForce GTX 1080 Ti and cuDNN v5 with Intel Xeon E5-2630v4 @2.20GHz and 128GB RAM.

#### 4.1 Evaluation of Face Detection

In this section, we firstly evaluate MTCNN and FaceBoxes on the common face detection benchmarks, then compare the runtime efficiency between them.

#### 4.1.1 Evaluate on benchmarks

We evaluate the FaceBoxes (Shifeng Zhang et al. "Faceboxes: A Cpu Real-Time Face Detector with High Accuracy") and MTCNN (Kaipeng Zhang et al.) on three

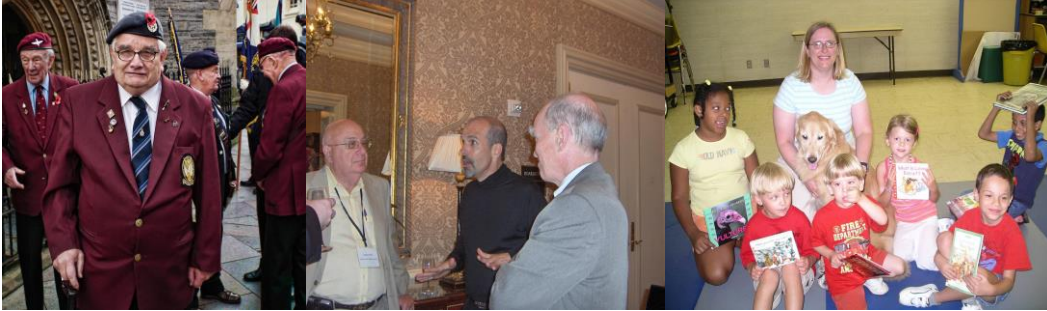


Figure 4.2: Some examples of AFW dataset. (Ramanan and Zhu)

common face detection benchmark datasets, including PASCAL Face (Everingham et al.), Annotated Faces in the Wild (AFW) (Ramanan and Zhu) and Face Detection Data Set and Benchmark (FDDB) (Jain and Learned-Miller).

**PASCAL Face dataset** is collected from the test set of PASCAL person layout dataset, consisting of 1335 faces with large face appearance and pose variations from 851 images. Some examples are shown in Fig. 4.1 and Fig. 4.3 (a) shows the precision-recall curves on this dataset, MTCNN significantly outperforms FaceBoxes.





Figure 4.1: Some examples of PASCAL Face dataset. (Everingham et al.)

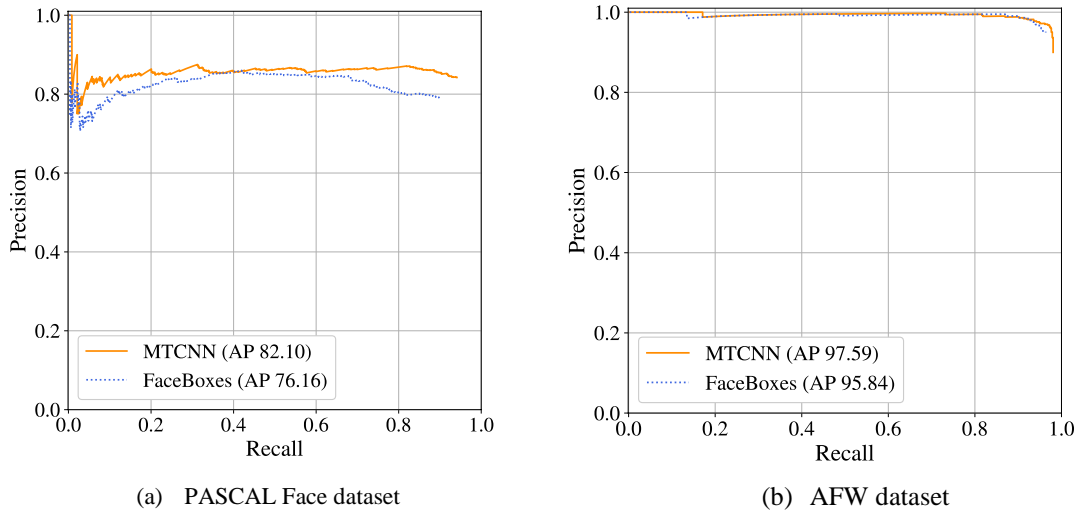


Figure 4.3: Precision-recall curves on the PASCAL and AFW benchmarks.

**AFW dataset** is built using Flickr images. It has 205 images with 473 faces. Some sample images are shown in Fig. 4.2. For each face, annotations include a rectangular bounding box, 6 landmarks, and the pose angles. According to the precision-recall curves in Fig. 4.3 (b), no significant differences in performance between MTCNN and FaceBoxes on this dataset.

**FDDB dataset** contains 5,171 faces in 2,845 images taken from news articles websites. FDDB provides the bounding ellipse, so we converted the ellipses to minimum bounding rectangles. The process is shown in Fig. 4.4. The results are shown in Fig. 4.4. MTCNN outperforms FaceBoxes a large margin on discontinuous ROC curve.

#### 4.1.2 Face Detection Runtime Efficiency

We measure the speed on the UTKFace (Zhifei Zhang et al.) dataset. During inference, we filter the boxes by a confidence threshold of 0.5 before applying NMS, then we perform NMS with IOU of 0.5.

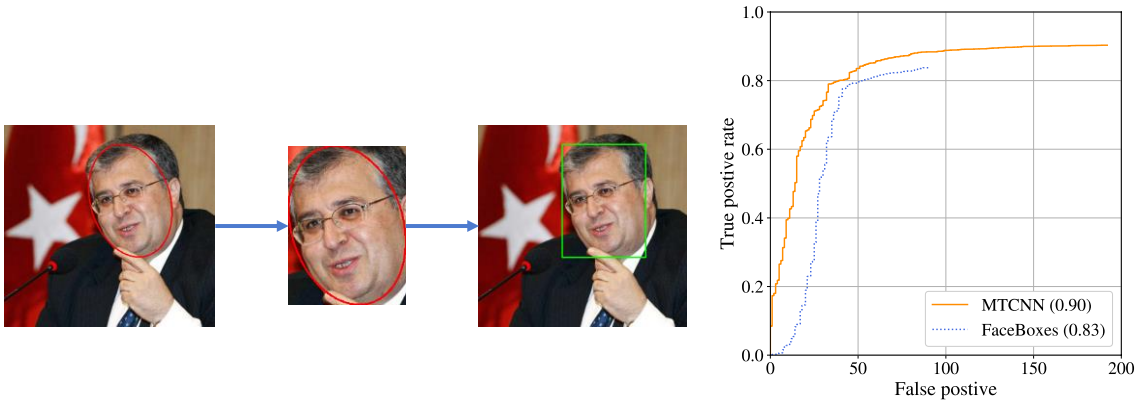


Figure 4.4: Evaluate on FDDB benchmark. **Left:** The processes of converting bounding ellipse to bounding box. **Right:** Discontinuous ROC curves on the FDDB dataset.

Table 4.1: FPS and mAP compared on different detection approach.

Approach	mAP(%)	FPS (on GPU)	FPS (on CPU)
MTCNN	<b>95.1</b>	8.86	6.25
FaceBoxes	89.3	<b>42.91</b>	<b>20.07</b>

**UTKFace** is a large-scale face dataset and only a single face in one image. The dataset consists of over 20,000 face images with annotations of age, gender, and ethnicity. The images cover large variation in pose, facial expression, illumination, occlusion, resolution, etc. Some samples are displayed in Fig. 4.5.

The result is listed in Table 4.1, MTCNN gets better performance on mean average precision (mAP), which is 95%. However, the FaceBoxes can achieve real-time face



Figure 4.5: Some examples of UTKFace. (Zhifei Zhang et al.)

detection at 42FPS on the GPU and 20FPS on the CPU with good enough mean average precision.

#### **4.1.3 Face Detection Conclusion**

Face detection in CNN-based methods have achieved remarkable progress but always been accused of its runtime efficiency. In different scenarios, we can choose the corresponding approach to meet the requirements. Since high accuracy is concerned in the preprocessing stage of the face feature extraction, we can apply MTCNN to detect most of the faces as much as possible. In addition, FaceBoxes is fast enough to meet the most of practical applications, we apply it on the user interface to get the face location fluently. Note that, if not mentioned otherwise we applied MTCNN as the face detection algorithm in the following section.

## 4.2 Evaluation of Face Verification

In section 4.2.1, we evaluate two different backbone feature extractors, VGG16 and ResNet-50 on LFW (Huang et al. "Labeled Faces in the Wild: A Database For studying Face Recognition in Unconstrained Environments") dataset to select better architecture. Then, we simulate a scenario with the CASIA-FaceV5 [14] dataset as the authorized user dataset while Helen (Le et al.) dataset as the intruder dataset. Lastly, we discuss the performance of different system configurations, including the integration of user features and alignment of the faces.

### 4.2.1 Performance on LFW

Labeled Faces in the Wild (LFW) contains 13,233 images with 5,749 identities and is the standard benchmark for automatic face verification. We follow the standard protocol for *unrestricted, labeled outside data*. LFW provides 10 sets., each set has 300 matched pairs and 300 mismatched pairs, some samples are shown in Fig. 4.6. Nine sets are used to select the cosine similarity threshold. Verification (same or different) is then performed on the tenth set. The selected optimal thresholds for VGG16 and ResNet-50 are respectively 0.694 and 0.463.

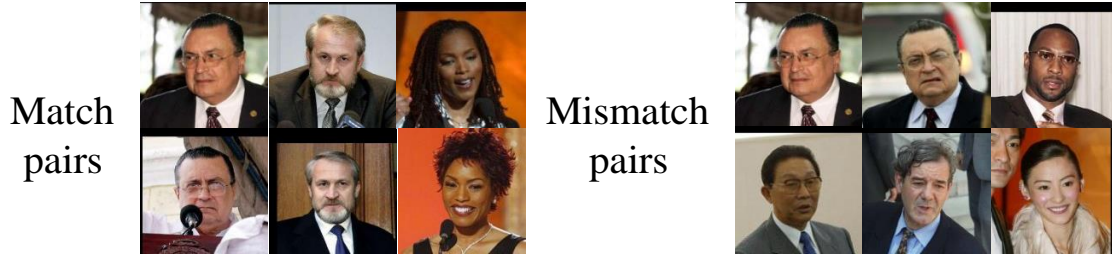


Figure 4.6: Some examples of LFW (Huang et al. "Labeled Faces in the Wild: A Database Forstudying Face Recognition in Unconstrained Environments") .

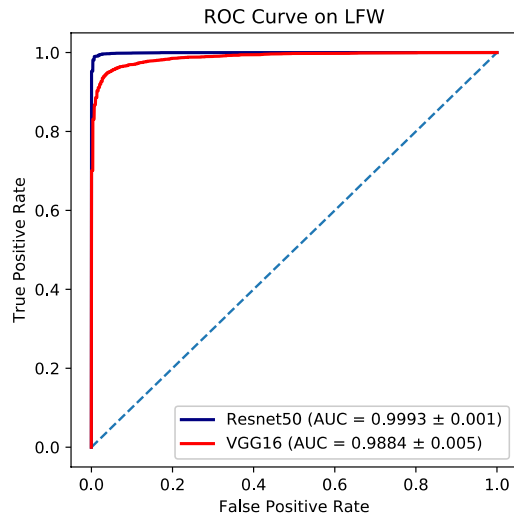


Figure 4.7: ROC curves on LFW

Table 4.2: Performance evaluation on LFW dataset

Backbone	Accuracy (%)	Time (s)
VGG16	95.33	<b>129</b>
ResNet-50	<b>99.33</b>	139

Fig. 4.7 shows the mean ROC curve on LFW, it can be observed that ResNet-50 architecture is significantly outperformed VGG16. Table 4.2 shows the accuracy and time consumption and it can be seen that ResNet-50 can achieve verification accuracy of 99.33%; thus, we choose ResNet-50 as our face descriptor backbone.

#### 4.2.2 Performance on CASIA-FaceV5 and Helen dataset

In order to evaluate the capability of ResNe-t50 backbone model in discriminating between authorized users and intruders in the practical scenarios, we use CASIA-FaceV5



Figure 4.8: Some examples of CASIA-FaceV5 and Helen dataset. **Left:** CASIA-FaceV5 [14] dataset. **Right:** Helen (Le et al.) dataset.

dataset [14] as the authorized user dataset and Helen (Le et al.) dataset as the intruder dataset.

CASIA-FaceV5 (CASIA Face Image Database Version 5.0) contains 2,500 color facial images of 500 subjects. That is, there are 5 images for each identity, we randomly chose one image for test and the others for the gallery images. All face images are 16-bit color BMP files and the resolution is 640\*480, Fig. 4.8 shows some examples.

Helen dataset is a high-resolution dataset originally built for facial feature localization, and it contains a broad range of appearance variation, including pose, lighting, expression, occlusion, and individual differences. This dataset consists of 2000 training and 330 test images, we use training images as the intruder dataset. If there are

multiple faces in the picture, we select the one closest the image center as the test face.

Some samples are shown in Fig. 4.8.

Inheriting from the confusion matrix, let ground Truth  $g(x) = 1$  for authorized user and  $g(x) = 0$  for intruder. **False Accept (FA)** means our system  $f(x)$  will incorrectly accept an access attempt by an unauthorized user. **False Reject (FR)** means failing to recognize an authorized person and rejects that person as an intruder. We defined the face verification penalty as:

$$\textbf{Face Verification Penalty (FVP)} = FA \cdot \alpha + FR \cdot \beta$$

$\alpha$  and  $\beta$  are respectively the penalty for FA and FR. A good face verification system is more concerned about the penalty of FA, then we set the FR penalty  $\beta = 1$



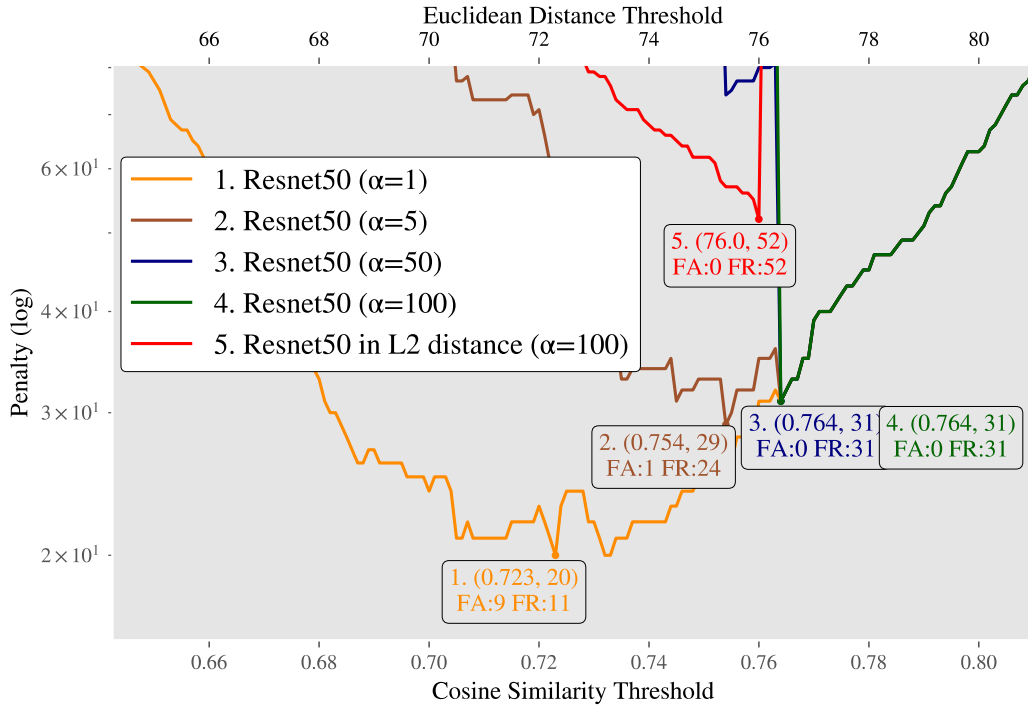


Figure 4.9: Penalty curves of different False Accept penalties and different distance measurements.

and alter the FA penalty  $\alpha$ . Fig 4.9 shows the minimum FVP in different  $\alpha$ , we observed that the penalty increases as the  $\alpha$  increases. It also shows the performance of two different distance measurements between Cosine similarity and Euclidean distance, which is Cosine similarity can get the lower penalty in the same  $\alpha$ .

#### 4.2.3 Alignment and Average

This section evaluates the effect of the different configurations when building the face verification system using the same authorized user database and intruder dataset mentioned in section 4.2.2. Note that the penalty of FA  $\alpha$  is fixed at 100.

**Alignment:** According to the component analysis of (Parkhi et al.), we compared the performance of performing 2D alignment in the process of building the database and the test images as well.

**Average:** (i) **Without average:** compared every image of the authorized user in the dataset, i.e. we selected the closest face in the database and return the name. (ii) **With average:** for each authorized user, we averaged the face representations of their gallery images which were embedded by the ResNet-50.

Fig. 4.10 shows the penalty curve of different configurations, as can be seen, the performance of aggregating each user's face representations is better than comparing every image in the database (orange and blue line). The probable reason for this is averaging the vectors may get more robust and general features from a person's face that can avoid the effect of angle, hairstyle or glasses. Furthermore, perform 2D alignment on both training and test images gives a boost in performance (solid and dotted line), comes to the same conclusion as (Bansal et al.). In conclusion, the best configuration of face

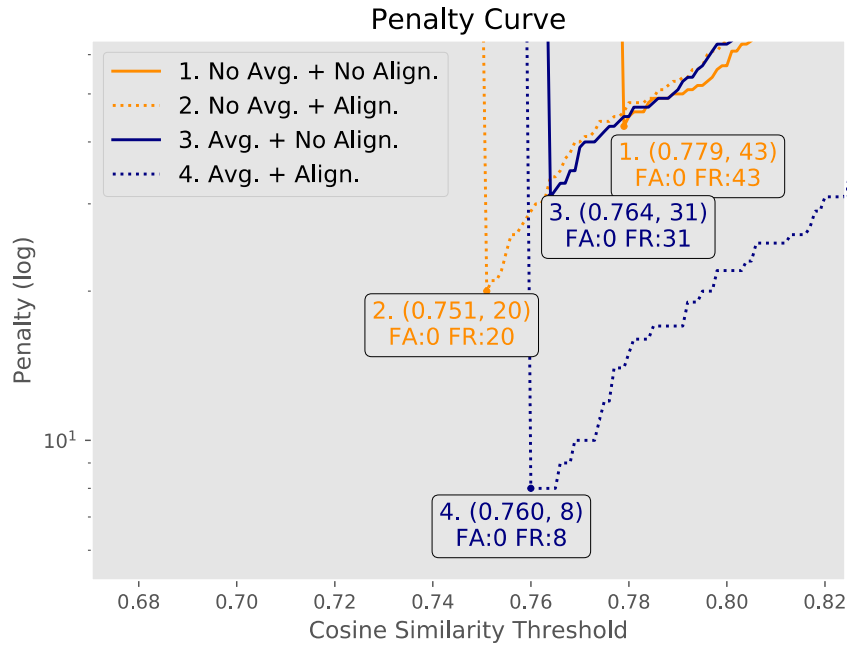


Figure 4.10: Compare the performance of different configurations in face verification.

verification is the average of user face representations and performing alignment on all images.

### 4.3 Evaluation of Face Identification

This section reports experimental results for face identification on different datasets. Section 4.3.1 and 4.3.2 discuss the performance on large inter-class variation datasets, which are CASIA-FaceV5 and CASIA-WebFace (Yi et al.) respectively. Section 4.3.3 and section 4.3.4 show the result on two large intra-class age-invariant datasets, FG-NET and Cross-Age Celebrity Dataset (CACD) (Bor-Chun Chen et al. "Cross-Age Reference Coding for Age-Invariant Face Recognition and Retrieval"). If not mentioned otherwise

we set the number of neighbors  $k$  to 10 and use HNSW to speed up the 1: N retrieval time and present the rank-1 accuracy.

#### 4.3.1 Experiments on CASIA-FaceV5

As mentioned previously, we randomly select one image for each identity as the test image and do 5-fold validation. In without average configuration, we set  $\lambda$  to 0.8. Table 4.3 compares the performance of different components of face identification. As can be seen, in spite of taking double time, our re-ranking method does improve the accuracy (rows 1 and 2, rows 5 and 6). In addition, Table 4.3 shows averaging the user images has the capability of dealing with the factors of poses, illumination, and hairstyle (rows 1 and

Table 4.3: Performance of different configurations on CASIA-FaceV5.

No.	Align.	Average	Re-rank	Avg. Time (s)	Mean Acc.
1	×	×	×	27	$0.9840 \pm 0.008$
2	×	×	✓	65	$0.9880 \pm 0.002$
3	×	✓	×	22	$0.9900 \pm 0.006$
4	×	✓	✓	48	$0.9980 \pm 0.002$
5	✓	×	×	43	$0.9847 \pm 0.011$
6	✓	×	✓	87	$0.9853 \pm 0.008$
7	✓	✓	×	50	$0.9920 \pm 0.005$
8	✓	✓	✓	92	<b><math>0.9987 \pm 0.001</math></b>

3, rows 5 and 7). It also shows the performance can be improved 1.47% in rank-1 accuracy via our method (rows 1 and 8).

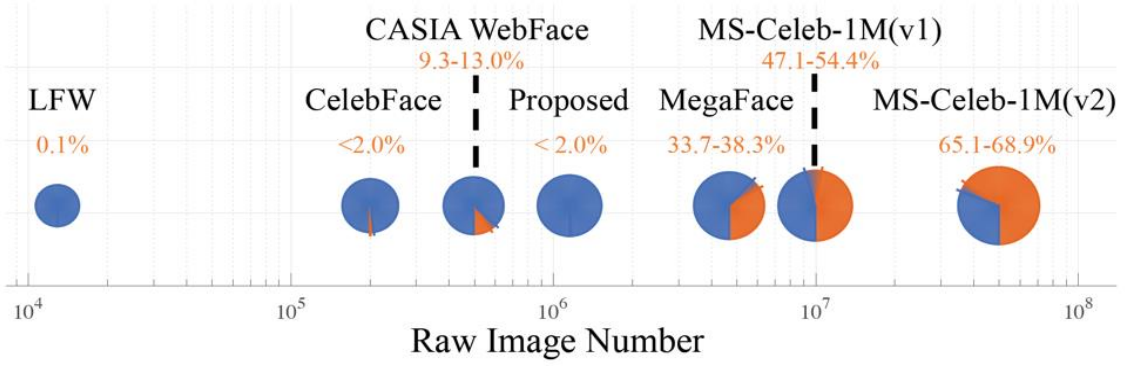


Figure 4.11: A visualization of size and estimated noise percentage of datasets. (Fei Wang et al.)

### 4.3.2 Experiments on CASIA-WebFace

This section discusses the performance on a larger inter-class variation dataset, CASIA-WebFace, which consists of 0.5M images of 10K celebrities, collected from the IMDb website. The authors use a semi-automatically clustering step to construct the dataset, Wang *et al.* (Fei Wang et al.) analyzed the noise of the dataset, shown in Fig. 4.11. Note that we applied the washed CASIA-WebFace<sup>4</sup>, which removes 27,703 wrong images and select the identities those images count is more than 5.

We follow the 5-fold strategy mentioned above, one image for testing, and the other for gallery images. We set  $\lambda$  to 0.8 for without average setting in this dataset. As

Table 4.4: Performance of different configurations on CASIA-WebFace.

Component	Configuration							
Alignment				✓	✓	✓		✓
Average			✓			✓	✓	✓
Re-rank		✓			✓		✓	✓
<b>Mean Acc. (%)</b>	84.47	85.84	86.48	82.97	84.98	85.26	<b>86.75</b>	86.14

<sup>4</sup> <https://github.com/cmusatyalab/openface/issues/119>



Figure 4.12: Some examples of FG-NET.

observed in Table 4.4, it can be seen that the best setting is with average and re-ranking, which increases the rank-1 accuracy by 2.28%. To put it another way, this configuration is robust to view changes and illumination variations. It is also worth noting that alignment is not conducive for this dataset.

### 4.3.3 Experiments on FG-NET

FG-NET database contains 1002 color or grayscale face images of 82 subjects, with ages from 0 to 69. Fig. 4.12 shows some examples.

Following the testing scheme in (Zhifeng Li et al.) , the leave-one-out strategy is used and we fixed the  $\lambda$  at 0.75. Table 4.5 shows our result on FG-NET, it reveals that

Table 4.5: Performance of different configurations on FG-NET.

Component	Configuration								
Alignment				✓	✓	✓	✓		
Average	✓						✓	✓	✓
Re-rank	✓			✓			✓		
Mean Acc. (%)	86.62	87.22	83.43	87.32	87.92	84.33	83.63	84.53	

Table 4.6: Performance of different methods on FG-NET.

<b>Method</b>	<b>Rank-1 Acc. (%)</b>
HFA [32]	69.0
MEFA [33]	76.2
CAN [115]	86.5
LF-CNNs [111]	88.1
<b>Ours</b>	<b>87.92</b>

the best configuration on this dataset is contrary to previous, without average and re-ranking can obtain better performance. The possible explanation is that single image comparison can handle the significant intra-personal variation and find the closest age image of the person. Average all gallery image vectors of a person might be led to the representation biases toward the middle year of the person. We also compared our result with some state-of-the-art approaches (Gong et al. "Hidden Factor Analysis for Age Invariant Face Recognition"; Gong et al. "A Maximum Entropy Feature Descriptor for Age Invariant Face Recognition"; Wen et al.; Xu et al.) on this dataset, the gap between our proposed method and specialized age-invariant face recognition methods is not significant. The comparative results are reported in Table 4.6.

#### 4.3.4 Experiments on CACD

Cross-Age Celebrity Dataset (CACD) (Bor-Chun Chen et al. "Cross-Age Reference Coding for Age-Invariant Face Recognition and Retrieval") is a dataset for age-invariant

face recognition, containing 163,446 images from 2,000 celebrities with ages ranging from 16 to 62. The images in this dataset have varied illumination, different poses, different makeup and better simulate the practical scenario.

We followed the experimental setting in (Bor-Chun Chen et al. "Cross-Age Reference Coding for Age-Invariant Face Recognition and Retrieval") , choose 120 celebrities with rank 3-5 as test sets where images taken at 2013 are used as query images. The remaining images are split into three subsets respectively taken in 2004-2006, 2007-2009 and 2010-2012 as database images.

In our experiment on CACD, we fix the  $\lambda$  at 0.75 and use mean average precision (MAP) as evaluation metrics. Cosine distance is used to compute the similarity of two images. Specifically, let  $q_i \in Q$  is the query image and  $Q$  is the query dataset. For each  $q_i$ , the positive images are expressed as  $Y_1, Y_2, Y_3, \dots, Y_m$  and we define  $E_{ic}$  as the retrieval results of  $q_i$  in descending order from the top to  $Y_c$ . Therefore, the average precision (AP) of  $q_i$  can be computed as below:

$$AP(q_i) = \frac{1}{m_i} \sum_{c=1}^{m_i} Precision(E_{ic}),$$

where  $Precision(E_{ic})$  means the ratio of relevant images in retrieval results  $E_{ic}$ . After that, the Mean Average Precision (MAP) of all query images can be denoted as below:



$$MAP(Q) = \frac{1}{|Q|} \sum_{i=1}^{|Q|} AP(q_i).$$

Using this evaluation metric, Fig. 4.13 reports the result that we compare our method with some state-of-the-art Cross-Age face recognition algorithms including hidden factor analysis (HFA) (Gong et al. "Hidden Factor Analysis for Age Invariant Face Recognition") , cross-age reference coding (CARC) (Bor-Chun Chen et al. "Face Recognition and Retrieval Using Cross-Age Reference Coding with Cross-Age Celebrity Dataset") , generalized similarity model (Lin et al.) (GSM-2 use more training data), coupled auto-encoder networks (CAN) (Xu et al.) and age estimation guided convolutional neural network (AE-CNN) (Tian Yue Zheng et al.). The result shows that our approach still yields good performance compared with age-invariant face recognition algorithms. We also show the rank-1 recognition accuracy of our approach and other methods (Bor-Chun Chen et al. "Face Recognition and Retrieval Using Cross-Age Reference Coding with Cross-Age Celebrity Dataset"; Dong Chen et al.) in Table 4.7. Note that the baseline method is only considering cosine distance and without re-ranking. It can be seen that our approach outperforms the baseline and gains nearly 2.5% improvement in rank-1 accuracy.

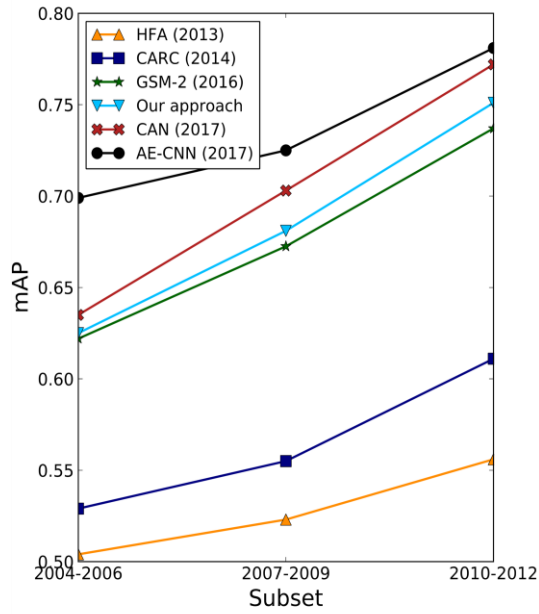


Figure 4.13: The performance of mAP of our approach compared with SOTA algorithms on CACD.

## 4.4 Parameters Analysis

The parameters of the re-ranking method are analyzed in this section. In Fig. 4.14, we evaluate the influence of  $\lambda$  on rank-1 accuracy on large inter-class and intra-class variation datasets. Note that, we fix the number of nearest neighbors  $k$  at 10 since assigning a too large value of  $k$  may lead to more false matches included. When  $\lambda$  is set to 0, we only consider the Jaccard distance; By contrast, when  $\lambda$  is set to 1, the baseline result is the original ranking list without re-ranking method which is only sorting by Cosine distance. It can be observed that when simultaneously considering both the

Cosine distance and the Jaccard distance, the performance obtains about 1% of

Table 4.7: The Rank-1 accuracy of different methods on three subsets in CACD.

Methods	Rank-1 accuracy (%)		
	04-06	07-09	10-12
LBP (Bor-Chun			85.5
Chen et al. "Face			
Recognition and			
Retrieval Using			
Cross-Age			
Reference	78.0	80.3	
Coding with			
Cross-Age			
Celebrity			
Dataset"; Dong			
Chen et al.)			
CARC (Bor-			
Chun Chen et al.			
"Face			
Recognition and			
Retrieval Using			
Cross-Age	88.8	88.5	92.2
Reference			
Coding with			
Cross-Age			
Celebrity			
Dataset")			
Baseline	81.6	84.1	85.4
Baseline + Ours	84.7	86.2	87.4

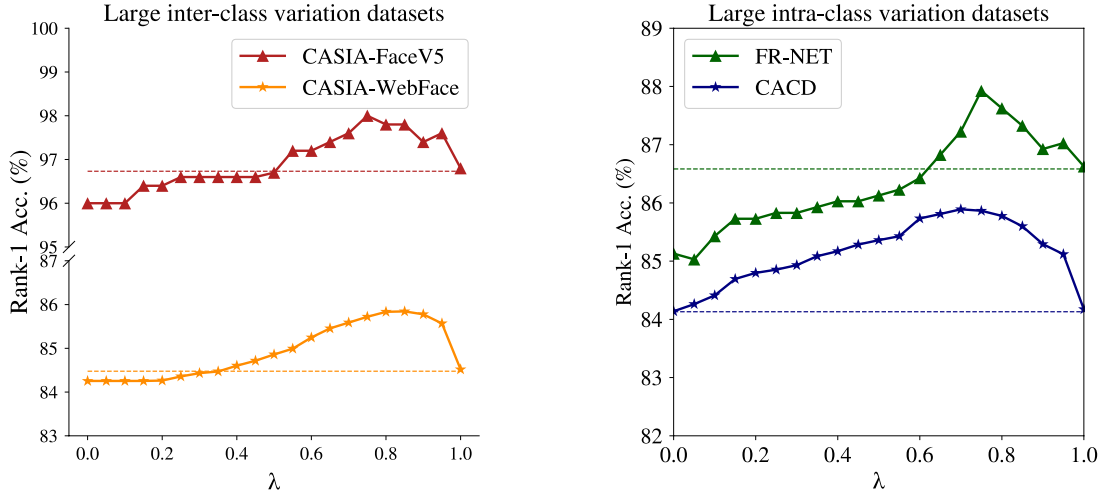


Figure 4.14: The impact of the parameter  $\lambda$  on rank-1 accuracy on large inter-class/intra-class variation datasets. We utilize the without average configuration on each dataset and fix the  $k$  at 10.

improvement and shows that the proposed re-ranking method is beneficial for face identification. Overall, these results imply that the optimal value of  $\lambda$  for the large inter-class variation dataset is around 0.8 and 0.75 for the large intra-class variation dataset.

## Chapter 5

### Conclusions and discussions

In this paper, we provided a ResNet-based face recognition system employing the postprocessing method. We also presented the result of two different face detectors so that we can apply the most suitable method in different requirements. Moreover, a specific preprocessing is provided to obtain the best performance for face authentication. According to the experimental results of face identification, our proposed re-ranking

method is beneficial for enhancing the performance. Not only achieves comparable performance on the dataset with large inter-class variation but also the dataset with large intra-class variation. The configuration depends on the type of the dataset, which is applying without average setting for intra-class variation datasets while using average strategy can get more robust representations on inter-class variation dataset.

Future work involves two directions. One will focus on improving the policy of re-ranking and the other one will develop more efficient models on edge devices.

## Reference

- [1] Andoni, Alexandr and Piotr Indyk. "Near-Optimal Hashing Algorithms for Approximate Nearest Neighbor in High Dimensions." *Communications of the ACM*, vol. 51, no. 1, 2008, p. 117.
- [2] Andoni, Alexandr and Ilya Razenshteyn. "Optimal Data-Dependent Hashing for Approximate near Neighbors." *Proceedings of the forty-seventh annual ACM symposium on Theory of computing*, ACM, 2015, pp. 793-801.
- [3] Asthana, Akshay et al. "Robust Discriminative Response Map Fitting with Constrained Local Models." *Proceedings of the IEEE conference on computer vision and pattern recognition*, 2013, pp. 3444-3451.
- [4] Aumüller, Martin et al. "Ann-Benchmarks: A Benchmarking Tool for Approximate Nearest Neighbor Algorithms." *Information Systems*, 2019.
- [5] Bai, Song and Xiang Bai. "Sparse Contextual Activation for Efficient Visual Re-Ranking." *IEEE Transactions on Image Processing*, vol. 25, no. 3, 2016, pp. 1056-1069.
- [6] Bansal, Ankan et al. "The Do's and Don'ts for Cnn-Based Face Verification." *Proceedings of the IEEE International Conference on Computer Vision*, 2017, pp. 2545-2554.

- [7] Belhumeur, Peter N et al. "Localizing Parts of Faces Using a Consensus of Exemplars." *IEEE transactions on pattern analysis and machine intelligence*, vol. 35, no. 12, 2013, pp. 2930-2940.
- [8] Bentley, Jon Louis. "Multidimensional Binary Search Trees Used for Associative Searching." *Communications of the ACM*, vol. 18, no. 9, 1975, pp. 509-517.
- [9] Beygelzimer, Alina et al. "Cover Trees for Nearest Neighbor." *Proceedings of the 23rd international conference on Machine learning*, ACM, 2006, pp. 97-104.
- [10] Bourdev, Lubomir and Jonathan Brandt. "Robust Object Detection Via Soft Cascade." *2005 IEEE Computer Society Conference on Computer Vision and Pattern Recognition (CVPR'05)*, vol. 2, IEEE, 2005, pp. 236-243.
- [11] Brubaker, S Charles et al. "On the Design of Cascades of Boosted Ensembles for Face Detection." *International journal of computer vision*, vol. 77, no. 1-3, 2008, pp. 65-86.
- [12] Cao, Qiong et al. "Vggface2: A Dataset for Recognising Faces across Pose and Age." *2018 13th IEEE International Conference on Automatic Face & Gesture Recognition (FG 2018)*, IEEE, 2018, pp. 67-74.
- [13] Chen, Bor-Chun et al. "Cross-Age Reference Coding for Age-Invariant Face Recognition and Retrieval." *European Conference on Computer Vision*, Springer, 2014, pp. 768-783.

- [14] ---. "Face Recognition and Retrieval Using Cross-Age Reference Coding with Cross-Age Celebrity Dataset." *IEEE Transactions on Multimedia*, vol. 17, no. 6, 2015, pp. 804-815.
- [15] Chen, Dong et al. "Blessing of Dimensionality: High-Dimensional Feature and Its Efficient Compression for Face Verification." *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 2013, pp. 3025-3032.
- [16] Chum, Ondrej et al. "Total Recall: Automatic Query Expansion with a Generative Feature Model for Object Retrieval." *2007 IEEE 11th International Conference on Computer Vision*, IEEE, 2007, pp. 1-8.
- [17] Ciaccia, Paolo et al. "M-Tree: An Efficient Access Method for Similarity Search in Metric Spaces." *Proceedings of the 23rd VLDB conference, Athens, Greece*, Citeseer, 1997, pp. 426-435.
- [18] Dai, Jifeng et al. "R-Fcn: Object Detection Via Region-Based Fully Convolutional Networks." *Advances in neural information processing systems*, 2016, pp. 379-387.
- [19] Dasgupta, Sanjoy and Yoav Freund. "Random Projection Trees and Low Dimensional Manifolds." *STOC*, vol. 8, Citeseer, 2008, pp. 537-546.
- [20] Datar, Mayur et al. "Locality-Sensitive Hashing Scheme Based on P-Stable Distributions." *Proceedings of the twentieth annual symposium on Computational geometry*, ACM, 2004, pp. 253-262.

- [21] Deerwester, Scott et al. "Indexing by Latent Semantic Analysis." *Journal of the American society for information science*, vol. 41, no. 6, 1990, pp. 391-407.
- [22] Deng, Jiankang et al. "Arcface: Additive Angular Margin Loss for Deep Face Recognition." *arXiv preprint arXiv:1801.07698*, 2018.
- [23] Deng, Jiankang et al. "Marginal Loss for Deep Face Recognition." *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition Workshops*, 2017, pp. 60-68.
- [24] Ding, Changxing and Dacheng Tao. "Robust Face Recognition Via Multimodal Deep Face Representation." *IEEE Transactions on Multimedia*, vol. 17, no. 11, 2015, pp. 2049-2058.
- [25] Everingham, Mark et al. "The Pascal Visual Object Classes (Voc) Challenge." *International journal of computer vision*, vol. 88, no. 2, 2010, pp. 303-338.
- [26] Farfadi, Sachin Sudhakar et al. "Multi-View Face Detection Using Deep Convolutional Neural Networks." *Proceedings of the 5th ACM on International Conference on Multimedia Retrieval*, ACM, 2015, pp. 643-650.
- [27] Ge, Tiezheng et al. "Optimized Product Quantization for Approximate Nearest Neighbor Search." *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 2013, pp. 2946-2953.



- [28] Gionis, Aristides et al. "Similarity Search in High Dimensions Via Hashing." *Vldb*, vol. 99, 1999, pp. 518-529.
- [29] Girshick, Ross et al. "Rich Feature Hierarchies for Accurate Object Detection and Semantic Segmentation." *Proceedings of the IEEE conference on computer vision and pattern recognition*, 2014, pp. 580-587.
- [30] Gong, Dihong et al. "Hidden Factor Analysis for Age Invariant Face Recognition." *Proceedings of the IEEE international conference on computer vision*, 2013, pp. 2872-2879.
- [31] Gong, Dihong et al. "A Maximum Entropy Feature Descriptor for Age Invariant Face Recognition." *Proceedings of the IEEE conference on computer vision and pattern recognition*, 2015, pp. 5289-5297.
- [32] Guo, Yandong et al. "Ms-Celeb-1m: A Dataset and Benchmark for Large-Scale Face Recognition." *European Conference on Computer Vision*, Springer, 2016, pp. 87-102.
- [33] He, Kaiming et al. "Deep Residual Learning for Image Recognition." *Proceedings of the IEEE conference on computer vision and pattern recognition*, 2016, pp. 770-778.
- [34] Hu, Peiyun and Deva Ramanan. "Finding Tiny Faces." *Proceedings of the IEEE conference on computer vision and pattern recognition*, 2017, pp. 951-959.

- [35] Huang, Gary B et al. "Learning Hierarchical Representations for Face Verification with Convolutional Deep Belief Networks." *2012 IEEE Conference on Computer Vision and Pattern Recognition*, IEEE, 2012, pp. 2518-2525.
- [36] Huang, Gary B et al. "Labeled Faces in the Wild: A Database For studying Face Recognition in Unconstrained Environments." *Workshop on faces in 'Real-Life' Images: detection, alignment, and recognition*, 2008.
- [37] Indyk, Piotr and Rajeev Motwani. "Approximate Nearest Neighbors: Towards Removing the Curse of Dimensionality." *Proceedings of the thirtieth annual ACM symposium on Theory of computing*, ACM, 1998, pp. 604-613.
- [38] Jain, Vidit and Erik Learned-Miller. "Fddb: A Benchmark for Face Detection in Unconstrained Settings." UMass Amherst Technical Report, 2010.
- [39] Jegou, Herve et al. "Product Quantization for Nearest Neighbor Search." *IEEE transactions on pattern analysis and machine intelligence*, vol. 33, no. 1, 2010, pp. 117-128.
- [40] Jiang, Huaizu and Erik Learned-Miller. "Face Detection with the Faster R-Cnn." *2017 12th IEEE International Conference on Automatic Face & Gesture Recognition (FG 2017)*, IEEE, 2017, pp. 650-657.

- [41] Joly, Alexis and Olivier Buisson. "A Posteriori Multi-Probe Locality Sensitive Hashing." *Proceedings of the 16th ACM international conference on Multimedia*, ACM, 2008, pp. 209-218.
- [42] Kazemi, Vahid and Josephine Sullivan. "One Millisecond Face Alignment with an Ensemble of Regression Trees." *Proceedings of the IEEE conference on computer vision and pattern recognition*, 2014, pp. 1867-1874.
- [43] Kemelmacher-Shlizerman, Ira et al. "The Megaface Benchmark: 1 Million Faces for Recognition at Scale." *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 2016, pp. 4873-4882.
- [44] Kim, Jaechul et al. "Deformable Spatial Pyramid Matching for Fast Dense Correspondences." *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 2013, pp. 2307-2314.
- [45] King, Davis E. "Dlib-Ml: A Machine Learning Toolkit." *Journal of Machine Learning Research*, vol. 10, no. Jul, 2009, pp. 1755-1758.
- [46] Klare, Brendan F et al. "Pushing the Frontiers of Unconstrained Face Detection and Recognition: Iarpa Janus Benchmark A." *Proceedings of the IEEE conference on computer vision and pattern recognition*, 2015, pp. 1931-1939.

- [47] Krizhevsky, Alex et al. "Imagenet Classification with Deep Convolutional Neural Networks." *Advances in neural information processing systems*, 2012, pp. 1097-1105.
- [48] Kumar, Amit et al. "Face Alignment by Local Deep Descriptor Regression." *arXiv preprint arXiv:1601.07950*, 2016.
- [49] Le, Vuong et al. "Interactive Facial Feature Localization." *European conference on computer vision*, Springer, 2012, pp. 679-692.
- [50] Learned-Miller, Erik et al. "Labeled Faces in the Wild: A Survey." *Advances in Face Detection and Facial Image Analysis*, Springer, 2016, pp. 189-248.
- [51] Li, Haoxiang et al. "A Convolutional Neural Network Cascade for Face Detection." *Proceedings of the IEEE conference on computer vision and pattern recognition*, 2015, pp. 5325-5334.
- [52] Li, Stan Z et al. "Statistical Learning of Multi-View Face Detection." *European Conference on Computer Vision*, Springer, 2002, pp. 67-81.
- [53] Li, Yunzhu et al. "Face Detection with End-to-End Integration of a Convnet and a 3d Model." *European Conference on Computer Vision*, Springer, 2016, pp. 420-436.
- [54] Li, Zhifeng et al. "A Discriminative Model for Age Invariant Face Recognition." *IEEE transactions on information forensics and security*, vol. 6, no. 3, 2011, pp. 1028-1037.

- [55] Liao, Shengcai et al. "A Fast and Accurate Unconstrained Face Detector." *IEEE transactions on pattern analysis and machine intelligence*, vol. 38, no. 2, 2015, pp. 211-223.
- [56] Lin, Liang et al. "Cross-Domain Visual Matching Via Generalized Similarity Measure and Feature Learning." *IEEE transactions on pattern analysis and machine intelligence*, vol. 39, no. 6, 2016, pp. 1089-1102.
- [57] Liu, Jingtuo et al. "Targeting Ultimate Accuracy: Face Recognition Via Deep Embedding." *arXiv preprint arXiv:1506.07310*, 2015.
- [58] Liu, Ting et al. "New Algorithms for Efficient High-Dimensional Nonparametric Classification." *Journal of Machine Learning Research*, vol. 7, no. Jun, 2006, pp. 1135-1158.
- [59] Liu, Wei et al. "Ssd: Single Shot Multibox Detector." *European conference on computer vision*, Springer, 2016, pp. 21-37.
- [60] Liu, Weiyang et al. "Sphereface: Deep Hypersphere Embedding for Face Recognition." *Proceedings of the IEEE conference on computer vision and pattern recognition*, 2017, pp. 212-220.
- [61] Liu, Weiyang et al. "Large-Margin Softmax Loss for Convolutional Neural Networks." *ICML*, vol. 2, 2016, p. 7.

- [62] Liu, Yu et al. "Rethinking Feature Discrimination and Polymerization for Large-Scale Recognition." *arXiv preprint arXiv:1710.00870*, 2017.
- [63] Lowe, David G. "Distinctive Image Features from Scale-Invariant Keypoints." *International journal of computer vision*, vol. 60, no. 2, 2004, pp. 91-110.
- [64] Lv, Qin et al. "Multi-Probe Lsh: Efficient Indexing for High-Dimensional Similarity Search." *Proceedings of the 33rd international conference on Very large data bases, VLDB Endowment*, 2007, pp. 950-961.
- [65] Malkov, Yury A and Dmitry A Yashunin. "Efficient and Robust Approximate Nearest Neighbor Search Using Hierarchical Navigable Small World Graphs." *IEEE transactions on pattern analysis and machine intelligence*, 2018.
- [66] Malkov, Yury et al. "Approximate Nearest Neighbor Algorithm Based on Navigable Small World Graphs." *Information Systems*, vol. 45, 2014, pp. 61-68.
- [67] Mathias, Markus et al. "Face Detection without Bells and Whistles." *European conference on computer vision*, Springer, 2014, pp. 720-735.
- [68] Matthews, Iain and Simon Baker. "Active Appearance Models Revisited." *International journal of computer vision*, vol. 60, no. 2, 2004, pp. 135-164.

- [69] Muja, Marius and David G Lowe. "Scalable Nearest Neighbor Algorithms for High Dimensional Data." *IEEE transactions on pattern analysis and machine intelligence*, vol. 36, no. 11, 2014, pp. 2227-2240.
- [70] Naidan, Bilegsaikhan et al. "Permutation Search Methods Are Efficient, yet Faster Search Is Possible." *Proceedings of the VLDB Endowment*, vol. 8, no. 12, 2015, pp. 1618-1629.
- [71] Navarro, Gonzalo. "Searching in Metric Spaces by Spatial Approximation." *The VLDB Journal*, vol. 11, no. 1, 2002, pp. 28-46.
- [72] Omohundro, Stephen M. "Efficient Algorithms with Neural Network Behavior." *Complex Systems*, vol. 1, no. 2, 1987, pp. 273-347.
- [73] Osadchy, Margarita et al. "Synergistic Face Detection and Pose Estimation with Energy-Based Models." *Journal of Machine Learning Research*, vol. 8, no. May, 2007, pp. 1197-1215.
- [74] Panigrahy, Rina. "Entropy Based Nearest Neighbor Search in High Dimensions." *Proceedings of the seventeenth annual ACM-SIAM symposium on Discrete algorithm*, Society for Industrial and Applied Mathematics, 2006, pp. 1186-1195.
- [75] Parkhi, Omkar M et al. "Deep Face Recognition." *bmvc*, vol. 1, 2015, p. 6.

- [76] Pham, Minh-Tri and Tat-Jen Cham. "Fast Training and Selection of Haar Features Using Statistics in Boosting-Based Face Detection." *2007 IEEE 11th International Conference on Computer Vision*, IEEE, 2007, pp. 1-7.
- [77] Preparata, Franco P and Michael I Shamos. *Computational Geometry: An Introduction*. Springer Science & Business Media, 2012.
- [78] Qin, Danfeng et al. "Hello Neighbor: Accurate Object Retrieval with K-Reciprocal Nearest Neighbors." *CVPR 2011*, IEEE, 2011, pp. 777-784.
- [79] Qin, Hongwei et al. "Joint Training of Cascaded Cnn for Face Detection." *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 2016, pp. 3456-3465.
- [80] Ramanan, Deva and Xiangxin Zhu. "Face Detection, Pose Estimation, and Landmark Localization in the Wild." *Proceedings of the 2012 IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, Citeseer, 2012, pp. 2879-2886.
- [81] Ranjan, Rajeve et al. "Crystal Loss and Quality Pooling for Unconstrained Face Verification and Recognition." *arXiv preprint arXiv:1804.01159*, 2018.
- [82] Ranjan, Rajeve et al. "L2-Constrained Softmax Loss for Discriminative Face Verification." *arXiv preprint arXiv:1703.09507*, 2017.



- [83] Ranjan, Rajeev et al. "A Deep Pyramid Deformable Part Model for Face Detection." *2015 IEEE 7th international conference on biometrics theory, applications and systems (BTAS)*, IEEE, 2015, pp. 1-8.
- [84] ---. "Hyperface: A Deep Multi-Task Learning Framework for Face Detection, Landmark Localization, Pose Estimation, and Gender Recognition." *IEEE transactions on pattern analysis and machine intelligence*, vol. 41, no. 1, 2019, pp. 121-135.
- [85] Ranjan, Rajeev et al. "An All-in-One Convolutional Neural Network for Face Analysis." *2017 12th IEEE International Conference on Automatic Face & Gesture Recognition (FG 2017)*, IEEE, 2017, pp. 17-24.
- [86] Ren, Shaoqing et al. "Faster R-Cnn: Towards Real-Time Object Detection with Region Proposal Networks." *Advances in neural information processing systems*, 2015, pp. 91-99.
- [87] Sagonas, Christos et al. "300 Faces in-the-Wild Challenge: The First Facial Landmark Localization Challenge." *Proceedings of the IEEE International Conference on Computer Vision Workshops*, 2013, pp. 397-403.
- [88] Sankaranarayanan, Swami et al. "Triplet Probabilistic Embedding for Face Verification and Clustering." *2016 IEEE 8th international conference on biometrics theory, applications and systems (BTAS)*, IEEE, 2016, pp. 1-8.

- [89] Saragih, Jason and Roland Goecke. "A Nonlinear Discriminative Approach to Aam Fitting." *2007 IEEE 11th International Conference on Computer Vision*, IEEE, 2007, pp. 1-8.
- [90] Schroff, Florian et al. "Facenet: A Unified Embedding for Face Recognition and Clustering." *Proceedings of the IEEE conference on computer vision and pattern recognition*, 2015, pp. 815-823.
- [91] Shang, Wenling et al. "Understanding and Improving Convolutional Neural Networks Via Concatenated Rectified Linear Units." *international conference on machine learning*, 2016, pp. 2217-2225.
- [92] Simonyan, Karen and Andrew Zisserman. "Very Deep Convolutional Networks for Large-Scale Image Recognition." *arXiv preprint arXiv:1409.1556*, 2014.
- [93] Sun, Yi et al. "Deep Learning Face Representation by Joint Identification-Verification." *Advances in neural information processing systems*, 2014, pp. 1988-1996.
- [94] Sun, Yi et al. "Deepid3: Face Recognition with Very Deep Neural Networks." *arXiv preprint arXiv:1502.00873*, 2015.
- [95] Sun, Yi et al. "Deep Learning Face Representation from Predicting 10,000 Classes." *Proceedings of the IEEE conference on computer vision and pattern recognition*, 2014, pp. 1891-1898.

- [96] ---. "Deeply Learned Face Representations Are Sparse, Selective, and Robust." *Proceedings of the IEEE conference on computer vision and pattern recognition*, 2015, pp. 2892-2900.
- [97] ---. "Hybrid Deep Learning for Face Verification." *Proceedings of the IEEE international conference on computer vision*, 2013, pp. 1489-1496.
- [98] Szegedy, Christian et al. "Going Deeper with Convolutions." *Proceedings of the IEEE conference on computer vision and pattern recognition*, 2015, pp. 1-9.
- [99] Taigman, Yaniv et al. "Deepface: Closing the Gap to Human-Level Performance in Face Verification." *Proceedings of the IEEE conference on computer vision and pattern recognition*, 2014, pp. 1701-1708.
- [100] Tang, Xu et al. "Pyramidbox: A Context-Assisted Single Shot Face Detector." *Proceedings of the European Conference on Computer Vision (ECCV)*, 2018, pp. 797-813.
- [101] Uhlmann, Jeffrey K. "Satisfying General Proximity/Similarity Queries with Metric Trees." *Information processing letters*, vol. 40, no. 4, 1991, pp. 175-179.
- [102] Uijlings, Jasper RR et al. "Selective Search for Object Recognition." *International journal of computer vision*, vol. 104, no. 2, 2013, pp. 154-171.
- [103] Vaillant, Régis et al. "Original Approach for the Localisation of Objects in Images." *IEE Proceedings-Vision, Image and Signal Processing*, vol. 141, no. 4, 1994, pp. 245-250.

- [104] Viola, Paul and Michael J Jones. "Robust Real-Time Face Detection." *International journal of computer vision*, vol. 57, no. 2, 2004, pp. 137-154.
- [105] Wang, Fei et al. "The Devil of Face Recognition Is in the Noise." *Proceedings of the European Conference on Computer Vision (ECCV)*, 2018, pp. 765-780.
- [106] Wang, Feng et al. "Additive Margin Softmax for Face Verification." *IEEE Signal Processing Letters*, vol. 25, no. 7, 2018, pp. 926-930.
- [107] Wang, Feng et al. "Normface: L 2 Hypersphere Embedding for Face Verification." *Proceedings of the 25th ACM international conference on Multimedia*, ACM, 2017, pp. 1041-1049.
- [108] Wang, Hao et al. "Cosface: Large Margin Cosine Loss for Deep Face Recognition." *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 2018, pp. 5265-5274.
- [109] Weinberger, Kilian Q and Lawrence K Saul. "Distance Metric Learning for Large Margin Nearest Neighbor Classification." *Journal of Machine Learning Research*, vol. 10, no. Feb, 2009, pp. 207-244.
- [110] Wen, Yandong et al. "Latent Factor Guided Convolutional Neural Networks for Age-Invariant Face Recognition." *Proceedings of the IEEE conference on computer vision and pattern recognition*, 2016, pp. 4893-4901.

- [111] Wolf, Lior et al. *Face Recognition in Unconstrained Videos with Matched Background Similarity*.  
IEEE, 2011.
- [112] Wu, Yue et al. "Deep Face Recognition with Center Invariant Loss." *Proceedings of the on  
Thematic Workshops of ACM Multimedia 2017*, ACM, 2017, pp. 408-414.
- [113] Xing, Eric P et al. "Distance Metric Learning with Application to Clustering with Side-  
Information." *Advances in neural information processing systems*, 2003, pp. 521-528.
- [114] Xu, Chenfei et al. "Age Invariant Face Recognition and Retrieval by Coupled Auto-Encoder  
Networks." *Neurocomputing*, vol. 222, 2017, pp. 62-71.
- [115] Yan, Junjie et al. "The Fastest Deformable Part Model for Object Detection." *Proceedings of the  
IEEE Conference on Computer Vision and Pattern Recognition*, 2014, pp. 2497-2504.
- [116] Yan, Junjie et al. "Face Detection by Structural Models." *Image and Vision Computing*, vol. 32,  
no. 10, 2014, pp. 790-799.
- [117] Yang, Bin et al. "Aggregate Channel Features for Multi-View Face Detection." *IEEE international  
joint conference on biometrics*, IEEE, 2014, pp. 1-8.
- [118] ---. "Fine-Grained Evaluation on Face Detection in the Wild." *2015 11th IEEE International  
Conference and Workshops on Automatic Face and Gesture Recognition (FG)*, vol. 1, IEEE, 2015,  
pp. 1-7.

- [119] Yang, Shuo et al. "From Facial Parts Responses to Face Detection: A Deep Learning Approach." *Proceedings of the IEEE International Conference on Computer Vision*, 2015, pp. 3676-3684.
- [120] ---. "Wider Face: A Face Detection Benchmark." *Proceedings of the IEEE conference on computer vision and pattern recognition*, 2016, pp. 5525-5533.
- [121] Yang, Shuo et al. "Face Detection through Scale-Friendly Deep Convolutional Networks." *arXiv preprint arXiv:1706.02863*, 2017.
- [122] Yi, Dong et al. "Learning Face Representation from Scratch." *arXiv preprint arXiv:1411.7923*, 2014.
- [123] Yianilos, Peter N. "Data Structures and Algorithms for Nearest Neighbor Search in General Metric Spaces." *SODA*, vol. 93, 1993, pp. 311-321.
- [124] Zhang, Jie et al. "Coarse-to-Fine Auto-Encoder Networks (Cfan) for Real-Time Face Alignment." *European conference on computer vision*, Springer, 2014, pp. 1-16.
- [125] Zhang, Kaipeng et al. "Joint Face Detection and Alignment Using Multitask Cascaded Convolutional Networks." *IEEE Signal Processing Letters*, vol. 23, no. 10, 2016, pp. 1499-1503.
- [126] Zhang, Shifeng et al. "Faceboxes: A Cpu Real-Time Face Detector with High Accuracy." *2017 IEEE International Joint Conference on Biometrics (IJCB)*, IEEE, 2017, pp. 1-9.

- [127] ---. "S3fd: Single Shot Scale-Invariant Face Detector." *Proceedings of the IEEE International Conference on Computer Vision*, 2017, pp. 192-201.
- [128] Zhang, Xiao et al. "Range Loss for Deep Face Recognition with Long-Tailed Training Data." *Proceedings of the IEEE International Conference on Computer Vision*, 2017, pp. 5409-5418.
- [129] Zhang, Zhifei et al. "Age Progression/Regression by Conditional Adversarial Autoencoder." *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 2017, pp. 5810-5818.
- [130] Zheng, Liang et al. "Sift Meets Cnn: A Decade Survey of Instance Retrieval." *IEEE transactions on pattern analysis and machine intelligence*, vol. 40, no. 5, 2017, pp. 1224-1244.
- [131] Zheng, Tianyue et al. "Age Estimation Guided Convolutional Neural Network for Age-Invariant Face Recognition." *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition Workshops*, 2017, pp. 1-9.
- [132] Zheng, Yutong et al. "Ring Loss: Convex Feature Normalization for Face Recognition." *Proceedings of the IEEE conference on computer vision and pattern recognition*, 2018, pp. 5089-5097.