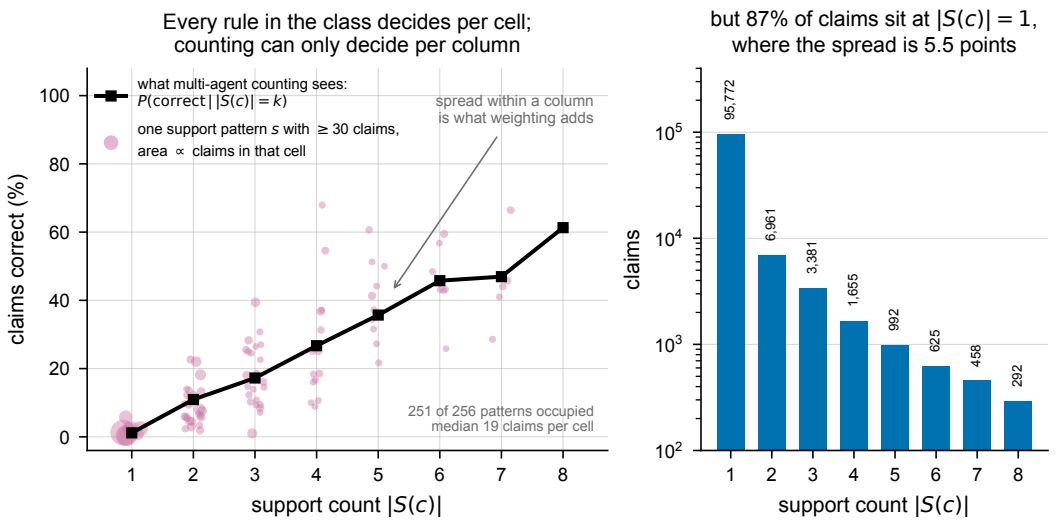
Every rule in the class decides per cell;
counting can only decide per column
what multi-agent counting sees:
$P(\text{correct} \mid |S(c)| = k)$
one support pattern s with ≥ 30 claims,
area $\propto$ claims in that cell
spread within a column
is what weighting adds
251 of 256 patterns occupied
median 19 claims per cell
claims correct (%)
support count $|S(c)|$
but 87% of claims sit at $|S(c)| = 1$,
where the spread is 5.5 points
claims
95,772
6,961
3,381
1,655
992
625
458
292
support count $|S(c)|$