Network families used by the actuator models

The ID/FD pair shares a residual trunk; the ROM carries history through a recurrent latent.

(a) residual MLP trunk

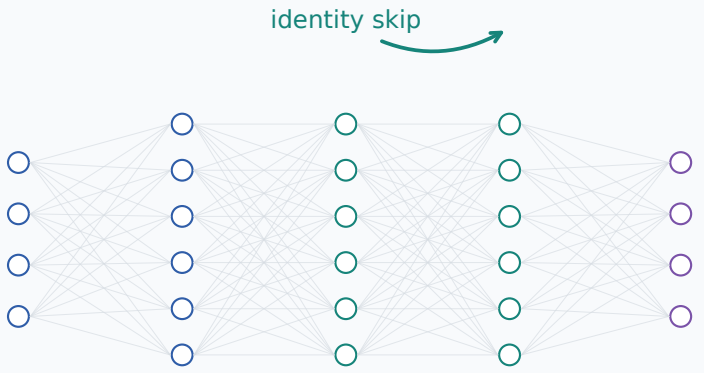

Linear → LayerNorm → SiLU → Dropout → Linear

input **projection** **residual ×4** **residual ×4** **head**

only the input and output widths differ between ID and FD

(b) recurrent ROM encoder

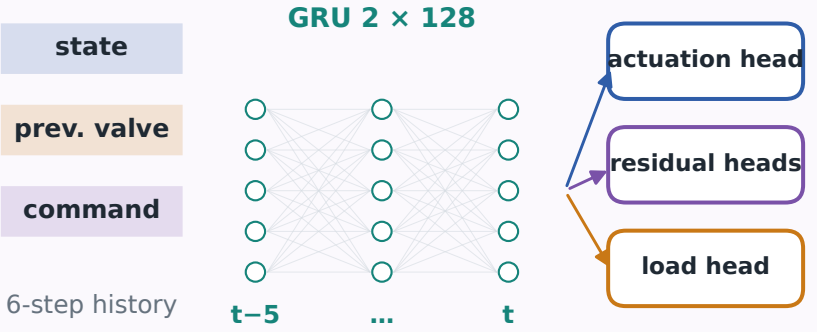

history → latent h_k → bounded physics-aware heads

the hidden state carries pressure and command transients