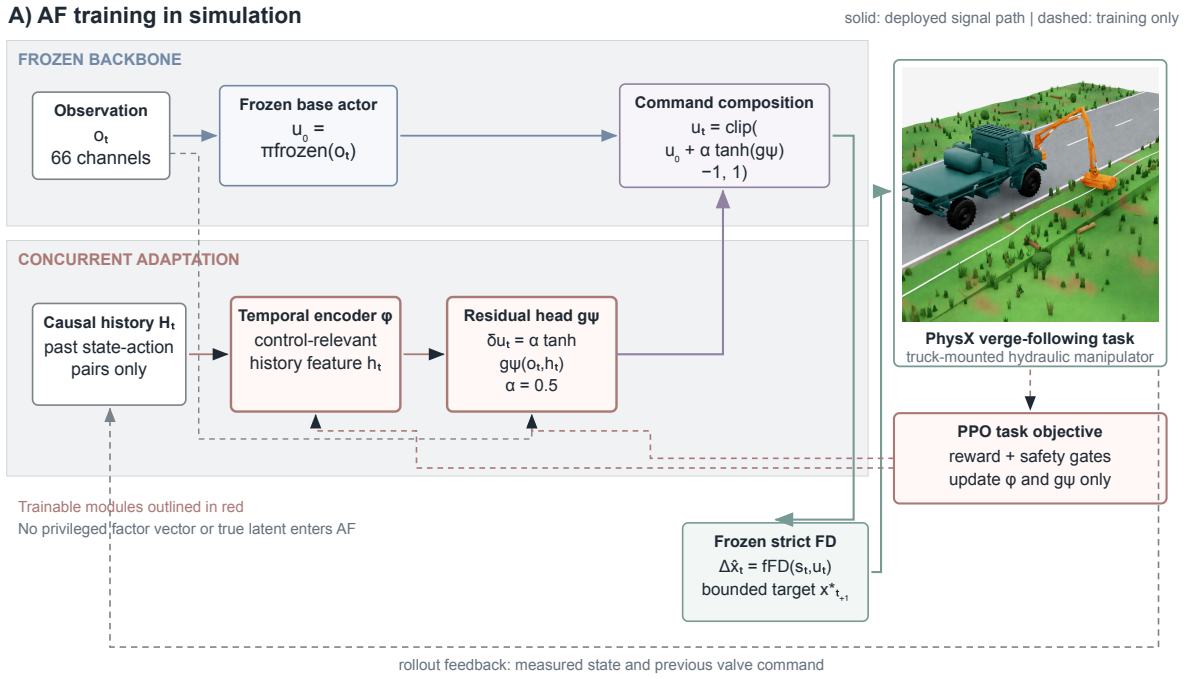


Figure 6.6: Training and deployment path of AF. The frozen base actor emits the valve command $\boldsymbol{u}_0$. A temporal encoder and residual head use causal state–action history to add the bounded correction of Equation (6.11). Only these two modules receive the PPO task gradient; the base actor and strict forward model remain frozen. The composed valve command drives the forward model and the shared PhysX verge-following task. Dashed paths denote training gradients and rollout feedback. No privileged factor vector, true latent or inverse model enters the AF command path.