一、Demo01 - 无序列表

- Each list item is marked with a label. The labels in this itemized list are bullets.
- LATEX permits at least four levels of nested lists, which is more than enough.
- Blank lines before an item have no effect.

```
源代码:
\documentclass { article }
\begin { document }
\parskip=10pt
\begin{itemize}
       \itemsep=4pt
       \item Each list item is marked with a label.
          The labels in this itemized list are
          bullets.
       \item \LaTeX\ permits at least four levels of
          nested lists, which is more than enough.
       \item Blank lines before an item have no
          effect.
\end{itemize}
\end{document}
内容讲解:
1.\begin{itemize} ... \end{itemize}用于非序号列表
2.\item[seq_flag]为列表项内容, seq_flag为序列标记符.
   列表如下:
       \textbullet - 实心圆点,第一层嵌套默认符号(最
          外层)
       \normalfont\bf\textendash - 破折号, 第二层嵌套
          默认符号
```

\textasteriskcentered - 星号(*), 第三层嵌套默 认符号

\textperiodcentered - 上下居中的句号, 第四层嵌套默认符号

3. 修改不同层级嵌套的默认符号, \renewcommand {\ labelitemi} {\ textbullet }. 层级列表如下:

\labelitemi — 第一层嵌套 \labelitemii — 第二层嵌套 \labelitemiii — 第三层嵌套 \labelitemiv — 第四层嵌套

- 4.\parskip用于指定列表与列表外文本的距离,通常在列表环境外使用.默认为4pt plus 2pt minus 1pt
- 5.\itemsep用于指定item之间的距离,通常在列表环境内使用. 默认为4pt plus 2pt minus 1pt
- 二、Demo02 特殊label的无序列表

求解相关变化率的方法:

- ➡ 识别出哪一个量需要求相关变化率
- ☞ 写出一个关联所有量的方程
- ➡ 对方程关于时间 t 作隐函数求导
- ➡ 将已知值代入方程中作替换

源代码:

\documentclass [UTF8, fontset=ubuntu] { ctexart } \usepackage { pifont } \begin { document }

```
\begin{dinglist}{47}
        \item 识别出哪一个量需要求相关变化率
        \item 写出一个关联所有量的方程
        \item 对方程关于时间t作隐函数求导
        \item 将已知值代入方程中作替换
\end{dinglist}
\end{document}
```

内容讲解:

- 1.\begin{dinglist}{<num>}...{dinglist}为特殊label的无序列表.包含在pifont环境中.label序号列表参考symbol_summary的表22
- 2.\ ding{<num>}为单个特殊符号
- 三、Demo03 enumerate list
 - 1. The item labels in an enumerated list are numerals or letters.
 - 2. A list should have at least two items.

源代码:

\begin{enumerate}

\item The item labels in an enumerated list are numerals or letters.

 $\label{list_should_have at least two items.} $$ \left\{ enumerate \right\} $$$

内容讲解:

- 1.\begin{enumerate} ... \end{enumerate}用于序号列表
- 2.\item为列表项内容

- gnat A small animal, found in the North Woods, that causes no end of trouble.
- **gnu** A large animal, found in crossword puzzles, that causes no end of trouble.

armadillo A medium-sized animal, named after a medium-sized Texas city.

Alice was beginning to get very tired of sitting by her sister on the bank, and of having nothing to do: once or twice she had peeped into

- B–I Each list item is marked with a label. The labels in this itemized list are bullets.
 - this is second paragraph
- B–II LaTeX permits at least four levels of nested lists, which is more than enough.

train Blank lines before an item have no effect.

Alice was beginning to get very tired of sitting by her sister on the

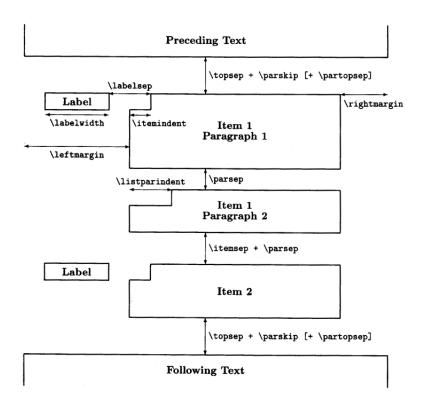


图 1: 引用自 Leslie Lamport - A Document Preparation System Figure 6.3: The format of a list